CSci 127: Introduction to Computer Science

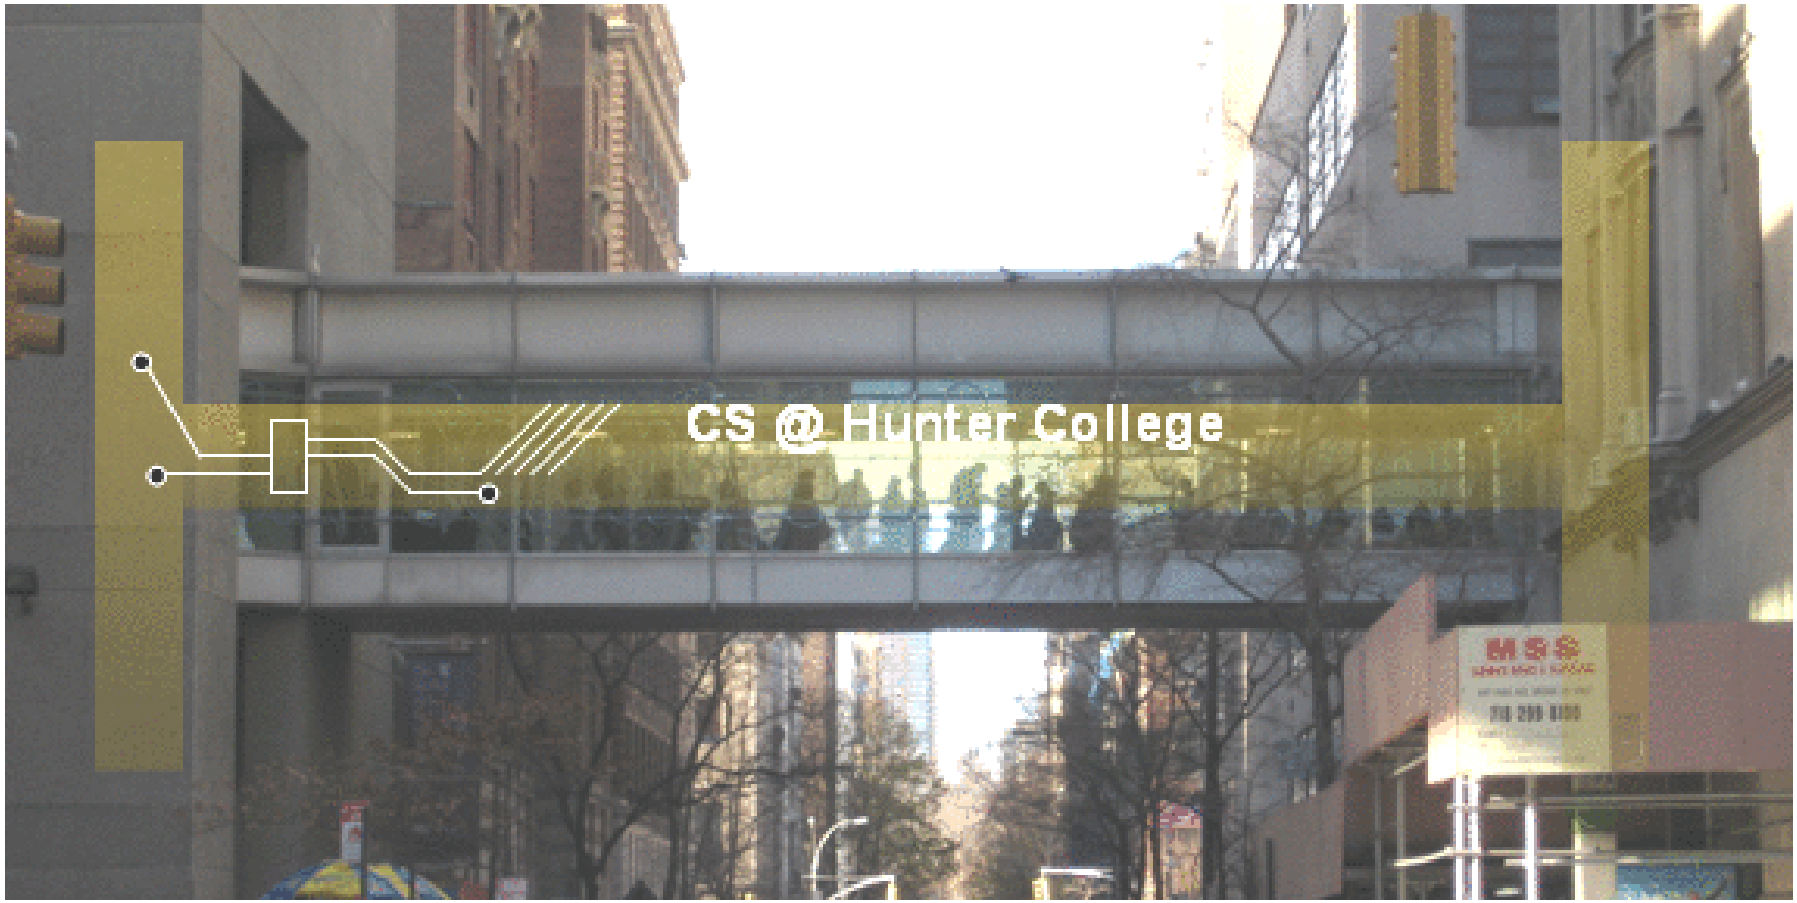

Finished the lecture preview?

hunter.cuny.edu/csci

Frequently Asked Questions

From lecture slips & email.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.
  More today!

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.
  More today!
- From lab: what is `numpy` really? And `matplotlib` & `pyplot`?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.
  More today!
- From lab: what is `numpy` really? And `matplotlib` & `pyplot`?
  They are Python libraries that includes useful functions, definitions, etc.

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.
  More today!
- From lab: what is `numpy` really? And `matplotlib` & `pyplot`?
  They are Python libraries that includes useful functions, definitions, etc.
- Could you spend more time on problem solving & algorithms?

Frequently Asked Questions

From lecture slips & email.

- Could you spend more time on colors?
  Yes! In today's lecture and the next couple of labs.
- Why hexadecimal? Why can't we just use decimal?
  Standard way of representing colors. And more! More in later classes.
- What does `len()` mean?
  `len(s)` *gives the length (# of items or chars.). Ex:* `len("hi!!")` *is 4.*
- When do you use [ ] and :? What's a slice?
  The square brackets, [ ], are used to give a slice, substring or sublist; the colon, :, is used to specify start and stop; ex: `myString[3:5]`.
  More today!
- From lab: what is `numpy` really? And `matplotlib` & `pyplot`?
  They are Python libraries that includes useful functions, definitions, etc.
- Could you spend more time on problem solving & algorithms?
  Yes! More in upcoming lectures & labs.

Today's Topics

- Recap: Colors
- 2D Arrays & Image Files
- Decisions

Today's Topics

- **Recap: Colors**
- 2D Arrays & Image Files
- Decisions

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` ☐☐☐☐☐☐ `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` ☐☐☐☐☐☐ `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` ☐☐☐☐☐☐ `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` ☐☐☐☐☐☐ `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` ☐☐☐☐☐☐ `")`

- Need to fill in hexcodes (always start with #):

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`
- White: `F F F F F F`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`
- White: `F F F F F F`
- Blue: `0 0 0 0 F F`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`
- White: `F F F F F F`
- Blue: `0 0 0 0 F F`
- Purple: `F F 0 0 F F`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`
- White: `F F F F F F`
- Blue: `0 0 0 0 F F`
- Purple: `F F 0 0 F F`
- Gray: `4 2 4 2 4 2`

In Pairs or Triples

EmpID: CSci 127 Mock Final, S19

2. (a) Fill in the boxes with the appropriate hexcode to change the color to match the comments:

```
import turtle
thomasH = turtle.Turtle()
```

i. `#Change thomasH to be the color black:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

ii. `#Change thomasH to be the color white:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iii. `#Change thomasH to be the brightest color blue:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

iv. `#Change thomasH to be the color purple:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

v. `#Change thomasH to be the color gray:`

`thomasH.color("#` [ ][ ][ ][ ][ ][ ] `")`

- Need to fill in hexcodes (always start with #): `R R G G B B`
- Black: `0 0 0 0 0 0`
- White: `F F F F F F`
- Blue: `0 0 0 0 F F`
- Purple: `F F 0 0 F F`
- Gray: `4 2 4 2 4 2` (any choice where RR = GG = BB).

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.
- Can specify by numbers:

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.
- Can specify by numbers:
  - Amount of Red, Green, and Blue (RGB).

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.
- Can specify by numbers:
  - Amount of Red, Green, and Blue (RGB).
  - Adding light, not paint:

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.
- Can specify by numbers:
  - Amount of Red, Green, and Blue (RGB).
  - Adding light, not paint:
    - ★ Black: 0% red, 0% green, 0% blue

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by name.
- Can specify by numbers:
  - Amount of Red, Green, and Blue (RGB).
  - Adding light, not paint:
    - ★ Black: 0% red, 0% green, 0% blue
    - ★ White: 100% red, 100% green, 100% blue

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):
  - Fractions of each:
    e.g. `(1.0, 0, 0)` is 100% red, no green, and no blue.

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):
  - Fractions of each:
    e.g. `(1.0, 0, 0)` is 100% red, no green, and no blue.
  - 8-bit colors: numbers from 0 to 255:
    e.g. `(0, 255, 0)` is no red, 100% green, and no blue.

Recap: Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):
  - Fractions of each:
    e.g. `(1.0, 0, 0)` is 100% red, no green, and no blue.
  - 8-bit colors: numbers from 0 to 255:
    e.g. `(0, 255, 0)` is no red, 100% green, and no blue.
  - Hexcodes (base-16 numbers)...

Recap: Hexadecimal

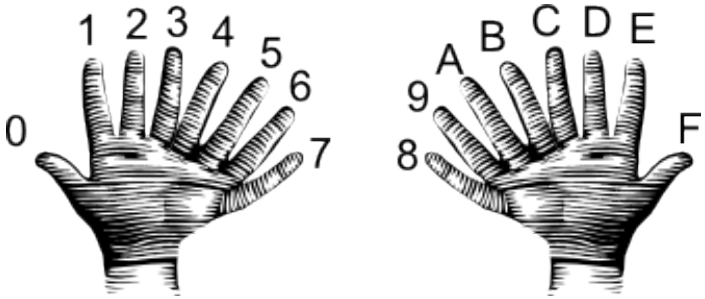


```
00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F
10 11 12 13 14 15 16 17 18 19 1A 1B 1C 1D 1E 1F
20 21 22 23 24 25 26 27 28 29 2A 2B 2C 2D 2E 2F
30 31 32 33 34 35 36 37 38 39 3A 3B 3C 3D 3E 3F
40 41 42 43 44 45 46 47 48 49 4A 4B 4C 4D 4E 4F
50 51 52 53 54 55 56 57 58 59 5A 5B 5C 5D 5E 5F
60 61 62 63 64 65 66 67 68 69 6A 6B 6C 6D 6E 6F
70 71 72 73 74 75 76 77 78 79 7A 7B 7C 7D 7E 7F
80 81 82 83 84 85 86 87 88 89 8A 8B 8C 8D 8E 8F
90 91 92 93 94 95 96 97 98 99 9A 9B 9C 9D 9E 9F
A0 A1 A2 A3 A4 A5 A6 A7 A8 A9 AA AB AC AD AE AF
B0 B1 B2 B3 B4 B5 B6 B7 B8 B9 BA BB BC BD BE BF
C0 C1 C2 C3 C4 C5 C6 C7 C8 C9 CA CB CC CD CE CF
D0 D1 D2 D3 D4 D5 D6 D7 D8 D9 DA DB DC DD DE DF
E0 E1 E2 E3 E4 E5 E6 E7 E8 E9 EA EB EC ED EE EF
F0 F1 F2 F3 F4 F5 F6 F7 F8 F9 FA FB FC FD FE FF
```

Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):
  - Fractions of each:
    e.g. `(1.0, 0, 0)` is 100% red, no green, and no blue.
  - 8-bit colors: numbers from 0 to 255:
    e.g. `(0, 255, 0)` is no red, 100% green, and no blue.
  - Hexcodes (base-16 numbers):

Colors

Color Name	HEX	Color
Black	#000000	
Navy	#000080	
DarkBlue	#00008B	
MediumBlue	#0000CD	
Blue	#0000FF	

- Can specify by numbers (RGB):
  - Fractions of each:
    e.g. `(1.0, 0, 0)` is 100% red, no green, and no blue.
  - 8-bit colors: numbers from 0 to 255:
    e.g. `(0, 255, 0)` is no red, 100% green, and no blue.
  - Hexcodes (base-16 numbers):
    e.g. `#0000FF` is no red, no green, and 100% blue.

Today's Topics

- Recap: Colors
- **2D Arrays & Image Files**
- Decisions

Arrays

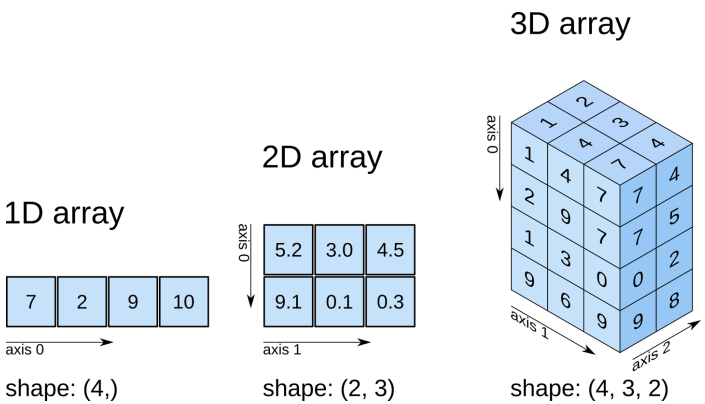

- An **array** is a sequence of elements, much like a list.

Arrays

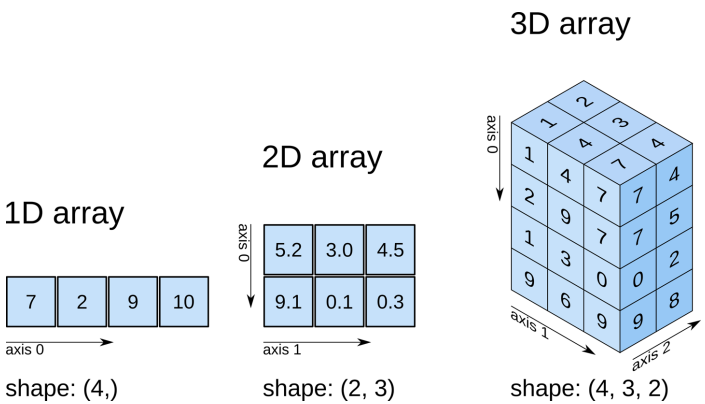

- An **array** is a sequence of elements, much like a list.
- A **2D array** is like a grid of elements, think a list of lists.

Arrays

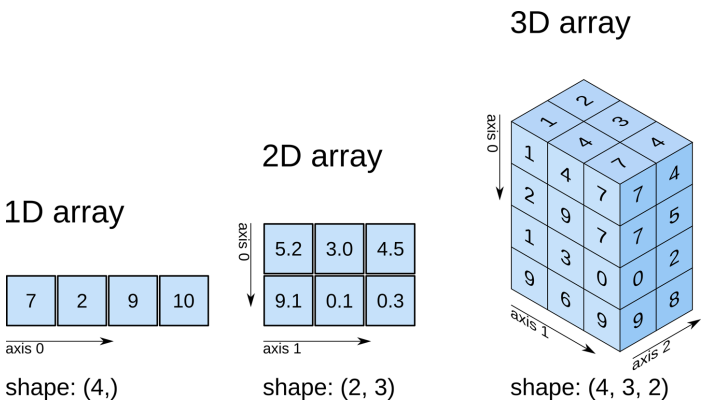

- An **array** is a sequence of elements, much like a list.
- A **2D array** is like a grid of elements, think a list of lists.
- Can keep on adding dimensions (3D, etc.)

Arrays

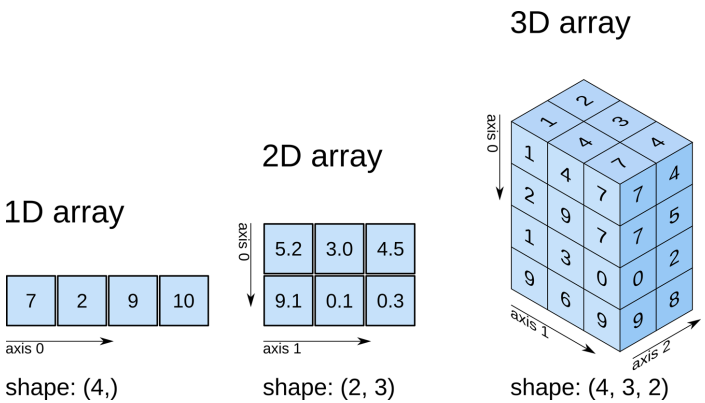

- An **array** is a sequence of elements, much like a list.
- A **2D array** is like a grid of elements, think a list of lists.
- Can keep on adding dimensions (3D, etc.)
- Can access pieces/slices as we do with strings and lists

Images

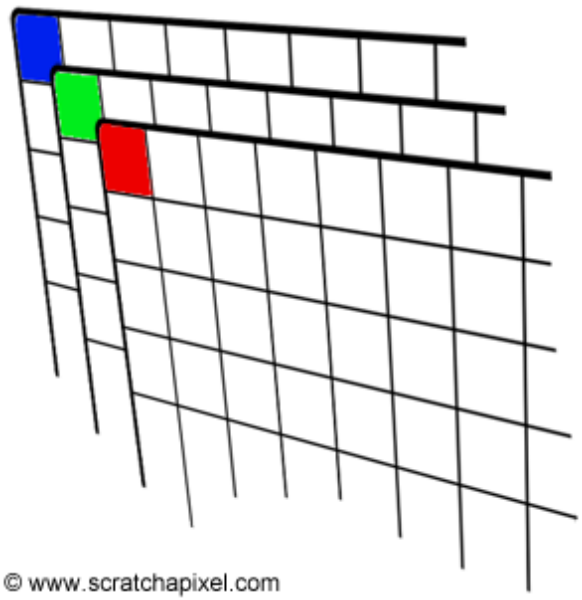

Images

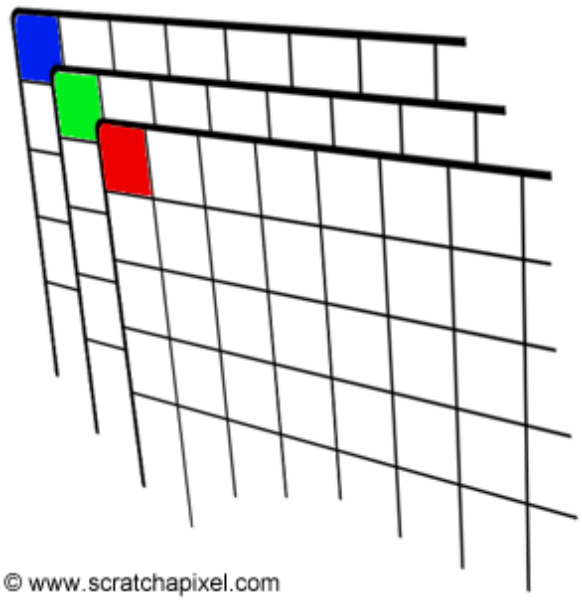

Images

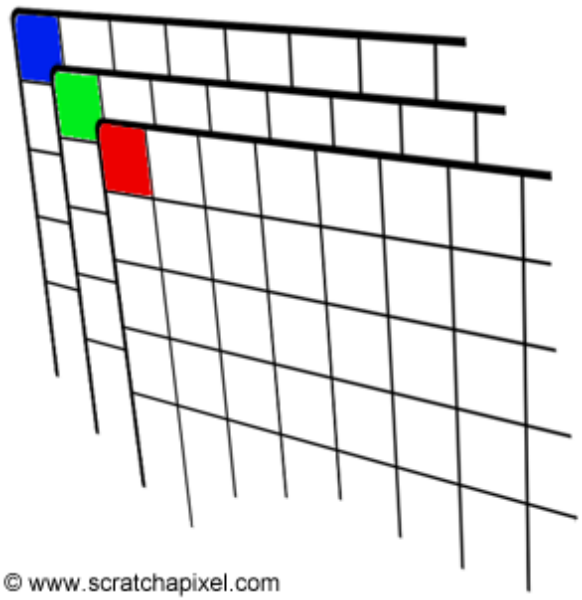

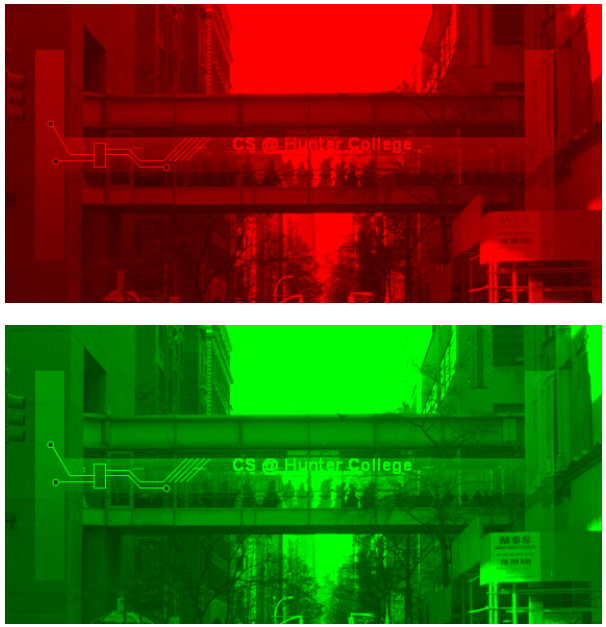

Images

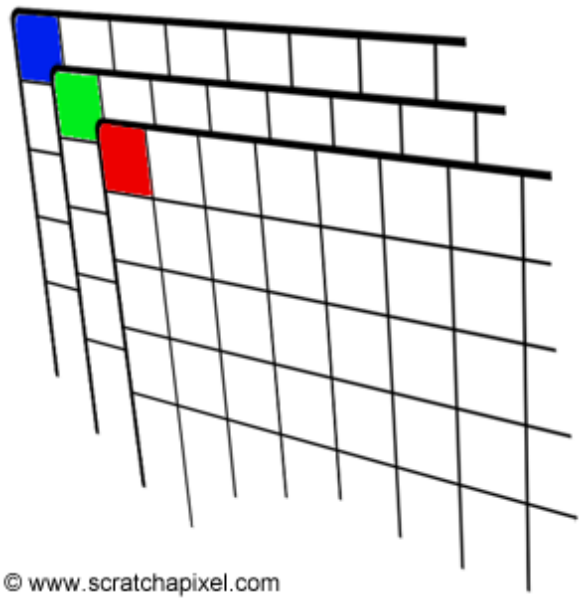
© www.scratchapixel.com

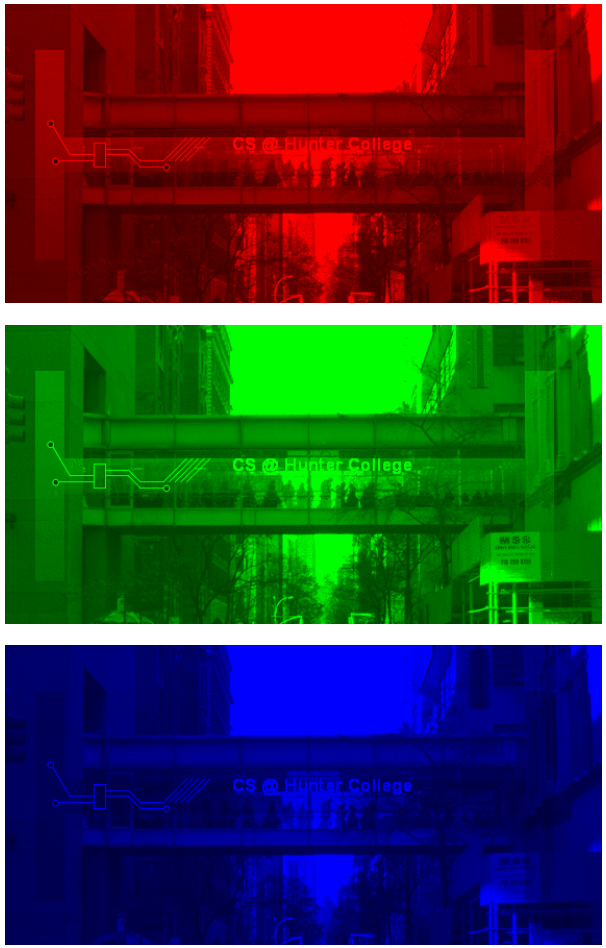
CS @ Hunter College
CS @ Hunter College
CS @ Hunter College

Useful Packages

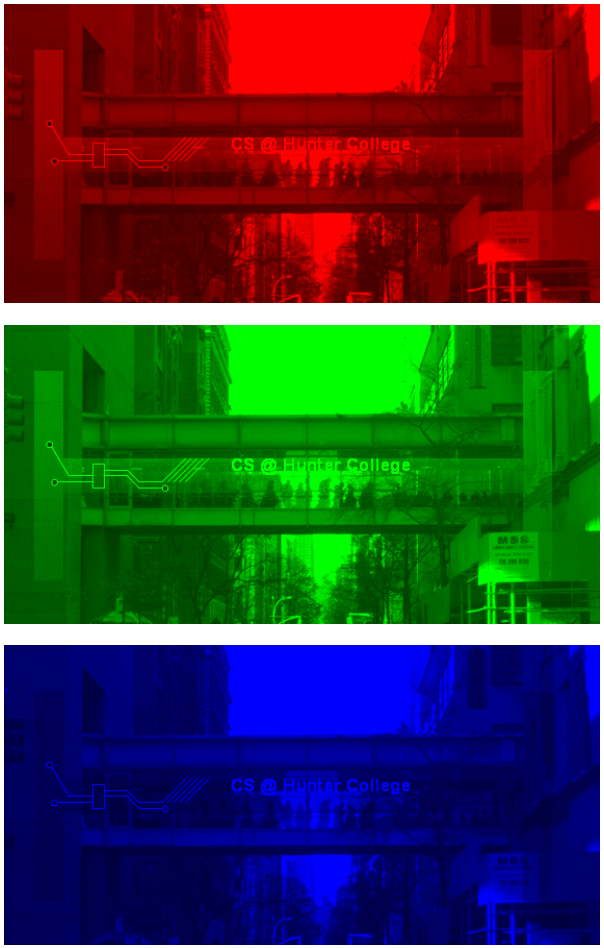

- We will use 2 useful packages for images:

Useful Packages

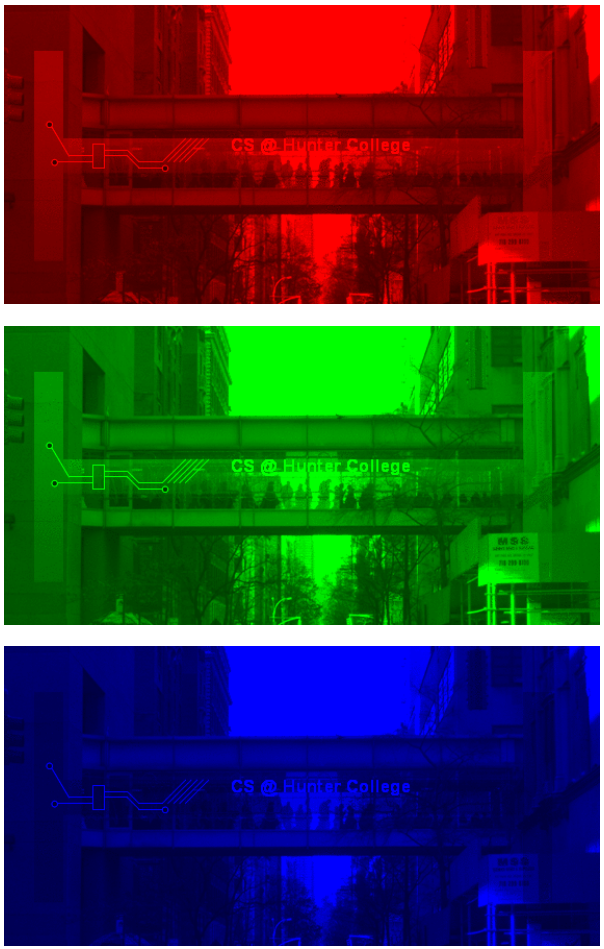

- We will use 2 useful packages for images:
  - `numpy`: numerical analysis package

Useful Packages

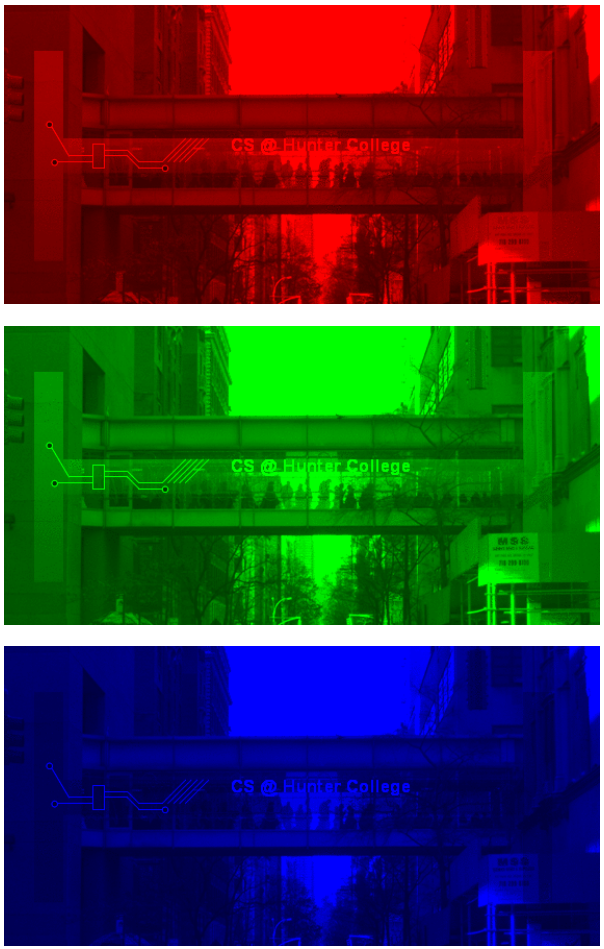

- We will use 2 useful packages for images:
  - `numpy`: numerical analysis package
  - `pyplot`: part of `matplotlib` for making graphs and plots

Useful Packages

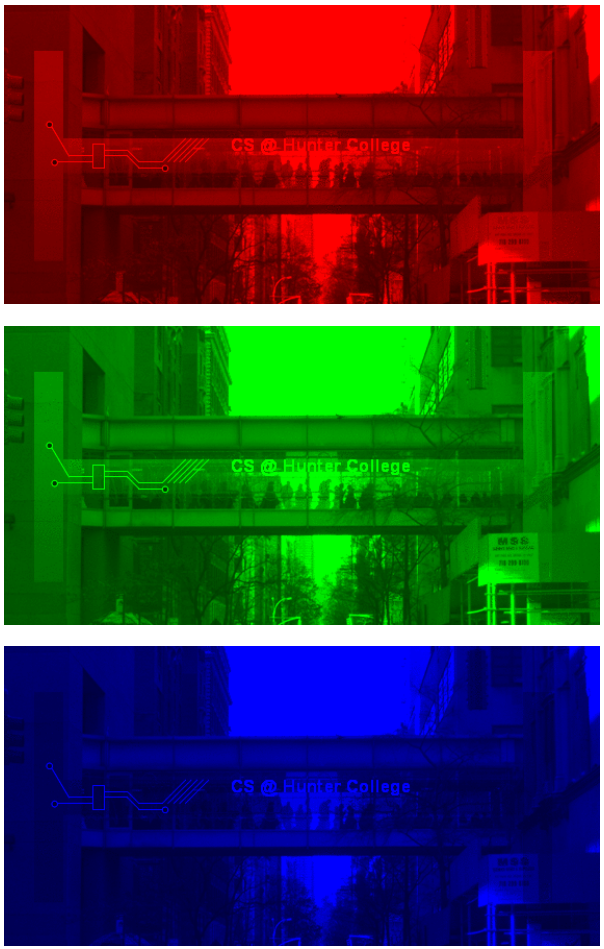

- We will use 2 useful packages for images:
  - `numpy`: numerical analysis package
  - `pyplot`: part of `matplotlib` for making graphs and plots
- See lab notes for installing on your home machine.

Images with pyplot and numpy




```
#Import the packages for images and arrays:
import matplotlib.pyplot as plt
import numpy as np


img = plt.imread('csBridge.png')    #Read in image from csBridge.png
plt.imshow(img)                      #Load image into pyplot
plt.show()                           #Show the image (waits until close

img2 = img.copy()          #make a copy of our image
img2[:,:,1] = 0            #Set the green channel to 0
img2[:,:,2] = 0            #Set the blue channel to 0

plt.imshow(img2)           #Load our new image into pyplot
plt.show()                 #Show the image (waits until closed to conti

plt.imsave('reds.png', img2)  #Save the image we created to the file:
```

Images with pyplot and numpy

```
#Import the packages for images and arrays:
import matplotlib.pyplot as plt
import numpy as np


img = plt.imread('csBridge.png')    #Read in image from csBridge.png
plt.imshow(img)                      #Load image into pyplot
plt.show()                           #Show the image (waits until close

img2 = img.copy()          #make a copy of our image
img2[:,:,1] = 0            #Set the green channel to 0
img2[:,:,2] = 0            #Set the blue channel to 0

plt.imshow(img2)           #Load our new image into pyplot
plt.show()                 #Show the image (waits until closed to conti

plt.imsave('reds.png', img2)  #Save the image we created to the file:
```

Creating Images

To create an image from scratch:



Creating Images

To create an image from scratch:

1. Import the libraries.



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):



Creating Images

To create an image from scratch:

1. Import the libraries.

   ```
   import matplotlib.pyplot as plt
   import numpy as np
   ```

2. Create the image– easy to set all color
   1. to 0% (black):
      ```
      img = np.zeros( (num,num,3) )
      ```



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):
      `img = np.ones( (num,num,3) )`



Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):
      `img = np.ones( (num,num,3) )`
3. *Do stuff to the pixels to make your image*



Creating Images

To create an image from scratch:

1. Import the libraries.

   ```
   import matplotlib.pyplot as plt
   import numpy as np
   ```

2. Create the image– easy to set all color
   1. to 0% (black):
      ```
      img = np.zeros( (num,num,3) )
      ```
   2. to 100% (white):
      ```
      img = np.ones( (num,num,3) )
      ```



3. *Do stuff to the pixels to make your image*
4. You can display your image:

Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):
      `img = np.ones( (num,num,3) )`
3. *Do stuff to the pixels to make your image*
4. You can display your image:

```
plt.imshow(img)
plt.show()
```



Creating Images



To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):
      `img = np.ones( (num,num,3) )`
3. *Do stuff to the pixels to make your image*
4. You can display your image:

```
plt.imshow(img)
plt.show()
```

5. And save your image:

Creating Images

To create an image from scratch:

1. Import the libraries.

```
import matplotlib.pyplot as plt
import numpy as np
```

2. Create the image– easy to set all color
   1. to 0% (black):
      `img = np.zeros( (num,num,3) )`
   2. to 100% (white):
      `img = np.ones( (num,num,3) )`
3. *Do stuff to the pixels to make your image*
4. You can display your image:

```
plt.imshow(img)
plt.show()
```

5. And save your image:

```
plt.imsave('myImage.png', img)
```



More on numpy arrays

```
>>> a[0,3:5]
array([3,4])

>>> a[4:,4:]
array([[44, 45],
       [54, 55]])

>>> a[:,2]
array([2,12,22,32,42,52])

>>> a[2::2,::2]
array([[20,22,24]
       [40,42,44]])
```

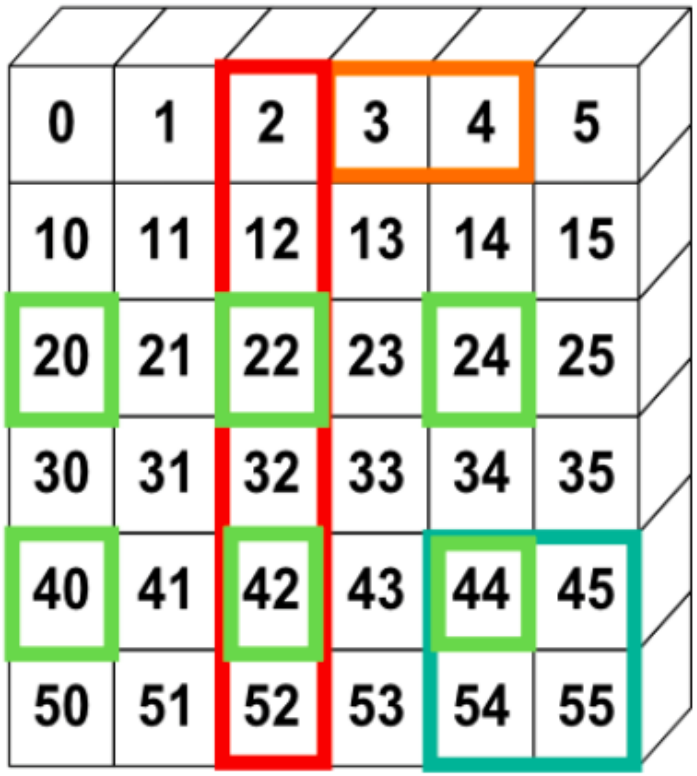

numpy tutorial

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    img = np.zeros( (10,10,3) )
    img[0:10,0:5,0:1] = 1
    ```
    ```

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    img = np.zeros( (10,10,3) )
    img[0:10,0:5,0:1] = 1
    ```

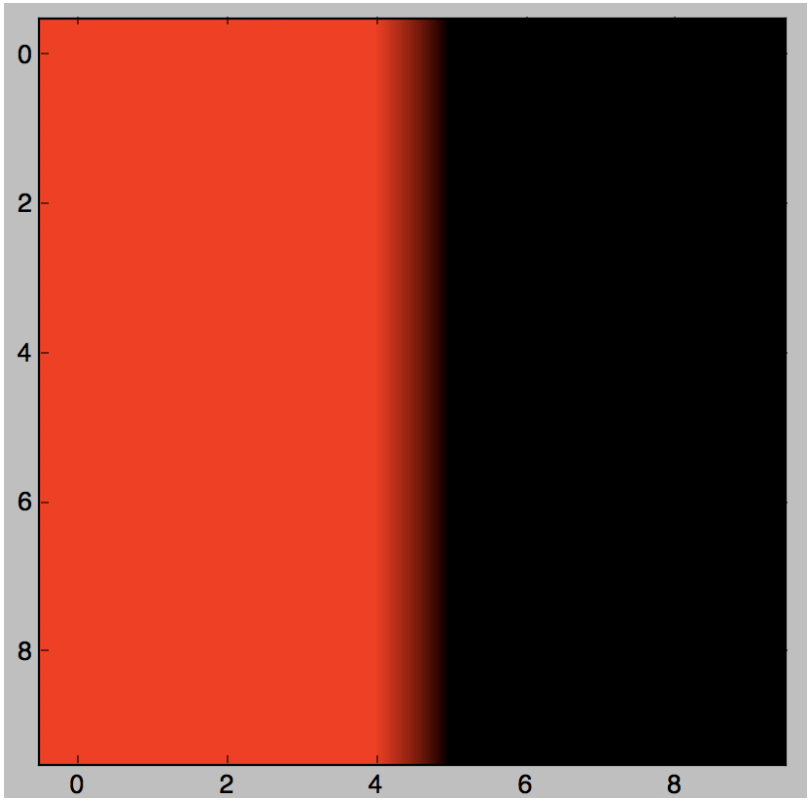
    ```

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    num = 10
    img = np.zeros( (num,num,3) )
    img[0:2,:,2:3] = 1.0
    ```
    ```

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    num = 10
    img = np.zeros( (num,num,3) )
    img[0:2,:,2:3] = 1.0
    ```

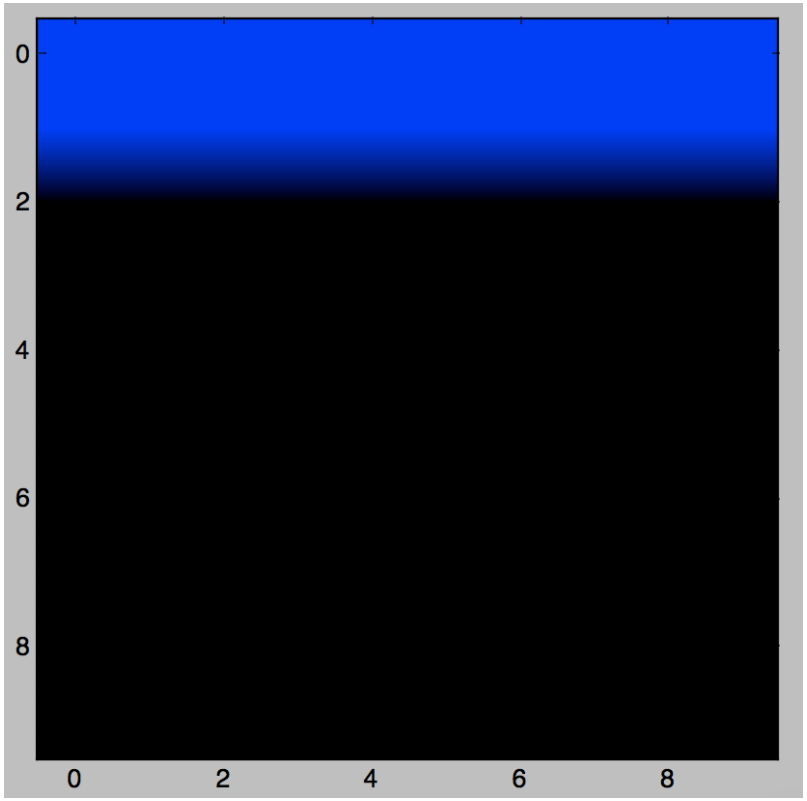
    ```

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    num = int(input('Enter size'))
    img = np.zeros( (num,num,3) )
    img[:,::2,1] = 1.0
    ```
    ```

Slicing & Image Examples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:
  - ```
    num = int(input('Enter size'))
    img = np.zeros( (num,num,3) )
    img[:,::2,1] = 1.0
    ```

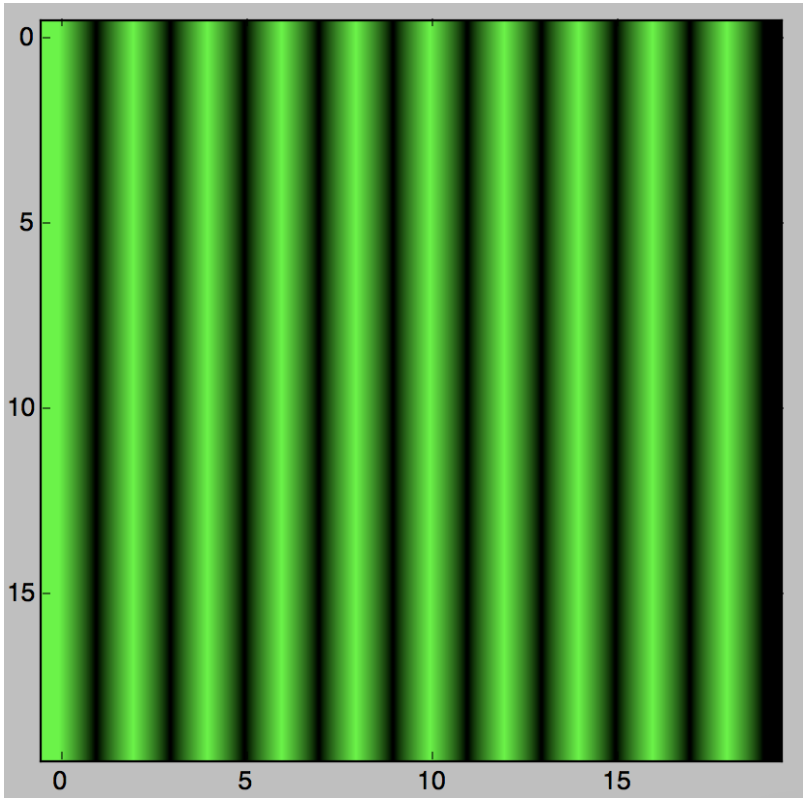
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.ones( (10,10,3) )
    img[0:10,0:5,0:2] = 0
    ```
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.ones( (10,10,3) )
    img[0:10,0:5,0:2] = 0
    ```

  - ```
    num = int(input('Enter size '))
    img = np.ones( (num,num,3) )
    img[::2,:,1:]  = 0
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.ones( (10,10,3) )
    img[0:10,0:5,0:2] = 0
    ```

  - ```
    num = int(input('Enter size '))
    img = np.ones( (num,num,3) )
    img[::2,:,1:]  = 0
    ```

  - ```
    img = np.zeros( (8,8,3) )
    img[::2,::2,0] = 1
    ```
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.ones( (10,10,3) )
    img[0:10,0:5,0:2] = 0
    ```
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.ones( (10,10,3) )
    img[0:10,0:5,0:2] = 0
    ```

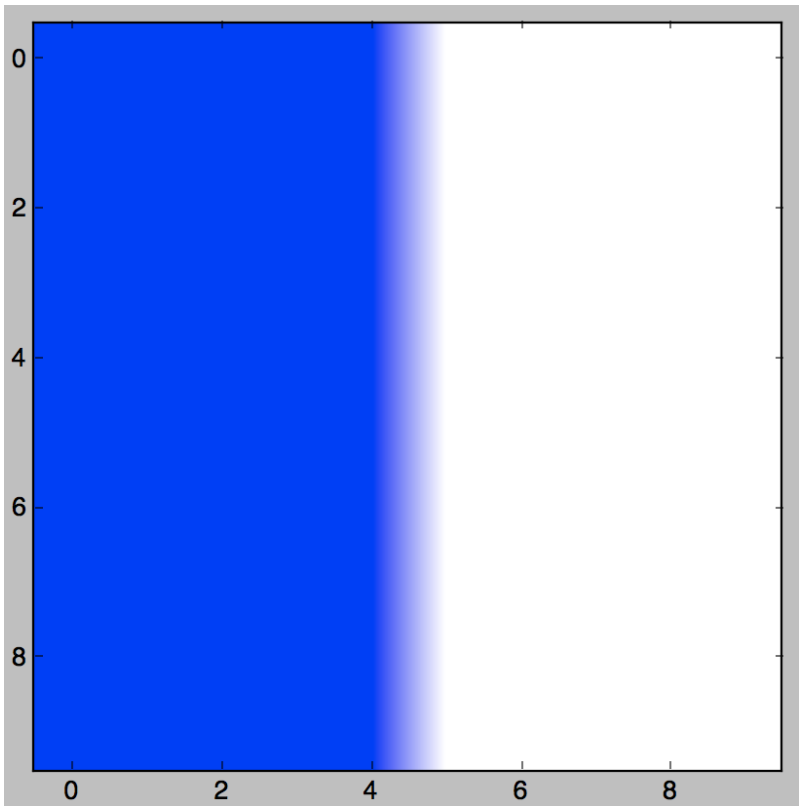
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    num = int(input('Enter size '))
    img = np.ones( (num,num,3) )
    img[::2,:,1:]  = 0
    ```
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    num = int(input('Enter size '))
    img = np.ones( (num,num,3) )
    img[::2,:,1:]  = 0
    ```

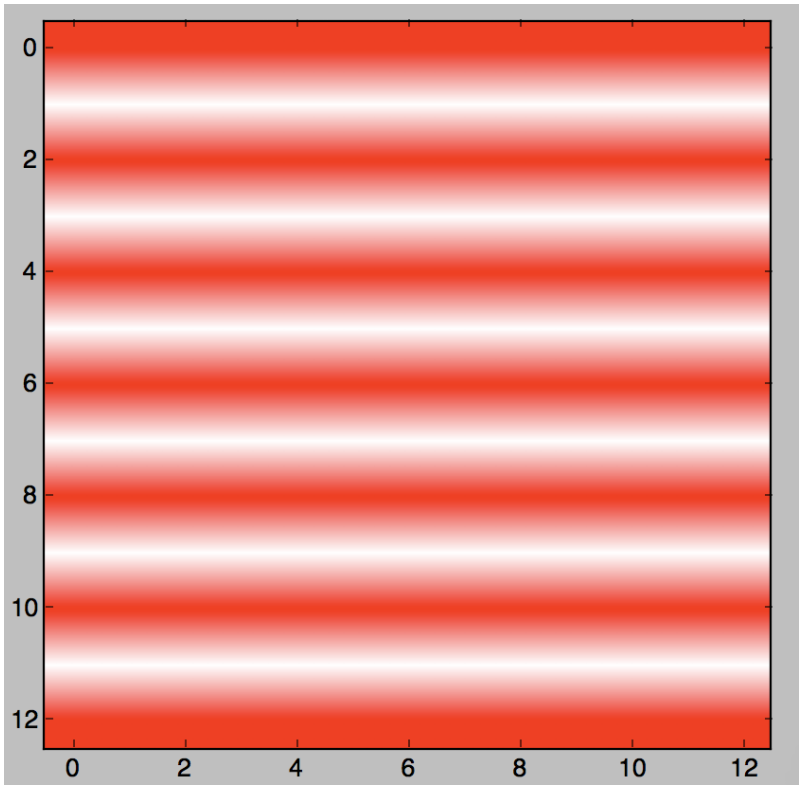
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.zeros( (8,8,3) )
    img[::2,1::2,0] = 1
    ```
    ```

In Pairs or Triples

- Basic pattern: *img[rows, columns, channels]* with: *start:stop:step*.
- Assuming the libraries are imported, what do the following code fragments produce:

  - ```
    img = np.zeros( (8,8,3) )
    img[::2,1::2,0] = 1
    ```

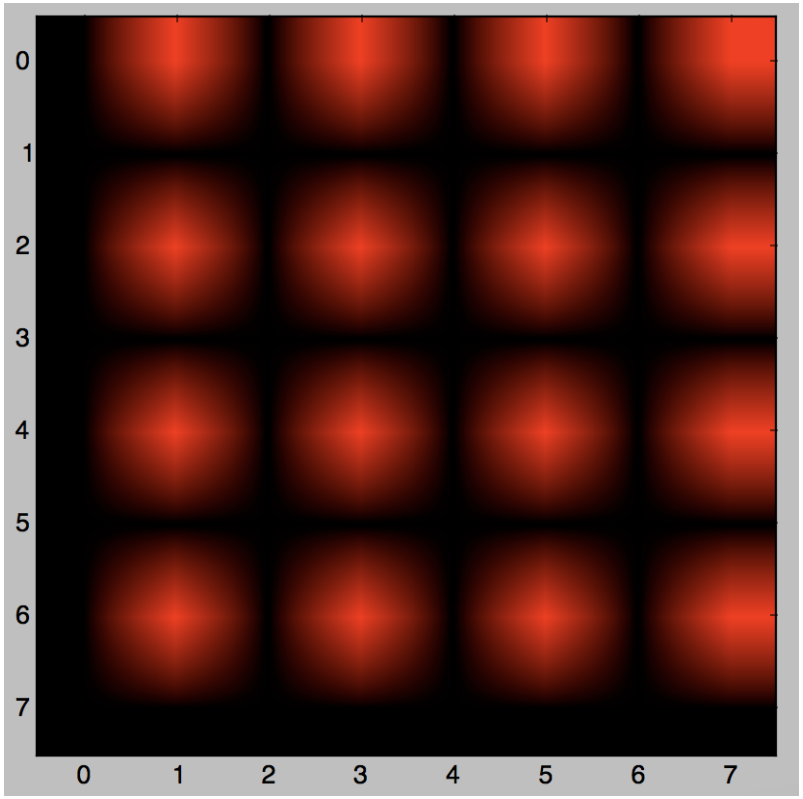
    ```

In Pairs or Triples...

	0	1	2	3	4	5	6	7	8	9
0										
1										
2										
3										
4										
5										
6										
7										
8										
9										

1. Design a 10 by 10 logo for Hunter College that contains a purple 'H'.

In Pairs or Triples...

	0	1	2	3	4	5	6	7	8	9
0										
1										
2										
3										
4										
5										
6										
7										
8										
9										

1. Design a 10 by 10 logo for Hunter College that contains a purple 'H'.
2. Your logo should only contain the colors purple and white.

In Pairs or Triples...

	0	1	2	3	4	5	6	7	8	9
0										
1										
2										
3										
4										
5										
6										
7										
8										
9										

1. Design a 10 by 10 logo for Hunter College that contains a purple 'H'.
2. Your logo should only contain the colors purple and white.
3. How can you make Python draw the logo?
   Write down a "To Do" list of things you need to do.

In Pairs or Triples...

	0	1	2	3	4	5	6	7	8	9
0										
1										
2										
3										
4										
5										
6										
7										
8										
9										

1. Design a 10 by 10 logo for Hunter College that contains a purple 'H'.
2. Your logo should only contain the colors purple and white.
3. How can you make Python draw the logo?
   Write down a "To Do" list of things you need to do.
4. If time, refine your steps above into a Python program.

Design a Hunter Logo

One possible solution:

Design a Hunter Logo

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

Design a Hunter Logo

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.
2. Set the 3 left columns to be purple.

Design a Hunter Logo

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.
2. Set the 3 left columns to be purple.
3. Set the 3 right columns to be purple.

Design a Hunter Logo

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.
2. Set the 3 left columns to be purple.
3. Set the 3 right columns to be purple.
4. Set the middle 2 rows to be purple.

Design a Hunter Logo

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.
2. Set the 3 left columns to be purple.
3. Set the 3 right columns to be purple.
4. Set the middle 2 rows to be purple.
5. Save `logo` array to a file.

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

4. Set the middle 2 rows to be purple.

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

4. Set the middle 2 rows to be purple.

```
logoImg[4:6,:,1] = 0 #Turn the green to 0 for middle rows
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

4. Set the middle 2 rows to be purple.

```
logoImg[4:6,:,1] = 0 #Turn the green to 0 for middle rows
```

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

4. Set the middle 2 rows to be purple.

```
logoImg[4:6,:,1] = 0 #Turn the green to 0 for middle rows
```

5. Save logo array to file.

Translating the Design to Code

1. Create a 10 by 10 array, `logo`, that starts out as all white pixels.

```
import matplotlib.pyplot as plt #import libraries for plotting
import numpy as np              #and for arrays (to hold images)
logoImg = np.ones((10,10,3))    #10x10 array with 3 sheets of 1's
```

2. Set the 3 left columns to be purple.

```
#To make purple, we'll keep red and blue at 100% and turn green to 0%
logoImg[:,:3,1] = 0 #Turn the green to 0 for first 3 columns
```

3. Set the 3 right columns to be purple.

```
logoImg[:,-3:,1] = 0 #Turn the green to 0 for last 3 columns
```

4. Set the middle 2 rows to be purple.

```
logoImg[4:6,:,1] = 0 #Turn the green to 0 for middle rows
```

5. Save logo array to file.

```
plt.imsave("logo.png", logoImg) #Save the image to logo.png
```

Today's Topics

- Recap: Colors
- 2D Arrays & Image Files
- **Decisions**

In Pairs or Triples...

Predict what these will do (novel concepts):

```
yearBorn = int(input('Enter year born: '))
if yearBorn < 1946:
    print("Greatest Generation")
elif yearBorn <= 1964:
    print("Baby Boomer")
elif yearBorn <= 1984:
    print("Generation X")
elif yearBorn <= 2004:
    print("Millennial")
else:
    print("TBD")

x = int(input('Enter number: '))
if x % 2 == 0:
    print('Even number')
else:
    print('Odd number')
```

```
import turtle

tess = turtle.Turtle()
myWin = turtle.Screen()     #The graphics window
commands = input("Please enter a command string: ")

for ch in commands:
    #perform action indicated by the character
    if ch == 'F':           #move forward
        tess.forward(50)
    elif ch == 'L':         #turn left
        tess.left(90)
    elif ch == 'R':         #turn right
        tess.right(90)
    elif ch == '^':         #lift pen
        tess.penup()
    elif ch == 'v':         #lower pen
        tess.pendown()
    elif ch == 'B':         #go backwards
        tess.backward(50)
    elif ch == 'r':         #turn red
        tess.color("red")
    elif ch == 'g':         #turn green
        tess.color("green")
    elif ch == 'b':         #turn blue
        tess.color("blue")
    else:                   #for any other character
        print("Error: do not know the command:", c)
```

Python Tutor

```
yearBorn = int(input('Enter year born: '))
if yearBorn < 1946:
    print("Greatest Generation")
elif yearBorn <= 1964:
    print("Baby Boomer")
elif yearBorn <= 1984:
    print("Generation X")
elif yearBorn <= 2004:
    print("Millennial")
else:
    print("TBD")

x = int(input('Enter number: '))
if x % 2 == 0:
    print('Even number')
else:
    print('Odd number')
```

(Demo with pythonTutor)

IDLE

```
import turtle

tess = turtle.Turtle()
myWin = turtle.Screen()     #The graphics window
commands = input("Please enter a command string: ")

for ch in commands:
    #perform action indicated by the character
    if ch == 'F':           #move forward
        tess.forward(50)
    elif ch == 'L':         #turn left
        tess.left(90)
    elif ch == 'R':         #turn right
        tess.right(90)
    elif ch == '^':         #lift pen
        tess.penup()
    elif ch == 'v':         #lower pen
        tess.pendown()
    elif ch == 'B':         #go backwards
        tess.backward(50)
    elif ch == 'r':         #turn red
        tess.color("red")
    elif ch == 'g':         #turn green
        tess.color("green")
    elif ch == 'b':         #turn blue
        tess.color("blue")
    else:                   #for any other character
        print("Error: do not know the command:", c)
```

(Demo with IDLE)

Decisions

```
if x < y:
    print("x is less than y")
elif x > y:
    print("x is greater than y")
else:
    print("x and y must be equal")
```

Decisions

```
if x < y:
    print("x is less than y")
elif x > y:
    print("x is greater than y")
else:
    print("x and y must be equal")
```

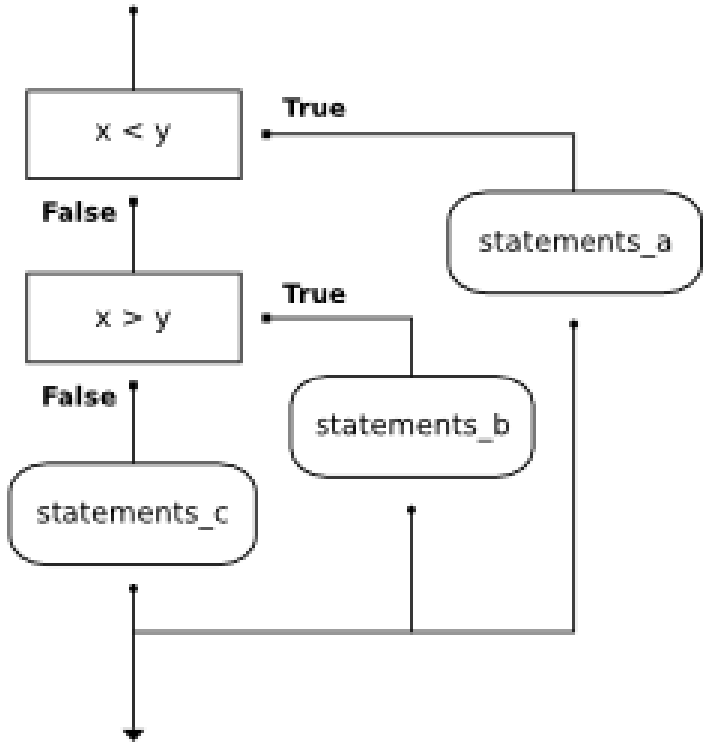

Decisions

```
if x < y:
    print("x is less than y")
elif x > y:
    print("x is greater than y")
else:
    print("x and y must be equal")
```

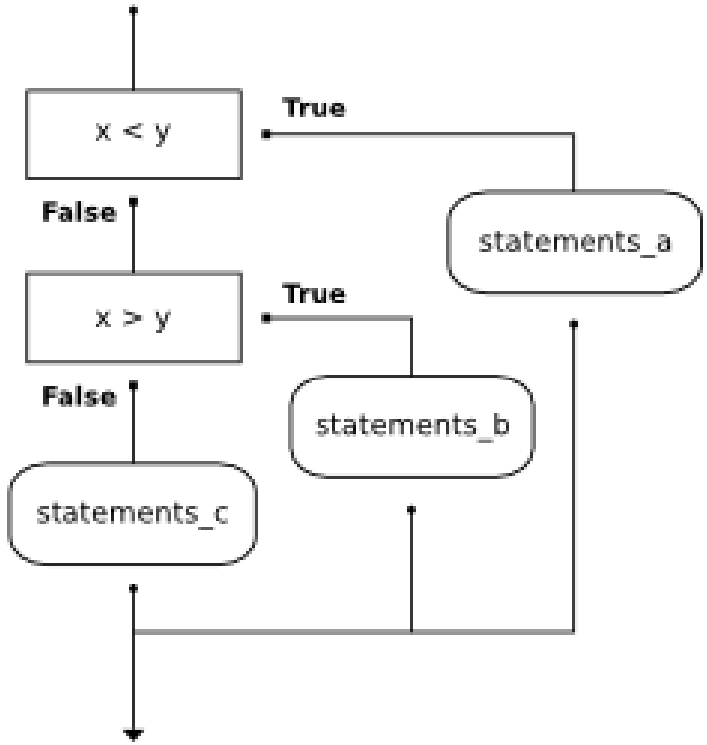

(This was just a first glance, will do much more on decisions over the next several weeks.)

Today's Topics

- Recap: Colors
- 2D Arrays & Image Files
- Decisions

Recap

- In Python, we introduced:

Recap

- In Python, we introduced:
  - Recap: Colors

Recap

- In Python, we introduced:
  - Recap: Colors
  - 2D Array & Image Files

Recap

- In Python, we introduced:
  - Recap: Colors
  - 2D Array & Image Files
  - Decisions

Recap

- In Python, we introduced:
  - Recap: Colors
  - 2D Array & Image Files
  - Decisions

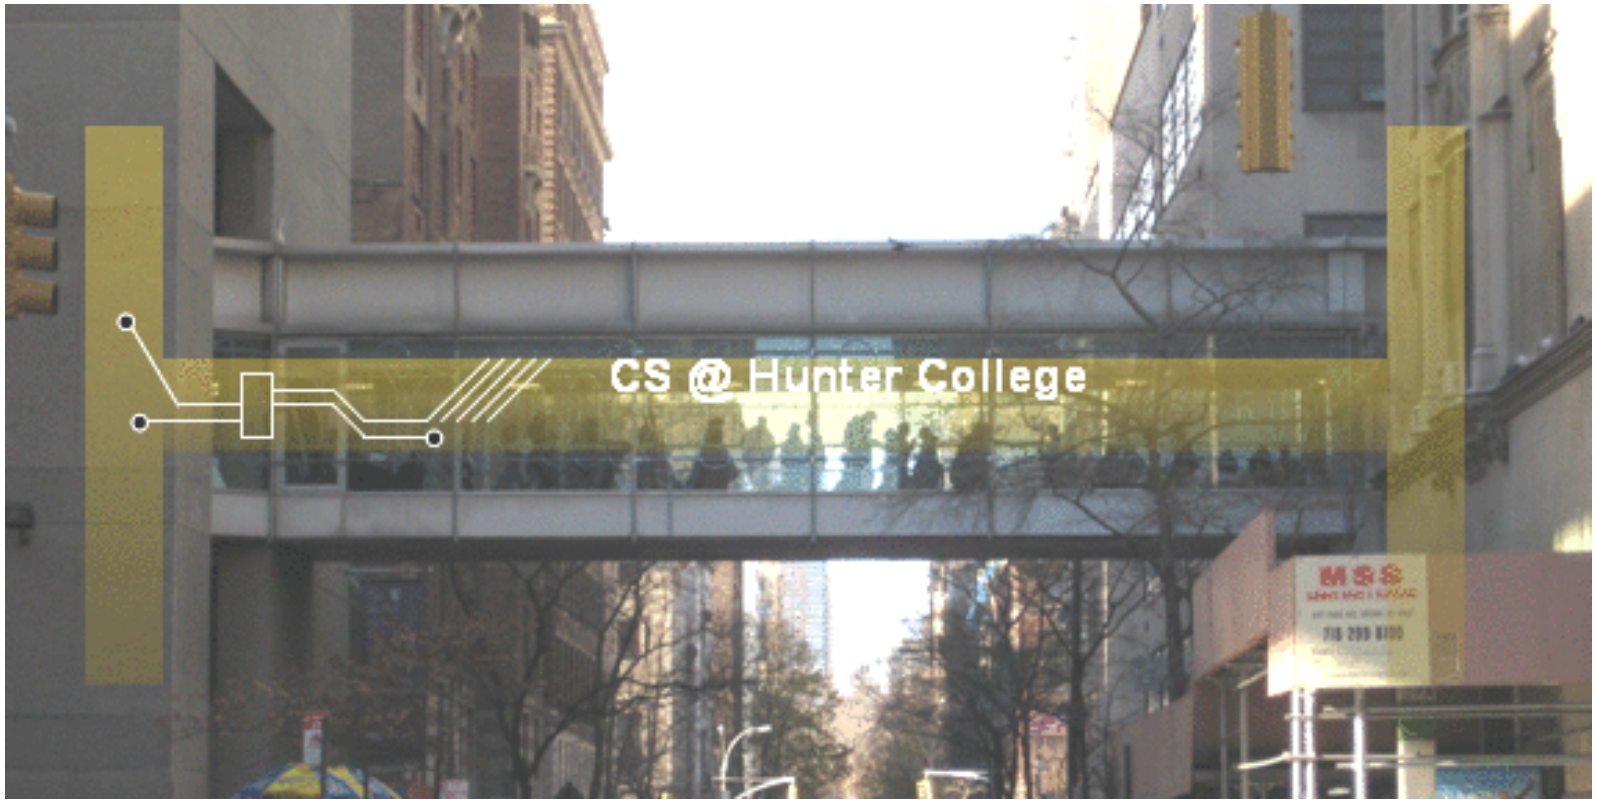

- Before next class:
- Read and work through LAB 4!
- Submit the programming assignments
- Tutoring and help is available through cscisummer23@gmail.com