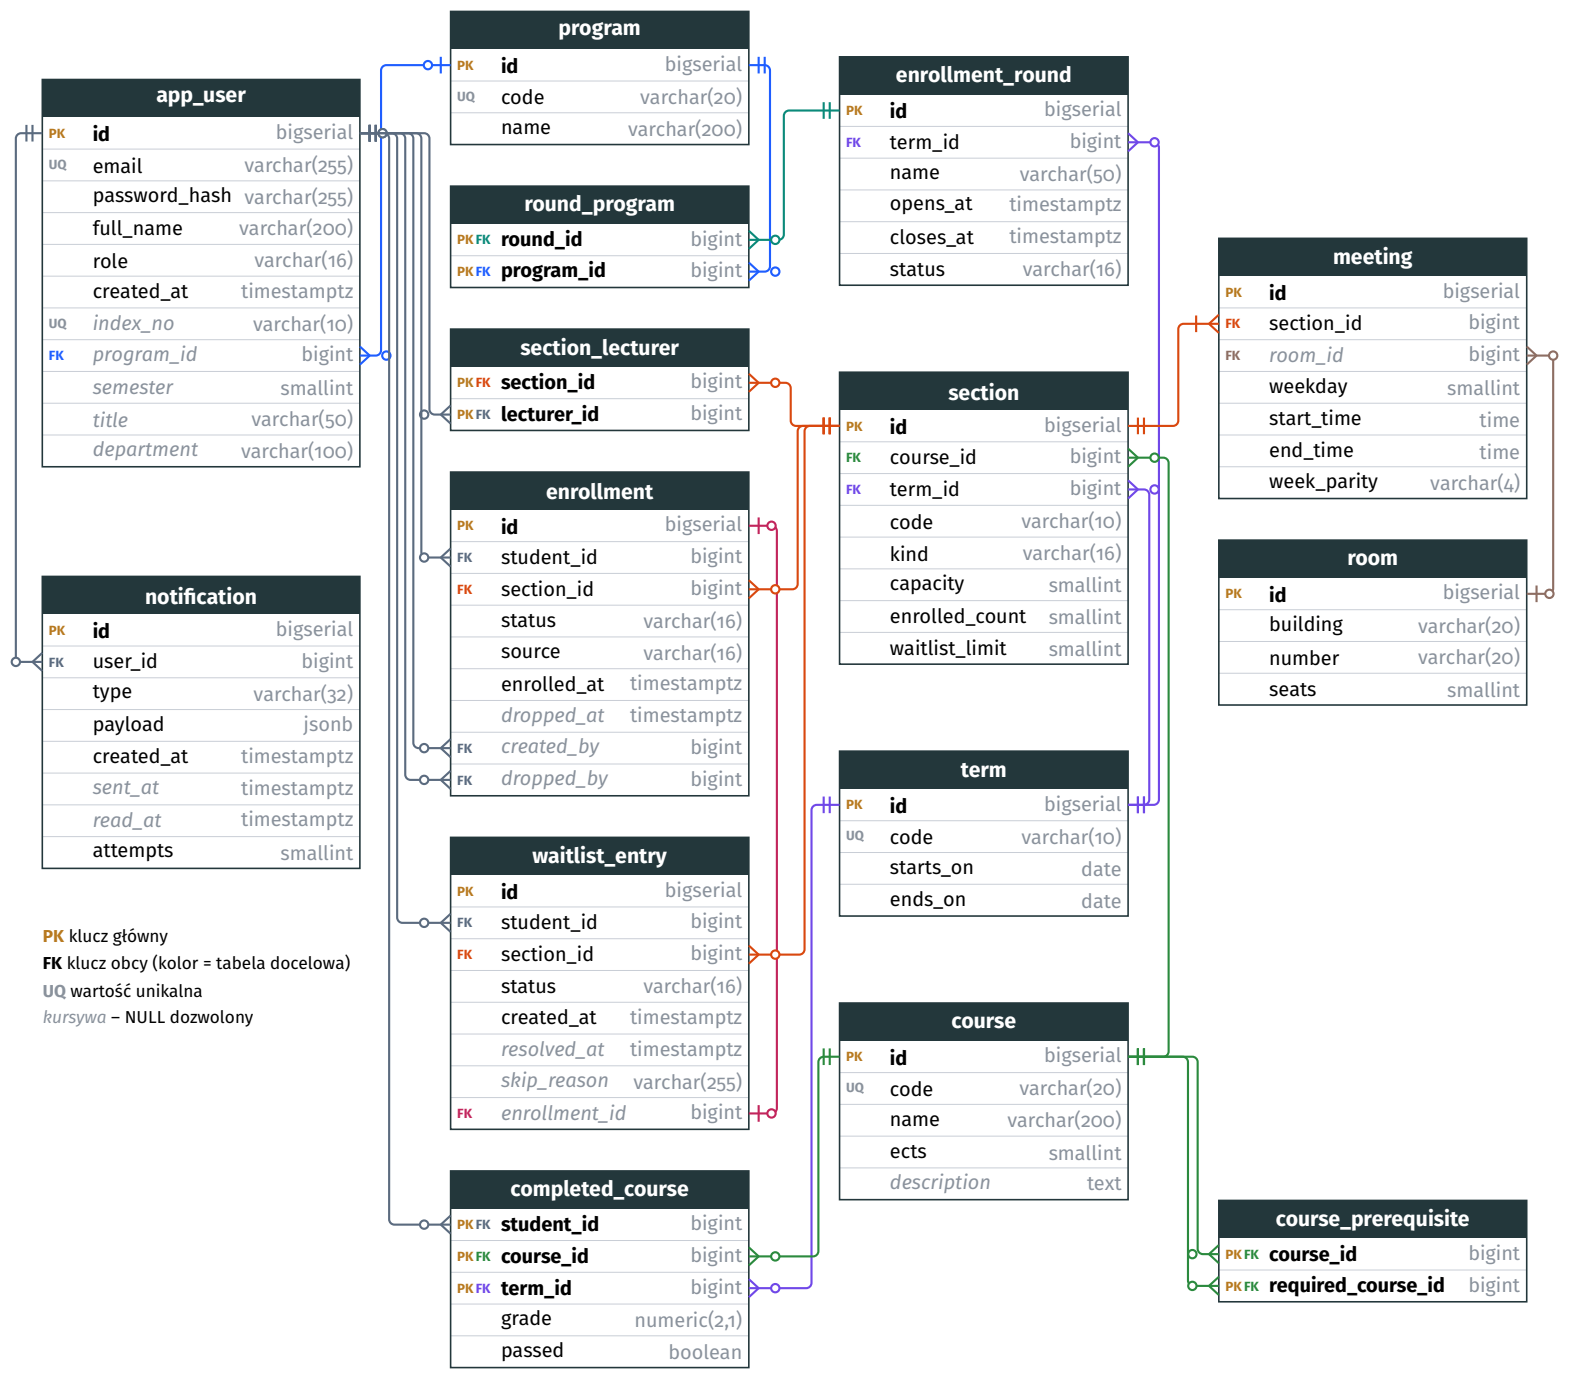
app_user
PK id bigserial
UQ email varchar(255)
password_hash varchar(255)
full_name varchar(200)
role varchar(16)
created_at timestamptz
UQ index_no varchar(10)
FK program_id bigint
semester smallint
title varchar(50)
department varchar(100)
program
PK id bigserial
UQ code varchar(20)
name varchar(200)
round_program
PK FK round_id bigint
PK FK program_id bigint
enrollment_round
PK id bigserial
FK term_id bigint
name varchar(50)
opens_at timestamptz
closes_at timestamptz
status varchar(16)
meeting
PK id bigserial
FK section_id bigint
FK room_id bigint
weekday smallint
start_time time
end_time time
week_parity varchar(4)
section_lecturer
PK FK section_id bigint
PK FK lecturer_id bigint
section
PK id bigserial
FK course_id bigint
FK term_id bigint
code varchar(10)
kind varchar(16)
capacity smallint
enrolled_count smallint
waitlist_limit smallint
room
PK id bigserial
building varchar(20)
number varchar(20)
seats smallint
enrollment
PK id bigserial
FK student_id bigint
FK section_id bigint
status varchar(16)
source varchar(16)
enrolled_at timestamptz
dropped_at timestamptz
FK created_by bigint
FK dropped_by bigint
notification
PK id bigserial
FK user_id bigint
type varchar(32)
payload jsonb
created_at timestamptz
sent_at timestamptz
read_at timestamptz
attempts smallint
term
PK id bigserial
UQ code varchar(10)
starts_on date
ends_on date
waitlist_entry
PK id bigserial
FK student_id bigint
FK section_id bigint
status varchar(16)
created_at timestamptz
resolved_at timestamptz
skip_reason varchar(255)
FK enrollment_id bigint
course
PK id bigserial
UQ code varchar(20)
name varchar(200)
ects smallint
description text
completed_course
PK FK student_id bigint
PK FK course_id bigint
PK FK term_id bigint
grade numeric(2,1)
passed boolean
course_prerequisite
PK FK course_id bigint
PK FK required_course_id bigint
PK klucz główny
FK klucz obcy (kolor = tabela docelowa)
UQ wartość unikalna
kursywa – NULL dozwolony