
Regression

1. Use RegressionFits and SpringData
    a. Plotting the scatter plot: Linear

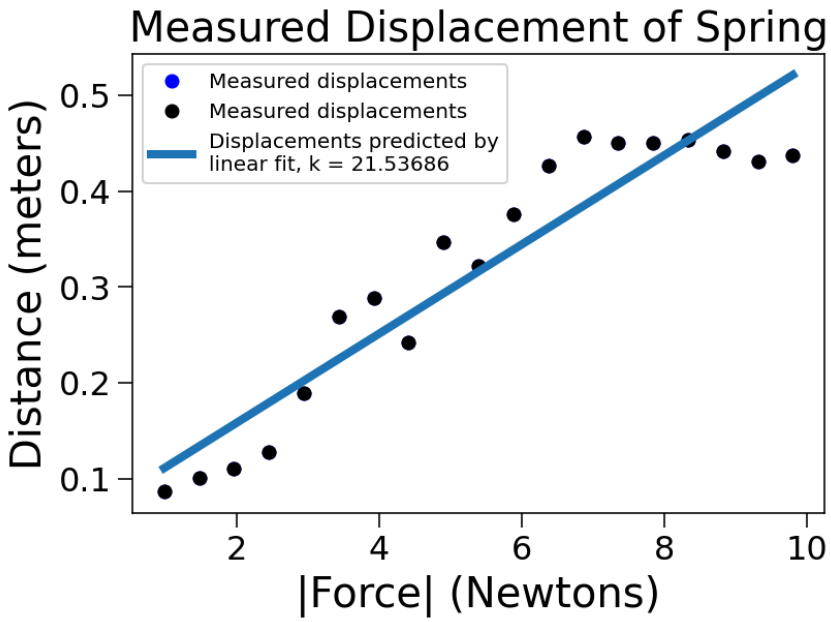

    b. Pearson correlation between the two parameters.

```
import csv

with open('CSPhDvsArcade.csv', newline='') as csvfile:
    datareader = csv.reader(csvfile, delimiter = ',')
    line_count = 0
    revenue = []
    PhDs = []
    for row in datareader:
        if line_count == 0:
            print(f'Column names are {", ".join(row)}')
            line_count += 1
        else:
            print(f'\tRevenue {row[0]} PhDs {row[1]}.')
            revenue.append(float(row[0]))
            PhDs.append(int(row[1]))
            line_count += 1
    print(f'Processed {line_count} lines.')
```