estpassportQ&A



Higher Quality

Better Service!

We offer free update service for one year Http://www.testpassport.com Exam : 98-381

Title : Introduction to Programming

Using Python

Version: DEMO


1.HOTSPOT

You are writing a Python program to validate employee numbers.


The employee number must have the format ddd-dd-dddd and consist only of numbers and dashes. The program must print True if the format is correct and print False if the format is incorrect.

How should you complete the code? To answer, select the appropriate code segments in the answer area.

Answer Area

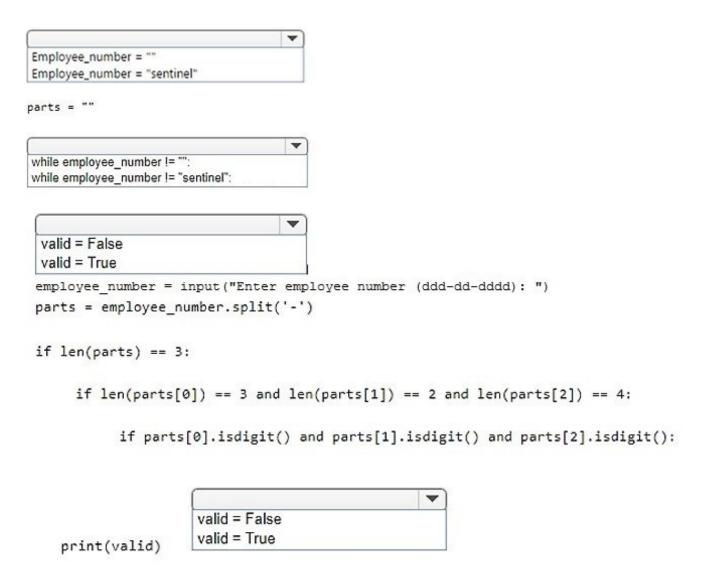

Answer:

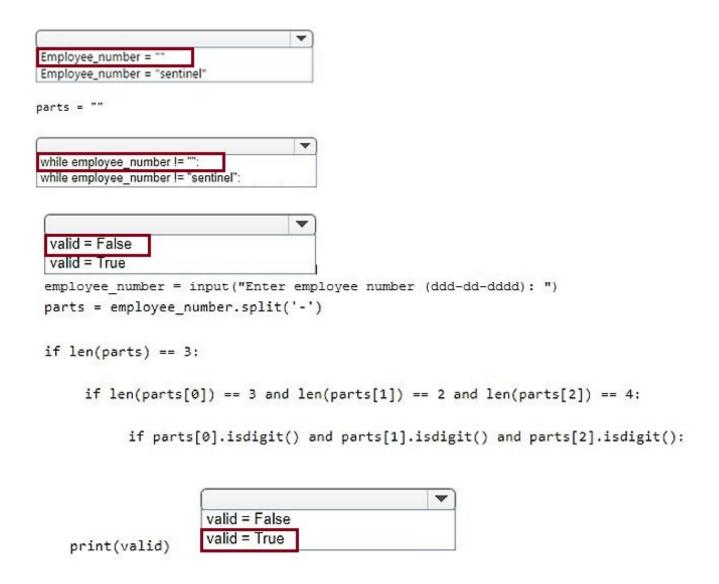

2.HOTSPOT

You are coding a math utility by using Python.

You are writing a function to compute roots.

The function must meet the following requirements:

```
If a is non-negative, return a**(1/b)

If a is negative and even, return "Result is an imaginary number"

If a is negative and odd, return -(-a)**(1/b)
```

How should you complete the code? To answer, select the appropriate code segments in the answer area.

def safe_root(a, b):

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

answer = $a^{**}(1/b)$

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

answer = "Result is an imaginary number"

```
if a >= 0:
if a % 2 == 0:
else:
elif:
answer = -(-a) ** (1/b)
```

return answer

Answer:

Answer Area

def safe_root(a, b):

```
if a >= 0:

if a % 2 == 0:

else:

elif:
```

answer = $a^{**}(1/b)$

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

```
if a >= 0:

if a % 2 == 0:

else:

elif:
```

answer = "Result is an imaginary number"

```
if a >= 0:
if a % 2 == 0:
else:
elif:
answer
```

Explanation: https://www.w3resource.com/python-if-else-statements.php

3. HOTSPOT

You work for a company that distributes media for all ages.

You are writing a function that assigns a rating based on a user's age. The function must meet the following requirements:

- Anyone 18 years old or older receives a rating of "A"
- Anyone 13 or older, but younger than 18, receives a rating of "T"
- Anyone 12 years old or younger receives a rating of "C"
- If the age is unknown, the rating is set to "C"

You need to complete the code to meet the requirements.

```
def get_rating(age):
      rating = ""
      if
      eli age < 13: rating = "C"
          age < 18: rating = "T"
      eli : rating = "A"
      els age == None: rating = "C"
      return rating
def get_rating(age):
     rating = ""
     elif
           age < 13: rating = "C"
     elif
           age < 18: rating = "T"
     else : rating = "A"
     retur age == None: rating = "C"
 def get_rating(age):
      rating = ""
      if
      elif
      elif
            age < 13: rating = "C"
      else
            age < 18: rating = "T"
      retur : rating = "A"
            age == None: rating = "C"
def get_rating(age):
     rating = ""
     if
    elif
    elif
     else
```

< 13: rating = "C"

The safer	easier way	to help	vou pass an	v IT exams
THE SUICE,	Casici wa	, to Holp	you pass an	y ii Chaiiis.

```
def get_rating(age):
      rating = ""
      if
      eli age < 13: rating = "C"
      age < 18: rating = "T"
: rating = "A"
      els age == None: rating = "C"
      return rating
def get_rating(age):
     rating = ""
    if
     elif
     elif (age < 13: rating = "C")
           age < 18: rating = "T"
     else : rating = "A"
     retur age == None: rating = "C"
 def get_rating(age):
      rating = ""
      if
      elif
      elif
            age < 13: rating = "C"
      else
            age < 18: rating = "T"
      retur : rating = "A"
            age == None: rating = "C"
def get_rating(age):
    rating = ""
```

Explanation: https://www.w3resource.com/python-if-else-statements.php

4.HOTSPOT

You are designing a decision structure to convert a student's numeric grade to a letter grade. The program must assign a letter grade as specified in the following table:

Percentage range	Letter grade
90 through 100	A
80 through 89	В
70 through 79	С
65 through 69	D
0 through 64	F

For example, if the user enters a 90, the output should be, "Your letter grade is A". Likewise, if a user enters an 89, the output should be "Your letter grade is B".

How should you complete the code? To answer, select the appropriate code segments in the answer area.

```
#Letter Grade Converter
grade = int(input("Enter a numeric grade"))
                                                       ₹
if grade <= 90:
if grade > = 90:
elif grade > 90:
elif grade > = 90:
      letter_grade = 'A'
if grade > 80:
if grade >= 80:
elif grade > 80:
elif grade >= 80:
       letter_grade = 'B'
 if grade > 70:
 if grade >= 70:
 elif grade > 70:
 elif grade >= 70:
       letter_grade = 'C'
 if grade > 65:
 if grade >= 65:
 elif grade > 65:
 elif grade >= 65:
```

letter_grade = 'D'

The cofor	easier way	to bo	do vou	nacc	any IT	Lovame
The saler.	easier way	to ne	uov als	pass	anv H	exams.

_					
Α	n	CI	A	ω	۳.
_		3	٧v	_	

```
#Letter Grade Converter
grade = int(input("Enter a numeric grade"))
                                                        \mathbf{v}
if grade <= 90:
(if grade > = 90:)
elif grade > 90:
elif grade > = 90:
      letter_grade = 'A'
if grade > 80:
if grade >= 80:
elif grade > 80:
elif grade >= 80:
      letter_grade = 'B'
 if grade > 70:
 if grade >= 70:
 elif grade > 70:
elit grade >= /0:
       letter_grade = 'C'
 if grade > 65:
 if grade >= 65:
 elif grade > 65:
 elif grade >= 65:)
```

letter_grade = 'D'

Explanation: https://www.w3resource.com/python-if-else-statements.php


5.HOTSPOT

You are developing a Python application for an online product distribution company.


You need the program to iterate through a list of products and escape when a target product ID is found. How should you complete the code? To answer, select the appropriate code segments in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

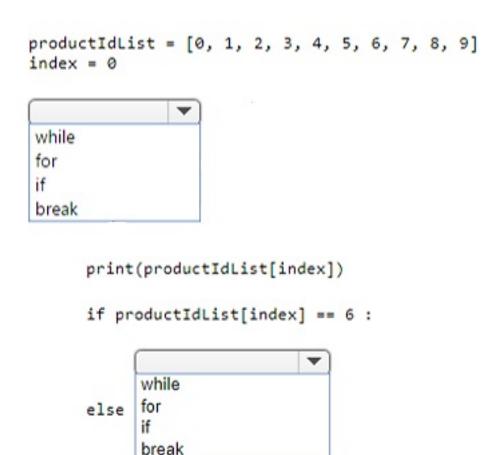

Answer:





```
print(productIdList[index])

if productIdList[index] == 6 :

while
else for
if
break
```

Explanation: https://www.w3resource.com/python/python-while-loop.php