```php
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>INTRODUCTION</title>
    <link rel="icon" href="img/logo1.png">
</head>
<body>

    <h2>WELCOME</h2><hr>

    <form action="" method="POST">
        <label for="username">Username</label>
        <input type="text" name="name"><br><br>
        <label for="email">Email</label>
        <input type="email" name="email"><br><br>
        <label for="phone">Phone Number</label>
        <input type="number" name="phone"><br><br>
        <label for="password">Password</label>
        <input type="password" name="password"><br><br>
        <input type="submit" name="submit">
    </form>

    <?php
    include 'conn.php';

    //validate form
    if (isset($_POST['submit'])) {
        $name = $_POST['name'];
        $email = $_POST['email'];
        $phone = $_POST['phone'];
        $password = $_POST['password'];

        //ceck value if not empty
        if (!empty($name) && !empty($email) && !empty($phone) && !empty($password)) {
            //SUBMIT
            $query = "INSERT INTO users (name, email, phone, password) VALUES ('$name', '$email', '$phone', '$password')";
            $result = mysqli_query(mysql: $conn, query: $query);

            echo "Insert data was successefully";
        }else{
            echo "Please fill all the values";
        }
    }

    ?>

</body>
</html>
```
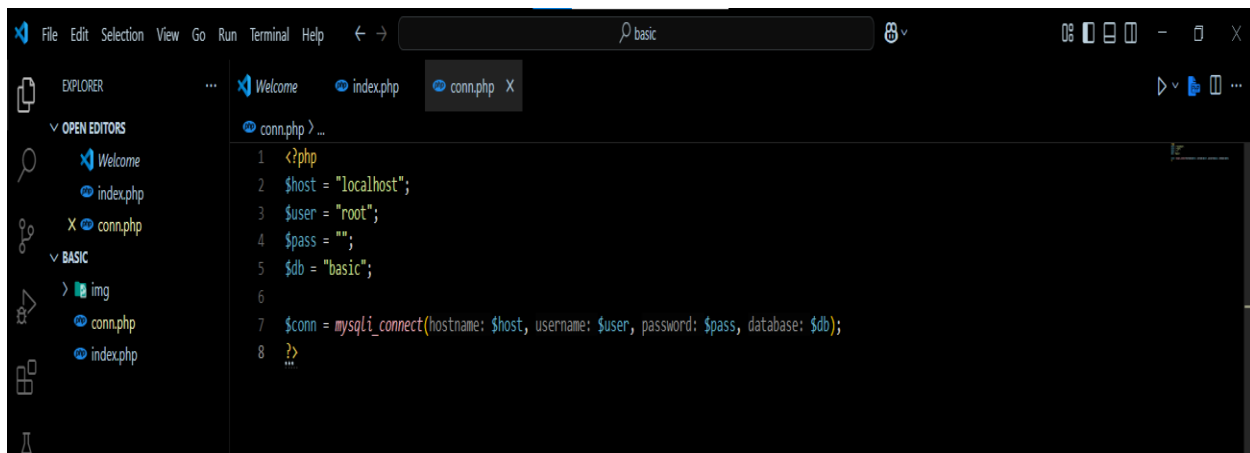
```php
<?php
$host = "localhost";
$user = "root";
$pass = "";
$db = "basic";

$conn = mysqli_connect(hostname: $host, username: $user, password: $pass, database: $db);
?>
```

```
C:\xampp\mysql\bin>mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 10
Server version: 10.4.32-MariaDB mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE basic;
Query OK, 1 row affected (0.002 sec)

MariaDB [(none)]> use basic;
Database changed
MariaDB [basic]> CREATE TABLE users(
    -> userID INT PRIMARY KEY AUTO_INCREMENT,
    -> name VARCHAR(100) NOT NULL,
    -> email VARCHAR(159) UNIQUE NOT NULL,
    -> phone INT NOT NULL,
    -> password VARCHAR(50) NOT NULL,
    -> create_at TIMESTAMP NOT NULL
    -> );
Query OK, 0 rows affected (0.032 sec)

MariaDB [basic]> DESC users;
+-----------+--------------+------+-----+-------------------+-----------------------------+
| Field     | Type         | Null | Key | Default           | Extra                       |
+-----------+--------------+------+-----+-------------------+-----------------------------+
| userID    | int(11)      | NO   | PRI | NULL              | auto_increment              |
| name      | varchar(100) | NO   |     | NULL              |                             |
| email     | varchar(159) | NO   | UNI | NULL              |                             |
| phone     | int(11)      | NO   |     | NULL              |                             |
| password  | varchar(50)  | NO   |     | NULL              |                             |
| create_at | timestamp    | NO   |     | current_timestamp() | on update current_timestamp() |
+-----------+--------------+------+-----+-------------------+-----------------------------+
6 rows in set (0.018 sec)

MariaDB [basic]> select * from users;
+--------+------------------------+------------------------+-----------+----------+---------------------+
| userID | name                   | email                  | phone     | password | create_at           |
+--------+------------------------+------------------------+-----------+----------+---------------------+
|      1 | husseinali2334@gmail.com | husseinali2334@gmail.com | 658216348 | 1234     | 2025-06-01 14:18:12 |
+--------+------------------------+------------------------+-----------+----------+---------------------+
1 row in set (0.002 sec)

MariaDB [basic]> _
```