GraphPathology enables geometry-aware reconstruction of spatial transcriptomics from sparse molecular measurements

Truong-Son Hy[1,*]

[1]Department of Computer Science, University of Alabama at Birmingham, Birmingham, Alabama, United States

[*]Correspondence: thy@uab.edu

Abstract

Sparse spatial transcriptomics reconstruction requires separating measured molecular support from image context. We preserve the original 50-gene results in 25 evaluation patients and report a separate exploratory study in previously inspected cohorts. Exact recovery of 22 Bassiouni patients enabled matched 20-estimator comparisons and controlled anchor-placement experiments. At 20% coverage, excluding a central region worsened reconstruction in every patient despite identical hidden targets and equal anchor counts. We trained 48 new bounded Transformer, fixed-distance, latent-coordinate EGNN and baseline/control models, retaining 30 older frozen heads, and evaluated all 78 in 26 patients. For distributed Bassiouni reconstruction, residual-anchor GPS and EGNN reduced median paired correlation versus IDW by 0.050 and 0.048 and increased MSE by 13.4% and 13.0%. Nonlocal-attention and coordinate-update ablations did not establish an accuracy advantage. All seeds, error metrics and patient effects are retained. Conditional geometric checks and attention reach validate software properties, not biological long-range correlation or complete-image equivariance. Limited image resolution, two source training patients and cross-platform transport constrain interpretation. The evidence supports careful anchor placement, without a stronger neural novelty claim or demonstrated total assay savings.

Keywords: spatial transcriptomics; sparse reconstruction; geometry-aware graph learning; spatial transcriptomics imputation; histopathology; breast cancer

1 Introduction

Spatial transcriptomics (ST) retains anatomical context while measuring gene expression across heterogeneous tissue[1]. However, dense profiling can be expensive, and many acquisition designs provide expression at only a subset of the tissue locations. Histology is comparatively available, motivating methods that leverage both tissue morphology and the geometry of measured molecular profiles[2, 3]. A computational approach to reconstructing unmeasured locations could support more efficient study designs, but the prediction task and the measured information available at inference must be specified explicitly.

In breast cancer, spatially resolved molecular measurements have revealed tissue-architecture features that are difficult to characterize through bulk assays[4–6]. We consider a precise reconstruction task: gene expression for a prespecified panel is observed at a subset of retained

locations within one tissue section, and the goal is to estimate that same panel at remaining locations. This differs from inferring an entirely unassayed panel or predicting expression from histology alone. Histological appearance and physical coordinates are known for all retained locations, but observed expression vectors are restricted to the measured anchors.

1.1 Related work

Histology-to-ST prediction has progressed from local convolutional approaches such as ST-Net[3] and DeepSpaCE[7] to combined visual-context models. Hist2ST uses Transformer and graph components[8], THItoGene studies richer histology representations[9], and FmH2ST uses feature-informed links between potentially distant histological regions[10]. These methods demonstrate that graph-based context and long-range histological associations are established approaches; neither idea in isolation is a novelty claim for GraphPathology. CMRCNet[11] and cross-cohort benchmarking[12] further motivate careful claims about transportability.

A complementary line of work conditions reconstruction on experimentally observed spatial expression. XFuse combines molecular measurements and images for super-resolution inference[13]; TESLA combines spatial and visual data to map tumors at high resolution[14]; and iStar integrates ST with high-resolution histology[15]. More recent approaches target sparse-measurement and efficient-acquisition settings: Sparser2Sparse learns from sparsely sampled sections[16], SCR^2-ST considers adaptive sampling[17], and PanoSpace addresses continuous tissue-wide reconstruction with additional modalities[18]. Spatial graph methods such as SPACEL address related spatial-domain and multi-section tasks[19]. These methods differ in required modalities, acquisition assumptions, target resolution and training strategy. We do not claim that interpolation, sparse acquisition, graph neural networks, or joint image–molecular inference originated in this work; direct head-to-head performance comparisons with these published systems were not conducted.

GraphGPS combines local message passing with global attention and structural encodings[20]; EGNNs propagate invariant messages and equivariant coordinates[21]. These published principles motivate the separately controlled, bounded post-v1 extension below; neither architectural principle is a new contribution of this study.

1.2 Methodological contribution and study objectives

We formulate *GraphPathology* as a geometry-aware and observation-constrained reconstruction framework with two distinct spatial pathways. First, a tissue-context graph constructed from physical coordinates determines the neighboring image embeddings that inform a contextual expression representation. We compare fixed mean-pooling, GCN[22] and GraphSAGE[23] aggregation within a controlled architecture, including spatial-topology controls. Second, at prediction time a molecular-support graph links an unmeasured site to its available measured anchors, enabling observed gene expression to enter predictions without revealing the hidden target labels. These are different graphs: one contextualizes morphology; the other transports *measured* molecular information.

The molecular-support graph is defined from the observed set and physical distance, without a hard spatial-distance cutoff. It can therefore connect locations across substantial gaps where

no measured molecular neighbors are nearby, although reliability may decrease with distance. The original contextual image GNN instead uses a single local aggregation step; we do not claim that it learned global dependencies or that it drove the final external improvements. The most consequential external results are from sparse molecular reconstruction under distributed and contiguous-missing-region protocols, compared with a frozen image predictor and calibrated fusion.

We test three central questions: (i) the gain available from observed molecular anchors at restricted measurement budgets, (ii) how distributed and contiguous absence differ at the protocol level, and (iii) whether the frozen image branch provides incremental predictive value after the anchors are supplied. We evaluate these questions in two independent breast-cancer studies, preserving patient-level analyses, fixed gene panels and the original negative controls. A 20% measurement budget represents fivefold fewer profiled locations, but does not itself demonstrate fivefold savings in total experimental costs.

Journal revision: original arXiv v1 results are retained below. Added analyses are explicitly post-v1 and use previously inspected cohorts.

2 Results

2.1 A staged evaluation separated development from fresh replication

The analytical design distinguished dataset roles before interpreting performance (Fig. 1; Table 1). The development cohort contained 35,536 paired locations from four HEST invasive ductal carcinoma patients, with two patients used for training, one for validation and one for the primary development evaluation. HER2ST contributed eight patients and 3,455 locations to an initial transportability test and was subsequently reused for calibration development; it was therefore not treated as an untouched final validation cohort. The Wu study contributed six patients, of whom three were reserved for evaluation after the other three were used to establish a frozen calibration object. The second replication used the first numbered section from each of 22 Bassiouni patients, selected from source metadata before outcome evaluation. All 30,003 locations from these selected sections were assigned to evaluation, with no Bassiouni-specific training, calibration or method selection.

Fresh replication thus comprised 25 evaluation patients across two independent studies, totaling 38,484 retained locations. Both studies contained all 50 primary genes in their original order. HER2ST analyses used a 40-gene intersection and were not pooled with 50-gene summaries. The public external histology inputs were substantially downsampled: the nominal 112-μm image patch contained only 15 or 25 native pixels in the Wu cohort and 24–29 native pixels in the Bassiouni cohort. Consequently, these datasets provide direct evidence about molecular interpolation, but only a resolution-limited test of the frozen histology predictor.



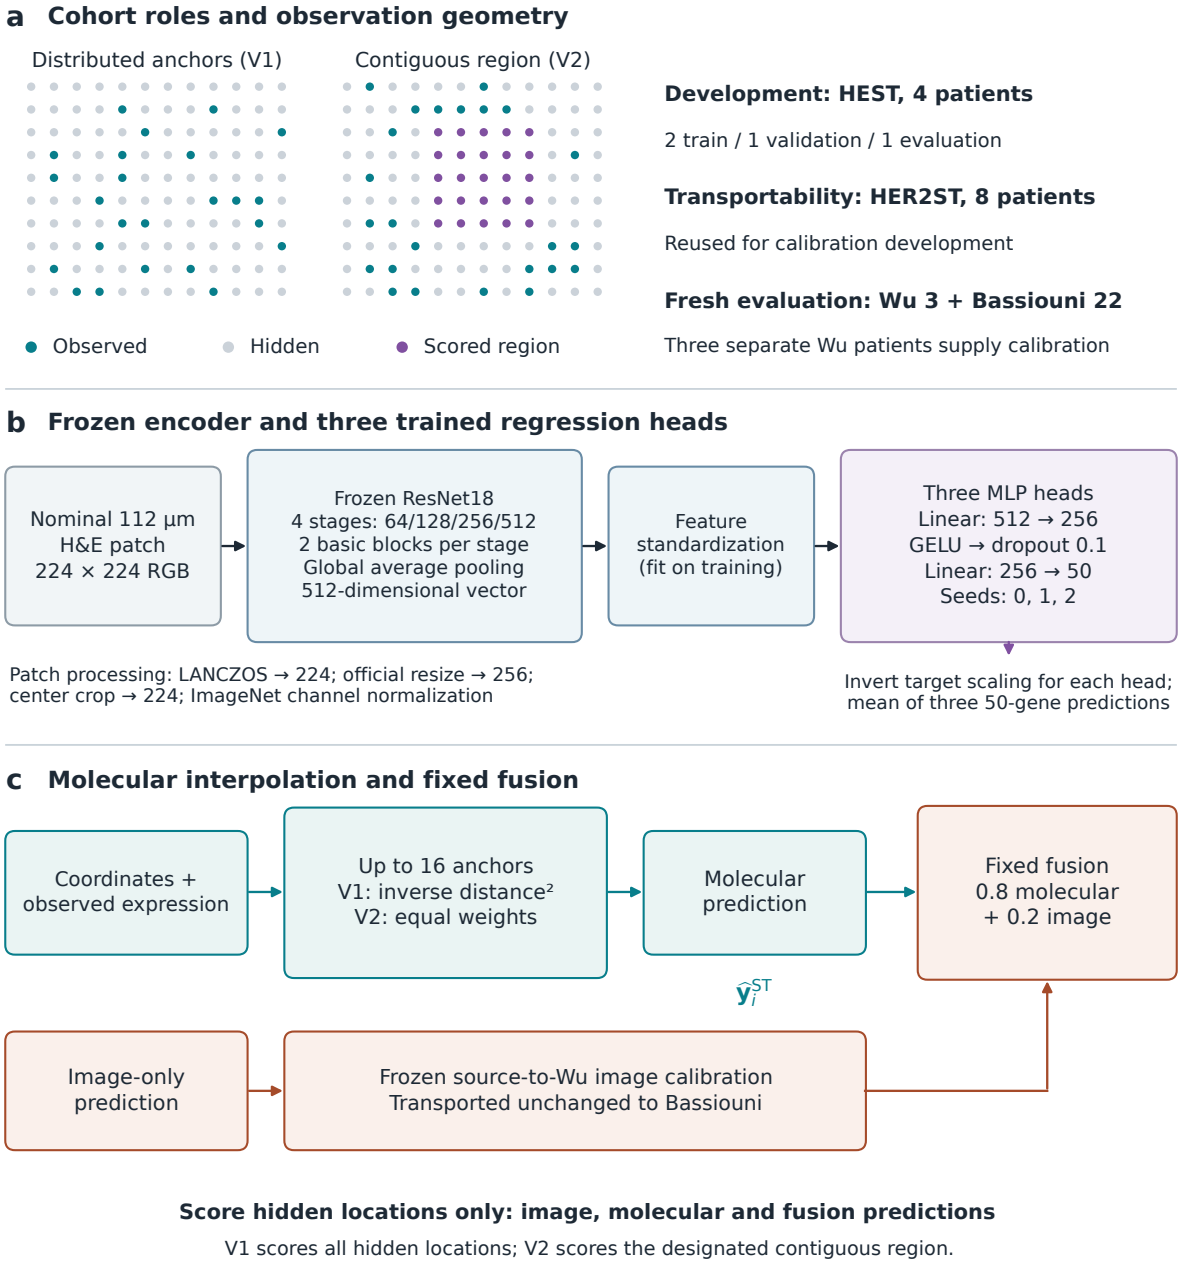


Figure 1: Study design and neural-image/molecular reconstruction architecture. a, Cohort roles and illustrative observation geometries. Teal locations are observed molecular anchors; gray locations are hidden; purple locations form the contiguous scored region. The synthetic spatial examples illustrate 20% coverage and are not patient measurements. The Wu calibration and evaluation groups contain different patients. **b,** The frozen ImageNet ResNet18 maps histology to a 512-dimensional vector after global average pooling; the ImageNet classifier is removed. External nominal 112-μm patches are first resized to 224×224 with LANCZOS, then processed by the official resize-to-256, central-crop-to-224 and channel-normalization transform. Feature scaling fitted on the training patients precedes each $512 \to 256 \to 50$ MLP, with GELU activation and dropout 0.1 after the hidden linear layer. The three heads use seeds 0, 1 and 2. Their predictions are inverse-scaled to the common target units and averaged. **c,** Molecular interpolation uses up to 16 observed neighbors, with inverse-distance-squared weighting for distributed evaluation (V1) and equal weighting for contiguous regional completion (V2). Fixed fusion combines this output with the calibrated image prediction using weights 0.8 and 0.2. The uncalibrated image ensemble is also evaluated separately. Calibration uses the development-training and Wu calibration patients and is transported unchanged to Bassiouni. Evaluation uses hidden locations only. V1 and V2 differ in weighting and scoring support as well as observation geometry.

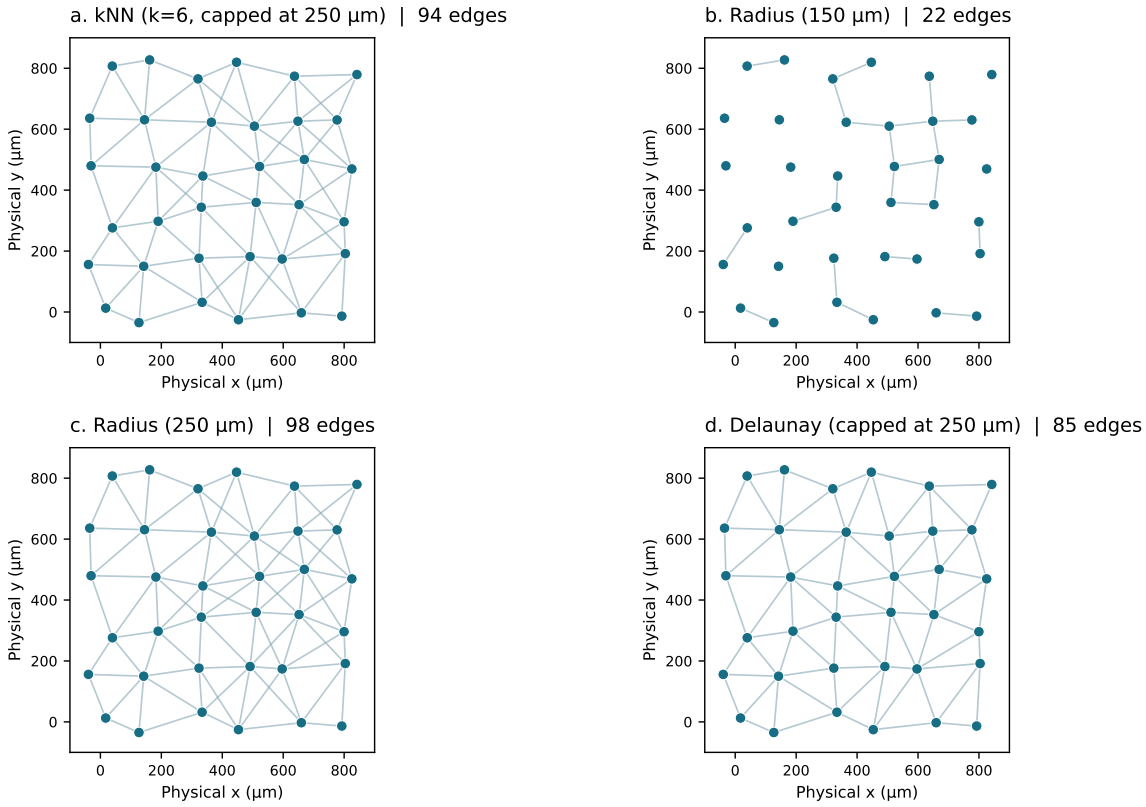

e. Geometry-aware contextual representation pathway (development models)



Illustrative coordinates only. The evaluation-stage molecular-anchor graph is constructed separately from observed sites.

Figure 2: Geometry-aware graph construction and contextual representations. a–d, The same 36 synthetic tissue locations are connected by (a) a symmetrized six-nearest-neighbor graph with a 250-μm distance cap, (b,c) 150- and 250-μm radius neighborhoods, or (d) a 250-μm-capped Delaunay graph. Coordinates and axes are identical across panels and all retained edges are displayed. Symmetrization means that a node can have more than six neighbors. **e,** Geometry determines a fixed adjacency/aggregation operator acting on the frozen image embeddings before an expression-regression head. The molecular-reconstruction stage uses a separate observation-dependent graph joining hidden locations to up to 16 measured molecular anchors. Synthetic points illustrate the architecture only, not a fitted patient graph or a performance result.

Table 1: Cohorts and their analytical roles. Counts refer to retained locations and patient-level study roles, not independent spot replicates. The same eight HER2ST patients were first inspected for transportability and subsequently used for calibration development. The Wu study contains 15,601 locations in all six patients; only 8,481 locations from its three evaluation patients enter fresh validation. All 22 Bassiouni patients were evaluated without new training or calibration. "Pixels per patch" refers to the native image information in a nominal 112-μm field of view, before resizing. The primary panel was fixed in development.

Cohort	Platform	Patients, total / evaluation	Locations, total / evaluation	Genes	Analytical role and image quality
Development (HEST)	Targeted Xenium	4 / 1	35,536 / 20,761	50/50	Two training, one validation, one primary evaluation patient; conditional four-patient sensitivity analyses. Estimated 0.21–0.36 μm/pixel.
HER2ST	Sequencing ST	8 / 8	3,455 / 3,455	40/50	Initial transportability, then calibration development on the same patients. Approximately 0.69–0.92 μm/pixel.
Wu	Visium	6 / 3	15,601 / 8,481	50/50	Three calibration and three fresh evaluation patients. Only 15 or 25 native pixels per patch.
Bassiouni	Visium	22 / 22	30,003 / 30,003	50/50	First numbered section per patient; fresh replication with no cohort-specific fitting. Only 24–29 native pixels per patch.

2.2 Distributed molecular anchors supported reconstruction across fresh cohorts

In the primary development patient, TENX99, expression at 20% distributed coverage was reconstructed with median gene Pearson correlations of 0.695 for image-only prediction, 0.792 for spatial interpolation and 0.822 for image–molecular fusion, averaged over the development masks (Fig. 3; Table 2). Mean squared errors (MSEs) were 0.911, 0.268 and 0.279, respectively. The higher fusion correlation therefore did not translate into lower error than interpolation. These values describe one development patient and do not quantify population-level generalization.

In the fresh Wu evaluation, the median of patient-level median gene correlations at 20% distributed coverage was 0.359 for spatial interpolation and 0.059 for image-only prediction (Fig. 4). Corresponding MSEs were 0.0987 and 2.9155, and mean absolute errors (MAEs) were 0.2179 and 1.5578. All three evaluation patients favored interpolation over the frozen image predictor in correlation, MSE and MAE at every tested budget. The large error reduction is partly relative to an image predictor with substantial cross-platform scale and image-resolution mismatch; it should not be interpreted as accurate recovery of absolute transcript abundance or superiority over all image-based methods.

The second fresh replication provided consistent support for the same comparison (Fig. 5).

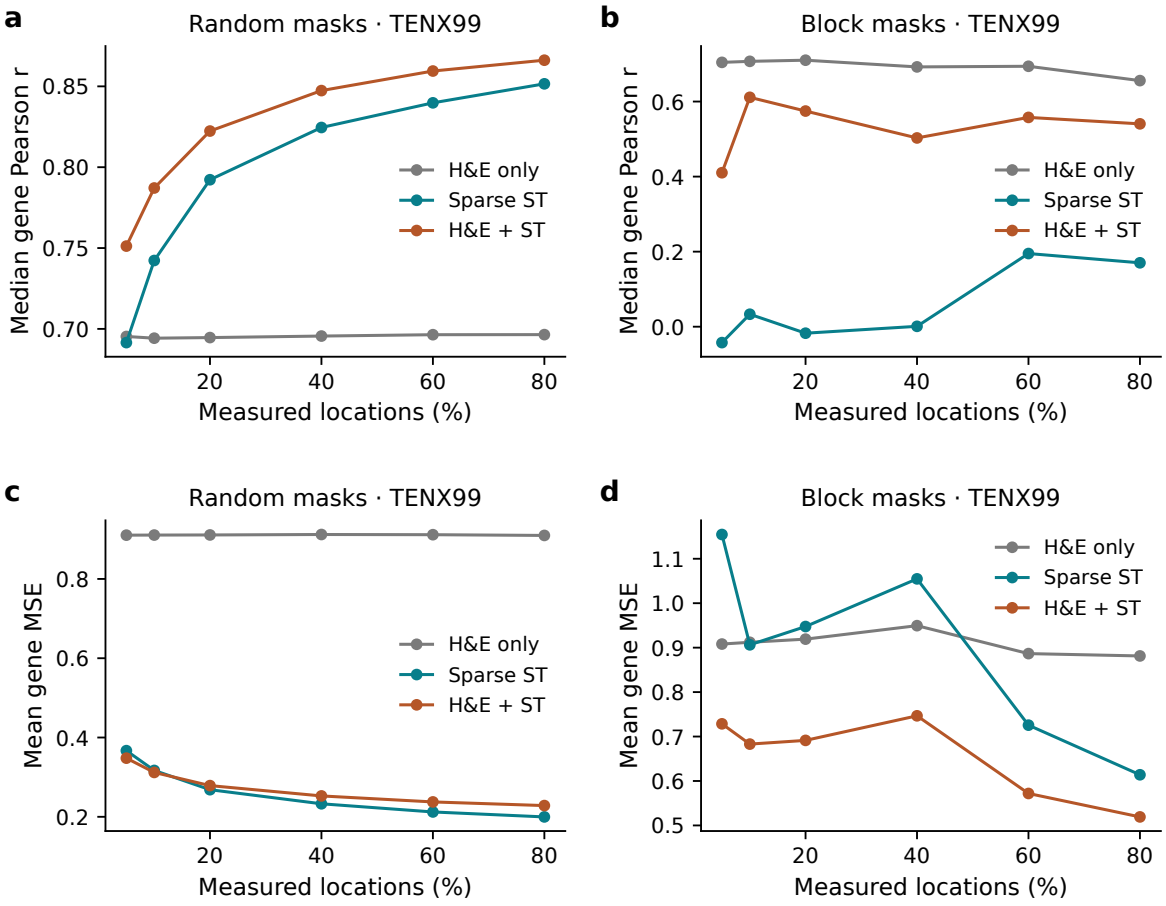


Figure 3: Development reconstruction depends on molecular coverage and masking regime. Results are from the single primary development patient, TENX99, using the frozen 50-gene panel and ResNet18 representation. **a,c,** Distributed random observation. **b,d,** The earlier development block-mask regime. Panels a and b show median gene Pearson correlation; panels c and d show mean gene MSE across measurement fractions. The image-only, selected molecular interpolation and fixed fusion curves summarize three frozen mask replicates per condition; curves are means over masks, not patient confidence intervals. Targets and error units are unchanged across methods. The development block masks differ from the external V2 forbidden-region protocol and should not be treated as directly equivalent geometry tests. At 20% distributed coverage, fusion has higher correlation than interpolation but slightly higher MSE, illustrating that spatial association and calibration are distinct properties. The image-only comparator receives no observed molecular anchors.

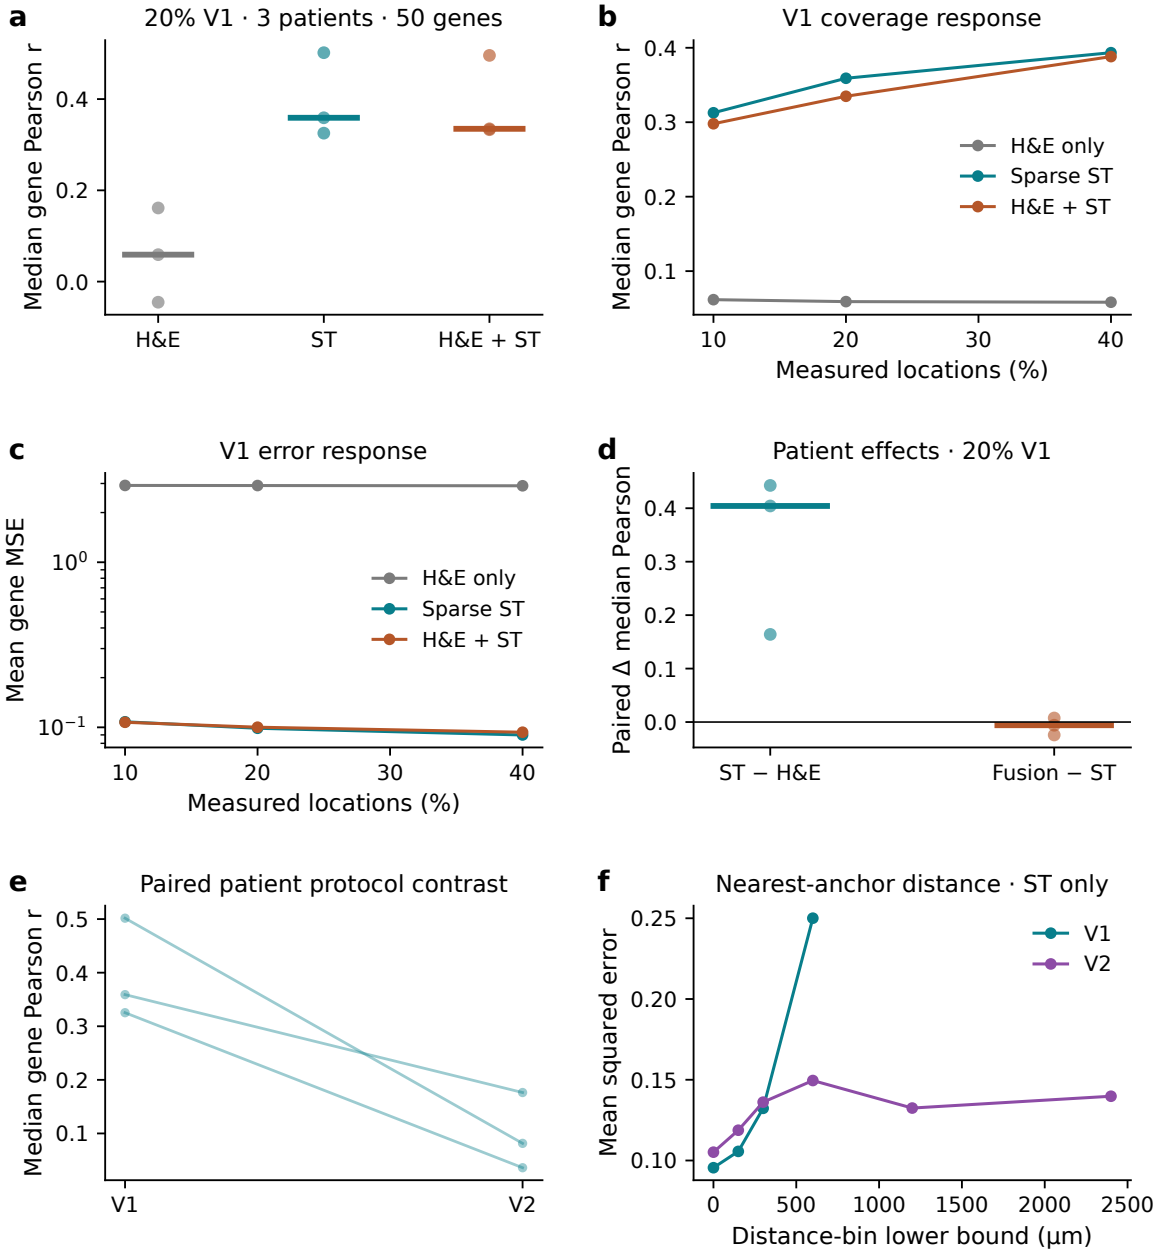


Figure 4: Fresh evaluation in three held-out Wu patients supports interpolation but not robust image fusion. The frozen 50-gene panel was evaluated in patients 1160920F, CID4290 and CID44971, none of whom contributed to Wu calibration. **a,** Patient-level correlation summaries at 20% distributed coverage. **b,c,** Median patient correlation and MSE across 10%, 20% and 40% distributed coverage. **d,** Paired patient correlation effects for interpolation versus image-only prediction and fusion versus interpolation. **e,** Paired distributed (V1) and contiguous-region (V2) molecular correlations at 20%. **f,** Distance-resolved molecular MSE at 20%. Patient summaries average ten random mask seeds within geometry and then geometry means; cohort summaries are medians, not pooled spot estimates. Three fixed contiguous geometries are used for V2. Each patient is a biological replicate; seeds are not. V1 uses inverse-distance-squared interpolation and V2 uses a nearest-anchor mean, so panel e is a protocol contrast. The public image inputs contained only 15 or 25 native pixels per 112-μm patch, limiting conclusions about morphology. Error units are common development-standardized log1p counts.

At 20% distributed coverage, spatial interpolation achieved a median patient correlation of 0.416, MSE of 0.0923 and MAE of 0.2033. Image-only values were 0.075, 1.9673 and 1.2120. All 22 patients met the prespecified joint support criterion at each of the three budgets: a correlation gain of at least 0.02, relative MSE reduction of at least 2%, and non-worsening MAE. This is a descriptive support criterion, not a significance test. Because interpolation receives measured expression from the evaluation section whereas the image-only model does not, the result establishes the utility of molecular anchors under the specified task rather than an equal-information algorithmic comparison.

Table 2: Reconstruction at 20% distributed measurement coverage. Each entry is a cohort median of patient-level summaries after averaging mask seeds within geometry and geometries within patient, except that the development row represents the single primary patient. Pearson r is the median correlation across panel genes; MSE and MAE are patient means across genes and hidden locations before the cohort median. All methods within a cohort use identical target units and observation masks. Different gene panels and assay count distributions preclude treating these values as a pooled cross-cohort ranking. Fusion rules and their calibration are frozen but differ between the development and external protocols; see Methods and Supplementary Information. The image-only branch has no same-section molecular anchors.

Cohort	n	Genes	Method	Pearson r	MSE	MAE
Development	1	50	Image only	0.695	0.9110	0.7606
			Spatial interpolation	0.792	0.2684	0.3904
			Fixed fusion	0.822	0.2787	0.4173
HER2ST, zero-shot	8	40	Image only	0.143	4.3665	1.9376
			Spatial interpolation	0.194	0.0680	0.1730
			Fixed fusion	0.255	0.3481	0.5153
Wu, fresh	3	50	Image only	0.059	2.9155	1.5578
			Spatial interpolation	0.359	0.0987	0.2179
			Fixed fusion	0.335	0.1002	0.2321
Bassiouni, fresh	22	50	Image only	0.075	1.9673	1.2120
			Spatial interpolation	0.416	0.0923	0.2033
			Fixed fusion	0.407	0.1022	0.2288

2.3 Increasing distributed coverage improved reconstruction consistently

Increasing the fraction of observed locations improved distributed reconstruction in both fresh cohorts (Supplementary Table S9). Across the Bassiouni patients, median patient correlations at 10%, 20% and 40% coverage were 0.380, 0.416 and 0.465; MSEs were 0.1001, 0.0923 and 0.0852. Every patient showed higher correlation and lower MSE at 40% than at 10%. The Wu cohort showed the same directional pattern in all three patients, with correlations of 0.313, 0.359 and 0.393 and MSEs of 0.1080, 0.0987 and 0.0899.

These curves describe the tested measurement fractions and do not identify a universally sufficient sampling budget. Coverage denotes the fraction of retained spatial locations whose complete expression vectors are revealed, not the fraction of tissue area assayed or a proportional reduction in experimental cost. Random sampling used nested anchor sets, but the hidden evaluation set also changes with coverage. The observed improvements therefore apply to the frozen budget-specific reconstruction protocols rather than to an identical set of targets at ev-

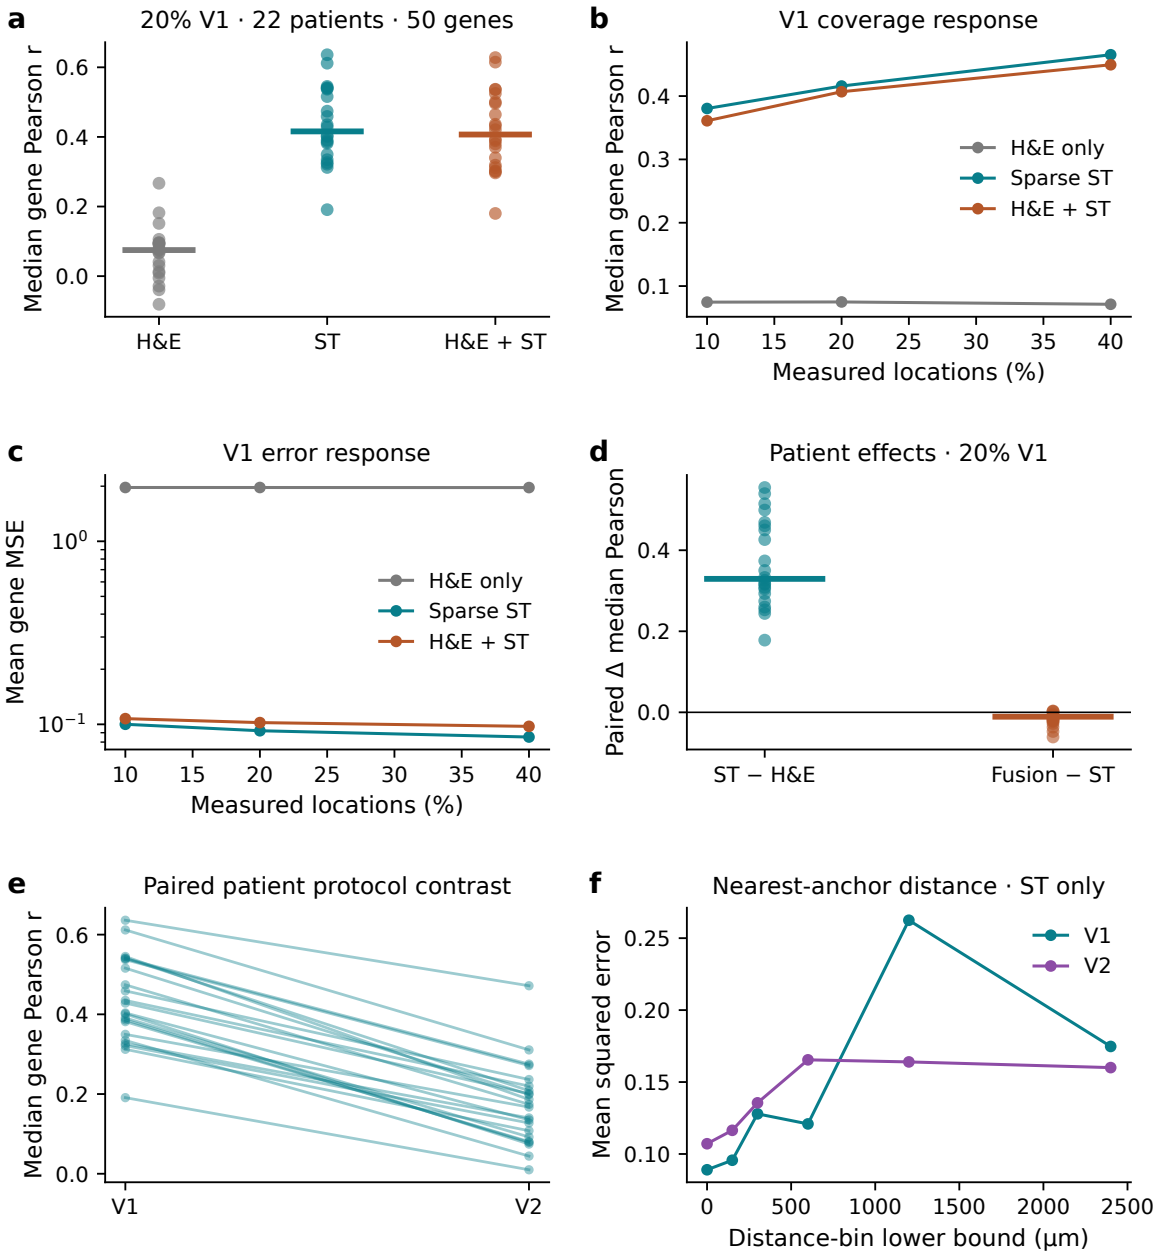


Figure 5: Independent 22-patient replication confirms the coverage response and weaker contiguous completion. One first-numbered section per Bassiouni patient was selected before evaluation, yielding 30,003 locations and the same 50 primary genes. No patient from this study was used for new training or calibration. **a,** Patient correlation summaries at 20% distributed coverage. **b,c,** Correlation and MSE across measurement fractions. **d,** Paired interpolation–image and fusion–interpolation correlation effects. **e,** Paired V1/V2 molecular correlations at 20%. **f,** Distance-resolved molecular MSE at 20%. Each patient summary averages ten mask seeds within geometry and then the three V2 geometry means where applicable; cohort curves use patient medians. All 22 patients improved in correlation and MSE between 10% and 40% V1 coverage and deteriorated in correlation, MSE and MAE under V2 relative to V1 at 20%. V1/V2 differ in scoring support and interpolation weighting as well as missing-region design. Image fusion uses the frozen Wu calibration and 0.2 image weight. Public histology contained only 24–29 native pixels per 112-μm patch. Distance curves have varying occupied-bin support and are not calibrated uncertainty intervals. No p-values or patient confidence intervals are implied.

ery budget. Label-free spatial coverage sampling was retained as a secondary analysis; earlier sampling comparisons had not established a reproducible advantage for difficult contiguous missing regions (Supplementary Fig. S8).

2.4 Contiguous regional completion exposed substantially weaker spatial prediction

Under the contiguous missing-region protocol, reconstruction quality deteriorated across the fresh cohorts (Figs. 4 and 5; Supplementary Table S9). At 20% coverage in the Bassiouni cohort, median patient correlation decreased from 0.416 for distributed interpolation to 0.171 for regional completion, while MSE increased from 0.0923 to 0.1496 and MAE from 0.2033 to 0.2624. All 22 patients deteriorated in all three measures. The median paired correlation change was -0.267, and the median paired relative MSE increase was 52.8%. The latter is not the ratio calculated from separate cohort medians.

The Wu cohort showed a similar limitation: median patient correlation under the contiguous protocol was 0.0815, compared with 0.359 for distributed interpolation. Every patient had higher error and lower correlation. These results show that a favorable distributed-masking score does not imply equally reliable recovery across a large unmeasured region.

This contrast must nevertheless be interpreted at the protocol level. Distributed evaluation used inverse-distance-squared interpolation and scored all hidden locations; regional evaluation used a nearest-anchor mean and scored the designated contiguous region only. Thus the comparison changes the interpolation rule, the spatial arrangement of observed locations and the composition of the scored tissue. It does not isolate a causal effect of geometry. Moreover, a withheld region can lie inside the convex hull of observed anchors. We use "contiguous extrapolation" only as an operational description of extending predictions into a region without molecular observations, not as proof of geometric out-of-support extrapolation.

2.5 Anchor distance was informative but did not define a universal reliability cutoff

Distance-resolved error summaries complemented the panel-level results and spatial error maps (Fig. 6). In the Bassiouni cohort at 20% coverage, the farthest occupied distance bin had higher MSE than the nearest bin in 15 of 22 patients for distributed interpolation and 20 of 22 for contiguous regional completion. Strictly increasing occupied-bin MSE curves occurred in only 6 and 13 patients, respectively. The Wu distributed curves increased across occupied bins in all three patients, whereas regional curves were nonmonotonic.

These heterogeneous patterns do not support a single extrapolation horizon applicable across patients, genes and missing-region designs. Distance bins contain different tissue locations and may differ in expression variance and tissue composition; remote bins can also contain relatively few observations. We therefore report bin support, omit empty bins and retain spatial error maps rather than assigning a universal distance cutoff (Supplementary Table S7). The analysis describes an association between distance and reconstruction error without controlling all other sources of spatial heterogeneity.

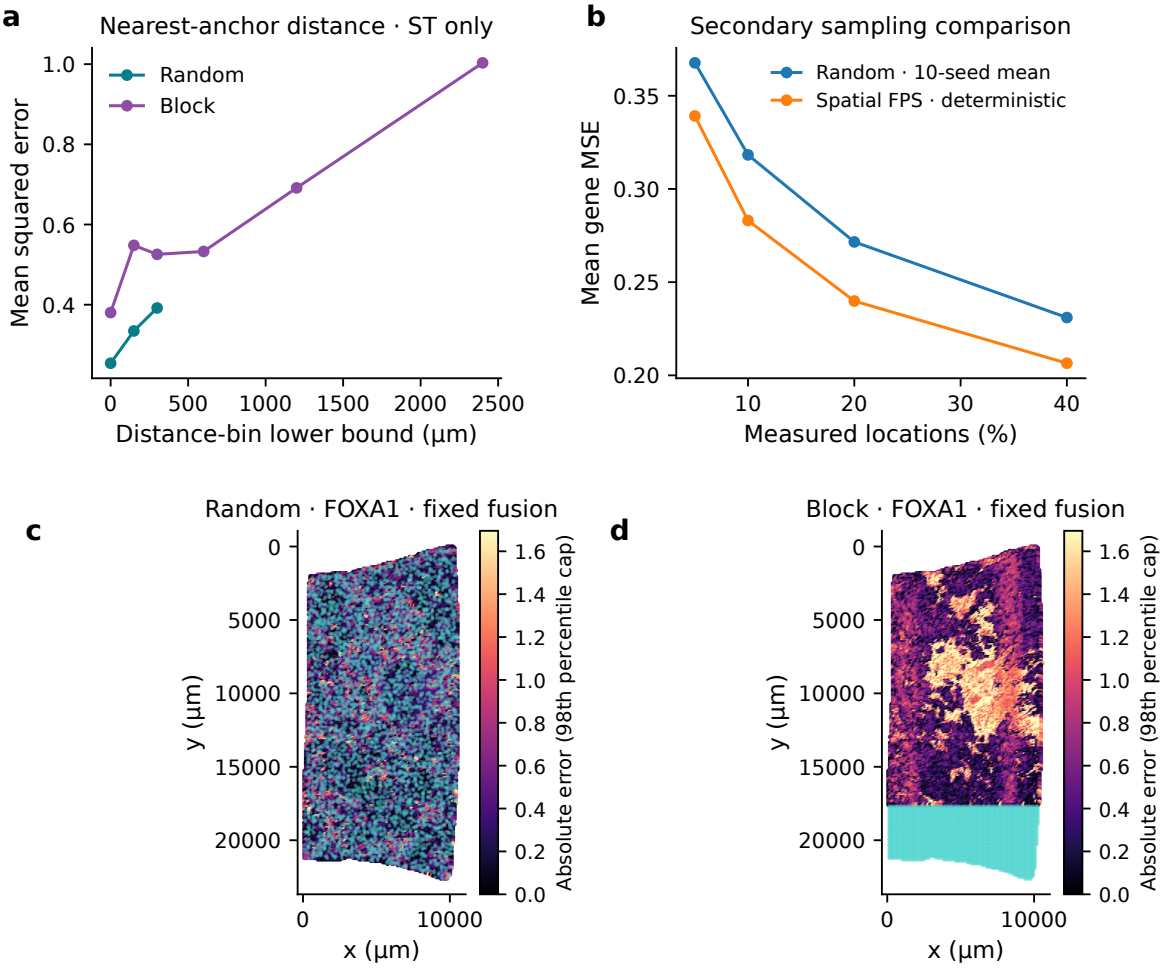


Figure 6: Spatial diagnostics reveal heterogeneous error beyond an overall prediction score. Development results use TENX99 and the frozen 50-gene panel. **a,** Mean gene MSE versus nearest-anchor distance for molecular interpolation at 20% coverage under distributed and development block masks; only occupied distance bins are shown. **b,** Development comparison of random and spatial farthest-point sampling, shown as MSE at matched measured-location budgets. These are descriptive single-patient sampling diagnostics, not a demonstration of universally optimal acquisition. **c,d,** Absolute-error maps for the preselected gene *FOXA1*, fixed fusion, 20% coverage and replicate 0 under random and block masks. Both maps use the same error scale, capped at the 98th percentile of the pooled preselected map-source values, which also include the archived capture-window condition; no locations are removed. Missing-region shape, available anchors and scored tissue differ between the maps. The figure illustrates why distance-bin support and spatial errors should accompany global correlation and why development geometry findings require independent evaluation.

2.6 Frozen image fusion did not provide a reproducible external advantage

The benefit of access to molecular anchors did not imply a benefit from adding the tested image prediction to those anchors. In the Bassiouni cohort at 20% distributed coverage, fixed fusion yielded a median patient correlation of 0.407, MSE of 0.1022 and MAE of 0.2288, compared with 0.416, 0.0923 and 0.2033 for interpolation alone. Fusion increased correlation in only 3 of 22 patients and improved neither MSE nor MAE in any patient. Median paired correlation change was -0.0108, with a median paired relative MSE increase of 10.7%. In the Wu cohort, only one of three patients improved in correlation and none improved in either error measure.

HER2ST transportability analyses had already exposed a substantial image/fusion calibration problem (Supplementary Figs. S1 and S9). Recalibration during subsequent development reduced scale-related error, but selected fusion rules did not establish robust joint correlation and error improvements (Supplementary Fig. S10). The final replication deliberately retained the Wu-derived calibration object and the fixed 0.2 image weight rather than adapting to Bassiouni outcomes. Together with external image downsampling, this restricts the conclusion to the frozen models and available inputs; it does not establish that high-resolution histology cannot improve a differently designed reconstruction method.

A separate invariance check clarified what target scaling could establish. Per-gene affine transformation followed by normalized linear interpolation and inverse transformation is algebraically equivalent to interpolation in the original target space. The molecular "harmonized" and unharmonized predictions consequently agreed to numerical precision. We did not count them as distinct algorithms or attribute improved molecular interpolation to this transformation (Supplementary Note: affine interpolation identity).

2.7 Controls and provenance audits bounded the interpretation of the results

Anchor-expression and anchor-position assignment permutations degraded molecular reconstruction in the predefined control cases, supporting dependence on the correct relationship between measured expression and location. These controls are related disruptions of the same association rather than independent mechanistic tests. Image permutation did not provide comparable evidence for a useful image contribution (Supplementary Figs. S11 and S12; Supplementary Table S4). Earlier morphology, graph-topology and encoder experiments were retained transparently and did not justify claims that exact graph topology was essential (Supplementary Figs. S3–S7).

The second replication produced 2,904 clean and 18 control bundles, containing 8,766 method predictions. All 17,532 hidden-label NaN/random corruption comparisons were invariant. The recorded audit reproduced 8,766 predictions and 35,064 per-gene metric arrays exactly and reconstructed 968 label-free mask trajectories. These checks establish computational traceability within the frozen workflow; they do not replace independent biological replication or remove limitations of the target representation (Supplementary Tables S5 and S6).

2.8 Post-v1 matched-information and identical-target checks

The following analyses were specified in a committed protocol before new comparator outcomes and remain separate from the immutable arXiv v1 record. The Wu and Bassiouni studies had already been inspected; no new blind external cohort is claimed. Exact public Wu archives and pinned HEST inputs were recovered with checksum verification. GEO HTTPS/API requests failed and direct anonymous FTP returned empty bodies for the selected Bassiouni files; checksum checks rejected those transfers. At that earlier revision, the new Bassiouni analyses were unavailable. The separate later extension below recovered exact original inputs and completed matched-estimator, identical-target and model comparisons; no historical summary substituted for a new prediction.

In the three Wu evaluation patients, we evaluated all 20 prespecified anchor-only estimators, spanning nearest-anchor, uniform, inverse-distance and Gaussian reconstruction, on identical original V1 masks at 10/20/40% coverage (Supplementary Table S10). The grid is a descriptive same-information comparison; it was not used to select an external winner. Separately, IDW k16/p2 and uniform k16 were crossed with every original random V1/V2 mask and scoring support (Fig. 7a; Supplementary Table S11). Changing the estimator is distinguishable from changing the historical protocol, but the original V1/V2 contrast remains compound.

The identical-target experiment fixed a coordinate-defined central region R and a single hidden set H, then compared equal numbers of distributed anchors and anchors restricted outside R. At 20% coverage, region exclusion reduced IDW correlation by 0.106–0.245 and increased relative MSE by 20.1–45.4% across the three patients. Uniform reconstruction also deteriorated in each patient: correlation fell by 0.093–0.188 and relative MSE increased by 21.7–38.9% (Fig. 7b; Supplementary Table S12). Both conditions scored the same H, unlike the historical V1/V2 contrast. These controlled placement effects concern a single predeclared central geometry in three previously inspected sections; they do not establish a universal missing-region effect. Nearest-anchor distances and occupied-bin errors/support are retained for every budget. Predetermined real-data gene maps include constant and poorly reconstructed fields rather than selected favorable examples (Supplementary Figs. S13 and S14).

Across 2,700 evaluated Wu runs, all 5,400 NaN/random substitutions of every unobserved label were invariant. Initial replay identified physically negligible coordinate recalibration differences that changed neighbor ties. Preserved label-free mask coordinates, independently checked against source-derived coordinates within 10^{-8} μm, restored all 360 original random-reference runs (54,000 per-gene Pearson/MSE/MAE values) within the declared 10^{-10} tolerances. Raw Spearman ranks remained sensitive to floating-point near ties and are explicitly excluded from numerical-exactness and improvement claims; the diagnostic and raw exports are retained.

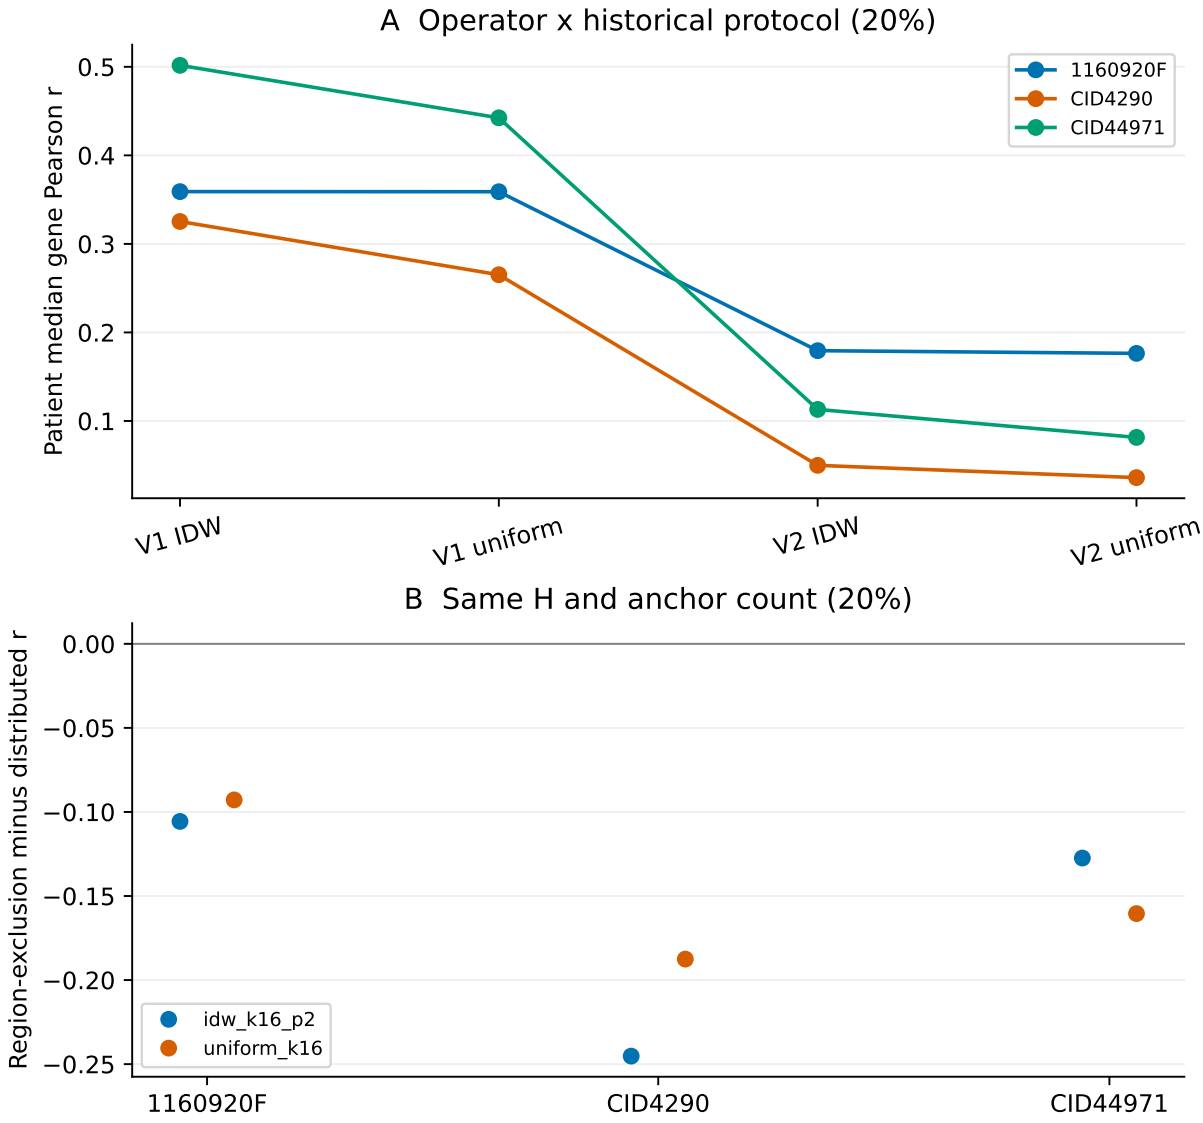


Figure 7: Post-v1 estimator and placement controls in previously inspected Wu patients. (a) Both operators share each historical mask and scored set; V2 values average the three geometries. (b) Region-exclusion minus distributed correlation on the identical H, with equal total anchor count and ten random seeds. The three individual patients are shown; masks and genes are not biological replicates. All points use 20% coverage and the frozen 50-gene panel.

2.9 Post-v1 patient uncertainty preserved the original effects

The new uncertainty analysis resamples patients from the original frozen patient-level exports, not individual genes, spots, masks or model seeds. At 20% V1 coverage in Bassiouni, the median paired anchor-versus-image correlation gain was 0.329 (95% patient percentile interval 0.304–0.438). Fusion minus anchors instead had a median correlation change of −0.0108 (interval −0.0187 to −0.0081), with median relative MSE increase 10.7% (6.6–14.5%). These post-v1 descriptive intervals reinforce the original direction without converting an unequal-information image comparison into an algorithmic benchmark (Table 3). All three Wu patient effects are tabulated individually; no primary three-patient bootstrap claim is made. The 10,000 resamples use patient units and fixed seed 20261101, and cohorts are never pooled.

Table 3: Post-v1 patient uncertainty reanalysis of original Bassiouni exports. Median paired effects at 20% V1 coverage, with 10,000 patient-resampling percentile 95% intervals (seed 20261101). Negative error changes improve; positive correlation changes improve. These are descriptive post-v1 intervals, not simultaneous bands or p-values. Anchors versus image is an unequal-information contrast; fusion versus anchors tests incremental image contribution. All original point estimates and source bytes are unchanged.

Contrast	Effect	Median	95% interval	Improved
Anchors minus image	Δr	0.3293	[0.3044, 0.4382]	22/22
Anchors minus image	Relative MSE (%)	-95.4534	[-96.2444, -94.0201]	22/22
Anchors minus image	Δ MAE	-1.0074	[-1.1341, -0.9108]	22/22
Fusion minus anchors	Δr	-0.0108	[-0.0187, -0.0081]	3/22
Fusion minus anchors	Relative MSE (%)	10.7078	[6.6170, 14.5048]	0/22
Fusion minus anchors	Δ MAE	0.0238	[0.0171, 0.0278]	0/22

2.10 New controlled neural development fits were distinct from historical models

All 30 protocol-specified new heads completed training. At 20% coverage, the local image head had training-seed mean correlation 0.682 and MSE 0.9114; GCN mean correlation 0.654 and MSE 0.8999; SAGE mean correlation 0.678 and MSE 0.8859. These values describe one previously used development patient, not population generalization. All spatial, self-only and shuffled configurations and seeds are shown, rather than selecting a best model (Fig. 8; Supplementary Table S13). Local, mean-self and GCN-self inputs were bitwise identical. Seed1/2 predictions also agreed bitwise; seed0 weights differed by at most 2.98×10^{-8} and predictions by 9.54×10^{-7}, passing a separately documented float32-precision identity check. These controls are not independent support. The fixed-fusion and exploratory residual-anchor results are reported separately from image-only prediction and from the missing historical fitted heads. On the identical masks, the fixed IDW reference had correlation 0.792 and MSE 0.2684. The local residual baseline had seed-mean correlation 0.821 and MSE 0.2567. The GCN residual baseline had seed-mean correlation 0.810 and MSE 0.2510. The SAGE residual baseline had seed-mean correlation 0.825 and MSE 0.2338. Matched-seed GCN spatial-minus-self correlation changes ranged from -0.0425 to -0.0149. Matched-seed SAGE spatial-minus-self correlation changes ranged from +0.0002 to +0.0318. Spatial context did not consistently improve every architecture and metric; notably, shuffled SAGE seed-mean image prediction exceeded spatial

SAGE in this patient. These descriptive one-patient comparisons do not establish external transportability or a general topology advantage.

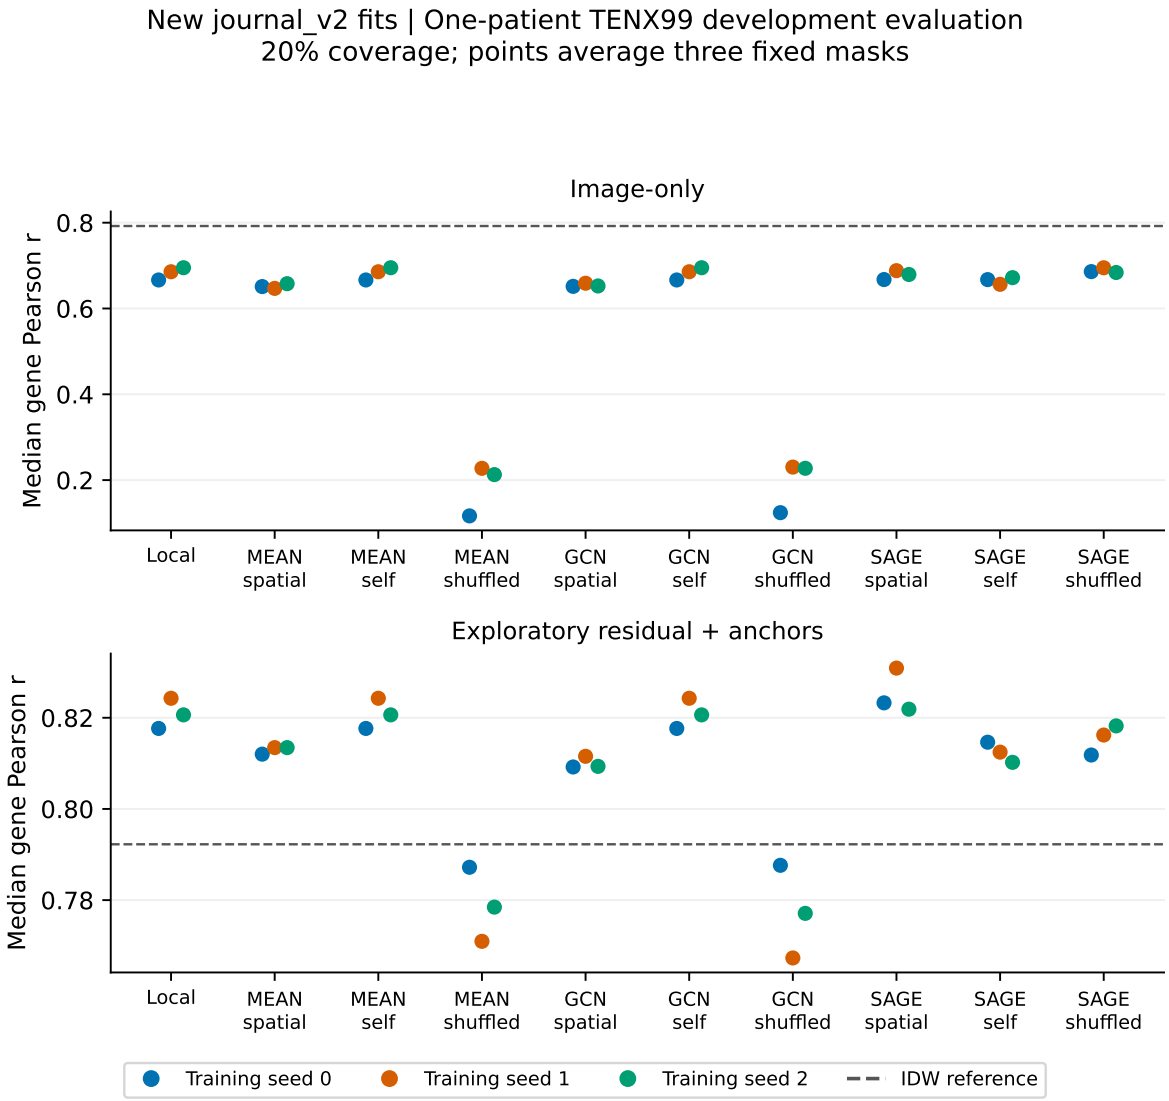


Figure 8: New journal-v2 neural development analyses. Three training seeds for each local, mean, GCN and GraphSAGE configuration, including self-only and node-shuffled controls; all evaluated on TENX99, a single previously used development patient. Points average three fixed masks at 20% coverage. Dashed lines give identical-mask IDW reference values. Top: image-only prediction; bottom: the protocol-specified exploratory residual-anchor baseline. Color identifies training seed, not an independent patient. Panels use different y-ranges. IDW receives measured expression unavailable to the image-only branch; residual versus IDW tests incremental morphology. These newly trained weights and caches are not the missing original states and were never tuned on Wu/Bassiouni.

2.11 Recovered exact inputs completed the 22-patient matched baseline study

The previously failed individual GEO transfers did not establish that the data were unavailable. Selective byte ranges from the official TAR recovered all 88 required original files with exact historical SHA 256 matches, transferring 291,569,893 bytes rather than the

37,690,060,800-byte whole bundle. All 22 patients passed the original primary numerical replay before new scoring. We then completed 19,800 new anchor-only runs and 39,600 exact NaN/random substitutions under the existing A/B1/B2 protocol, in a separate output directory. The 20-estimator grid remains fully reported rather than used to select a winner (Fig. 9).

The controlled placement comparison holds the hidden set H and total anchor count identical, unlike the historical V1/V2 comparison. Each patient contributes one seed-averaged effect. Table 4 and Fig. 10 report both fixed estimators, all 22 patients and all budgets. The uncertainty is descriptive patient resampling within this previously inspected study; it is not fresh validation or a universal biological distance scale.

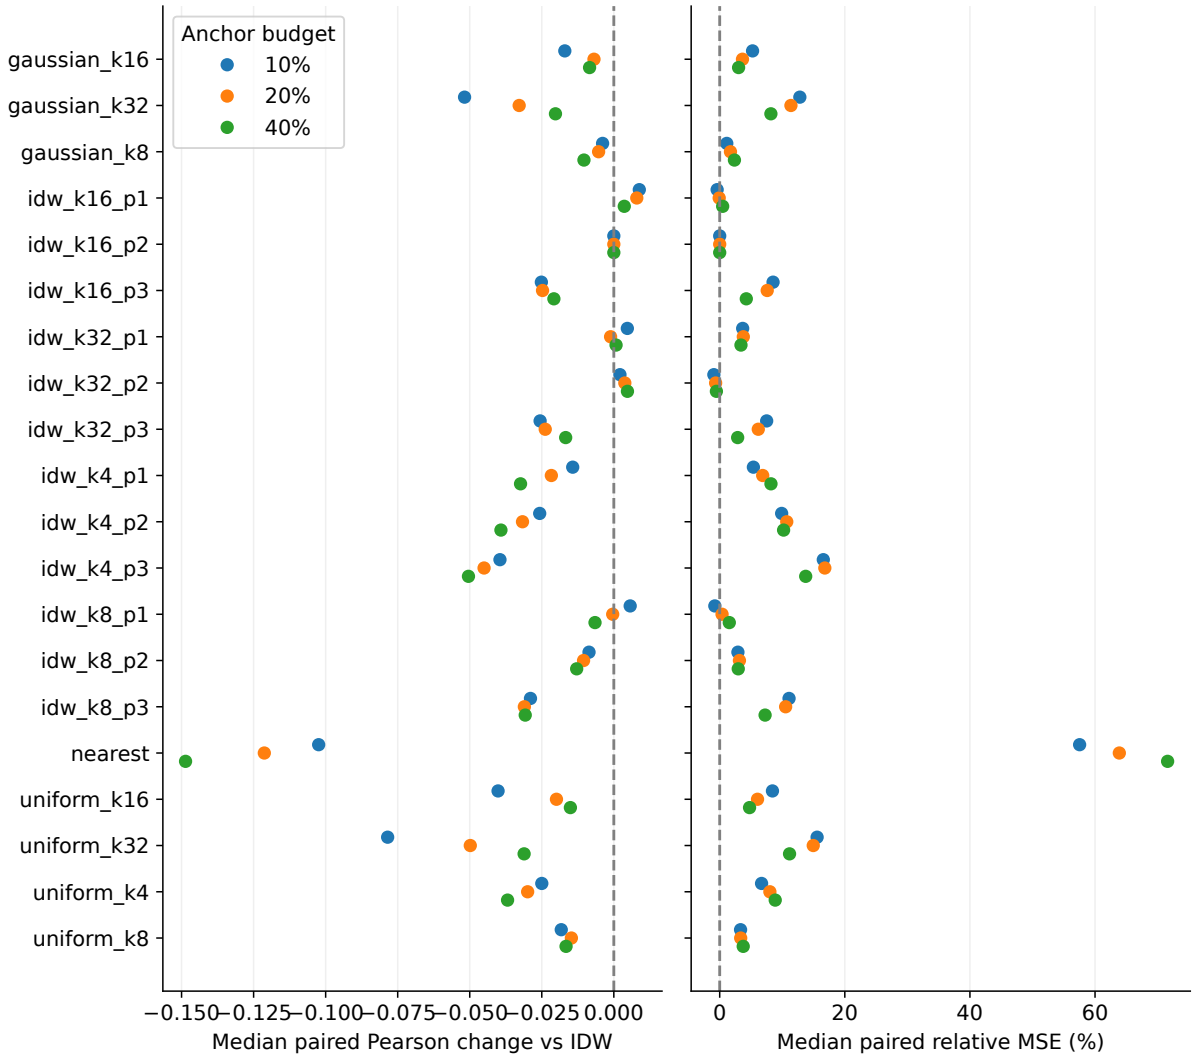


Figure 9: Complete matched-information baseline grid in 22 previously inspected Bassiouni patients. Every declared estimator and budget is shown. Points are medians of paired patient effects relative to fixed IDW k16/p2 after averaging ten original mask trajectories. Correlation increases and error decreases improve. No estimator was selected from these outcomes.

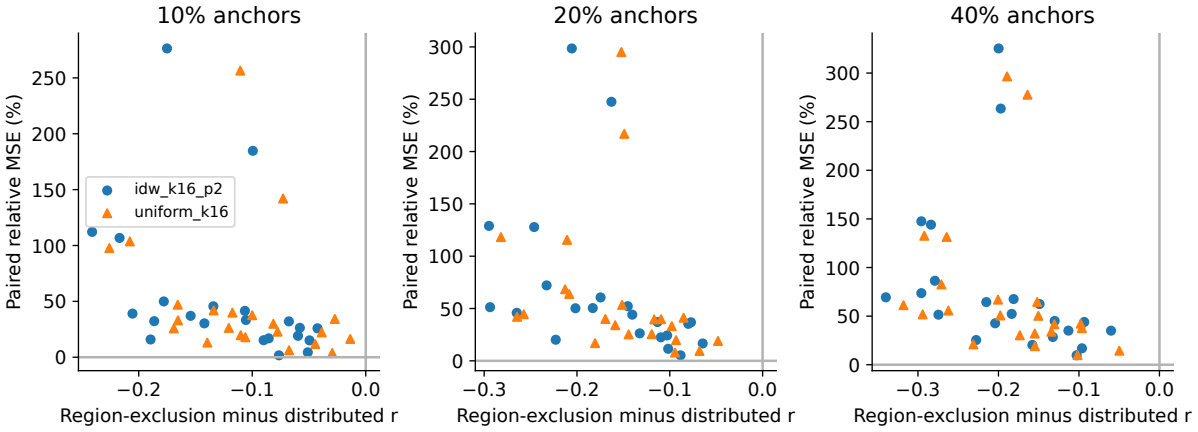


Figure 10: Identical-target placement effects in all 22 recovered patients. Each point is one patient, averaged over ten mask seeds; shapes distinguish fixed IDW and uniform k16. Both anchor placements score the same H with equal anchor counts. Panels retain all three budgets. These are not historical V2-minus-V1 effects.

Table 4: New exact-input Bassiouni placement effects. Region-exclusion minus distributed anchors at20% coverage, identical H and anchor counts. Median paired patient effects with descriptive95% percentile intervals from10,000 patient resamples. Positive error changes deteriorate. All22 patients are retained; masks are averaged within patient. The full20-estimator and three-budget exports accompany the paper.

Operator	Effect	Median [95% interval]
IDW	Δr	-0.1541 [-0.2056, -0.1096]
IDW	MSE%	+44.9864 [+29.8116, +52.2347]
IDW	Δ MAE	+0.0335 [+0.0266, +0.0508]
Uniform	Δr	-0.1502 [-0.1805, -0.1094]
Uniform	MSE%	+39.9128 [+29.2387, +53.4974]
Uniform	Δ MAE	+0.0326 [+0.0234, +0.0462]

2.12 Bounded nonlocal and latent-coordinate models were tested without external selection

We committed an outcome-blind local protocol before fitting 16 specified configurations with seeds 0/1/2, retaining all 48 new fits alongside the 30 frozen journal-v2 heads. This is a post-v1 exploratory protocol, not formal preregistration. Every new model used the same two source training patients, validation-only stopping, full-section update budget and frozen image embeddings. The GraphGPS-inspired implementation combines local gated message passing with at most 32 spatial landmarks; the latent-coordinate EGNN is compared directly with a fixed-coordinate distance model (Fig. 11). These are new implementations inspired by published architectures, not official GraphGPS benchmark reproductions[20, 21].

The complete 78-model matrix crossed identical masks and information routes in TENX99 (one previously inspected development patient), three previously inspected Wu patients and 22 previously inspected Bassiouni patients. External image outputs used the same frozen C9 T1 affine transformation with no destination refitting. Image-only comparisons against IDW are unequal-information comparisons. Fixed and residual routes provide the same measured anchors as IDW and test incremental image/context information. No evaluation patient, archi-

tecture outcome, epoch or seed selected a new fit, coefficient or display subset.

GPS full changed patient correlation by -0.0504 [-0.0629, -0.0389], relative MSE by +13.4264 [+11.2710, +18.3865]% and MAE by +0.0244 [+0.0204, +0.0295]. EGNN latent changed patient correlation by -0.0480 [-0.0698, -0.0368], relative MSE by +13.0083 [+9.0839, +18.3071]% and MAE by +0.0252 [+0.0188, +0.0310]. Both primary residual models worsened correlation, MSE and MAE relative to IDW at 20% distributed coverage; none of the 22 patients improved in any of these three endpoints. Nonlocal GPS also worsened median correlation and errors relative to GPS local, and latent EGNN worsened them relative to fixed-distance messages (Table 5). In identical-H region exclusion, median relative MSE increases versus IDW were 10.2% for GPS and 9.2% for EGNN; the component ablations again did not establish an error advantage. These are negative findings for this bounded source-only experiment, not evidence that all native-resolution geometry-aware models are ineffective. Figure 12 shows every new architecture/control against IDW for distributed and region-exclusion settings. Table 5 tests the nonlocal and coordinate-update components against their specified controls. Per-patient effects, all metrics, all masks, every training seed and all three routes are supplied in source data. The three Wu patients remain individually visible; no primary three-patient bootstrap claim is made. Software success and geometric tests do not themselves establish an accuracy benefit, spatial specificity, superiority over published systems or learned long-range molecular correlation.

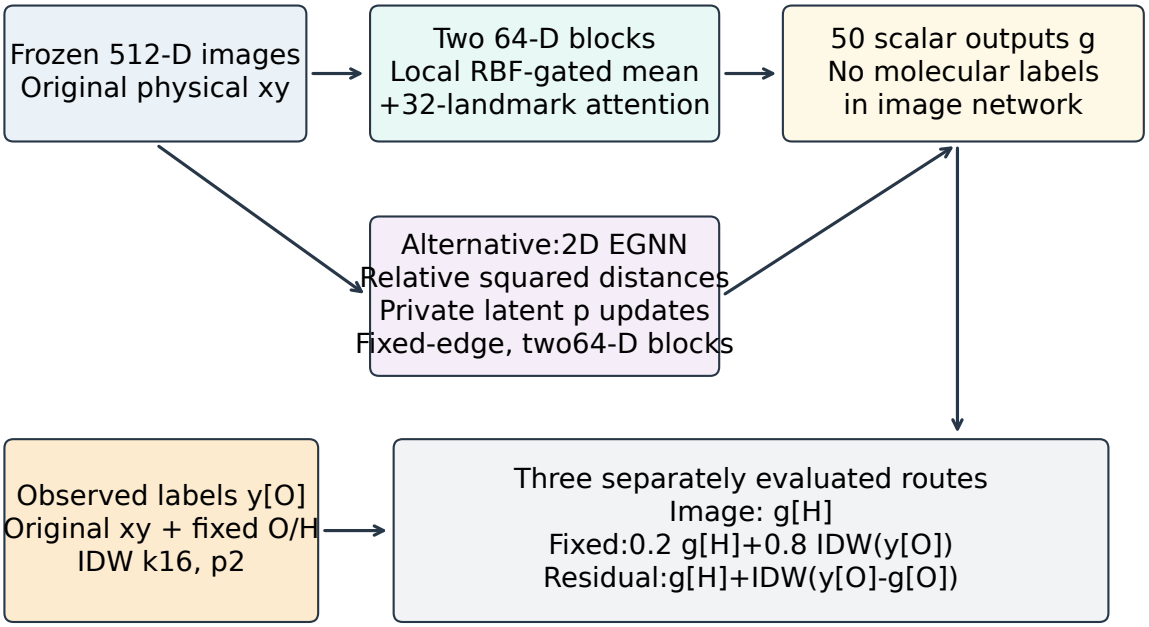


Figure 11: Implemented extension and information boundaries. The image network receives frozen image embeddings and coordinate-defined structure. The GraphGPS-inspired branch combines local gated aggregation with bounded attention to 32 coordinate-only landmarks. The alternative EGNN changes private latent coordinates through relative displacements; the distance-only model fixes them. Original physical coordinates always define masks, anchor interpolation and physical-distance diagnostics. No hidden expression is an image-network input. The optional learned anchor-conditioned architecture was not executed.

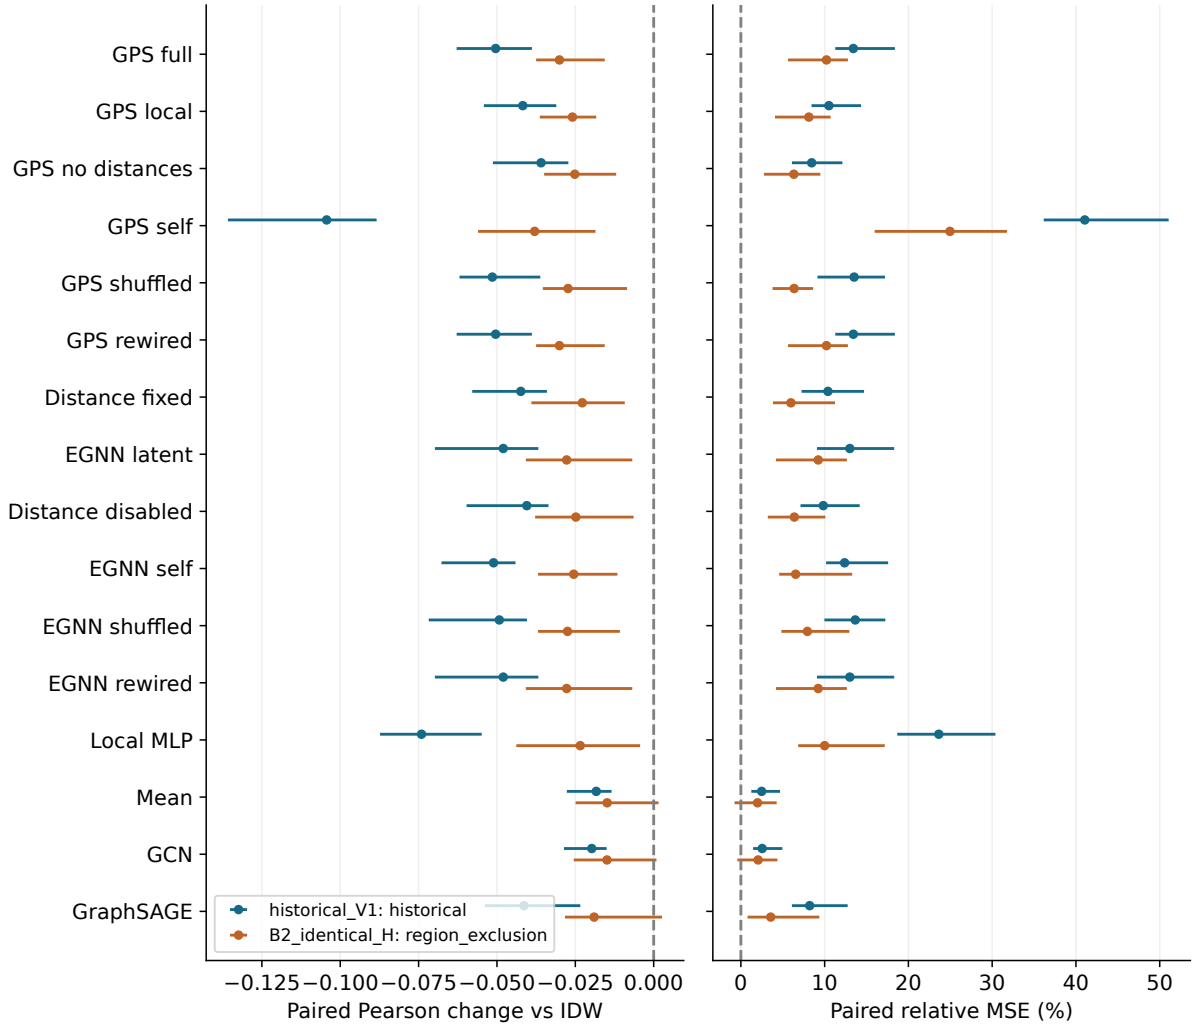


Figure 12: All 16 new architectures/controls versus molecular IDW in 22 Bassiouni patients. Exploratory residual route at 20% coverage; colors distinguish historical distributed V1 and identical-H region exclusion. Bars are descriptive 95% patient percentile intervals for median paired effects after mask/training-seed averages. Positive correlation and negative relative MSE improve. The two designs have different scored support and are not subtracted here. All models are shown regardless of direction; nominally equal parameter counts do not imply equal effective function classes.

Table 5: Predefined architecture contrasts in recovered Bassiouni patients. At20% historical V1 coverage, the exploratory residual route uses identical measured anchors for both models. Effects average all three training seeds and three mask seeds within each patient before pairing; relative MSE is normalized by the reference patient mean MSE after these averages. Intervals resample22 whole patients, not genes, masks or training seeds. They are descriptive, unadjusted intervals, not simultaneous significance claims. Other routes, controls, budgets and individual Wu effects are fully exported.

Candidate vs control	Effect	Median [95% interval]
GPS full vs GPS local	Δr	-0.0050 [-0.0074, -0.0044]
GPS full vs GPS local	MSE%	+2.7228 [+2.0494, +3.6169]
GPS full vs GPS local	Δ MAE	+0.0039 [+0.0030, +0.0054]
GPS full vs GPS no distances	Δr	-0.0121 [-0.0135, -0.0088]
GPS full vs GPS no distances	MSE%	+4.9138 [+3.6647, +5.7686]
GPS full vs GPS no distances	Δ MAE	+0.0064 [+0.0056, +0.0078]
EGNN latent vs Distance fixed	Δr	-0.0048 [-0.0074, -0.0008]
EGNN latent vs Distance fixed	MSE%	+1.6673 [+0.7107, +2.8664]
EGNN latent vs Distance fixed	Δ MAE	+0.0026 [+0.0014, +0.0046]
EGNN latent vs Distance disabled	Δr	-0.0065 [-0.0096, -0.0024]
EGNN latent vs Distance disabled	MSE%	+1.9736 [+1.0100, +3.3448]
EGNN latent vs Distance disabled	Δ MAE	+0.0028 [+0.0020, +0.0053]

2.13 Geometric and reach checks delimit architectural claims

All 384 saved-checkpoint geometric checks passed. They establish scalar invariance and latent-coordinate equivariance conditional on fixed embeddings and the documented graph/landmark construction or transformed fixed graph. Float 64 primary-model tolerances were 10^{-8}; float 32 and preaggregated baseline tolerances were 10^{-4}. Physical latent tolerances include the $250\,\mu$m scale. Recomputed-graph unit tests use nondegenerate synthetic coordinates without distance ties. No claim of rotation/reflection invariance of the frozen CNN or complete image pipeline follows.

Connectivity fractions and actual attention mass beyond $250/600/1200\,\mu$m, together with a distant-feature perturbation diagnostic, distinguish functional nonlocal access from a verbal long-range claim. Neither establishes a biological correlation length. Degree/length controls report actual successful rewiring; zero or sparse swaps are limited controls rather than independent positive evidence. Full route/control matrices, occupied distance bins with support, parameter counts, validation-selected epochs and resource records accompany the Supplementary Information.

3 Discussion

The added controlled study does not support the proposed nonlocal or latent-coordinate accuracy gains under these source-only, downsampled-image conditions. Its strongest new evidence is the22-patient identical-target anchor-placement experiment. We retain the negative neural and component-control results without selecting a favorable architecture or metric; this supports a careful reconstruction benchmark, not a stronger architectural novelty claim.

Potential measurement-cost implication. The 20% coverage protocol reveals molecular expression at one fifth of retained spatial locations, equivalent to fivefold fewer measured locations than complete profiling in the retrospective masking design. If the location-dependent expenditure is proportional to the number of assayed locations, its variable component could be reduced fivefold. With fixed cost C_0, variable cost c per location and N full-coverage locations, however, the ratio is

$$\frac{C_{\text{full}}}{C_{20\%}} = \frac{C_0 + cN}{C_0 + 0.2cN} \leq 5. \tag{1}$$

The study did not implement selective capture or measure laboratory expenditure, and the inequality does not claim fivefold reduction in total assay costs. Coverage describes the retained location count, not an experimentally validated reduction in tissue area, sequencing burden or platform price. Prospective acquisition and outcome-specific accuracy requirements would be necessary to establish realized savings.

This study shows that a simple, frozen spatial interpolation protocol can recover part of the variation in a predefined expression panel when molecular measurements are available at distributed locations in the same tissue section. The direction of benefit over the frozen image-only comparator was consistent in two fresh breast cancer studies, including all 22 patients in the larger replication. Increasing measured-location coverage improved correlation and reduced error, whereas contiguous regional completion remained substantially weaker. The con-

tribution is the explicit separation of tissue-context representation learning from observation-constrained molecular transport, together with multi-cohort characterization of reconstruction reliability; we do not claim transcriptome-wide recovery or a newly learned long-range GNN.

The comparison with histology requires particular care. Molecular interpolation uses patient-specific observations from the evaluation section and therefore has access to information unavailable to the image-only model. Its advantage demonstrates the practical value of these anchors but does not establish superiority over all histology-based prediction methods. Prior image-based and multimodal approaches address different training and inference settings[3, 7, 11, 13]. The appropriate test of incremental morphology in our setting was fusion versus interpolation. That original fixed-fusion test did not show a reproducible benefit. The separately reported exploratory residual-anchor extension evaluates new models and does not replace that historical result. Low-resolution public images, a generic ImageNet representation and transported calibration constrain the comparison; a comprehensive benchmark of native-resolution pathology models was outside the frozen replication protocol.

The contiguous missing-region results make the evaluation design as important as the average score. A method that interpolates between nearby measurements can perform poorly when observations are absent from a substantial tissue region. This is consistent with the broader need to match validation structure to the intended prediction task in spatially dependent data[24]. However, our V1/V2 protocols also differ in interpolation family and scored locations. The post-v1 operator and identical-target analyses now address these distinctions in the three Wu patients, and the later exact-input Bassiouni extension completes the analogous baseline study. They do not retroactively make the original V1/V2 contrast a pure geometry intervention. The historical protocol comparison remains compound. The new identical-H experiments instead isolate anchor placement for the specified central geometry and equal counts; they do not establish a universal spatial effect.

Distance-to-anchor summaries expose additional heterogeneity but are not calibrated uncertainty estimates. The absence of a universal monotonic curve suggests that distance alone is insufficient to determine where a reconstructed expression value is trustworthy. Reconstruction may also be affected by variation in the target field and the composition of the scored locations. Uncertainty-aware approaches such as TISSUE illustrate why uncertainty in predicted expression matters for downstream analyses[25]; we did not implement that framework or claim calibrated intervals here. Regional errors, low-support bins and patient-specific failures should remain visible before reconstructed values are used for differential expression, cell-state interpretation or other biological analyses.

Cross-platform scale differences present a distinct challenge. A common numerical transformation does not make targeted in situ counts and sequencing-based capture-spot counts biologically interchangeable. Capture support, depth and composition remain different even after values are centered and scaled. The observed reduction in image/fusion error during HER2ST calibration development should therefore not be confused with a validated improvement in molecular interpolation. The affine identity shows why the latter comparison is unidentifiable for the specified normalized weighted average. It also provides a useful implementation check: negligible numerical rank differences should not be interpreted as biological gains.

Several limitations define the scope of the study. The primary panel was selected in development and contained 50 genes, with only 40 shared in HER2ST. The results do not establish

recovery of unmeasured genes or an entire transcriptome. Missingness was simulated by withholding existing measurements, not created through a prospective reduced-assay experiment. Reported coverage is a proportion of retained locations and does not translate directly to tissue area, sequencing expenditure or financial savings. Patient numbers were small in the first fresh validation, and all cohorts were breast tissue. External images were downsampled and the frozen fusion rule was not optimized for them. We also did not benchmark a comprehensive set of spatial statistical or modern histology-to-expression methods under equal information access. Consequently, the current evidence should not be read as state-of-the-art superiority or clinical utility.

The sequential design offers a complementary strength. Development, inspected transportability cohorts and fresh evaluation cohorts were kept distinct, and mixed results were retained rather than used to retroactively revise the external protocol. Technical replay, mask provenance and hidden-label corruption checks reduce the risk that an apparent reconstruction benefit arises from leakage. These safeguards are especially important when measurement masks expose expression from the evaluation tissue itself. Nevertheless, the decision rules and repeated development analyses remain part of an iterative research process rather than a substitute for prospective experimental confirmation.

Overall, sparse molecular anchors provided useful reconstruction under distributed sampling, with a consistent coverage response across fresh cohorts. The same evidence delineated weaker contiguous regional completion and a lack of reproducible benefit from the tested image fusion. Reporting measurement coverage, missing-region design, anchor distance, calibration behavior and patient-level effects together gives a more informative account of reliability than a single pooled prediction score.

4 Methods

4.1 Data sources and analytical roles

All experiments used previously released paired spatial expression and histology data. The four development samples were obtained through HEST[2]: NCBI783 and NCBI785 were the training patients, TENX95 was the validation patient and TENX99 was the primary development evaluation patient. The cohort comprised 7,015 training locations, 7,760 validation locations and 20,761 primary evaluation locations. Earlier conditional leave-one-patient-out analyses reused frozen gene panels and development-selected configurations and were interpreted as sensitivity analyses, not unbiased external cross-validation.

HER2ST[4] contributed one patient-specific section for each of A1–H1. Initial evaluation was followed by patient-disjoint calibration development using the same inspected cohort; these two analytical roles are distinguished throughout. In the Wu local Visium cohort[5], patients 1142243F, CID4465 and CID4535 supplied calibration statistics, and patients 1160920F, CID4290 and CID44971 remained held out. The fresh Bassiouni cohort was obtained from GSE210616[6]. The source study includes 43 sections from 22 patients. We selected the first numbered section for every published patient from metadata before target evaluation, yielding BASS_P01–P09, P11–P15 and P17–P24. Gaps in identifiers reflect source numbering rather than outcome-dependent exclusion. The source study's own reference and validation groups

were not used as calibration groups in this reconstruction study.

Metadata, repository identifiers, prior-use records and available asset hashes were checked to exclude reused or reprocessed development samples. Such checks support cohort independence but cannot conclusively establish patient identity across unrelated anonymized repositories. Cohort roles and sample counts are summarized in Table 1; identifiers and exact panels are supplied in Supplementary Tables S1 and S2.

4.2 Expression targets and preprocessing

The primary panel contained the 50 genes ranked using development-training expression variance; ranking did not use evaluation expression. The development assay provided 280 harmonized biological genes, and larger 250- and 280-gene settings were used in earlier development analyses. The primary fresh studies retained all 50 genes. HER2ST retained the frozen 40-gene intersection without replacing missing genes. The optional 278/280 intersection in the Bassiouni metadata was not used to claim a secondary whole-transcriptome experiment.

For the second replication, the source filtered feature-barcode H5 files, tissue positions, scale-factor JSON files and tissue images were acquired for each selected section. Barcode joins and published in-tissue flags defined included locations. No new expression-derived quality threshold, tissue-class annotation or deconvolution output was used to select evaluation locations. Counts were checked for finite, nonnegative integer values. For count c_{ig} at location i and gene g, the evaluation target was

$$y_{ig} = \frac{\log(1 + c_{ig}) - \mu_g^{\mathrm{dev}}}{\sigma_g^{\mathrm{dev}}}, \tag{2}$$

where the centering and scaling constants were the pooled location mean and population standard deviation frozen from development-training patients; a standard deviation below 10^{-8} was replaced by 1. No destination library-size or capture-area correction was fitted. Identical target units were used for all methods within each comparison. These common mathematical units do not imply cross-platform calibration of absolute molecular abundance. Supplementary Fig. S2 summarizes cross-cohort patterns without pooling panels; the gene-level results are provided in Supplementary Table S3.

4.3 Spatial registration and image acquisition

Visium array coordinates were mapped to image coordinates by a least-squares fit to the source hexagonal lattice with 100-μm spacing. Coordinate residuals, image scale and anisotropy were checked against the frozen qualification settings, and overlays were inspected before outcome evaluation. These tests concern location consistency and do not establish cell-level registration. Images were not super-resolved.

The Wu and Bassiouni images contained only 15/25 and 24–29 native pixels, respectively, across the nominal 112-μm patch width. Resizing does not recover morphology absent from these public inputs. Image quality was therefore recorded as a limitation of the image comparator, not as a restriction on spatial interpolation that uses only coordinates and observed expression.

4.4 Neural image predictor and reconstruction architecture

The reconstruction framework combined a frozen neural image predictor with a separate coordinate-based molecular interpolation branch (Fig. 1). Both predicted the same ordered 50-gene panel. Molecular interpolation used spatial coordinates and observed expression; the final fusion was a fixed weighted average, with no additional neural layers fitted in the fresh replication experiments.

At each external location, an RGB patch covered a nominal 112-μm square, rounded to the available native pixels. The patch was resized with LANCZOS to 224×224 pixels. The torchvision `IMAGENET1K_V1` preprocessing then resized the shorter side to 256 pixels using bilinear interpolation, took a central 224×224 crop, rescaled intensities to $[0, 1]$, and normalized RGB channels using means $(0.485, 0.456, 0.406)$ and standard deviations $(0.229, 0.224, 0.225)$. The second resize and central crop were retained explicitly; 112 μm denotes the nominal extracted patch, rather than the final uncropped field seen by the network. Development embeddings used the supplied 224×224 HEST patches with the same torchvision transform. No stain normalization, random image augmentation or encoder fine-tuning was applied.

The frozen ResNet18[26] comprised a 7×7 convolutional stem with stride 2, batch normalization, a rectified-linear activation and 3×3 max pooling with stride 2, followed by four residual stages. The stages contained two basic blocks each, with channel widths 64, 128, 256 and 512. Each block used two 3×3 convolutions with batch normalization and a rectified-linear activation after the first convolution and after shortcut addition. Identity or projected shortcuts matched the feature dimensions. Global average pooling produced a 512-dimensional vector; the original ImageNet classifier was replaced by the identity operation. All encoder parameters and batch-normalization statistics remained fixed during feature extraction.

Each expression head was a one-hidden-layer MLP with the exact sequence

$$512 \xrightarrow{\text{linear}} 256 \xrightarrow{\text{GELU}} 256 \xrightarrow{\text{dropout (0.1)}} 256 \xrightarrow{\text{linear}} 50, \tag{3}$$

where GELU denotes the Gaussian error linear unit. Both linear layers included biases and used the default PyTorch initialization, uniform on $[-1/\sqrt{d_{\text{in}}}, 1/\sqrt{d_{\text{in}}}]$. The output was linear, with no nonnegativity constraint. Each head contained 144,178 trainable parameters. Feature-wise centering and scaling, S_x, were fitted to the pooled 7,015 training locations from NCBI783 and NCBI785. A separate per-gene scaler, S_y, was fitted to their already normalized expression targets. Both used population standard deviations, replacing scales below 10^{-8} with 1. If f_{θ_s} denotes the head trained with seed $s \in \{0, 1, 2\}$ and ϕ_{R18} the frozen encoder, the image prediction in the common target units was

$$\widehat{\boldsymbol{y}}_i^{\text{image}} = \frac{1}{3} \sum_{s=0}^{2} S_y^{-1}[f_{\theta_s}(S_x(\phi_{\text{R18}}(x_i)))] \,. \tag{4}$$

Dropout was disabled at inference. The three inverse-scaled predictions were averaged without fitting ensemble weights.

Heads minimized mean squared error in the additionally standardized target space using AdamW, learning rate 10^{-3}, weight decay 10^{-4}, $(\beta_1, \beta_2) = (0.9, 0.999)$ and $\epsilon = 10^{-8}$. Weight decay applied to all head parameters, including biases. Each epoch shuffled the training locations into minibatches of 512, retaining the final partial batch, for at most 80 epochs. Train-

ing used CPU float32 computation and no learning-rate scheduler. Early stopping used the TENX95 validation patient: an improvement required validation MSE to decrease by more than 10^{-4}, and training stopped after 10 consecutive epochs without such an improvement. The best qualifying parameters were restored. Hidden widths $\{128, 256\}$ and dropout probabilities $\{0, 0.1\}$ were compared at seed 0; the configuration with the highest validation median gene Pearson correlation was selected, with lower validation MSE breaking ties. This configuration-selection criterion was distinct from the within-fit stopping criterion. The selected width-256, dropout-0.1 heads were fitted with seeds 0, 1 and 2; their retained epochs were 12, 11 and 12, respectively. No external patient was used to select or refit these heads.

The molecular branch used up to 16 observed anchors and the weights in Eq. 6. Fusion combined its output with the calibrated image prediction using fixed molecular and image weights of 0.8 and 0.2 (Eq. 7). The calibration established from development-training and Wu calibration patients was transported unchanged to Bassiouni.

4.5 Graph construction from physical tissue geometry

For every tissue section, retained locations are vertices $V = \{1, \ldots, N\}$ with physical positions $p_i \in \mathbb{R}^2$ and frozen image embeddings $x_i \in \mathbb{R}^d$. Candidate graphs $G = (V, E)$ were computed without expression measurements. The symmetrized six-nearest-neighbor construction connects i and j if either is among the other's six nearest locations and their separation is within 250 μm. Radius graphs use a 150- or 250-μm distance threshold. Delaunay triangulation provides an alternative geometry-induced candidate edge set, capped at 250 μm. Edges are undirected and binary, and isolated vertices are retained. Different edge definitions produce different contextual neighborhoods at the same spatial coordinates (Fig. 2).

The graph-context models operate on $X = [x_1, \ldots, x_N]^\top$ after fitting-data standardization. With adjacency A, self-augmented adjacency $\widetilde{A} = A + I$ and its diagonal degree matrix $\widetilde{D}$, our fixed mean and GCN aggregators are $P = \widetilde{D}^{-1}\widetilde{A}$ and $Q = \widetilde{D}^{-1/2}\widetilde{A}\widetilde{D}^{-1/2}$. Mean-GraphSAGE concatenates the original embedding with its separate-neighbor mean RX, where $R = D^{-1}A$ and zero-degree rows of R are zero. The three resulting features PX, QX or $[X, RX]$ are passed through a trainable regression head, rather than through stacked learned message-passing layers. This is a single-step contextual representation, consistent with established graph aggregation principles[22, 23, 27].

4.6 Experimental setup: shared heads and training

The supporting image and graph comparisons used the development split described in the main Methods: NCBI783 and NCBI785 for fitting, TENX95 for validation and TENX99 for the primary evaluation. The image encoders remained frozen. Each trainable multilayer perceptron (MLP) had one hidden fully connected layer, a Gaussian error linear unit (GELU), dropout and a linear gene-output layer:

$$f(U) = \mathrm{Dropout}_p[\mathrm{GELU}(UW_1 + b_1)]\, W_2 + b_2.$$

The input U was a local image embedding or a fixed aggregate of embeddings, as specified below. Feature and target means and population standard deviations were estimated from

fitting patients only; scales below 10^{-8} were replaced by one. The additional target standardization used to train the head was inverted before scoring in the common development target units. For graph predictors, the local embeddings were standardized before aggregation.

All MLPs minimized mean squared error with AdamW, learning rate 10^{-3}, weight decay 10^{-4} and minibatch size 512. Training used a new random ordering of fitting rows each epoch, at most 80 epochs and validation-MSE early stopping with patience 10 and minimum improvement 10^{-4}. The parameters at the best qualifying validation epoch were retained, and dropout was disabled for prediction. The three training seeds were 0, 1 and 2; hyperparameter candidates were evaluated using seed 0. No learning-rate schedule or auxiliary loss was used. Computation used CPU float32 tensors and four threads with deterministic PyTorch algorithms enabled.

The initial local comparison in Supplementary Fig. S3 selected hidden width from $\{128, 256\}$ and dropout from $\{0, 0.1\}$ by the lowest validation MSE. For 50 genes, the selected architecture was $512 \to 128 \to 50$ with dropout 0.1. The ridge baseline used an intercept and a Cholesky solver, with penalty selected from $\{10^{-4}, 10^{-3}, 10^{-2}, 10^{-1}, 1, 10, 100\}$ by the highest validation median gene Pearson correlation, breaking ties by lower MSE and then smaller penalty; the selected 50-gene penalty was 100. Training-target and training-embedding permutations disrupted pairing within the fitting data; validation and evaluation data were unchanged.

The representation comparison in Supplementary Fig. S6 used the same four width/dropout candidates but selected the highest validation median gene Pearson correlation, with lower MSE as the first tie-breaker. Both ResNet18 and Phikon selected width 256 and dropout 0.1 for 50 genes. Thus the initial local predictor in Supplementary Fig. S3 and the ResNet18 predictor used in the representation comparison and final sparse pipeline have different selected widths. The latter predictor is described in the main Methods. The representation comparison also evaluated ridge penalties $\{0.1, 1, 10, 100, 1000\}$; both encoders selected 1000 for 50 genes. Equal width and search budget did not imply equal parameter count because the input dimensions differed.

Conditional leave-one-patient-out sensitivity fits used the remaining three development patients, refitted feature and head-target scalers on those patients, retained the primary-selected hyperparameters and used fixed epoch counts without early stopping on the held-out patient. For the 50-gene heads, these counts were 14 for the initial MLP, 14 for mean pooling and GCN, 7 for GraphSAGE, 12 for the representation-comparison ResNet18 head and 1 for the Phikon head. These were rounded medians of the corresponding primary fits' best epochs. Since the configurations and underlying target definition had already been selected during development, these fits are conditional sensitivity analyses.

4.7 Coordinate-based graph construction and GNN representation learning

Graphs were constructed independently within each section from physical coordinates, without expression labels. The candidates were symmetrized six-nearest-neighbor adjacency capped at 250 μm, radius graphs at 150 or 250 μm, and Delaunay adjacency capped at 250 μm. Symmetrization takes the union of directed nearest-neighbor edges, so final degree need not equal six. The binary adjacency A had no self edges. With $\widetilde{A} = A + I$, degree matrix $\widetilde{D}$ of $\widetilde{A}$, and

degree matrix D of A, the three fixed operators were

$$P = \widetilde{D}^{-1}\widetilde{A}, \qquad Q = \widetilde{D}^{-1/2}\widetilde{A}\widetilde{D}^{-1/2}, \qquad R = D^{-1}A.$$

For R, an isolated node has a zero neighbor aggregate. The input to the MLP was PX for mean pooling, QX for GCN and $[X, RX]$ for mean-GraphSAGE, where X contains standardized frozen image embeddings and brackets denote concatenation. Each predictor therefore applies one fixed graph aggregation followed by the one-hidden-layer MLP defined above. No graph attention or learned adjacency was used.

Graph choice was selected at seed 0 by the highest validation median gene Pearson correlation, then lower MSE and deterministic graph-name order. All three 50-gene predictors selected capped Delaunay adjacency. Mean pooling and GCN used width 128; GraphSAGE used width 67 to approximately match the initial local head's parameter count after doubling the input dimension. With ResNet18, these models contain 72,114 and 72,075 trainable head parameters, respectively; all use dropout 0.1. Supplementary Table S8 summarizes the selected dimensions.

The matched controls in Supplementary Fig. S5 retained the GraphSAGE head and training settings. The self-only control used $[X, X]$. Vertex permutation preserved the graph's degree distribution, while double-edge rewiring preserved each node's degree. The additional distance-constrained rewiring preserved the numbers of physical edge lengths in $[0, 175)$, $[175, 250)$ and $[250, \infty)$ μm. Rewiring targeted five accepted swaps per edge, with limits of 100 attempts per edge for degree-only rewiring and 1,000 for distance-constrained rewiring; the latter used candidate endpoints within 275 μm. Five graph randomization seeds were crossed with the three model seeds. The Phikon spatial sensitivity comparison reused the selected graph, hidden widths and dropout: mean pooling used $768 \to 128 \to 50$, and GraphSAGE used $1536 \to 67 \to 50$, with true and degree-plus-length-matched graphs. These inherited widths do not constitute exact parameter matching between encoders.

4.8 Pathology foundation representation comparison

Phikon used the public `owkin/phikon` ViT-B/16 model, pinned to revision `057cc0295895`. Its 12-layer transformer produced the 768-dimensional final-layer-normalized classification-token representation, without a pooler. The official `ViTImageProcessor` processed the same RGB patches as the ResNet18 analysis: 224×224 pixels, rescaling by 1/255 and ImageNet channel means and standard deviations. There was no recropping, stain normalization or augmentation. Extraction used the model in evaluation mode with frozen weights, float32 precision, batches of 16 and eight CPU threads (Transformers 4.57.3, PyTorch scaled dot-product attention). The head and validation selection were as specified above; the encoder was not fine-tuned.

4.9 Sparse molecular graph reconstruction and residual correction

The learned-propagation model in Supplementary Fig. S7 is a gene-specific ridge residual correction using fixed graph summaries. Its image prediction H is the equal average of the three frozen local MLP predictions from the representation comparison. Let o be the observed-

location indicator and Z the expression matrix containing permitted observed vectors and zeros elsewhere. A self-inclusive row-normalized operator P was constructed from the symmetrized six-nearest-neighbor graph capped at 250 μm. The observed masses and molecular messages were

$$m^{(1)} = Po, \quad m^{(2)} = P^2 o, \qquad V_{ig}^{(1)} = \frac{(PZ)_{ig}}{\max(m_i^{(1)}, 10^{-6})}, \quad V_{ig}^{(2)} = \frac{(P^2 Z)_{ig}}{\max(m_i^{(2)}, 10^{-6})}.$$

Image features were standardized on fitting patients and reduced to eight whitened principal components with randomized singular-value decomposition and random seed 0. Denote these components by X_{PCA}. The 29 shared covariates at each location were X_{PCA}, PX_{PCA}, $P^2 X_{\mathrm{PCA}}$, o, $m^{(1)}$, $m^{(2)}$, $\log(1 + d_1/100)$, and the fraction of the nearest 16 observed anchors lying within 300 μm, where d_1 is nearest-anchor distance in μm. Five further covariates for gene g were the image prediction H_g, the fixed fusion prediction F_g, Z_g, $V_g^{(1)}$ and $V_g^{(2)}$. The resulting design has 34 covariates and an intercept for each gene.

Predictions were $\widehat{y}_g = F_g + \Phi_g \theta_g$, where the last column of Φ_g is one. Coefficients were fitted by

$$\underset{\theta_g}{\operatorname{argmin}} \ \|(y_g - F_g) - \Phi_g \theta_g\|_2^2 + \alpha \, \|\theta_{g,1:34}\|_2^2 .$$

The intercept was unpenalized. Fitting sampled up to 256 hidden locations without replacement per training mask using that mask's seed; their expression entered only the supervised response. Masks covered 5, 10, 20, 40, 60 and 80% of locations under random, block and capture-window sampling, with three replicates per condition. The penalty grid was $\{1, 100, 10000\}$, selected by mean validation MSE across masks with equal mask weights; both encoders selected $\alpha = 10000$ for 50 genes. No additional expression scaler or auxiliary loss was introduced.

The underlying development fusion was $F = \lambda H + (1 - \lambda)M$. Nearest-anchor mean interpolation selected k from $\{1, 4, 8, 16\}$; inverse-distance interpolation used up to 16 anchors and selected power from $\{1, 2, 3\}$. The stronger family and $\lambda \in \{0, 0.25, 0.5, 0.75, 1\}$ were chosen by mean validation MSE separately by panel and sampling geometry. For 50 genes, random sampling selected inverse-distance-squared interpolation and $\lambda = 0.25$; block sampling selected the 16-anchor mean and $\lambda = 0.5$; capture-window sampling selected inverse-distance-cubed interpolation and $\lambda = 0.5$. These development settings differ from the final external fusion settings. Supplementary Fig. S7 evaluates three permutation seeds on one random 20% observation mask, with the fitted models unchanged. The plotted B1, B3 and B4 labels denote the frozen image predictor, fixed fusion and ridge residual correction, respectively.

4.10 Patient-disjoint HER2ST calibration and fusion selection

Supplementary Figs. S1 and S10 use the same eight HER2ST patients and 40 shared genes. Four outer folds held out the pairs A1/B1, C1/D1, E1/F1 and G1/H1, respectively. Within each remaining six-patient set, target-mapping candidates were evaluated by leave-one-patient-out records: the mapping for an inner patient's predictions was estimated from the other five patients. The fixed source moments came from NCBI783 and NCBI785. The candidates were the unchanged target, per-gene mean/standard-deviation mapping and per-gene median/interquartile-range mapping. Each patient had equal total weight in moment or quan-

tile estimates. An interquartile range below 10^{-8} fell back to the corresponding standard deviation, and a standard deviation below 10^{-8} was replaced by one. Source and destination moments were estimated separately. Image predictions were expressed in source-standardized coordinates, anchors in destination-standardized coordinates, and final errors were computed after mapping predictions back to common target units.

The target-mapping comparison retained fixed image weights 0.25 for V1 and 0.5 for V2. Selection used inner random-mask seeds 0–2 and four equally weighted conditions: V1 coverage 10, 20 and 40%, and V2 coverage 20%. Seeds and geometries were first averaged within patient and condition, then conditions within patient, then the six patients. Candidates within 0.005 of the highest mean patient median gene Pearson correlation were eligible; among these, the candidate with lowest common-unit MSE was selected. The mean/standard-deviation transform was selected in every fold; the corresponding outer mapping used moments estimated from all six outer-training patients.

The selected-fusion analysis then used the corresponding inner records to fit and select among four families: molecular interpolation alone; one global image weight from $\{0, 0.1, \ldots, 1\}$; 35 nondecreasing three-bin weight rules with weights from $\{0, 0.1, 0.25, 0.5, 1\}$ and nearest-anchor boundaries 300 and 600 μm; and a five-parameter sigmoid gate. All weights were shared across genes, regimes and budgets within an outer fold. The sigmoid gate was

$$w_i = \mathrm{sigmoid}(\beta_0 + \widetilde{q}_i^{\top}\beta), \qquad \widehat{y}_i = M_i + w_i(H_i - M_i),$$

where the four features before fitting-data standardization were $\log(1+d_1/200)$, $\log(1+\overline{d}_{16}/200)$, $\log(1+n_{600})$ and $\log(1+v)$: nearest-anchor distance, mean distance to up to 16 nearest anchors, the number of observed anchors within 600 μm, and mean across-gene variance among the neighboring observed vectors. The gate minimized common-unit squared error with equal patient/condition/run/location contributions, divided by each run's interpolation MSE floored at 10^{-8}, plus $0.01\|\beta\|_2^2 + 10^{-6}\beta_0^2$. The same weights defined feature means and standard deviations. L-BFGS-B used initial coefficients $(-2, 0, 0, 0, 0)$, bounds $[-12, 12]$, maximum 300 iterations, function tolerance 10^{-12} and gradient tolerance 10^{-7}. No outer-patient outcomes entered fitting or candidate selection.

The same correlation-then-MSE rule selected the fusion family. The first three patient-pair folds selected global image weight 0.2; the G1/H1 fold selected the sigmoid gate. Outer evaluation used mask seeds 0–9. Supplementary Fig. S10 reports these fold-selected rules, whereas Supplementary Fig. S1 shows the fixed-fusion target-mapping comparison. Both remain calibration-development analyses of previously examined HER2ST patients.

The full-precision primary image feature scaler, target normalization and source-to-Wu calibration constants are supplied in `methods_data/`. The primary head settings and recorded software versions are provided there in machine-readable form. These constants specify the published transformations without refitting them.

4.11 Development comparisons of local and contextual representations

Development analyses compared an initial local MLP, neighborhood-mean pooling, and predictors using graph-convolutional[22] or mean-GraphSAGE[23] representations (Supplementary Figs. S3 and S4). The implemented graph predictors applied one fixed aggregation to frozen

image embeddings, followed by a one-hidden-layer GELU MLP; they did not stack multiple trainable message-passing layers. Self-only, vertex-permuted, degree-rewired and degree-plus-edge-length-rewired controls tested whether gains depended on the true spatial adjacency (Supplementary Fig. S5). The representation comparison used the 768-dimensional final classification-token representation from frozen Phikon ViT-B/16[28] with a $768 \to 256 \to 50$ local head (Supplementary Fig. S6). The sparse-reconstruction comparator termed learned propagation was a gene-wise ridge regression correction over explicit image and molecular neighborhood summaries, rather than a neural message-passing model (Supplementary Fig. S7). Exact graph operators, head sizes, regularization and fitting settings are provided in the Methods and summarized in Supplementary Table S8. These were development diagnostics; the fresh external protocol retained the ResNet18–MLP ensemble, fixed molecular interpolation and fixed fusion. The evidence did not establish a reproducible benefit attributable to exact graph topology.

4.12 Observation masks and measurement budgets

For a section with N retained locations, the observed set $\mathcal{O}$ contained $\lfloor Nb + 0.5 \rfloor$ anchors at budget $b \in \{0.10, 0.20, 0.40\}$. Every hidden location lacked its entire expression vector; coordinates and image features remained available. Primary random trajectories used seeds 0–9 with nested prefixes, so higher budgets added anchors without discarding earlier observations. All trajectories were frozen without using expression values.

In distributed interpolation (V1), anchors were eligible throughout the tissue and all unobserved locations were scored. In contiguous regional completion (V2), a forbidden region consisted of the nearest 40% of locations to a center determined from the 25th, 50th or 75th percentile of the first coordinate principal-component rank. The three centers defined three fixed geometries. Anchors were sampled outside the forbidden region, and only the forbidden region was scored. All other unobserved labels were also removed from model inputs. Thus the same nominal budget refers to the full retained section even when evaluation is restricted to a region.

A deterministic spatial farthest-point policy was retained as a secondary sampling analysis. It started from the eligible location farthest from the eligible-coordinate centroid and selected locations without expression labels. It was not optimized on external outcomes. Earlier development block and capture-window masks differ from the final regional-completion definition and are labeled separately in Fig. 3 and the source tables.

4.13 Observation-dependent molecular graph and image–molecular fusion

For every unmeasured location $i \in \mathcal{U}$, we define directed support edges $i \to j$ to at most 16 measured locations $j \in \mathcal{O}$, identified by the smallest coordinate distance. The resulting observation-dependent edge-weight matrix $W_{\mathcal{U}\mathcal{O}}$ has row-normalized positive weights and zero entries for unavailable anchors. The molecular reconstruction operator is

$$\widehat{Y}_{\mathcal{U}}^{\mathrm{ST}} = W_{\mathcal{U}\mathcal{O}} Y_{\mathcal{O}}. \tag{5}$$

The operator has no explicit maximum-distance cutoff, permitting cross-gap transport of observed expression. It is not a learned attention matrix, and absence of a cutoff is not evidence of reliable long-range inference. The distinct V1 and V2 weights and scoring supports are defined next.

The molecular predictor used the up to 16 nearest observed anchors, $\mathcal{N}_{16}(i;\mathcal{O})$. For distinct observed and hidden coordinates, distributed interpolation used normalized inverse-distance-squared weights, a local form of inverse-distance interpolation[29]:

$$\widehat{y}_{ig}^{\mathrm{ST}} = \sum_{j\in\mathcal{N}_{16}(i;\mathcal{O})} w_{ij} y_{jg}, \qquad w_{ij} = \frac{\|p_i - p_j\|^{-2}}{\sum_{k\in\mathcal{N}_{16}(i;\mathcal{O})} \|p_i - p_k\|^{-2}}. \tag{6}$$

For the frozen V2 protocol, the same neighborhood size was used with equal weights $w_{ij} = 1/|\mathcal{N}_{16}|$. These rules were fixed during the Wu evaluation and were not selected on Bassiouni outcomes. Fewer than 16 anchors, if available, were handled by using all available anchors. Euclidean distances were rounded to six decimal places in micrometers and floored at 10^{-6} μm before inverse-square weighting; the normalized weights therefore remained finite at coincident coordinates.

The image-only prediction was denoted $\widehat{y}^{\mathrm{image}}$. The final fusion was

$$\widehat{y}_{ig}^{\mathrm{fusion}} = 0.8\widehat{y}_{ig}^{\mathrm{ST}} + 0.2\widetilde{y}_{ig}^{\mathrm{image}}, \tag{7}$$

where the image calibration was

$$\widetilde{y}_{ig}^{\mathrm{image}} = a_g^{\mathrm{W}} + b_g^{\mathrm{W}} \frac{\widehat{y}_{ig}^{\mathrm{image}} - a_g^{\mathrm{S}}}{b_g^{\mathrm{S}}}. \tag{8}$$

Here S denotes the two development-training patients and W the three Wu calibration patients. Moments were computed from all retained targets of the designated source and calibration patients, rather than their sparse anchor subsets or image predictions. Each patient contributed equal total weight: for a domain with P patients and n_p locations in patient p,

$$a_g = \frac{1}{P}\sum_{p=1}^{P}\frac{1}{n_p}\sum_{i=1}^{n_p} y_{pig}, \qquad b_g = \sqrt{\frac{1}{P}\sum_{p=1}^{P}\frac{1}{n_p}\sum_{i=1}^{n_p}(y_{pig} - a_g)^2}. \tag{9}$$

A scale below 10^{-8} was replaced by 1. This scale includes variation about the shared domain center; it is not the mean of patient-specific standard deviations. All moments used the common target units in Eq. 2. Bassiouni evaluation reused these source and Wu constants without fitting new moments or fusion weights. The calibrated image term used in fusion therefore differs from the raw image-only comparator reported in Table 2.

A per-gene affine transformation $T_g(y) = (y - a_g)/s_g$ with $s_g > 0$ satisfies

$$T_g^{-1}\left(\sum_j w_{ij} T_g(y_{jg})\right) = \sum_j w_{ij} y_{jg} \quad \text{when} \quad \sum_j w_{ij} = 1. \tag{10}$$

Accordingly, the transform–interpolate–inverse-transform molecular prediction was checked as an equivalence test and omitted from duplicate primary metric tables. Floating-point differences affecting tied ranks were not counted as harmonization benefits.

4.14 Metrics, patient aggregation and decision criteria

All expression metrics were computed on hidden locations only; the full observed expression vector was available at each anchor and the full target vector was withheld at every other location. Observed rows were selected before molecular prediction, so hidden expression could not influence anchor values or interpolation weights. For each gene, Pearson and Spearman correlations summarized spatial association, while MSE and MAE summarized prediction error. Panel Pearson values were medians across genes with defined correlations. Constant-target or constant-prediction correlations were left undefined rather than assigned zero; such genes did not pass positive-correlation threshold counts. Panel MSE and MAE were means of per-gene errors. In formulae, for the scored hidden set $\mathcal{H}$,

$$\mathrm{MSE} = \frac{1}{G|\mathcal{H}|}\sum_{g=1}^{G}\sum_{i\in\mathcal{H}}(\widehat{y}_{ig}-y_{ig})^2, \qquad \mathrm{MAE} = \frac{1}{G|\mathcal{H}|}\sum_{g=1}^{G}\sum_{i\in\mathcal{H}}|\widehat{y}_{ig}-y_{ig}|. \tag{11}$$

Within each patient and geometry, metrics were averaged over mask seeds; geometry means were then averaged equally. Headline cohort values were medians of these patient summaries. Tables label an MSE value as a cohort median of patient mean MSEs, not a pooled mean over all spots. Paired effects were calculated within patients before taking their median. This distinction is necessary because a median paired effect need not equal the difference or ratio of marginal medians.

The patient was the biological unit. Seeds described computational or mask variability, not additional patients. The original v1 record reported descriptive effects and patient-support counts without hypothesis tests or spot-level significance claims. The added journal analysis reports separately labelled descriptive patient bootstrap intervals; it does not reinterpret seeds or spots as biological replicates. The second-replication support criterion required a median gene Pearson gain of at least 0.02 over image-only prediction, relative mean MSE reduction of at least 2%, and non-worsening MAE. The cohort rule required at least $\lceil 2N/3 \rceil$ patients meeting the joint criterion at at least two budgets, positive median benefits at every budget, and the same support threshold for correlation/MSE improvement from 10% to 40%. For 22 patients this threshold was 15. The limited native image resolution restricts interpretation of the image comparisons even when the molecular support criterion is satisfied.

4.15 Distance-resolved evaluation

For each hidden location, the nearest-anchor distance was $d_i = \min_{j\in\mathcal{O}} \|p_i - p_j\|$. Distances were grouped into the frozen bins $[0, 150)$, $[150, 300)$, $[300, 600)$, $[600, 1200)$, $[1200, 2400)$ and $[2400, \infty)$ μm. Error summaries were reported for occupied bins; the Bassiouni binwise correlations required at least 20 scored locations, while the Wu distance summaries contained errors only. Empty bins were omitted, not filled with zero. Counts, geometry and run identities were retained to distinguish sparse support from low error. Nearest-versus-farthest contrasts and monotonicity summaries were descriptive properties of the occupied-bin curves, not estimates of a universal biological length scale.

4.16 Negative controls and reproducibility

In the second replication, control patient BASS_P01, 20% coverage, random-mask seed 0, V1 geometry 0 and V2 geometry 1 were designated before evaluation. Three control seeds permuted observed expression-vector assignments, anchor-position assignments or image predictions. The first two disrupt related molecular–location associations; they were not interpreted as independent biological evidence. Every saved prediction was also repeated after all unobserved expression was replaced with NaNs and with independent random values. Observed/hidden barcodes, mask identities, configurations and hashes accompanied the predictions.

Analyses used Python, NumPy[30], SciPy[31], pandas, PyTorch and related scientific libraries. Reproduction instructions and environment specifications are maintained with the code. Model training and fresh replication used recorded configurations and checksums; source-data tables provide the numerical outputs underlying the published figures.

4.17 Post-v1 journal protocols, estimators and neural controls

A committed protocol preceded new comparator outcomes. Original arXiv sources, numerical targets and archived checkpoint records were immutable. Public data and encoder weights were downloaded into a new ignored cache, with source terms, full SHA256 records and published Zenodo MD5 checks. New learned states were labelled journal-v2 and stored separately. No paid computing service was used.

Experiment A used all ten original random V1 trajectories at each of 10/20/40% coverage for nearest anchor; uniform k=4,8,16,32; IDW at those k with p=1,2,3; and Gaussian k=8,16,32. We retained cKDTree ordering, six-decimal distances and a 10^{-6} μm inverse-weight floor. Gaussian bandwidth was the median observed-anchor distance to its kth other observed neighbor, with k limited by available anchors; it never used hidden expression. Every declared estimator is reported. Experiment B1 held each original mask and scored set fixed while changing IDW k16/p2 versus uniform k16, for both V1 and all three V2 geometries.

Experiment B2 used only the predeclared central PCA-coordinate region R (40% of locations). H was a fixed random 20% subset of R (about 8% of all locations), selected using SHA256("H|patient") first eight bytes, little-endian. Distributed anchors were drawn from all non-H sites; region-exclusion anchors from outside R. Seeds 0–9 gave nested prefixes with equal total counts at every budget. R, H, barcodes and anchor trajectories were persisted before scoring. Both estimators scored exactly H; no expression-based geometry or exclusion was used. Seed means preceded geometry means and patient pairing. Both primary error and correlation effects and nearest-anchor distances were exported, with occupied-bin errors and support.

Uncertainty resampled whole paired patients 10,000 times (seed 20261101) and took percentile 95% intervals for the median paired correlation change, MAE change and relative MSE. Fractions improved used the same finite paired patients, whose number is explicit. No cohorts were pooled and no p-values or simultaneous-band claims were made. Wu's three individual effects are primary; Those earlier intervals reanalyzed original exports; the separate later extension also reports intervals from new exact-input Bassiouni predictions. Raw Spearman was

retained descriptively with explicit near-tie sensitivity, not used for numerical-exactness or improvement claims.

New neural fits used the original HEST 50-gene panel and C0 training normalization, frozen ImageNet ResNet18 embeddings with the original PIL resize/crop transform, and a feature scaler fit only on NCBI783/NCBI785. Coordinate-only Delaunay edges were capped at 250 μm within each section. A single learned linear/GELU/dropout/readout layer followed mean or symmetric GCN aggregation; GraphSAGE concatenated self and neighbor mean. Widths were 128 for local/mean/GCN and 67 for SAGE (72,114 versus 72,075 parameters). Spatial, self-only and degree-preserving node-shuffled controls shared each family's nominal parameters, labels and training settings. SAGE self-only concatenated X with X and has a smaller effective function class. AdamW used lr 10^{-3}, decay 10^{-4}, batch size 512, dropout0.1, maximum 80 epochs, patience 10 and minimum validation improvement 10^{-4}; TENX95 alone selected stopping. Seeds 0/1/2 were all retained. Deterministic float32 CPU execution used four torch/BLAS threads; caches and checkpoints have independent new hashes. After diagnosing tiny CPU float32 differences, identity controls required exactly equal inputs and weight/prediction agreement within rtol=atol=$32\,\epsilon_{\mathrm{float32}} = 3.8147 \times 10^{-6}$. This precision guard did not relax original float64 molecular replay or exact within-model hidden-label invariance.

TENX99 evaluation used three exact original random masks per budget. Alongside image and IDW predictions, we evaluated fixed $0.2\,g_\theta + 0.8\,\mathrm{IDW}(y_{\mathcal{O}})$ and the protocol-specified exploratory exploratory residual baseline

$$\widehat{y}_i = g_\theta(i) + \sum_{j \in \mathcal{O}} w_{ij}\,[y_j - g_\theta(j)].$$

Only observed residual vectors entered interpolation; replacing every unobserved label with NaNs or random values had to leave predictions unchanged. This is residual interpolation, not a novelty claim. No external cohort selected a new model, coefficient or seed, and no biological confidence interval was inferred from one patient's masks or training seeds.

4.18 Post-v1 bounded Transformer and latent-coordinate extension

The timestamped local protocol commit preceded all 48 fits. AdamW used learning rate 10^{-3}, weight decay 10^{-4}, maximum 80 epochs, patience 10 and minimum validation-MSE improvement 10^{-4}; there was one full-section update per source training patient per epoch, in seeded random order. TENX95 alone selected epochs. Local/mean/GCN widths were 128; concatenated GraphSAGE used 67. The older 30 heads used their original pooled 512-node minibatch regime and remain frozen references, not optimization-matched controls. New full-section baselines supply the matched-update-budget comparison. Models differ in parameter count and compute; fixed epoch/update budgets are not matched floating-point-operation budgets.

GraphGPS-inspired blocks use a512-to 64 projection, two 64-wide blocks, four attention heads, dropout 0.1, pre-LayerNorm, local linear messages gated by eight relative-distance radial features, parallel bounded attention, residual additions and a two-layer GELU feed-forward path. The local graph is Delaunay with a250 μm cap. Global keys/values are at most 32 deterministic coordinate-only farthest-point landmarks, giving O(NL) attention storage with $L \leq 32$; there is no dense N-by-N allocation. The nonlocal-disabled model attends self plus up to seven nearest graph neighbors, padding unused slots with self. Thus full/local changes attention

range and key count as well as connectivity, despite identical 121,018 nominal parameters. Local radial features use log(1+d/250) with eight centers 0–1 and width 0.15; attention relative bias uses eight centers 0–4 and width 0.5. The distance-disabled version removes explicit gates/biases but retains coordinate-defined graph/landmark selection and is not coordinate-free.

The invariant fixed-coordinate and EGNN alternatives use two 64-wide message blocks. With centered normalized $p = (x - \mathrm{mean}(x))/250$, $m_{ij} = \phi_e(h_i, h_j, \mathrm{RBF}(\|p_i - p_j\|^2))$, node updates aggregate the mean message through ϕ_h, using SiLU, LayerNorm and dropout 0.1. Eight radial centers span 0–4 with width 0.5. EGNN additionally updates private coordinates as

$$p_i^{l+1} = p_i^l + \frac{1}{\max(1, |\mathcal{N}_i|)} \sum_{j \in \mathcal{N}_i} 0.1 \tanh(\phi_x(m_{ij}))(p_i^l - p_j^l).$$

Each ϕ_x is a bias-free 64-to 1 map initialized at standard deviation 0.001. Only the first coordinate update affects the second layer's scalar readout; the last update has no downstream scalar loss. EGNN has 87,282 nominal parameters versus 87,154 for fixed distance (128 additional coordinate coefficients, of which the last 64 do not affect prediction). Both are E(2)-compatible conditional on frozen features, so their accuracy difference cannot identify equivariance itself. Latent positions never change original masks, anchors or IDW distances.

Self-only and coordinate/graph-shuffled variants retain nominal parameter tensors but have different effective function classes; inactive attention or edge parameters do not make them capacity-equivalent. Conjugating the graph and assigned coordinates together preserves edge-length geometry while breaking image-to-location assignment. Degree/length rewiring preserves each node's degree and global 50 μm edge-length bins below the same 250 μm cap, targeting E/4 accepted double swaps with at most 20E attempts. Actual successes are reported, including infeasible or weak rewiring. No hidden expression enters any graph, landmark or distance encoding.

Development uses nine original random masks (three seeds at each budget); external cohorts use original V1 and central V2 geometry 1 with seeds 0/1/2. All 78 models also use B2 seeds 0/1/2 at 10/20/40% budgets. This bounded extension does not replace the original ten-seed/three-geometry analyses. B2 uses identical H and equal anchor counts in both placements. For every fixed/residual route, all unobserved labels, including unscored labels, were replaced with NaNs and independent random numbers and predictions required exact equality. Image-only B2 metrics must be identical across placements, budgets and mask seeds because H is fixed. Full per-gene metrics and defined-correlation counts are retained. Seed averages precede patient effects, cohorts remain separate, and the 22-patient bootstrap uses 10,000 resamples and seed 20261101; intervals are descriptive and unadjusted.

Exact Bassiouni raw recovery activated the protocol's conditional cohort analysis without model or calibration changes. All 88 original SHA 256 checks, source barcode joins and independently derived coordinates were verified; source coordinates agreed with preserved label-free coordinates within 10^{-8} μm, which then governed exact neighbor ties. The published Resize 256/CenterCrop 224 transform retains approximately 0.875 of the native patch linear field, so the nominal 112 μm crop is not the exact final encoder field. External image patches used the identical 112 μm field, nearest-integer side/top-left, LANCZOS 224 resize, frozen ResNet18 ImageNet weights and their published transform; no labels entered feature extrac-

tion. The existing C9 T1 map was applied to all image predictions before both image and observed-residual routes, with no new calibration fit. Both external cohorts were previously inspected. Low native image resolution and cross-platform scale/domain shift constrain morphology conclusions.

Conditional geometric checks apply rotations, reflections, translations and node permutations at float 64/float 32, recording scalar and physical latent-coordinate errors separately. Attention diagnostics report physical and assigned-coordinate connectivity fractions and actual mass beyond 250/600/1200 μm per head/layer/seed/patient. The distant perturbation zeros one coordinate-selected remote landmark feature; it tests functional dependency only. Optional learned anchor-conditioned models and complete-image equivariance experiments were skipped by protocol. CPU timings, memory, exact environments, optimizer states, complete histories and data/checkpoint hashes are retained; model weights and raw datasets are excluded from Git.

5 Ethics

This work reanalyzed publicly released, anonymized datasets without new recruitment, tissue collection or experimental intervention. The original studies describe their ethics and consent procedures[4–6].

6 Data availability

The development data were drawn from HEST[2]. HER2ST data are available at https://zenodo.org/records/4751624; the Wu local spatial dataset at https://zenodo.org/records/4739739; and the Bassiouni spatial dataset under GEO accession GSE210616, https://www.ncbi.nlm.nih.gov/geo/query/acc.cgi?acc=GSE210616. The accompanying source-data files contain the tabulated results underlying the manuscript and supplementary figures. Canonical source links are listed above. Initial individual GEO transfers failed; the later extension recovered all88 exact original files through bounded HTTP byte ranges from the official TAR and performed the separately reported new analyses. Raw tissue images and complete prediction caches are not redistributed in the manuscript package.

7 Code availability

Source code and instructions are available at https://github.com/HySonLab/GraphPathology. Figure and table source data accompany the manuscript package.

8 Acknowledgements

We acknowledge the investigators who generated and released the source spatial transcriptomics datasets. Figures were prepared for this study from the reported numerical outputs; final layouts and the original architecture schematic were drawn using Matplotlib 3.10.8

(https://matplotlib.org/); the original schematic spatial examples are synthetic. The earlier added journal maps show actual Wu counts, anchors, predictions and errors. The later extension figures and predetermined Bassiouni maps were generated from exported tables with Matplotlib3.11.2; no tissue annotations were inferred.

9 Funding

No funding to disclose.

10 Author contributions

Truong-Son Hy was responsible for study conception and design, methodology, computational analysis and validation, interpretation, visualization, and manuscript writing and revision.

11 Competing interests

Truong-Son Hy is an Editorial Board Member of *Scientific Reports*. The author declares no other competing interests.

References

[1] Ståhl, P. L. *et al.* Visualization and analysis of gene expression in tissue sections by spatial transcriptomics. *Science* **353**, 78–82 (2016). https://doi.org/10.1126/science.aaf2403.

[2] Jaume, G. *et al.* HEST-1k: A dataset for spatial transcriptomics and histology image analysis. In *Advances in Neural Information Processing Systems*, vol. 37 (2024). https://doi.org/10.52202/079017-1704.

[3] He, B. *et al.* Integrating spatial gene expression and breast tumour morphology via deep learning. *Nat. Biomed. Eng.* **4**, 827–834 (2020). https://doi.org/10.1038/s41551-020-0578-x.

[4] Andersson, A. *et al.* Spatial deconvolution of HER2-positive breast cancer delineates tumor-associated cell type interactions. *Nat. Commun.* **12**, 6012 (2021). https://doi.org/10.1038/s41467-021-26271-2.

[5] Wu, S. Z. *et al.* A single-cell and spatially resolved atlas of human breast cancers. *Nat. Genet.* **53**, 1334–1347 (2021). https://doi.org/10.1038/s41588-021-00911-1.

[6] Bassiouni, R. *et al.* Spatial transcriptomic analysis of a diverse patient cohort reveals a conserved architecture in triple-negative breast cancer. *Cancer Res.* **83**, 34–48 (2023). https://doi.org/10.1158/0008-5472.CAN-22-2682.

[7] Monjo, T., Koido, M., Nagasawa, S., Suzuki, Y. & Kamatani, Y. Efficient prediction of a spatial transcriptomics profile better characterizes breast cancer tissue sections

without costly experimentation. *Sci. Rep.* **12**, 4133 (2022). https://doi.org/10.1038/s41598-022-07685-4.

[8] Zeng, Y., Wei, Z., Yu, W. *et al.* Spatial transcriptomics prediction from histology jointly through transformer and graph neural networks. *Briefings in Bioinformatics* (2022).

[9] Jia, Y., Liu, J., Chen, L., Zhao, T. & Wang, Y. Thitogene: a deep learning method for predicting spatial transcriptomics from histological images. *Briefings in Bioinformatics* **25**, bbad464 (2024).

[10] Wang, Y. *et al.* Fmh2st: foundation model-based spatial transcriptomics generation from histological images. *Nucleic Acids Research* **53**, gkaf865 (2025).

[11] Liu, J., Eckstein, M., Wang, Z., Feuerhake, F. & Merhof, D. Spatial transcriptomics expression prediction from histopathology based on cross-modal mask reconstruction and contrastive learning. *Med. Image Anal.* **108**, 103889 (2026). https://doi.org/10.1016/j.media.2025.103889.

[12] Wang, C. *et al.* Benchmarking the translational potential of spatial gene expression prediction from histology. *Nat. Commun.* **16**, 1544 (2025). https://doi.org/10.1038/s41467-025-56618-y.

[13] Bergenstråhle, L. *et al.* Super-resolved spatial transcriptomics by deep data fusion. *Nat. Biotechnol.* **40**, 476–479 (2022). https://doi.org/10.1038/s41587-021-01075-3.

[14] Hu, J. *et al.* Deciphering tumor ecosystems at super resolution from spatial transcriptomics with tesla. *Cell Systems* **14**, 404–417.e4 (2023).

[15] Zhang, D., Schroeder, A., Yan, H. *et al.* Inferring super-resolution tissue architecture by integrating spatial transcriptomics with histology. *Nature Biotechnology* **42**, 1372–1377 (2024).

[16] Fang, Y., Qian, J., Wang, X., Cooper, L. A. & Zhou, B. Sparser2sparse: Single-shot sparser-to-sparse learning for spatial transcriptomics imputation with natural image co-learning. *IEEE Journal of Biomedical and Health Informatics* (2026).

[17] Zhu, J., Deng, R., Guo, J. *et al.* Scr^2-st: Combine single cell with spatial transcriptomics for efficient active sampling via reinforcement learning. In *Proceedings of the 9th International Conference on Medical Imaging with Deep Learning*, vol. 315, 488–509 (PMLR, 2026). https://proceedings.mlr.press/v315/zhu26a.html.

[18] He, H.-F., Peng, P., Yang, S.-T. *et al.* Unlocking single-cell level and continuous whole-slide insights in spatial transcriptomics with panospace. *Nature Computational Science* **6**, 358–371 (2026).

[19] Xu, H., Wang, S., Fang, M. *et al.* Spacel: deep learning-based characterization of spatial transcriptome architectures. *Nature Communications* **14**, 7603 (2023).

[20] Rampasek, L. *et al.* Recipe for a general, powerful, scalable graph transformer. In *Advances in Neural Information Processing Systems*, vol. 35, 14501–14515 (2022).

[21] Satorras, V. G., Hoogeboom, E. & Welling, M. E(n) equivariant graph neural networks. In *Proceedings of the 38th International Conference on Machine Learning*, vol. 139 of *Proceedings of Machine Learning Research*, 9323–9332 (2021).

[22] Kipf, T. N. & Welling, M. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations* (2017). https://arxiv.org/abs/1609.02907.

[23] Hamilton, W., Ying, Z. & Leskovec, J. Inductive representation learning on large graphs. In *Advances in Neural Information Processing Systems*, vol. 30 (2017). https://proceedings.neurips.cc/paper/2017/hash/5dd9db5e033da9c6fb5ba83c7a7ebea9-Abstract.html.

[24] Roberts, D. R. *et al.* Cross-validation strategies for data with temporal, spatial, hierarchical, or phylogenetic structure. *Ecography* **40**, 913–929 (2017). https://doi.org/10.1111/ecog.02881.

[25] Sun, E. D., Ma, R., Navarro Negredo, P., Brunet, A. & Zou, J. TISSUE: uncertainty-calibrated prediction of single-cell spatial transcriptomics improves downstream analyses. *Nat. Methods* **21**, 444–454 (2024). https://doi.org/10.1038/s41592-024-02184-y.

[26] He, K., Zhang, X., Ren, S. & Sun, J. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 770–778 (2016). https://doi.org/10.1109/CVPR.2016.90.

[27] Gilmer, J., Schoenholz, S. S., Riley, P. F., Vinyals, O. & Dahl, G. E. Neural message passing for quantum chemistry. In *Proceedings of the 34th International Conference on Machine Learning*, vol. 70, 1263–1272 (PMLR, 2017). https://proceedings.mlr.press/v70/gilmer17a.html.

[28] Filiot, A. *et al.* Scaling self-supervised learning for histopathology with masked image modeling. *medRxiv* (2023). https://doi.org/10.1101/2023.07.21.23292757. Preprint.

[29] Shepard, D. A two-dimensional interpolation function for irregularly-spaced data. In *Proceedings of the 1968 23rd ACM National Conference*, 517–524 (ACM, 1968). https://doi.org/10.1145/800186.810616.

[30] Harris, C. R. *et al.* Array programming with NumPy. *Nature* **585**, 357–362 (2020). https://doi.org/10.1038/s41586-020-2649-2.

[31] Virtanen, P. *et al.* SciPy 1.0: fundamental algorithms for scientific computing in Python. *Nat. Methods* **17**, 261–272 (2020). https://doi.org/10.1038/s41592-019-0686-2.

Supplementary Information

GraphPathology enables geometry-aware reconstruction of spatial transcriptomics from sparse molecular measurements

Truong-Son Hy[1,*]

[1]Department of Computer Science, University of Alabama at Birmingham, Birmingham, Alabama, United States

[*]Correspondence: thy@uab.edu

Contents and source-data guide

This document contains interpretive notes, the original twelve supplementary figures and nine supplementary tables, followed by separately labelled post-v1 analyses, two real-data maps and four new tables. The full architecture and training Methods are now provided in the main article. Supporting source-data exports, including unrounded per-gene observations, accompany the publication package. Independent biological replicates are patients rather than masks or training seeds.

S1 Supplementary notes

S1.1 Affine interpolation identity

For a gene with transform $T(y) = (y - \mu)/\sigma$, $\sigma > 0$, and interpolation weights satisfying $\sum_j w_{ij} = 1$, we have

$$T^{-1}\left(\sum_j w_{ij} T(y_j)\right) = \sigma \sum_j w_{ij} \frac{y_j - \mu}{\sigma} + \mu$$
$$= \sum_j w_{ij} y_j.$$

Consequently, applying and inverting a fixed per-gene affine transform does not create a distinct molecular interpolation method when weights are unchanged. In the Wu evaluation, the raw and transformed predictions differed by at most 2.66×10^{-15}, consistent with roundoff. Tiny numerical changes can break tied ranks and alter raw Spearman calculations; such changes were logged as numerical rank sensitivity, not counted as harmonization benefits. Calibration can still alter an image branch or a learned fusion model; that is a different comparison. The manuscript therefore omits duplicate molecular interpolation curves and makes no claim of an affine-harmonization advantage for molecular interpolation itself.

S1.2 Dataset roles, masking and interpretation

The four-patient HEST cohort was used for development. HER2ST was first evaluated under a frozen protocol and subsequently used for calibration development; those two views reuse the same eight patients. The Wu cohort supplied three calibration and three evaluation patients. The 22 Bassiouni patients were evaluated without new cohort-specific fitting. Counts of independent evaluation patients must not add repeated HER2ST analyses or mask replicates as new patients.

Distributed evaluation reveals molecular vectors at sampled anchors and scores all remaining locations. The external regional-completion protocol instead withholds a contiguous 40% region, samples anchors outside it, and scores that region only. V1 uses inverse-distance-squared interpolation and V2 uses an equal-weight nearest-anchor mean. Their contrast is therefore a protocol-level difference, not an isolated geometry intervention. The earlier development block/capture masks are also not identical to the external forbidden-region design.

Public external H&E images are downsampled, and sparse molecular interpolation receives same-section expression unavailable to the image-only baseline. Image-resolution limitations and unequal available information must accompany comparisons with histology. An H&E-fusion failure under these frozen inputs does not establish that native-resolution histology is generally uninformative.

S1.3 Aggregation and metric interpretation

The primary external summaries compute gene-level metrics on hidden locations, summarize genes within each run, average random seeds within geometry, average geometries within pa-

tient, and finally summarize patients. Unless a figure legend states otherwise, external cohort markers are medians across patients. Several development and transportability plots instead show arithmetic means; their legends state this explicitly. A difference between two cohort medians is not a median paired patient effect.

Mean squared error and mean absolute error use the unchanged development-standardized log1p-count target. Shared numerical units do not remove capture-depth or assay differences. Correlations are undefined when the target or prediction range is at most 10^{-12}; they are excluded from correlation averages but not counted as successes in threshold fractions. Spearman correlations use average ranks for ties. Mask and model seeds describe computational variation, not independent biological replication. The original v1 displays contain no confidence intervals or significance tests. Separate post-v1 patient bootstrap intervals are now reported in main Table 3 and the journal CSVs; no significance tests were added.

S2 Supplementary figures

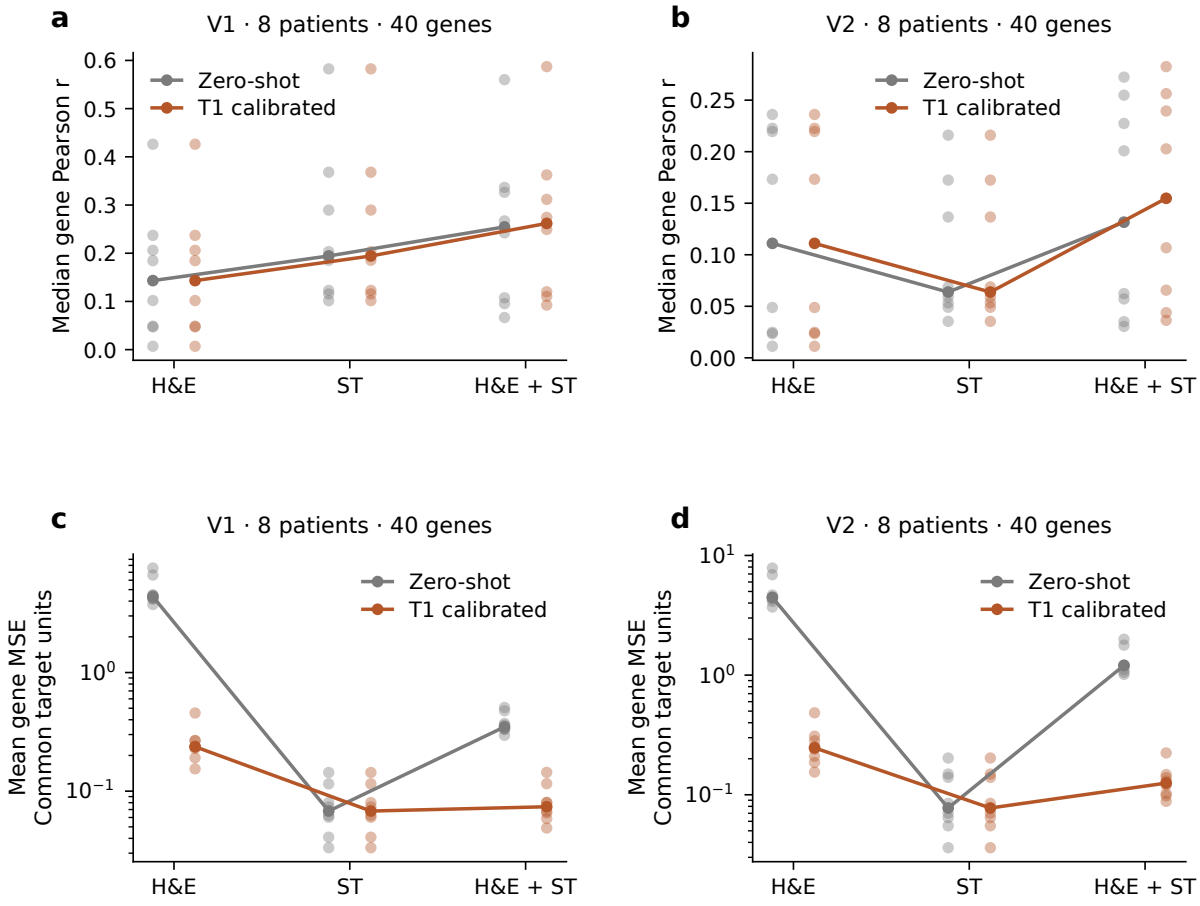


Figure S1: HER2ST transportability and target calibration. Eight HER2ST patients and the frozen 40-gene intersection are shown at 20% random measured-location coverage. **a,c,** Distributed interpolation (V1). **b,d,** Contiguous regional completion (V2). Panels a/b show median gene Pearson correlation and c/d show mean gene MSE in common target units on a logarithmic axis. Dots are patient summaries after averaging seeds and geometries; connected markers are medians across patients. T0 denotes the uncalibrated zero-shot analysis, whereas T1 denotes the calibrated target mapping with fixed fusion. Image weights were 0.25 for V1 and 0.5 for V2; these development weights differ from the final external weight of 0.2. These are the same patients, not independent replication groups. The T1 fixed-fusion analysis differs from the later fold-selected fusion results in Supplementary Fig. S10. Affine transformation and inverse transformation leave molecular interpolation unchanged; apparent image/fusion calibration effects are not a new interpolation advantage.

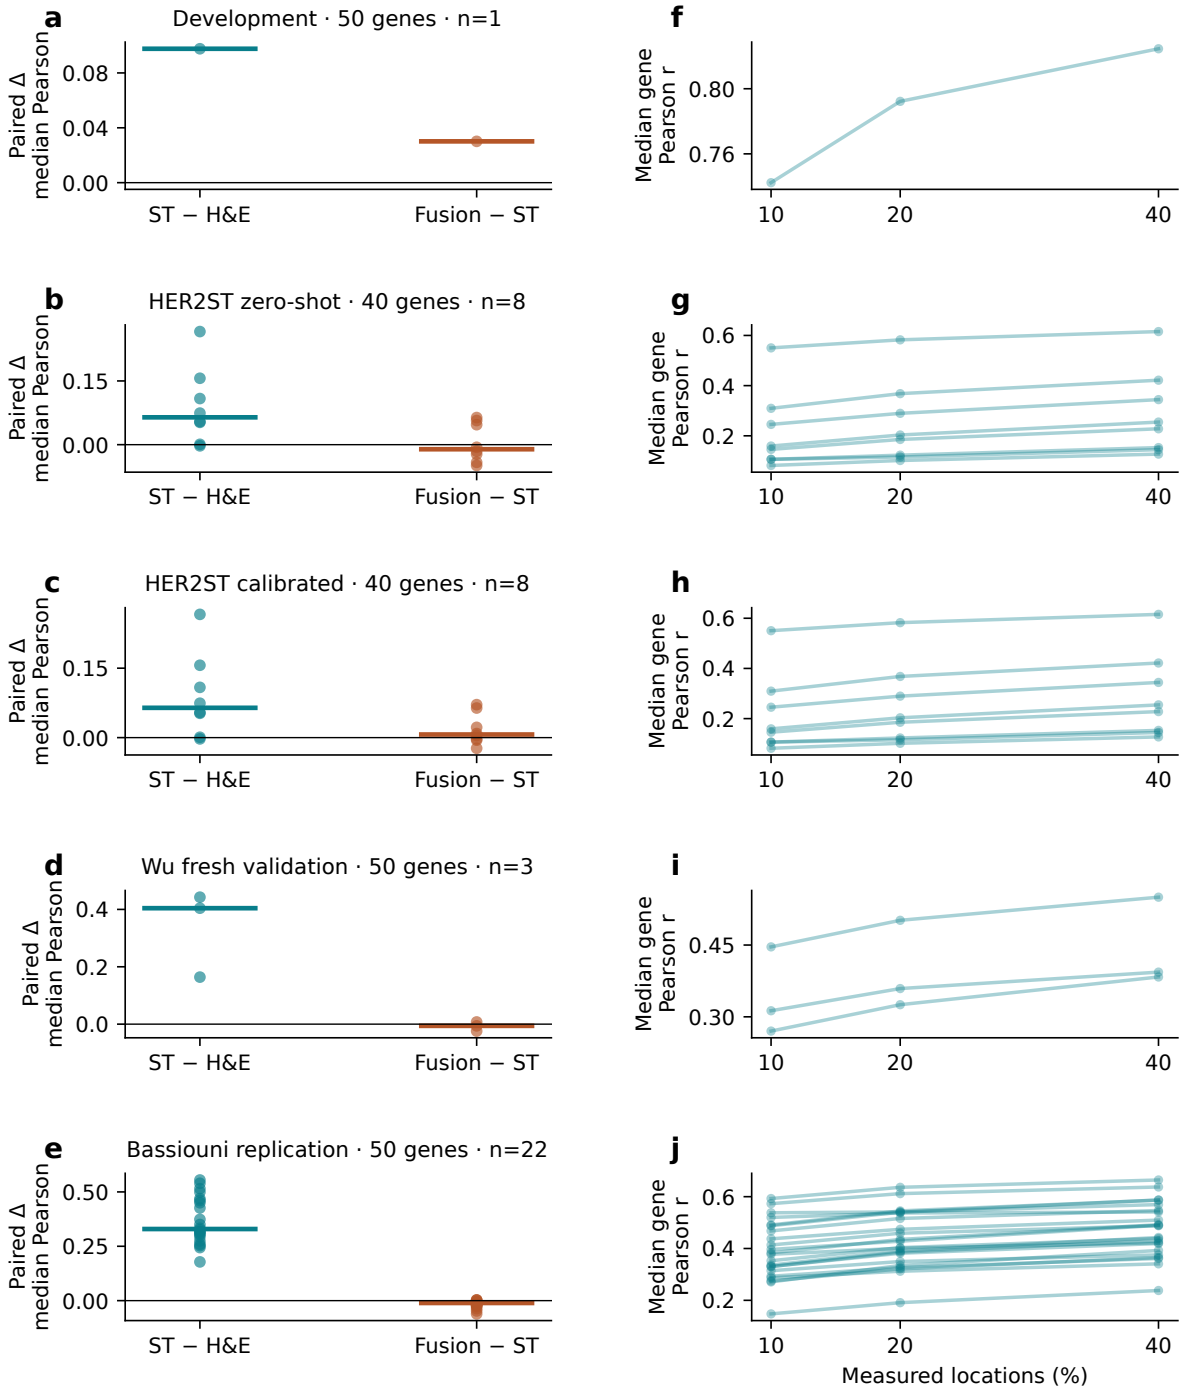


Figure S2: Cross-cohort synthesis without pooling different panels. Rows correspond to the development primary patient ($n = 1$), HER2ST zero-shot ($n = 8$), HER2ST calibrated ($n = 8$, the same patients), fresh Wu evaluation ($n = 3$) and fresh Bassiouni replication ($n = 22$). The development and fresh cohorts use 50 genes; HER2ST uses 40. **a–e,** Left-column paired patient correlation effects at 20% distributed coverage for molecular interpolation minus image-only prediction and fusion minus molecular interpolation; bars are median paired effects. **f–j,** Right-column individual patient molecular correlation curves at 10%, 20% and 40% distributed coverage. The panels preserve differences in analytical role and gene panel and do not define a pooled cross-cohort score. HER2ST calibration is development, not an additional fresh validation cohort.

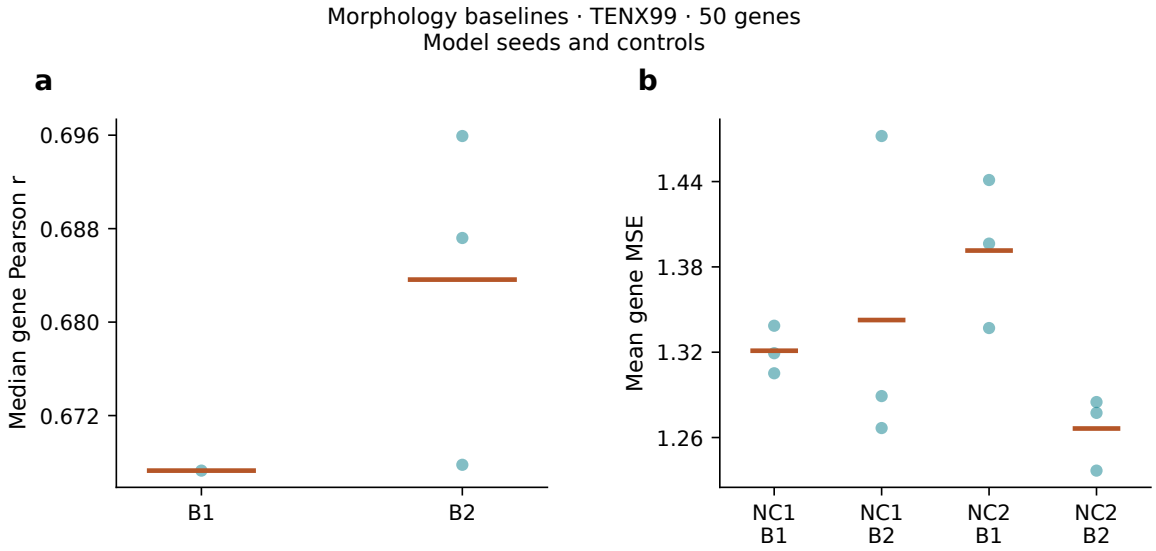


Figure S3: Morphology-only development baselines and controls. The morphology-only development analyses use the single primary development patient TENX99 and 50 genes. **a,** Median gene Pearson correlation for ridge regression (B1) and the small multilayer perceptron (B2). The training-mean baseline has constant predictions and undefined correlations and is not drawn as zero. **b,** MSE under training-target-row permutation (NC1) and training-embedding-row permutation (NC2). Dots represent saved model-seed runs and bars are arithmetic means of displayed runs, not independent patient estimates. The controls disrupt image–expression pairing while preserving validation and evaluation data. This initial image-only head differs from the frozen local MLP selected in the representation comparison and used for external replication.

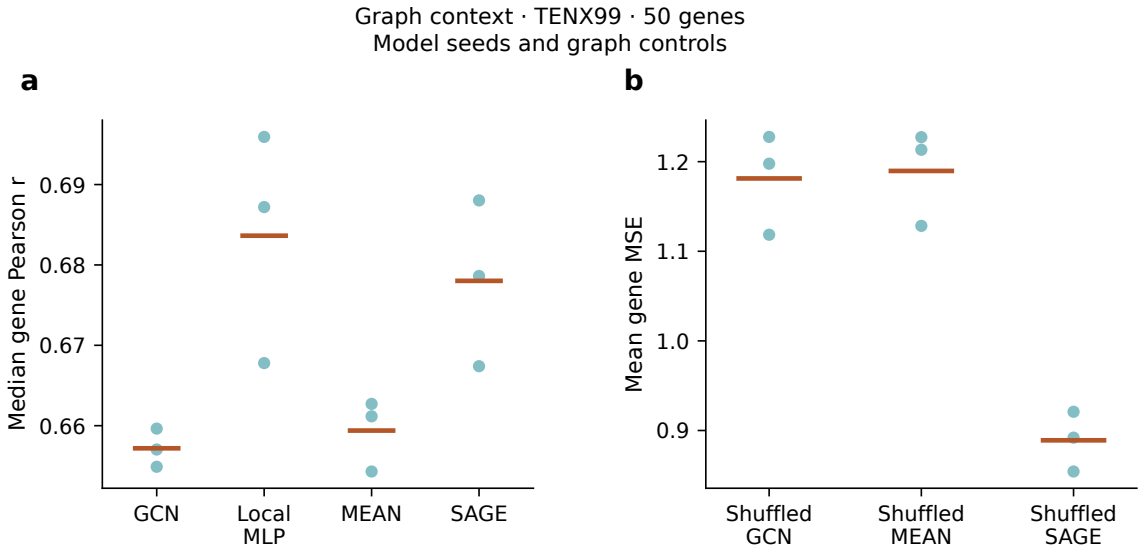


Figure S4: Single-scale graph context did not by itself establish spatial specificity. The single-scale graph comparison uses TENX99 and the 50-gene panel. **a,** Median gene correlation for the frozen local MLP, neighborhood mean pooling plus MLP, GCN and GraphSAGE. **b,** Mean gene MSE for the archived shuffled-neighborhood runs. Dots are training-seed runs and bars are their arithmetic means. A graph model outperforming a local predictor does not establish that the correct spatial adjacency caused the gain; generic aggregation or model parameterization can also contribute. The results use the original fitted models without additional graph selection or local-predictor refitting.

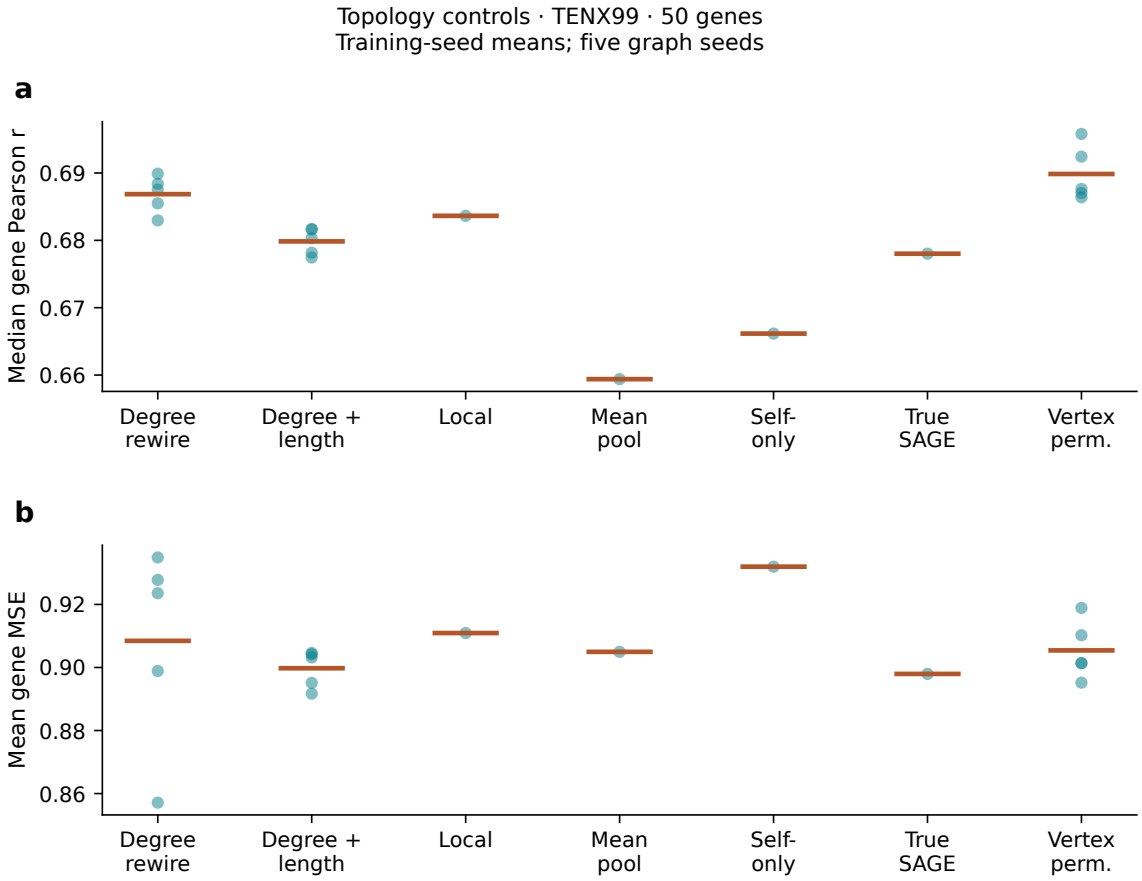


Figure S5: Matched graph controls limited claims about exact topology. The matched graph controls use one development patient, TENX99, and 50 genes. **a,** Median gene Pearson correlation. **b,** Mean gene MSE. Local, self-only, mean-pooling and true-spatial GraphSAGE results accompany vertex-permuted, degree-rewired and degree-plus-edge-length-rewired controls. Training seeds are averaged within each graph randomization seed; the randomized controls have five graph seeds. Dots are these averages and bars are arithmetic means. Random graph seeds are not biological replicates. The experiment did not establish a reproducible advantage of the true spatial topology. This figure records a negative/mixed development result, not evidence that topology is irrelevant in every representation or tissue.

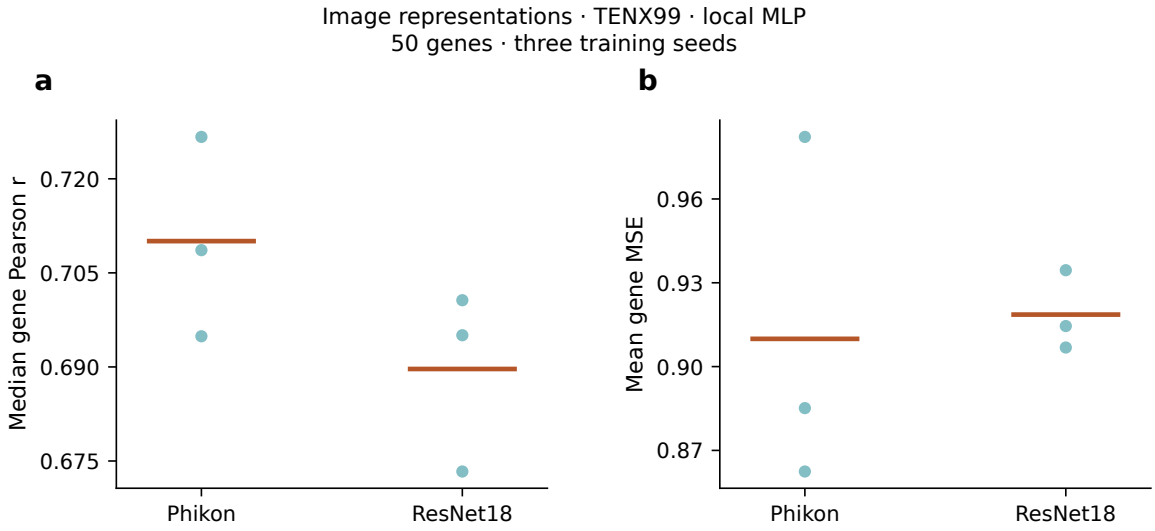


Figure S6: Pathology representation effects in the development patient. The local MLP representation comparison evaluates frozen ImageNet ResNet18 and Phikon representations in TENX99 for 50 genes. **a,** Median gene Pearson correlation. **b,** Mean gene MSE. Each dot is one of three training seeds; bars are arithmetic means. The panel-specific improvement did not establish general superiority on larger target panels or reproducible topology-specific gains. Phikon is not introduced into the final Bassiouni replication; that analysis retains the frozen ResNet18 image branch. These are development comparisons, not external encoder validation.

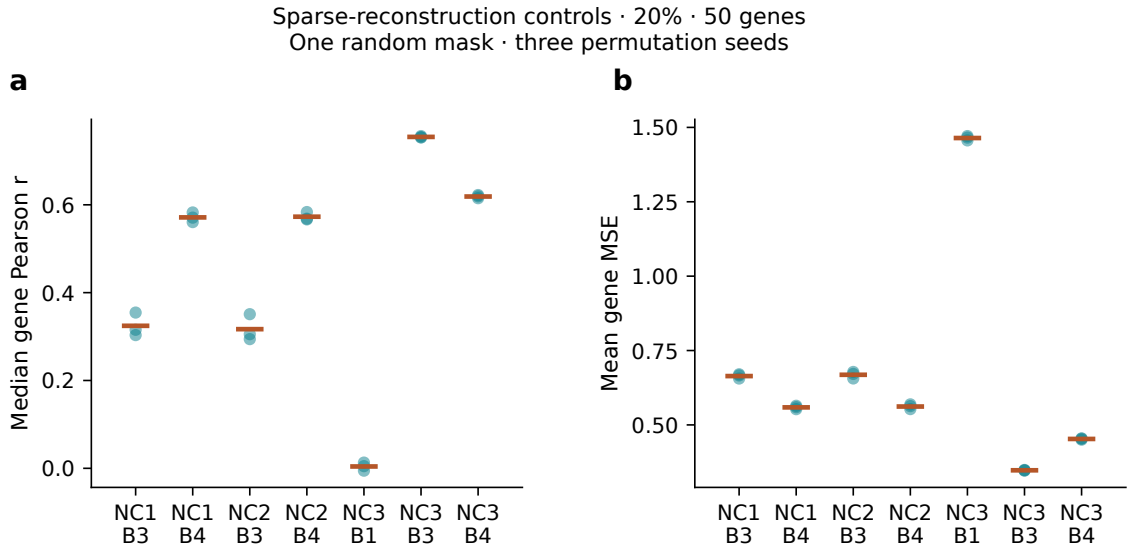


Figure S7: Sparse-reconstruction development controls. The sparse-reconstruction controls use the ResNet18 branch, TENX99, 50 genes and 20% measured-location coverage. In this figure, B1 denotes image-only prediction, B3 image–molecular fusion and B4 learned propagation. Controls include anchor-expression permutation (NC1), anchor-position permutation (NC2) and image-location permutation (NC3). Model labels are specific to this experiment. **a,** Median gene Pearson correlation. **b,** Mean gene MSE. All controls use the same random observation mask (replicate 0); dots represent three permutation seeds and bars are arithmetic means. These distributions are control diagnostics rather than estimates of a geometry effect. Separate integrity checks establish invariance to corruption of hidden labels. Related anchor-assignment disruptions must not be counted as independent biological mechanisms.

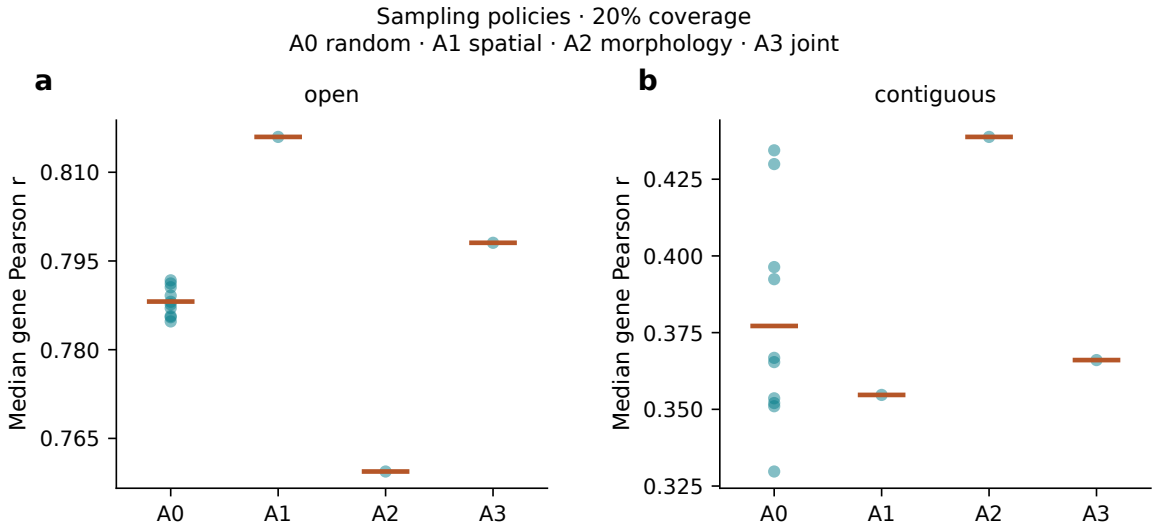


Figure S8: Sampling effects depended on the reconstruction regime. The sampling comparison uses interpolation-only results for TENX99, the ResNet18 reference branch, 50 genes and 20% coverage. **a,** Open-tissue interpolation. **b,** Contiguous missing-region evaluation. A0 is random sampling with ten seeds; A1 is spatial farthest-point sampling, A2 morphology-space farthest-point sampling, and A3 a locked joint policy. A1–A3 are deterministic given their stored initialization. Dots are policy runs and bars are arithmetic means. This limited baseline diagnostic is not a complete summary of all learned/fusion families and does not demonstrate universally optimal sampling.

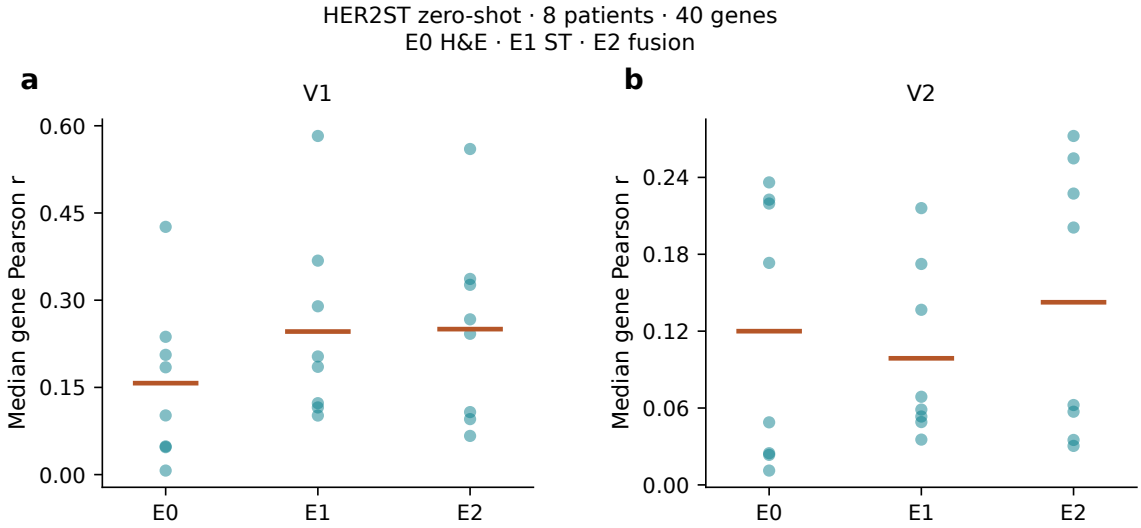


Figure S9: HER2ST patient distributions under the frozen zero-shot protocol. The eight HER2ST patients, 40 shared primary genes and 20% random-anchor coverage are summarized separately for **a,** distributed interpolation and **b,** contiguous regional completion. E0 denotes H&E-only prediction, E1 molecular interpolation and E2 frozen fusion, with image weights 0.25 for V1 and 0.5 for V2. Dots are patient means across seeds/geometries. Bars are arithmetic patient means, unlike the median summaries in Supplementary Fig. S1 and the primary tables. These zero-shot results and the subsequent calibration analyses use the same patients; HER2ST therefore does not supply an untouched final validation cohort.

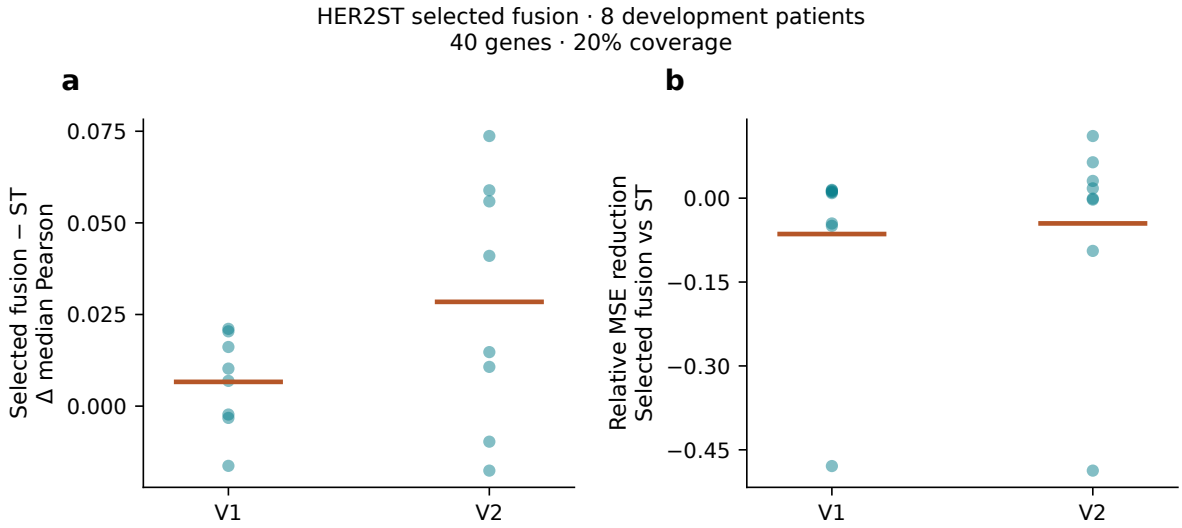


Figure S10: Patient-disjoint calibration did not establish robust fusion superiority. The calibration-development analysis includes eight HER2ST patients, the frozen 40-gene intersection and 20% coverage. **a,** Selected calibrated fusion minus molecular interpolation in Pearson correlation. **b,** Relative MSE reduction compared with molecular interpolation; positive values indicate lower fusion error. Dots are patient/fold results grouped by V1/V2 and bars are arithmetic means. The selected fusion rule was determined within patient-disjoint training/calibration folds, not from the displayed outer-patient outcomes. Joint correlation and error improvements were not consistent across patients. These selected-fusion results should not be interchanged with the T1 fixed-fusion target study shown in Supplementary Fig. S1.

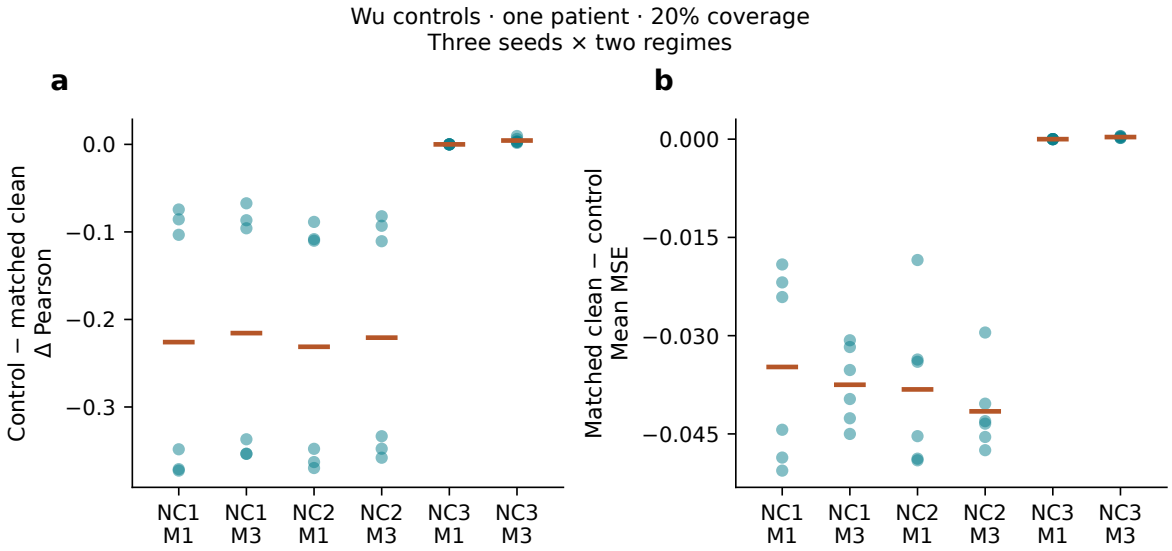


Figure S11: Matched negative controls in fresh Wu evaluation. The predeclared held-out patient 1160920F, 50 genes, 20% coverage and random mask seed 0 were used, with V1 geometry 0 and V2 geometry 1. Three permutation seeds were evaluated for NC1 anchor-vector reassignment, NC2 anchor-position reassignment and NC3 image-prediction permutation. **a,** Control minus matched-clean median gene Pearson correlation. **b,** Matched-clean minus control MSE, so negative values indicate increased control error. Molecular interpolation (M1) and fixed image fusion (M3) are shown. Dots are matched control settings and bars are means; they are not independent patients. Molecular controls disrupt the correct spatial anchor assignments, whereas image permutation provides no robust supporting evidence for the frozen image contribution.

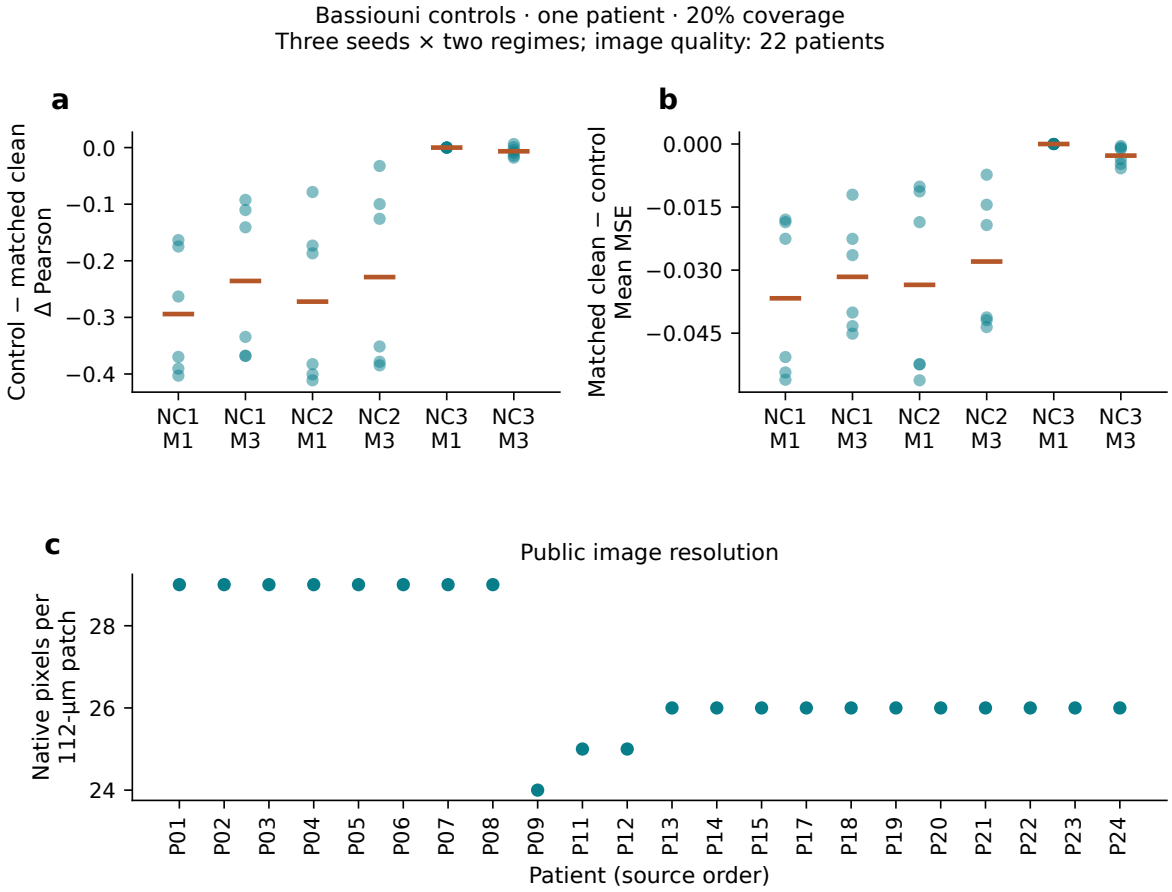


Figure S12: Replication controls and native image resolution. The independent-replication controls use the predeclared Bassiouni patient BASS_P01, 50 genes, 20% coverage, random mask seed 0, V1 geometry 0 and V2 geometry 1. **a,b,** Matched Pearson and MSE effects for M1/M3 under three control seeds, with definitions and signs as in Supplementary Fig. S11. Dots are matched control settings and bars are arithmetic means. **c,** Native pixels per nominal 112-μm patch for all 22 patients in source order. The supplied images provide only 24–29 native pixels before resizing for the encoder. This is image-input quality control, not expression-prediction performance. It explains why the image comparisons cannot establish the limits of native-resolution histopathology. Coordinate overlays for all patients are recorded in the archived qualification audit.

S3 Supplementary tables

The tables below provide compact views of the accompanying machine-readable data and definitions needed to interpret the supplementary figures. Table S2 is rounded for presentation; the digital files retain unrounded exported values. Large gene-level and distance-resolved tables are supplied as separate files rather than reproduced in full in this PDF. Mask, model and permutation seeds are computational replicates and do not increase the number of independent patients.

Table S1: Primary gene panel. The 50 genes are listed in the order fixed by variance ranking in the development-training patients. The fresh Wu and Bassiouni analyses retain all 50 genes. HER2ST analyses use the 40-gene intersection with this panel; unavailable genes are not replaced. The full data file also includes the larger development panels and cohort-specific availability records: `source_data/SuppTable1_gene_panels.csv`.

Order	Gene	Order	Gene
1	FOXA1	26	LUM
2	SCD	27	MYO5B
3	KRT7	28	SFRP4
4	ERBB2	29	KRT14
5	POSTN	30	TOP2A
6	CEACAM6	31	IL7R
7	SERHL2	32	AR
8	ANKRD30A	33	KRT5
9	EPCAM	34	PCLAF
10	ABCC11	35	KLF5
11	TACSTD2	36	SFRP1
12	GATA3	37	TRAF4
13	FASN	38	CXCR4
14	MLPH	39	MYH11
15	S100A14	40	TENT5C
16	CDH1	41	TCIM
17	CD9	42	NARS
18	KRT8	43	ACTG2
19	CCND1	44	PDK4
20	DSP	45	CD3E
21	SERPINA3	46	TRAC
22	LYPD3	47	JUP
23	TFAP2A	48	LYZ
24	TPD52	49	CENPF
25	PTGDS	50	CCDC80

Table S2: Patient-resolved reconstruction metrics. Compact view of the 25 fresh evaluation patients at 20% distributed coverage, using 50 genes. Values average mask seeds within patient. r is the median gene Pearson correlation; MSE is mean gene squared error in the common target units. I denotes image-only, ST molecular interpolation, and F fixed image fusion. Complete exported patient summaries for the available cohorts, regimes, budgets and methods are supplied in `source_data/SuppTable2_per_patient.csv`.

Patient	r_{I}	r_{ST}	r_{F}	$\mathrm{MSE}_{\mathrm{I}}$	$\mathrm{MSE}_{\mathrm{ST}}$	$\mathrm{MSE}_{\mathrm{F}}$
Wu						
1160920F	-0.045	0.359	0.335	0.846	0.082	0.095
CID4290	0.161	0.325	0.333	2.915	0.099	0.100
CID44971	0.059	0.502	0.496	2.949	0.115	0.118
Bassiouni						
BASS_P01	0.077	0.382	0.370	1.304	0.087	0.106
BASS_P02	0.009	0.459	0.431	1.067	0.093	0.127
BASS_P03	0.030	0.545	0.537	2.585	0.081	0.089
BASS_P04	-0.039	0.334	0.312	1.882	0.113	0.125
BASS_P05	0.096	0.636	0.628	1.581	0.133	0.155
BASS_P06	-0.005	0.312	0.297	1.567	0.069	0.072
BASS_P07	0.013	0.191	0.180	2.684	0.092	0.097
BASS_P08	0.095	0.403	0.393	2.120	0.088	0.095
BASS_P09	0.075	0.391	0.380	1.763	0.120	0.139
BASS_P11	-0.081	0.474	0.464	2.052	0.104	0.109
BASS_P12	0.182	0.435	0.436	1.748	0.113	0.120
BASS_P13	0.151	0.612	0.615	2.228	0.104	0.119
BASS_P14	0.041	0.540	0.536	1.458	0.126	0.154
BASS_P15	0.093	0.386	0.389	1.777	0.101	0.115
BASS_P17	0.095	0.428	0.421	1.773	0.088	0.096
BASS_P18	0.090	0.516	0.496	2.391	0.083	0.086
BASS_P19	0.068	0.537	0.501	2.431	0.068	0.078
BASS_P20	0.067	0.326	0.319	2.407	0.096	0.098
BASS_P21	0.075	0.401	0.340	2.607	0.092	0.108
BASS_P22	-0.029	0.322	0.300	2.149	0.087	0.090
BASS_P23	0.267	0.541	0.525	2.166	0.054	0.061
BASS_P24	0.106	0.350	0.302	1.626	0.048	0.052

Table S3: Per-gene results and metric definitions. The accompanying digital table, `source_data/SuppTable3_per_gene.csv.gz`, contains the exported Wu and Bassiouni gene-level results, with run, patient, panel, mask and method identifiers. Compression changes storage only. Every metric is calculated using the hidden locations scored by the corresponding protocol. The definitions below explain the gene-level statistics and their summaries; genes and repeated runs are not independent patient observations.

Quantity	Definition and interpretation
Pearson correlation	Correlation between predicted and measured values across scored locations, calculated separately for each gene. Constant targets or predictions yield undefined correlations.
Spearman correlation	Correlation between the ranks of predicted and measured values across scored locations, calculated separately for each gene. Numerical changes in tied ranks do not establish a biological improvement.
Mean squared error (MSE)	Mean squared prediction error across scored locations for each gene, evaluated in the common development-standardized log1p-count units.
Mean absolute error (MAE)	Mean absolute prediction error across scored locations for each gene, evaluated in the same target units.
Panel correlation	Median of defined gene correlations. Undefined correlations are excluded from this median and do not count as positive-correlation successes.
Panel error	Arithmetic mean of the gene-level MSEs or MAEs. All genes are retained in error summaries.
Patient and cohort summaries	Mask seeds are averaged within geometry and geometries within patient. Headline cohort values are medians of patient summaries; paired effects are calculated within patients before summarizing them.

Table S4: Negative-control families. Control definitions are experiment-specific and are given in the corresponding figure legends. Training-row controls differ from inference-time controls that permute permitted sparse inputs. Permuting anchor-expression assignments and anchor-position assignments disrupts related associations and does not constitute independent biological evidence. Exported control results are supplied in `source_data/SuppTable4_negative_controls.csv`.

Control family	Interpretation
Training-target or training-embedding row permutation	Disrupts local morphology–target pairing during development while preserving the validation and evaluation data.
Anchor-expression assignment permutation	Reassigns observed expression vectors among anchors, disrupting their correspondence with spatial position.
Anchor-position assignment permutation	Disrupts the spatial assignment of observed anchors while retaining the permitted molecular information.
Image-location or image-prediction permutation	Tests dependence on the image input while retaining the allowed molecular measurements.

Table S5: Recorded integrity and replay checks. Counts are taken from the original Wu and Bassiouni technical audits; these audits were not rerun during manuscript preparation. Method predictions and metric arrays are distinct audit units. For each prediction, hidden labels were independently replaced by NaNs and random values to test that unobserved expression could not influence model inputs. Digital records: `source_data/SuppTable5_integrity.csv`.

Audit quantity	Wu	Bassiouni
Mask trajectories	132	968
Clean run bundles	396	2,904
Control run bundles	18	18
Method prediction replays	1,656	8,766
Metric array replays	6,624	35,064
Hidden-label corruption checks	3,312	17,532

Table S6: Observation masks and sampling protocols. Coverage is the proportion of retained locations with observed complete expression vectors, not the proportion of tissue area assayed. All unobserved labels are excluded from model inputs. The three regional geometries and ten random-mask seeds are computational replicates. The accompanying `source_data/SuppTable6_masks.csv` records the exported mask identities, patients, regimes, geometries and sampling trajectories.

Protocol component	Definition
Measurement budgets	For N retained locations and $b \in \{0.10, 0.20, 0.40\}$, the observed count is $\lfloor bN + 0.5 \rfloor$. Random anchor sets use nested prefixes of the same trajectory as coverage increases.
Distributed interpolation (V1)	Anchors may be sampled throughout the retained tissue; every remaining location is scored. Predictions use up to 16 nearest observed anchors with normalized inverse-distance-squared weights.
Contiguous regional completion (V2)	A prespecified contiguous region contains the 40% of locations nearest to its center. Anchors are sampled outside that region, and only locations within it are scored. Predictions use the mean of up to 16 nearest observed anchors.
Regional geometry	Three centers are selected at the 25th, 50th and 75th percentile of first coordinate principal-component rank. The three geometries are averaged equally within patient.
Secondary spatial sampling	Label-free farthest-point sampling starts from the eligible location farthest from the eligible-coordinate centroid. It is not optimized using external expression outcomes.
Development masks	Earlier block and capture-window masks differ from the external regional-completion protocol and are interpreted separately.

Table S7: Distance-resolved evaluation and patient support. Distance is measured from each scored hidden location to its nearest observed anchor. Empty bins are omitted. Bassiouni binwise Pearson correlations require at least 20 scored locations in the corresponding run; Wu distance bins report MSE and MAE only. Error summaries may include smaller occupied bins. The patient counts below summarize the Bassiouni cohort at 20% coverage and do not define a universal distance cutoff. Exported bin-level metrics and support counts are supplied in `source_data/SuppTable7_distance_bins.csv`.

Evaluation component	Definition
Distance bins (μm)	$[0, 150)$, $[150, 300)$, $[300, 600)$, $[600, 1200)$, $[1200, 2400)$ and $[2400, \infty)$.
Bin support	Number of scored hidden locations contributing to the patient, method, mask and distance-bin summary; occupied-bin support may differ across patients and protocols.
Nearest-to-farthest comparison	Compares MSE in the nearest and farthest occupied bins within each patient.
Monotonicity	Assesses whether MSE strictly increases across the occupied distance bins.

Bassiouni patient summary	V1	V2
Higher MSE in farthest than nearest occupied bin	15/22	20/22
Strictly increasing occupied-bin MSE	6/22	13/22

Table S8: Selected supporting predictor architectures for the 50-gene panel. Dimensions denote input → hidden → output, and every listed MLP has GELU, dropout 0.1 and a linear output layer. Encoder parameters remain frozen; counts include trainable head biases. All MLPs use the shared optimizer and stopping rule above. The initial local predictor and the representation-comparison predictor are distinct fitted heads.

Predictor	Selected dimensions	Fitting settings or fixed aggregation
Initial ResNet18 ridge	$512 \to 50$	Ridge penalty 100; intercept; 25,650 coefficients.
Initial ResNet18 MLP	$512 \to 128 \to 50$	Lowest validation MSE; 72,114 head parameters.
ResNet18 mean pooling / GCN	$512 \to 128 \to 50$	PX or QX on capped Delaunay adjacency; 72,114 head parameters.
ResNet18 mean-GraphSAGE	$1024 \to 67 \to 50$	$[X, RX]$ on capped Delaunay adjacency; 72,075 head parameters.
ResNet18 representation-comparison MLP	$512 \to 256 \to 50$	Highest validation median gene Pearson; 144,178 head parameters.
Phikon local MLP	$768 \to 256 \to 50$	Same candidate grid and selection criterion; 209,714 head parameters.
Phikon spatial MLPs	$768 \to 128 \to 50$; $1536 \to 67 \to 50$	Mean pooling and mean-GraphSAGE, respectively; inherited graph and head widths.
Sparse residual correction	34 covariates plus intercept per gene	Gene-specific ridge correction of fixed fusion; penalty 10,000; 1,750 coefficients for 50 genes.

Table S9: Coverage response and contiguous-region completion in the two fresh studies. All rows use the same frozen 50-gene panel and spatial interpolation. Values are medians of patient summaries, with $n = 3$ for Wu and $n = 22$ for Bassiouni. V1 is distributed interpolation with inverse-distance-squared weighting; V2 is completion of a predefined contiguous region using the mean of nearby anchors. Both the scoring support and interpolation rule change between V1 and V2. The comparison therefore describes protocol-level deterioration rather than an isolated causal geometry effect. In both studies, every evaluation patient improved in Pearson correlation and MSE from 10% to 40% V1 coverage; every patient deteriorated in Pearson, MSE and MAE under V2 relative to V1 at 20%.

Cohort	Coverage	V1 Pearson r	V1 MSE	V2 Pearson r	V2 MSE
Wu, fresh	10%	0.313	0.1080	0.111	0.1356
	20%	0.359	0.0987	0.081	0.1366
	40%	0.393	0.0899	0.088	0.1385
Bassiouni, fresh	10%	0.380	0.1001	0.121	0.1520
	20%	0.416	0.0923	0.171	0.1496
	40%	0.465	0.0852	0.181	0.1518

S4 Post-v1 journal analyses: source-data and limitations

New source files are under source_data/journal and results under experiments/journal_revision. These analyses reuse previously inspected Wu patients and original Bassiouni exports. At that earlier revision, Bassiouni prediction/map analyses were blocked by failed individual transfers. The separate later extension recovered exact inputs through bounded TAR ranges and reports new predictions; no old summary substitutes for a new prediction. Primary real-data replay passes per-gene Pearson/MSE/MAE tolerances; raw Spearman near-tie sensitivity is explicit. Every new Wu run was invariant to corruption of every unobserved label. The B2 H and anchor trajectories are label-free, persisted and hashed. All estimators, budgets, patient effects, bin supports and new training seeds are retained in machine-readable exports.

Table S10: All 20 matched-information estimators in Wu at 20% V1 coverage. Each patient value averages ten original random trajectories. P1=1160920F, P2=CID4290, P3=CID44971. Relative MSE is candidate minus fixed IDW k16/p2, divided by that reference; negative values improve. No external winner was selected. All 10/20/40% results, MAE and individual paired effects accompany the CSV exports. Gaussian bandwidth uses observed-anchor geometry only.

Estimator	r P1	r P2	r P3	MSE% P1	MSE% P2	MSE% P3
nearest	0.223	0.228	0.368	+68.3	+61.9	+63.7
uniform_k4	0.328	0.293	0.474	+8.0	+8.2	+7.5
uniform_k8	0.354	0.294	0.475	+0.7	+4.6	+4.0
uniform_k16	0.359	0.265	0.442	-0.8	+7.5	+6.8
uniform_k32	0.348	0.220	0.396	+0.8	+13.7	+11.7
idw_k4_p1	0.327	0.305	0.483	+8.5	+6.6	+6.4
idw_k4_p2	0.313	0.299	0.475	+13.1	+9.7	+10.2
idw_k4_p3	0.297	0.289	0.460	+19.8	+15.3	+16.3
idw_k8_p1	0.360	0.321	0.499	-0.0	+0.8	+0.3
idw_k8_p2	0.341	0.317	0.495	+4.4	+2.8	+3.0
idw_k8_p3	0.315	0.301	0.474	+12.7	+9.4	+10.4
idw_k16_p1	0.378	0.318	0.497	-3.1	+0.7	+0.0
idw_k16_p2	0.359	0.325	0.502	+0.0	+0.0	+0.0
idw_k16_p3	0.324	0.305	0.479	+9.1	+6.6	+7.6
idw_k32_p1	0.387	0.307	0.480	-3.3	+3.8	+2.1
idw_k32_p2	0.371	0.328	0.503	-2.2	-0.8	-1.2
idw_k32_p3	0.329	0.308	0.481	+7.2	+5.2	+6.3
gaussian_k8	0.360	0.308	0.489	-0.1	+2.6	+2.0
gaussian_k16	0.374	0.286	0.461	-1.9	+4.8	+4.4
gaussian_k32	0.358	0.249	0.417	-0.5	+10.3	+9.5

Table S11: Operator by historical protocol at 20% coverage. IDW and uniform operators share each original mask and scored set. V2 averages geometries equally after averaging seeds. The V1/V2 contrast still changes spatial support and is not a causal geometry estimate. All budgets are supplied in source data.

Patient	Protocol	IDW r	IDW MSE	Uniform r	Uniform MSE
1160920F	V1	0.359	0.0817	0.359	0.0811
1160920F	V2	0.179	0.1029	0.176	0.1028
CID4290	V1	0.325	0.0987	0.265	0.1061
CID4290	V2	0.050	0.1367	0.036	0.1366
CID44971	V1	0.502	0.1150	0.442	0.1228
CID44971	V2	0.113	0.1781	0.081	0.1767

Table S12: Identical-target anchor-placement effects at 20% coverage in Wu. Region-exclusion minus distributed anchors, with the same H and total anchor count. Each row averages ten seeds. The holdout H is fixed across conditions and budgets. All three patients deteriorate in Pearson, MSE and MAE with both estimators. This central-region result is post-v1 robustness evidence in previously inspected patients, not new blind validation.

Patient	Operator	Δr	Relative MSE%	Δ MAE
1160920F	IDW	-0.1056	+20.1	+0.0214
1160920F	Uniform	-0.0928	+21.7	+0.0196
CID4290	IDW	-0.2452	+45.4	+0.0464
CID4290	Uniform	-0.1875	+36.0	+0.0361
CID44971	IDW	-0.1274	+37.3	+0.0386
CID44971	Uniform	-0.1605	+38.9	+0.0387

Table S13: All new controlled neural fits at 20% TENX99 coverage. Each value averages three identical original masks. Models fit NCBI783/NCBI785 and use TENX95 alone for stopping. Seeds are training variability, not patients. Residual is the exploratory image plus interpolated observed-residual predictor. All budgets, fixed 20% fusion and anchor-only values are in CSVs. No architecture or seed was selected using TENX99. Nominal parameter counts are 72,114 (local/mean/GCN) and 72,075 (SAGE); SAGE self-only duplicates self inputs and has a smaller effective function class.

Configuration	Seed	Image r	Image MSE	Residual r	Residual MSE
local local	0	0.666	0.9142	0.818	0.2576
local local	1	0.686	0.9008	0.824	0.2569
local local	2	0.695	0.9191	0.821	0.2555
MEAN spatial	0	0.651	0.8825	0.812	0.2458
MEAN spatial	1	0.647	0.9095	0.813	0.2497
MEAN spatial	2	0.658	0.9206	0.813	0.2446
MEAN self	0	0.666	0.9142	0.818	0.2576
MEAN self	1	0.686	0.9008	0.824	0.2569
MEAN self	2	0.695	0.9191	0.821	0.2555
MEAN shuffled	0	0.117	1.2311	0.787	0.2747
MEAN shuffled	1	0.227	1.1425	0.771	0.2865
MEAN shuffled	2	0.213	1.1819	0.778	0.2889
GCN spatial	0	0.652	0.8871	0.809	0.2508
GCN spatial	1	0.659	0.8885	0.812	0.2518
GCN spatial	2	0.653	0.9240	0.809	0.2503
GCN self	0	0.666	0.9142	0.818	0.2576
GCN self	1	0.686	0.9008	0.824	0.2569
GCN self	2	0.695	0.9191	0.821	0.2555
GCN shuffled	0	0.124	1.2297	0.788	0.2743
GCN shuffled	1	0.230	1.1264	0.767	0.2909
GCN shuffled	2	0.228	1.1830	0.777	0.2908
SAGE spatial	0	0.667	0.8611	0.823	0.2340
SAGE spatial	1	0.688	0.8792	0.831	0.2346
SAGE spatial	2	0.679	0.9173	0.822	0.2329
SAGE self	0	0.667	0.9364	0.815	0.2574
SAGE self	1	0.656	0.9010	0.812	0.2590
SAGE self	2	0.672	0.9599	0.810	0.2582
SAGE shuffled	0	0.686	0.8615	0.812	0.2511
SAGE shuffled	1	0.695	0.8655	0.816	0.2564
SAGE shuffled	2	0.684	0.9124	0.818	0.2403

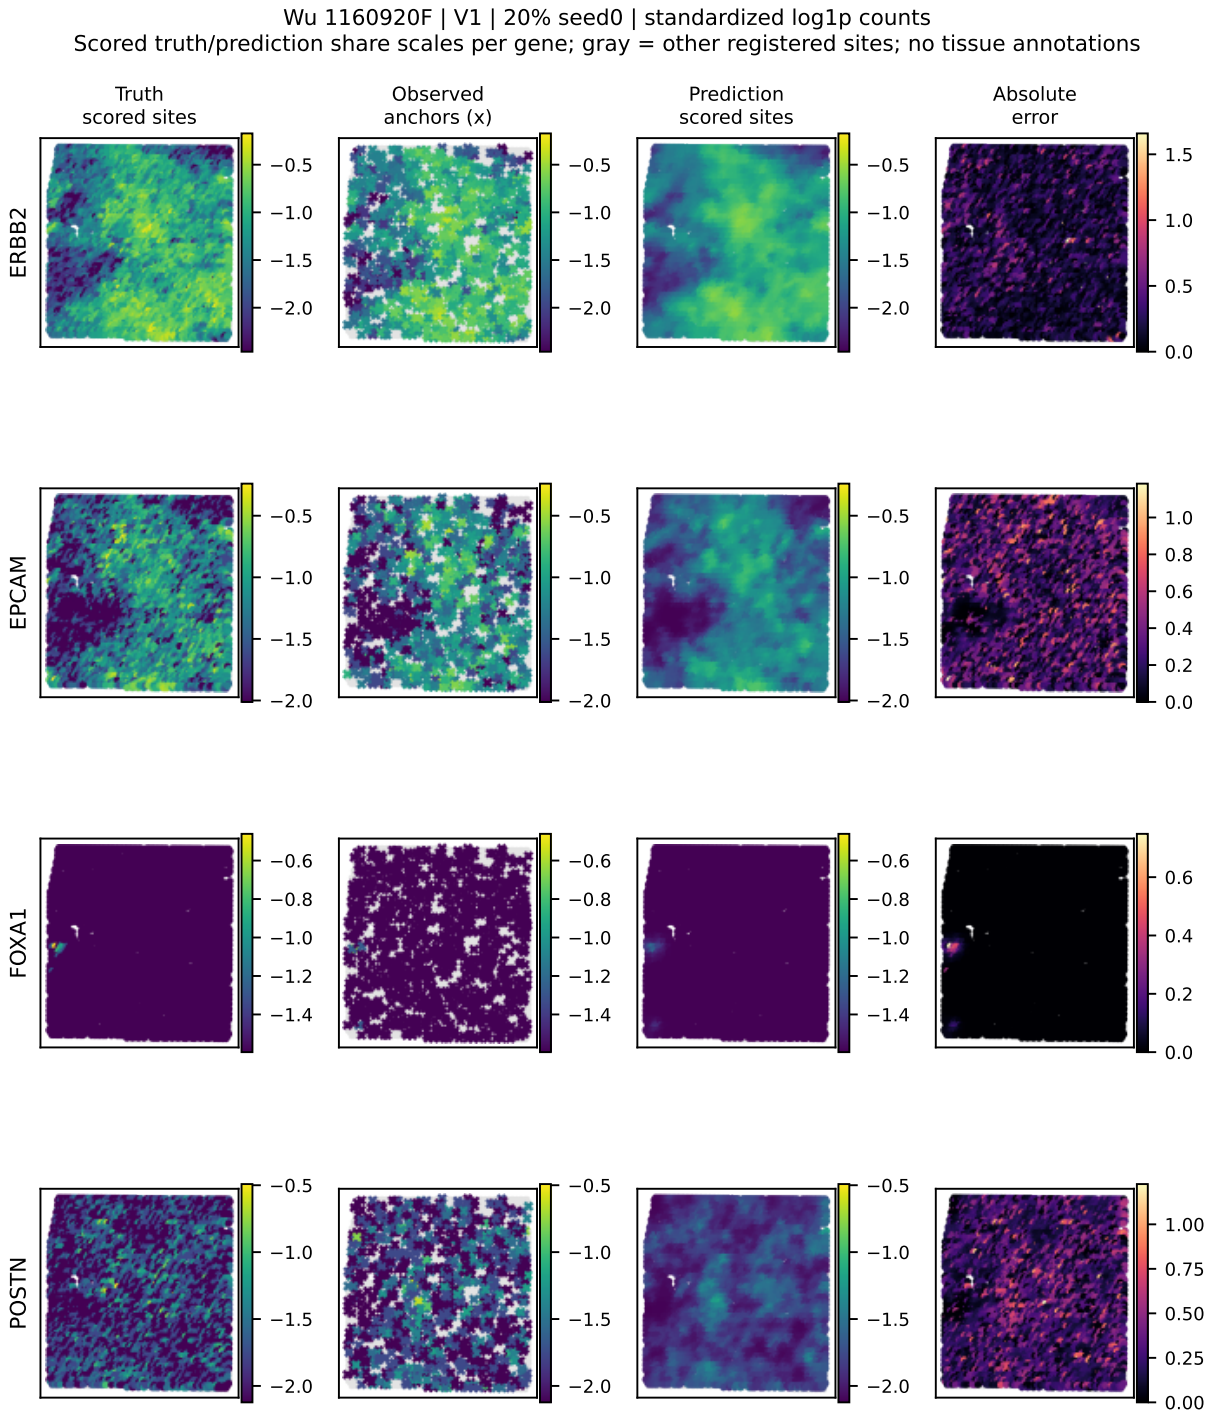


Figure S13: Predetermined real Wu V1 gene maps. Patient 1160920F, 20% random seed0, original mask, fixed IDW k16/p2. Genes ERBB2, EPCAM, FOXA1 and POSTN were designated before comparisons. Truth/prediction use shared per-gene scales over scored sites; errors have separate scales. Anchors are crosses and gray sites are other registered locations. Standardized log1p counts are not absolute transcript abundance. Constant scored fields are labelled rather than omitted or given misleading contrast. Source: Wu et al., Zenodo 4739739, CC-BY4.0; no tumor/cell annotations are inferred.

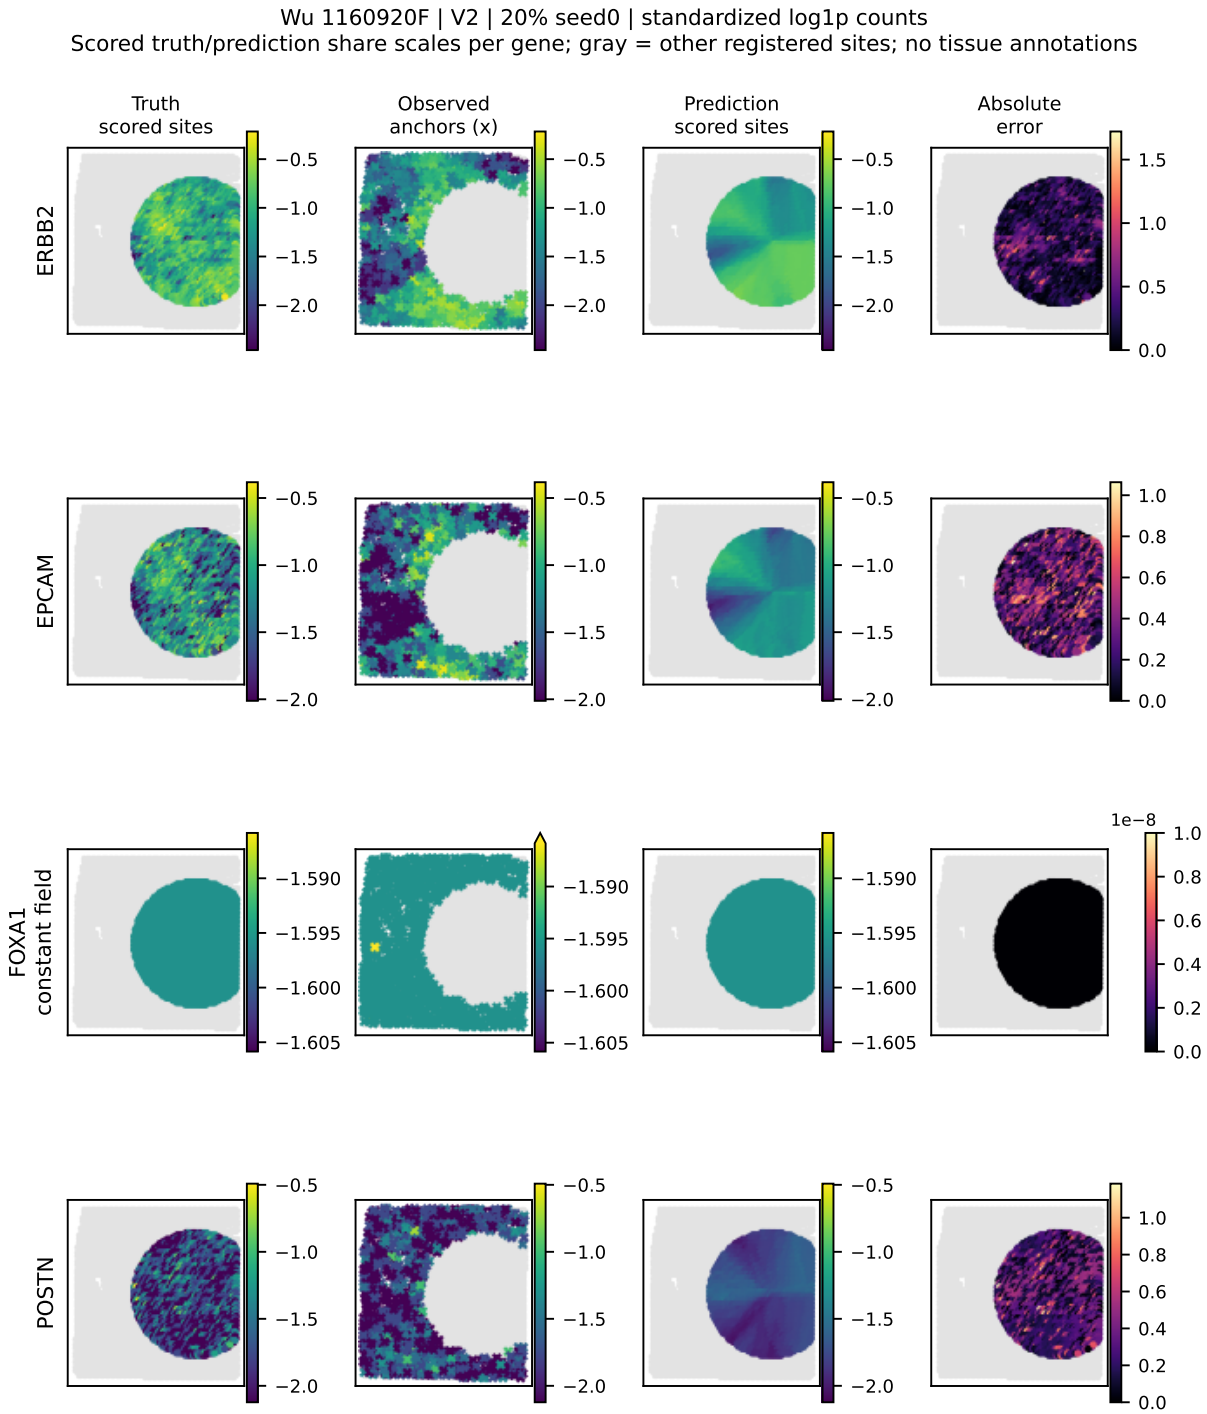


Figure S14: Predetermined real Wu V2 gene maps. Same patient, genes, 20% budget and seed0, central original V2 geometry 1, historical uniform k16 operator. Colored truth/prediction/error points are the original forbidden scoring region; anchor crosses lie outside. Scales and source terms match the preceding figure. FOXA1 has a constant scored field; numerical residuals do not establish biological recovery. These maps retain unsuccessful/constant examples and are not independent validation. The requested BASS_P01 map was not generated because its raw inputs could not be acquired.

S5 Post-v1 bounded Transformer and EGNN extension

These are exploratory analyses in previously inspected cohorts. Full per-gene/mask/seed exports, hashes, loss histories and paired patient effects accompany the source package. The patient is the biological unit. Black ticks in the complete matrices are cohort medians; dots are individual patient summaries after seed averages, with separate Wu patient colors. No spread of dots is a confidence interval. Molecular rows receive same-section measured labels; image-only rows do not. Older frozen models are marked [old] and were trained under a different update regime.

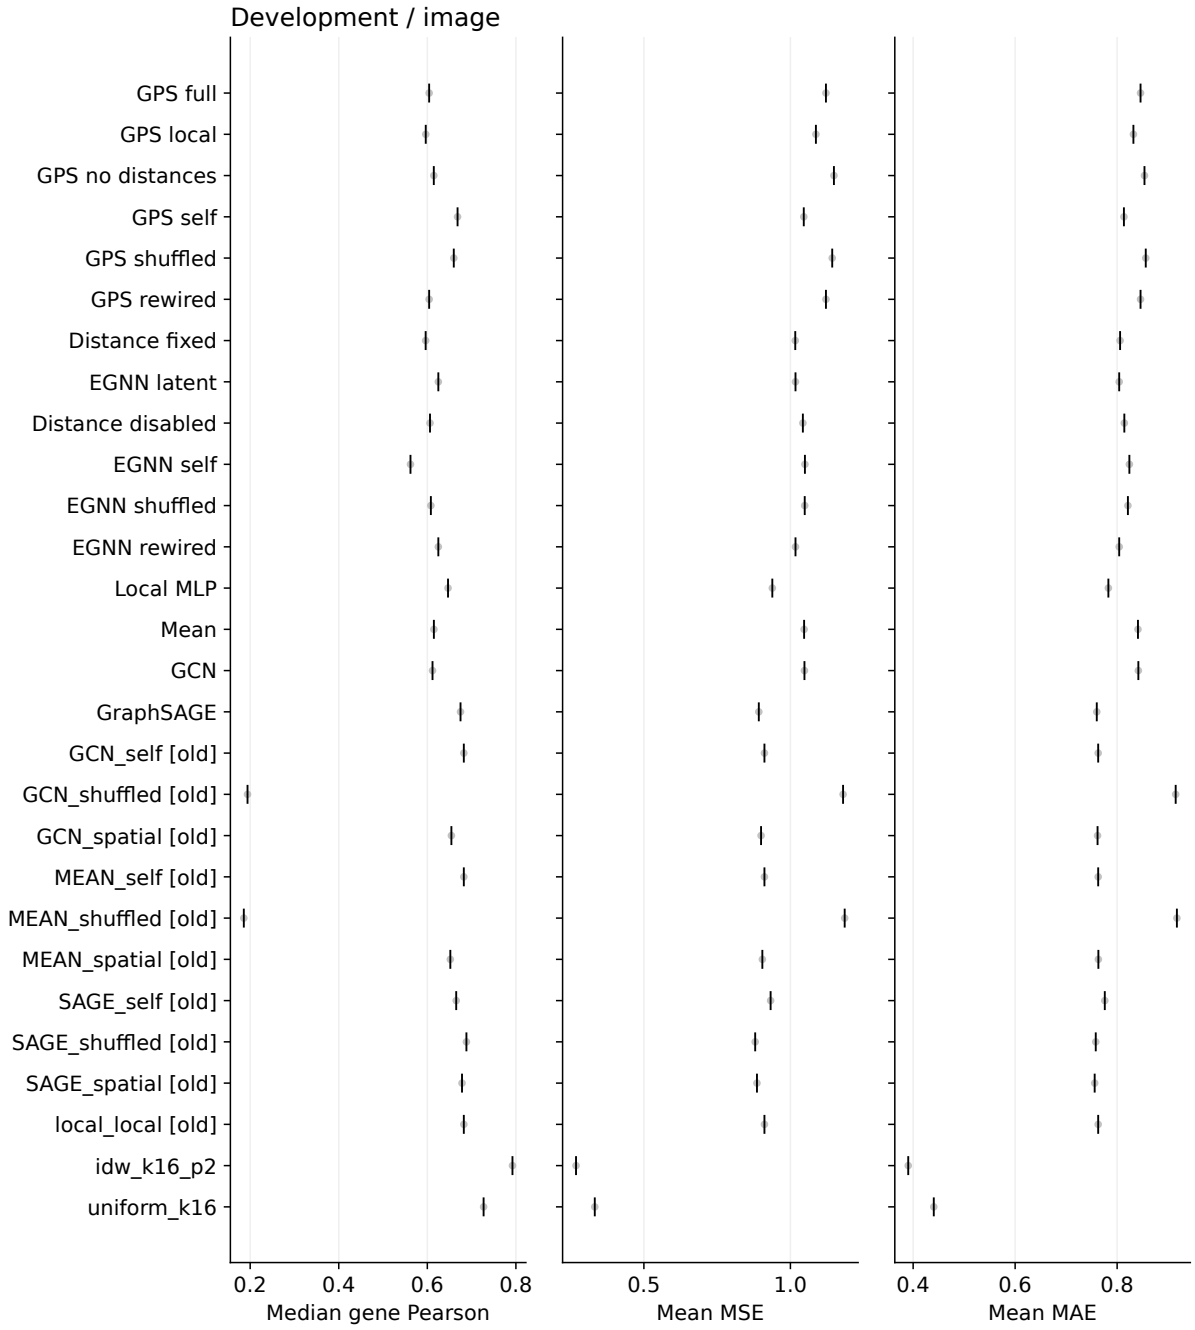


Figure S15: Complete Development image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

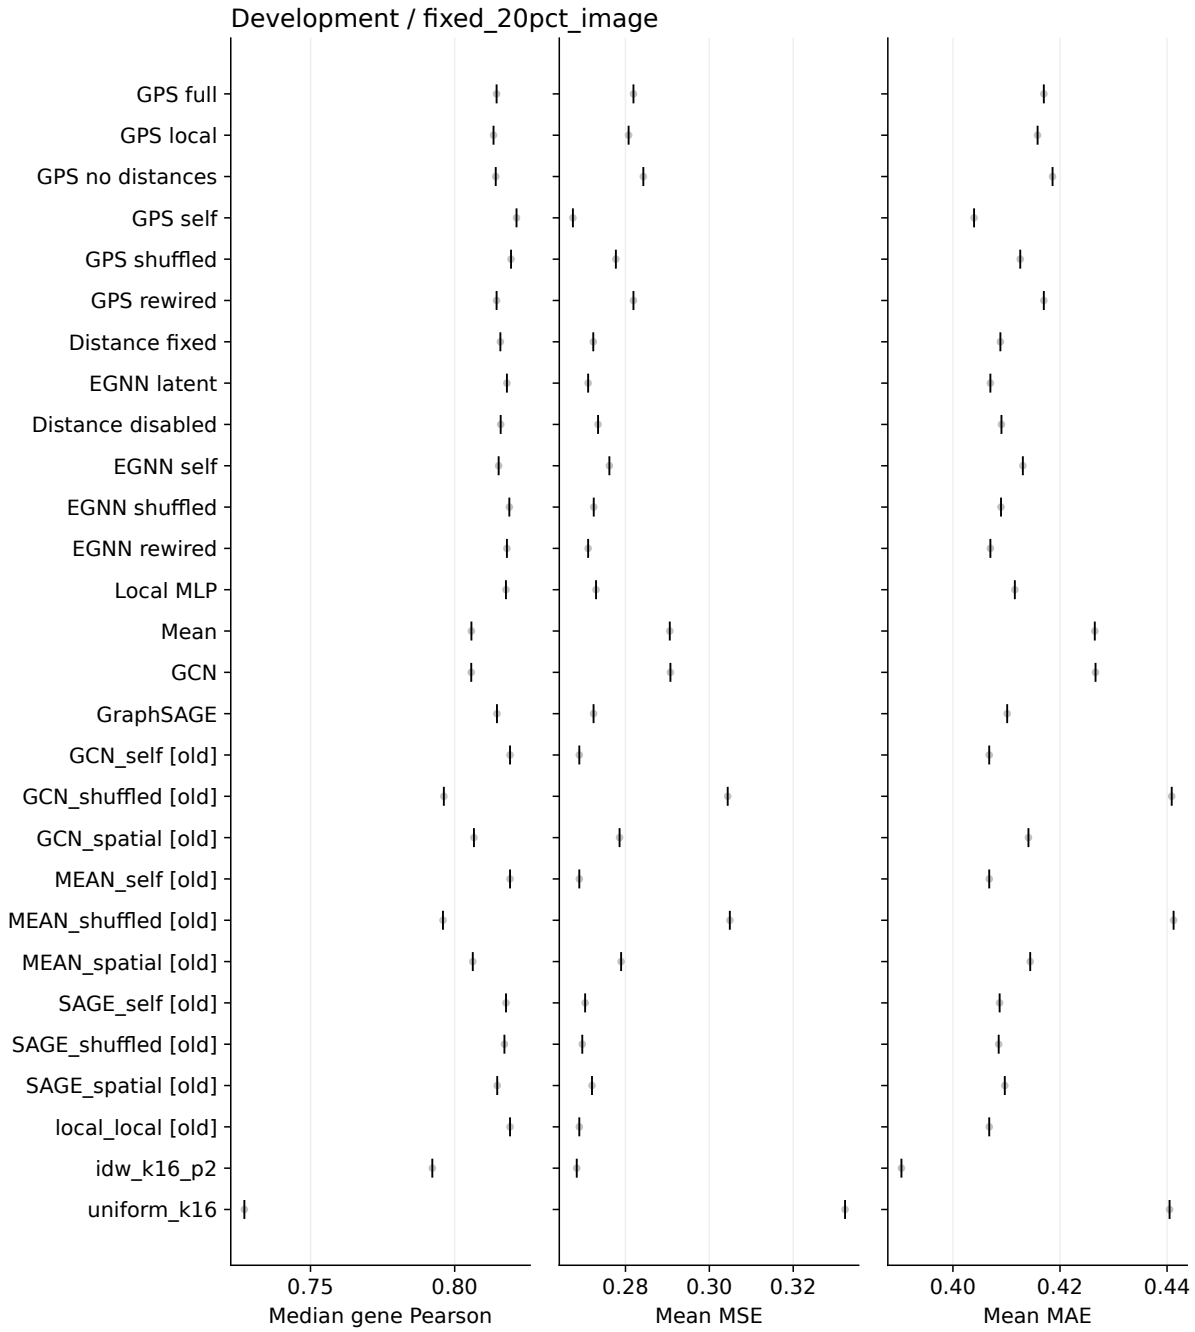


Figure S16: Complete Development fixed_20 pct_image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

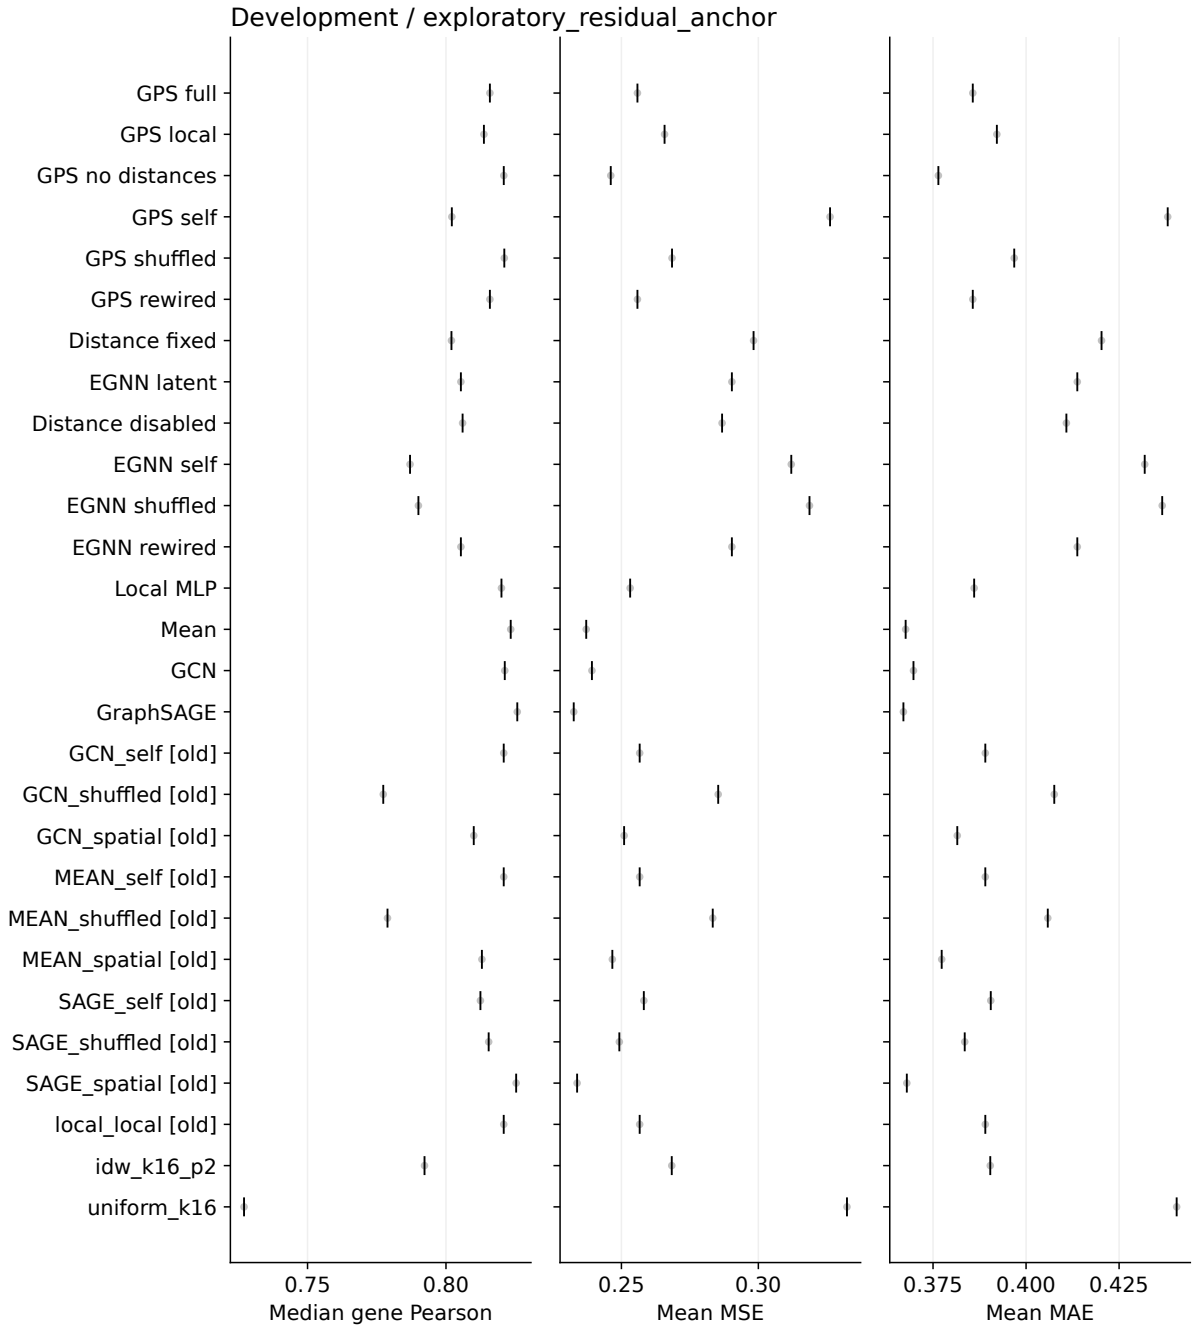


Figure S17: Complete Development exploratory_residual_anchor matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

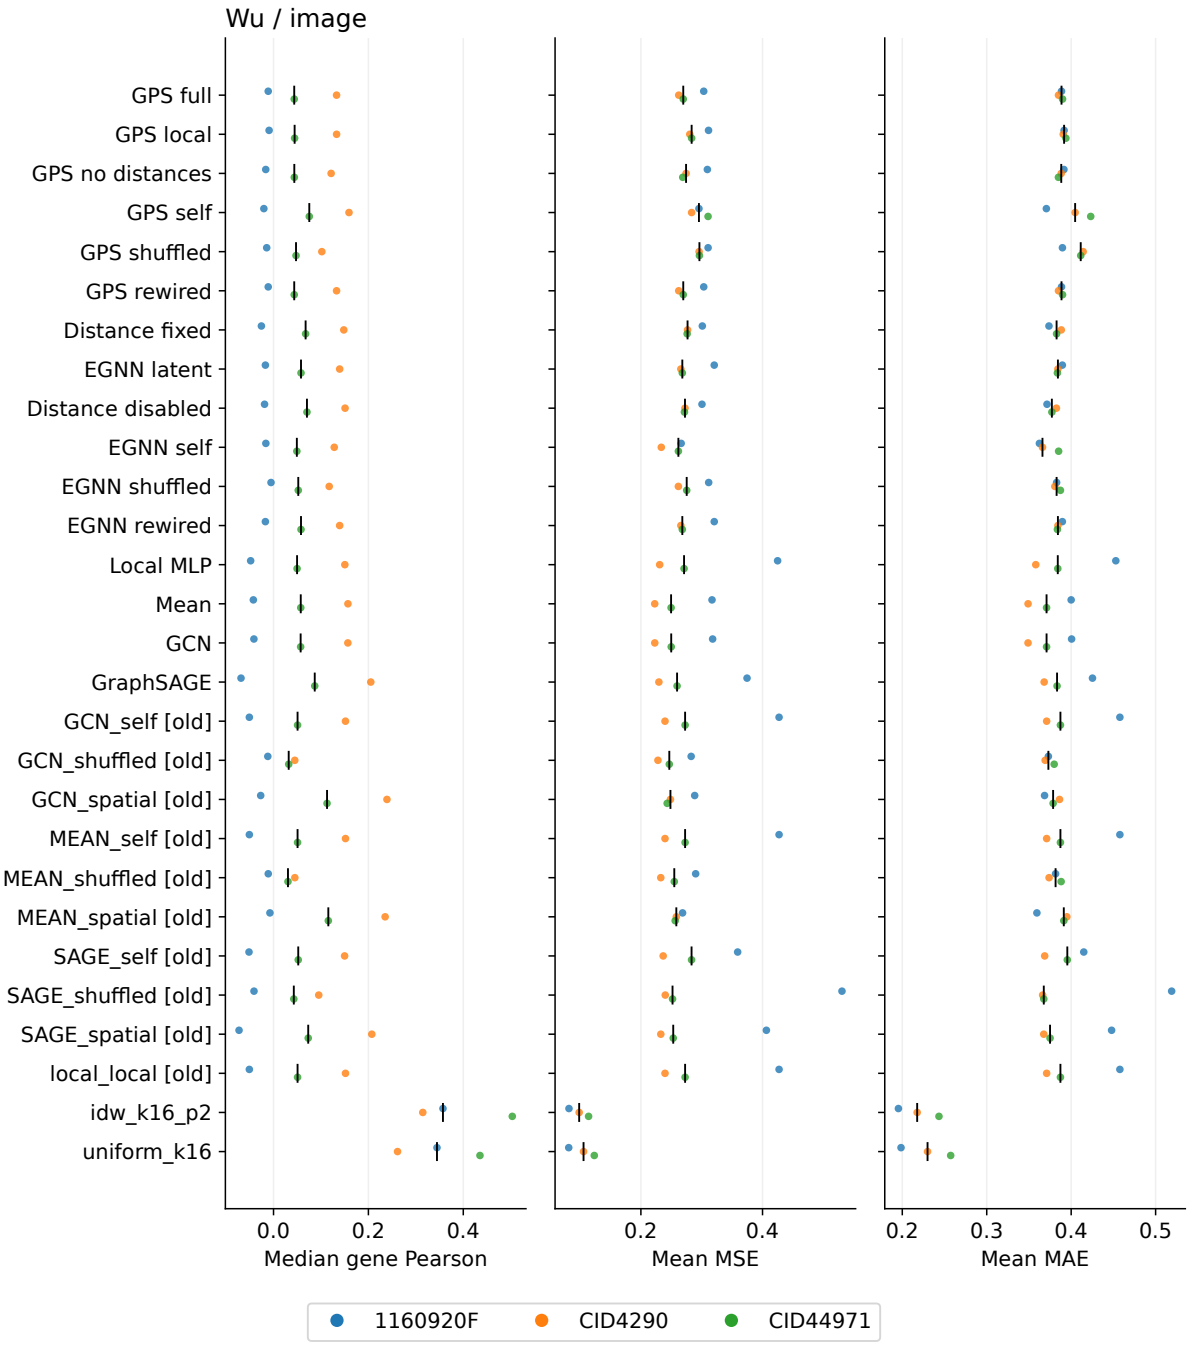


Figure S18: Complete Wu image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

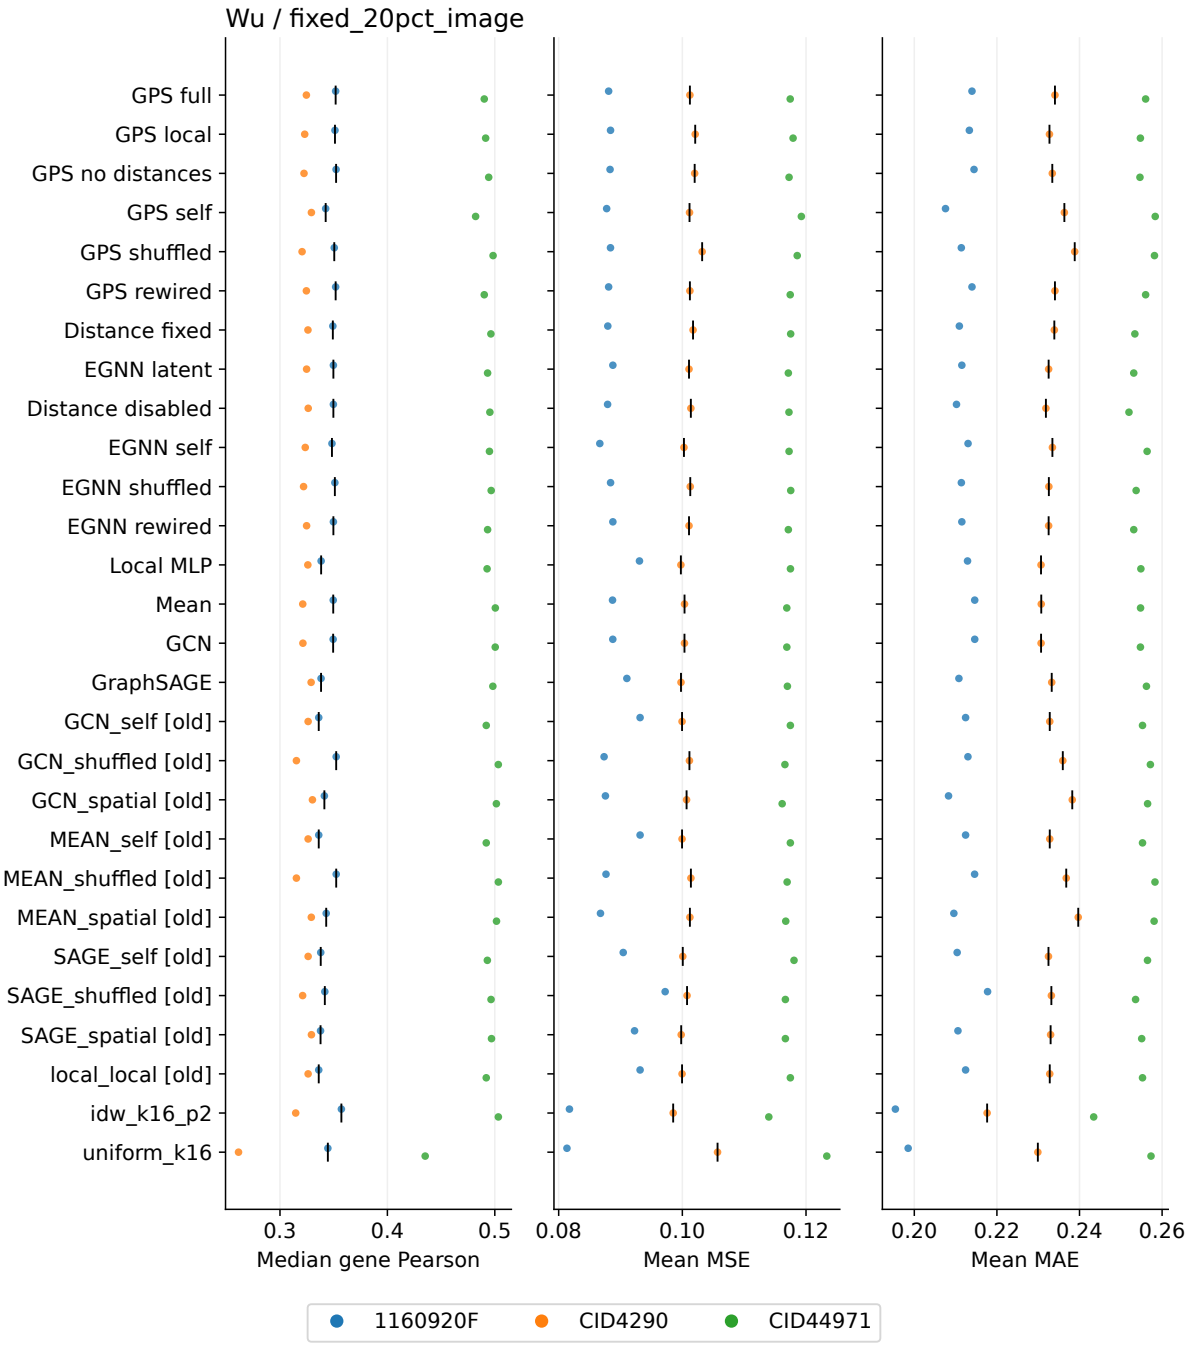


Figure S19: Complete Wu fixed_20 pct_image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

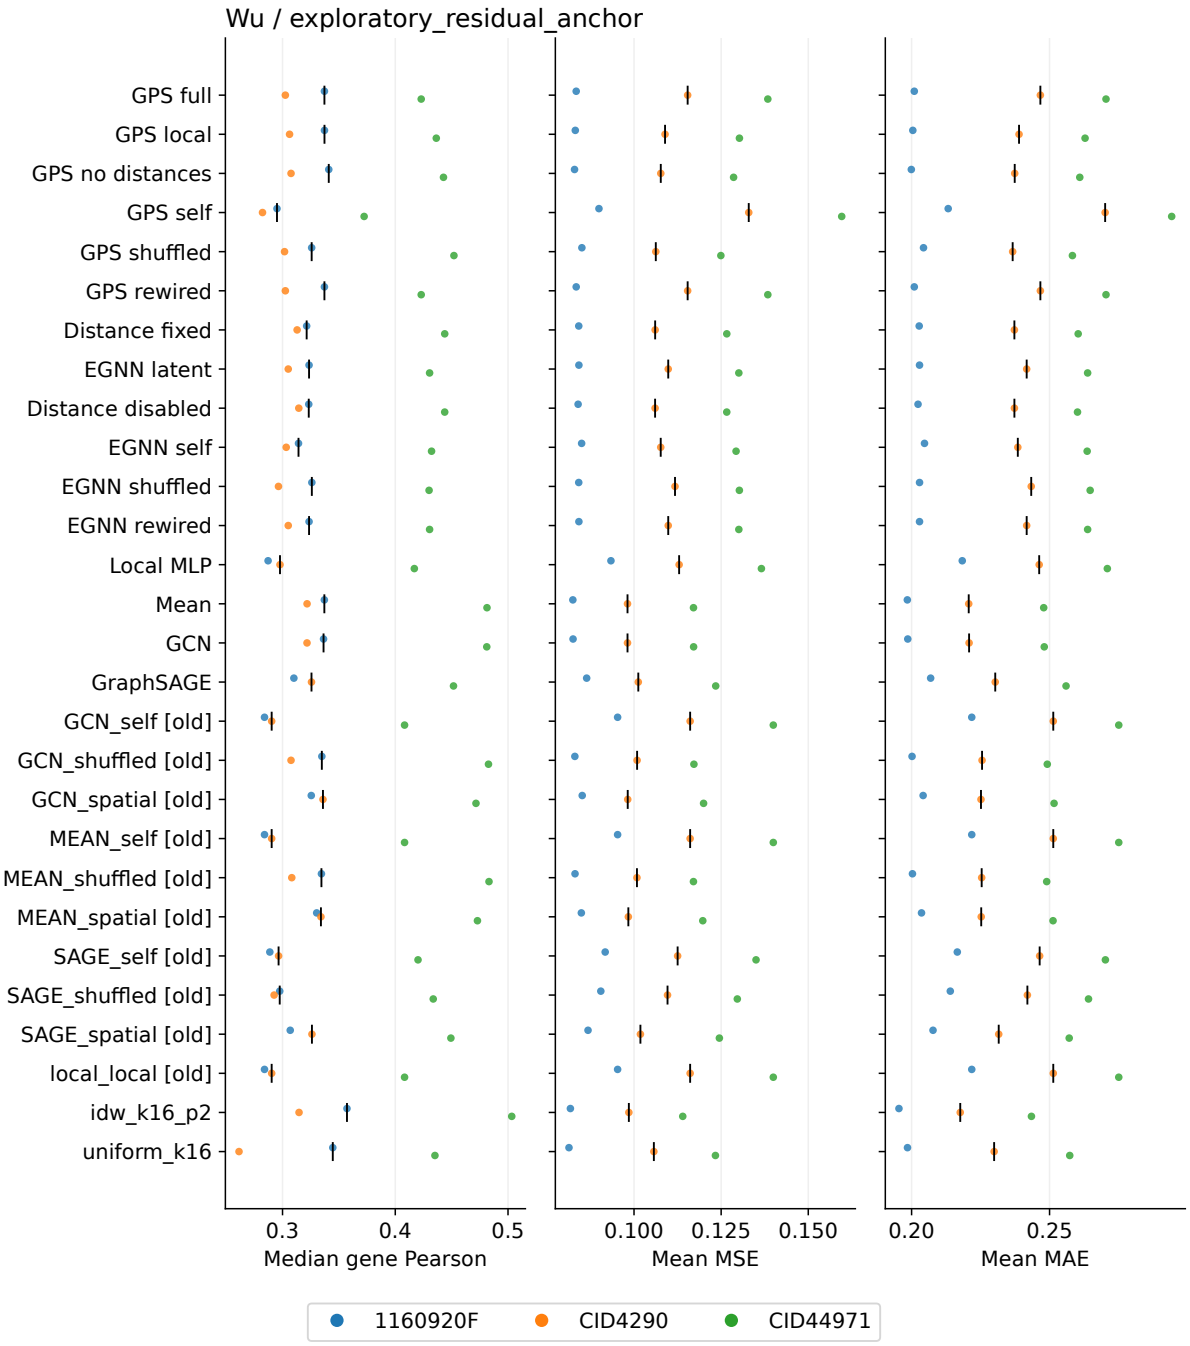


Figure S20: Complete Wu exploratory_residual_anchor matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

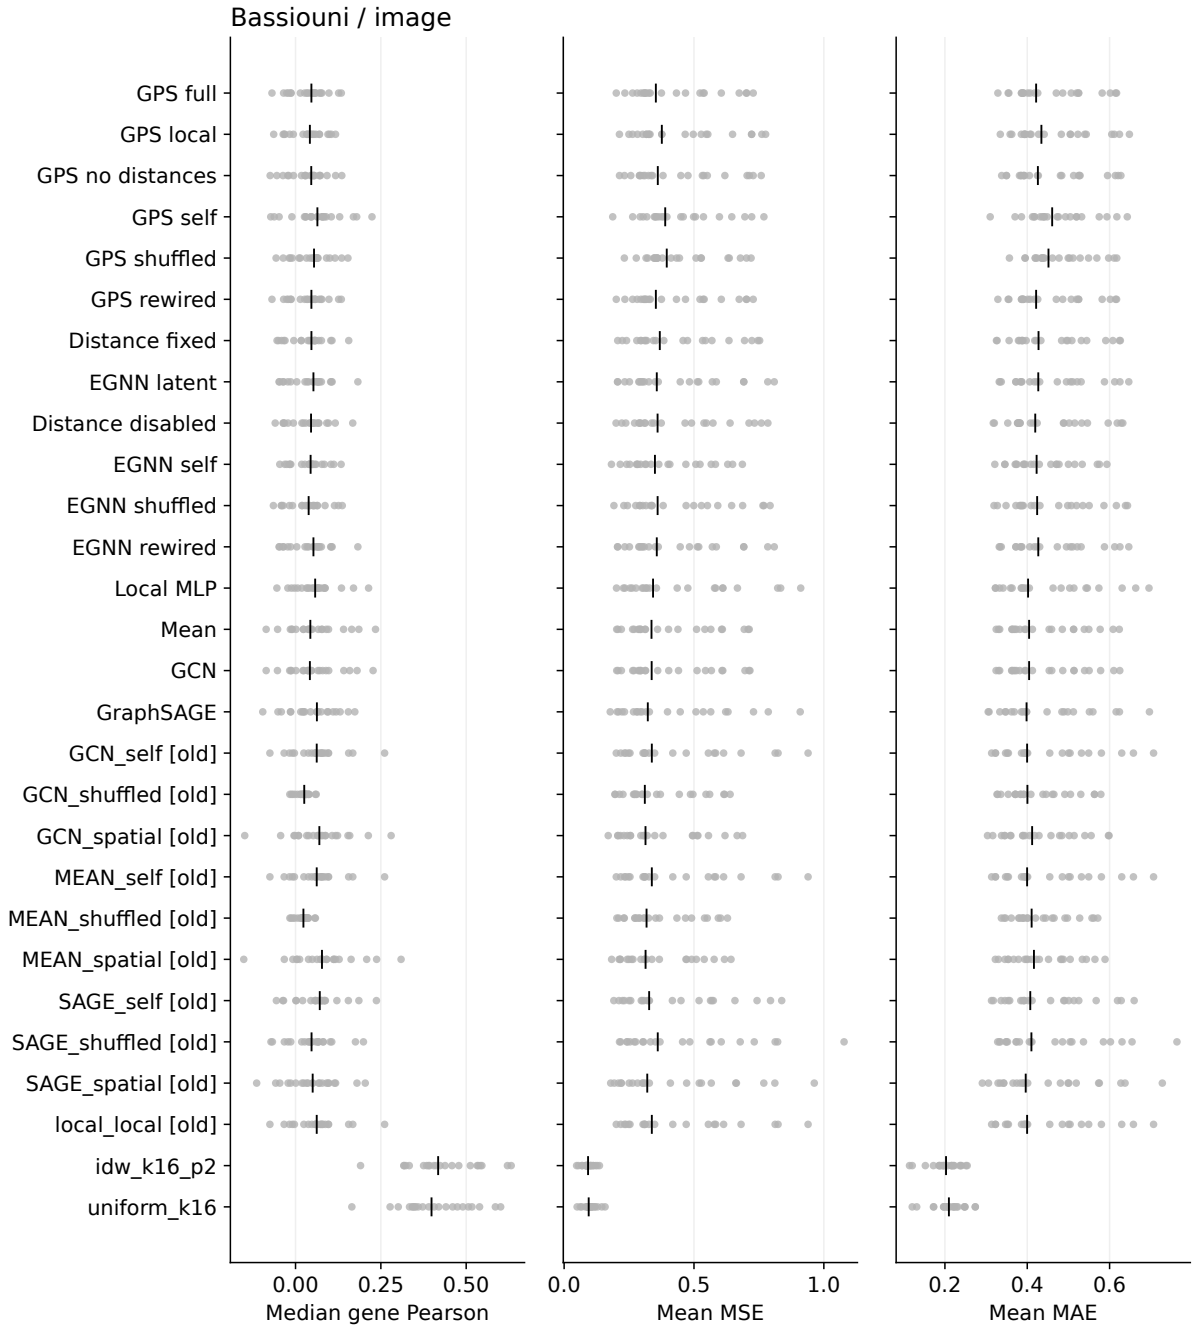


Figure S21: Complete Bassiouni image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

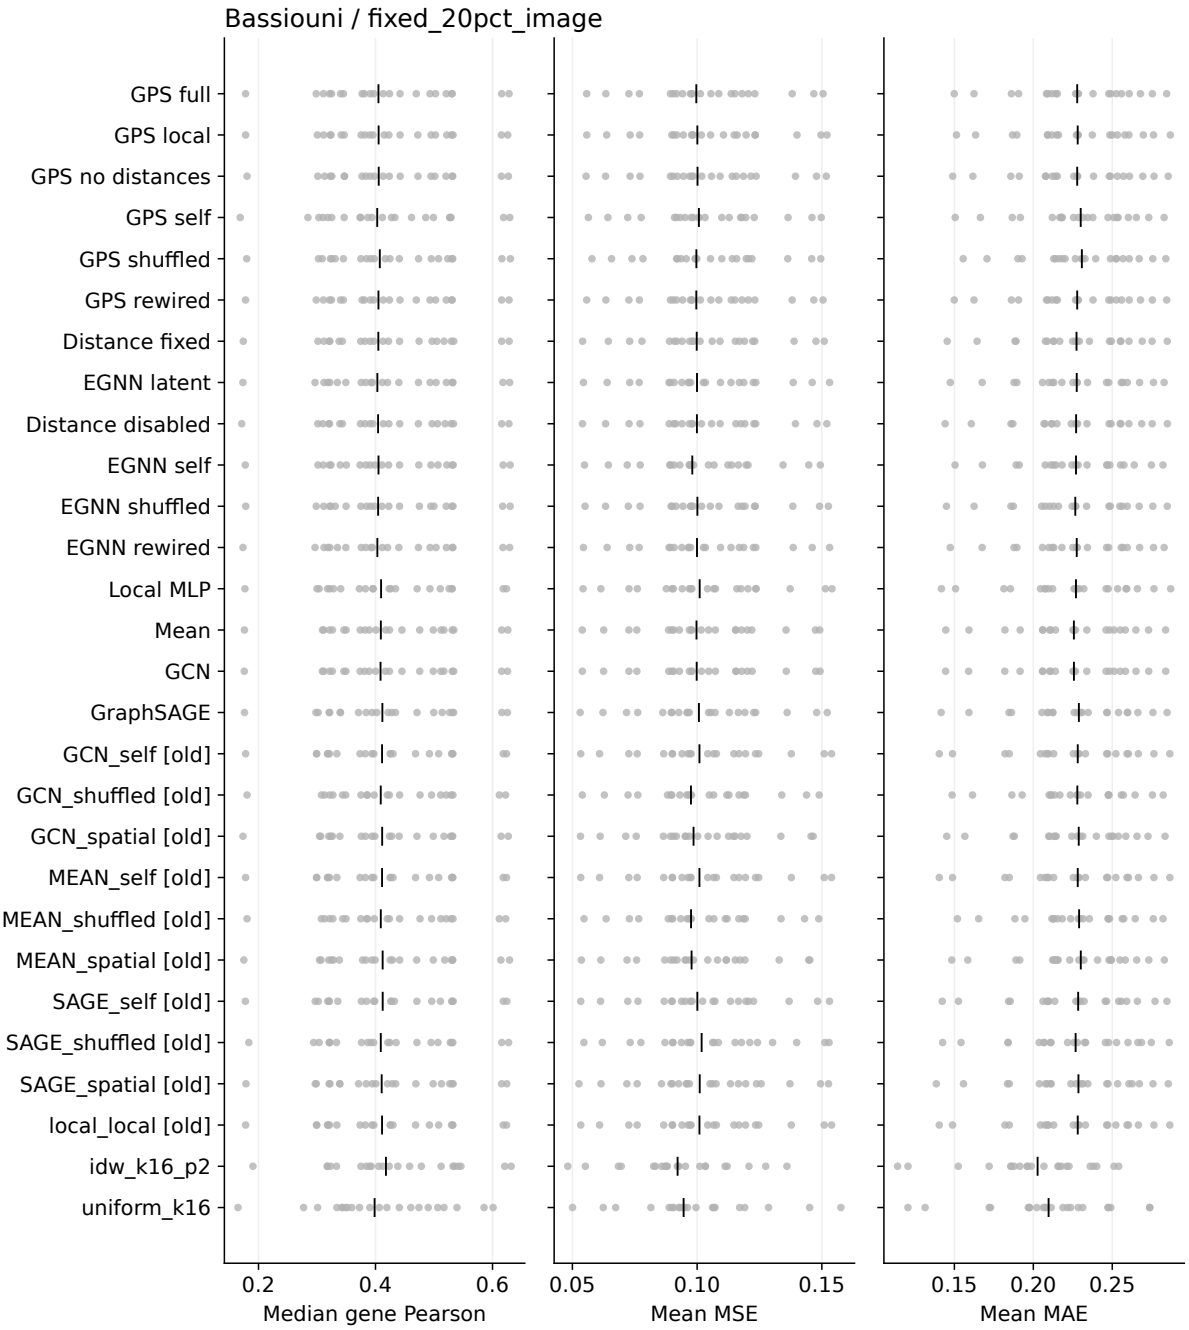


Figure S22: Complete Bassiouni fixed__20 pct__image matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

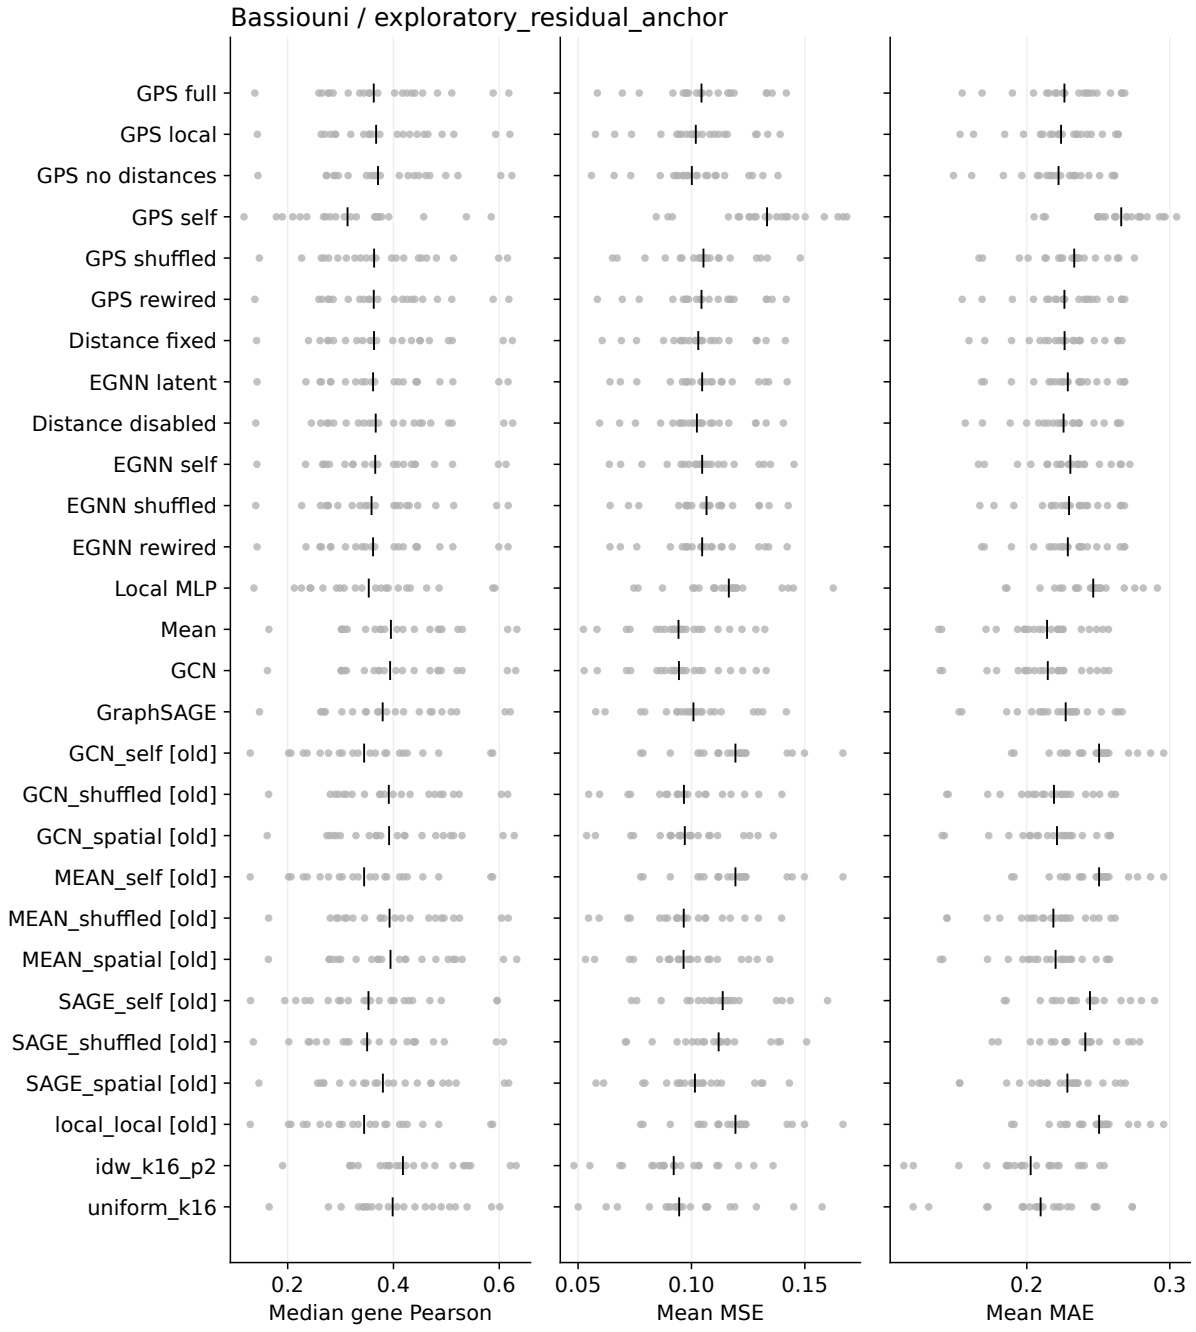


Figure S23: Complete Bassiouni exploratory_residual_anchor matrix at 20% historical V1 coverage. All 16 new architectures/controls, all 10 older configuration families (three fits each), and both fixed molecular comparators are shown. Model summaries average training/mask seeds within patient. Pearson, MSE and MAE are retained together; no external winner is selected. Fixed and residual routes use identical anchors as their molecular references. The HEST development plot has one patient and no population interval.

Table S14: All 384 saved-checkpoint conditional geometric checks. Maxima across all three seeds and recorded transforms. Physical latent errors are in micrometers. Tests are conditional on fixed image features, not the complete CNN pipeline. Baseline preaggregation remains float 32 even when the head is tested in float 64.

Model	Precision	Max scalar error	Max latent error	Checks
Distance disabled	float 64	0	1.14×10^{-13}	12
Distance disabled	float 32	7.75×10^{-7}	2.40×10^{-5}	12
Distance fixed	float 64	1.11×10^{-15}	1.14×10^{-13}	12
Distance fixed	float 32	8.42×10^{-7}	2.40×10^{-5}	12
EGNN rewired	float 64	8.88×10^{-16}	1.14×10^{-13}	12
EGNN rewired	float 32	7.15×10^{-7}	3.13×10^{-5}	12
EGNN latent	float 64	1.33×10^{-15}	1.14×10^{-13}	12
EGNN latent	float 32	7.45×10^{-7}	2.86×10^{-5}	12
EGNN self	float 64	0	1.14×10^{-13}	12
EGNN self	float 32	7.15×10^{-7}	2.40×10^{-5}	12
EGNN shuffled	float 64	1.33×10^{-15}	1.14×10^{-13}	12
EGNN shuffled	float 32	7.45×10^{-7}	2.70×10^{-5}	12
GPS rewired	float 64	1.33×10^{-15}	1.14×10^{-13}	12
GPS rewired	float 32	9.54×10^{-7}	2.40×10^{-5}	12
GPS full	float 64	1.33×10^{-15}	1.14×10^{-13}	12
GPS full	float 32	9.54×10^{-7}	2.40×10^{-5}	12
GPS local	float 64	1.11×10^{-15}	1.14×10^{-13}	12
GPS local	float 32	7.75×10^{-7}	2.40×10^{-5}	12
GPS no distances	float 64	0	1.14×10^{-13}	12
GPS no distances	float 32	8.34×10^{-7}	2.40×10^{-5}	12
GPS self	float 64	0	1.14×10^{-13}	12
GPS self	float 32	7.15×10^{-7}	2.40×10^{-5}	12
GPS shuffled	float 64	1.55×10^{-15}	1.14×10^{-13}	12
GPS shuffled	float 32	9.54×10^{-7}	2.40×10^{-5}	12
GCN	float 64	0	1.14×10^{-13}	12
GCN	float 32	8.94×10^{-8}	2.40×10^{-5}	12
Local MLP	float 64	0	1.14×10^{-13}	12
Local MLP	float 32	3.58×10^{-7}	2.40×10^{-5}	12
Mean	float 64	3.49×10^{-9}	1.14×10^{-13}	12
Mean	float 32	1.19×10^{-7}	2.40×10^{-5}	12
GraphSAGE	float 64	0	1.14×10^{-13}	12
GraphSAGE	float 32	1.19×10^{-7}	2.40×10^{-5}	12

Table S15: Resource accounting for every new configuration. All three seeds are included. Training wall times were measured under the documented concurrent workload and are not a controlled throughput comparison. Standardized inference uses the same 7,760-node TENX95 section, four CPU threads, two warmups and median of five forwards, including model-specific feature aggregation/Tensor conversion but excluding frozen CNN and graph construction. Peak process RSS includes interpreter and data, not only model activations. No GPU or paid external service was used. Full per-seed values, graph construction times and environments are exported.

Model	Parameters	Best epoch range	Fit s	Forward ms	RSS MiB
GPS full	121018	5–60	5.67	78.4	546
GPS local	121018	5–56	7.04	102.3	568
GPS no distances	121018	5–42	5.45	69.6	568
GPS self	121018	47–53	15.76	34.6	568
GPS shuffled	121018	6–76	22.15	76.5	568
GPS rewired	121018	5–60	3.78	81.5	546
Distance fixed	87154	7–53	12.47	56.5	533
EGNN latent	87282	7–57	13.95	54.2	538
Distance disabled	87154	7–74	12.10	54.1	537
EGNN self	87282	8–35	1.91	11.7	534
EGNN shuffled	87282	7–40	14.76	54.6	545
EGNN rewired	87282	7–57	13.95	62.2	544
Local MLP	72114	8–77	5.30	9.9	520
Mean	72114	8–9	1.24	36.2	550
GCN	72114	8–9	1.26	75.8	581
GraphSAGE	72075	39–60	3.77	58.4	550

Table S16: Every new fit, without seed selection. Histories, optimizer states, input hashes and complete checkpoint SHA 256 values are available in the fit JSON files and inventory CSV; weights are distributed separately from Git.

Model	Seed	Best epoch	Ran	Seconds	RSS MiB
Distance disabled	0	74	80	35.82	632
Distance disabled	1	30	40	12.10	643
Distance disabled	2	7	17	5.66	650
Distance fixed	0	53	63	28.79	613
Distance fixed	1	30	40	12.47	638
Distance fixed	2	7	17	4.35	632
EGNN rewired	0	23	33	13.95	642
EGNN rewired	1	57	67	20.21	651
EGNN rewired	2	7	17	5.02	643
EGNN latent	0	23	33	13.95	640
EGNN latent	1	57	67	19.52	639
EGNN latent	2	7	17	5.50	648
EGNN self	0	35	45	4.64	506
EGNN self	1	8	18	1.88	504
EGNN self	2	8	18	1.91	502
EGNN shuffled	0	24	34	18.71	634

Model	Seed	Best epoch	Ran	Seconds	RSS MiB
EGNN shuffled	1	40	50	14.76	635
EGNN shuffled	2	7	17	4.77	643
GPS rewired	0	60	70	35.00	631
GPS rewired	1	5	15	3.70	633
GPS rewired	2	6	16	3.78	624
GPS full	0	60	70	15.56	626
GPS full	1	5	15	5.67	629
GPS full	2	6	16	3.82	629
GPS local	0	56	66	30.11	692
GPS local	1	5	15	5.24	679
GPS local	2	5	15	7.04	674
GPS no distances	0	42	52	31.17	600
GPS no distances	1	5	15	3.67	599
GPS no distances	2	6	16	5.45	596
GPS self	0	51	61	20.15	543
GPS self	1	47	57	15.76	546
GPS self	2	53	63	13.54	546
GPS shuffled	0	76	80	47.42	631
GPS shuffled	1	46	56	22.15	630
GPS shuffled	2	6	16	6.00	634
GCN	0	8	18	1.26	524
GCN	1	8	18	0.98	522
GCN	2	9	19	1.36	522
Local MLP	0	8	18	2.20	497
Local MLP	1	77	80	5.30	497
Local MLP	2	74	80	6.21	497
Mean	0	8	18	1.27	521
Mean	1	8	18	1.01	522
Mean	2	9	19	1.24	522
GraphSAGE	0	48	58	6.51	570
GraphSAGE	1	60	70	3.77	570
GraphSAGE	2	39	49	2.81	570

Source interpretation. Undefined correlations remain undefined; valid-gene counts accompany every panel row. Raw Spearman is secondary because near-tied ranks are floating-point sensitive. Complete distance-bin errors retain occupied-bin support and omit empty bins. Native external images are heavily downsampled, the model is trained in only two source patients, and calibration is frozen. The original selected primary heads are still missing; these 48

new states and 30 older journal-v2 states do not replace them. Optional anchor-conditioned learning and complete-image equivariance tests have status SKIPPED_PROTOCOL. No null or missing analysis is converted into a negative biological finding.

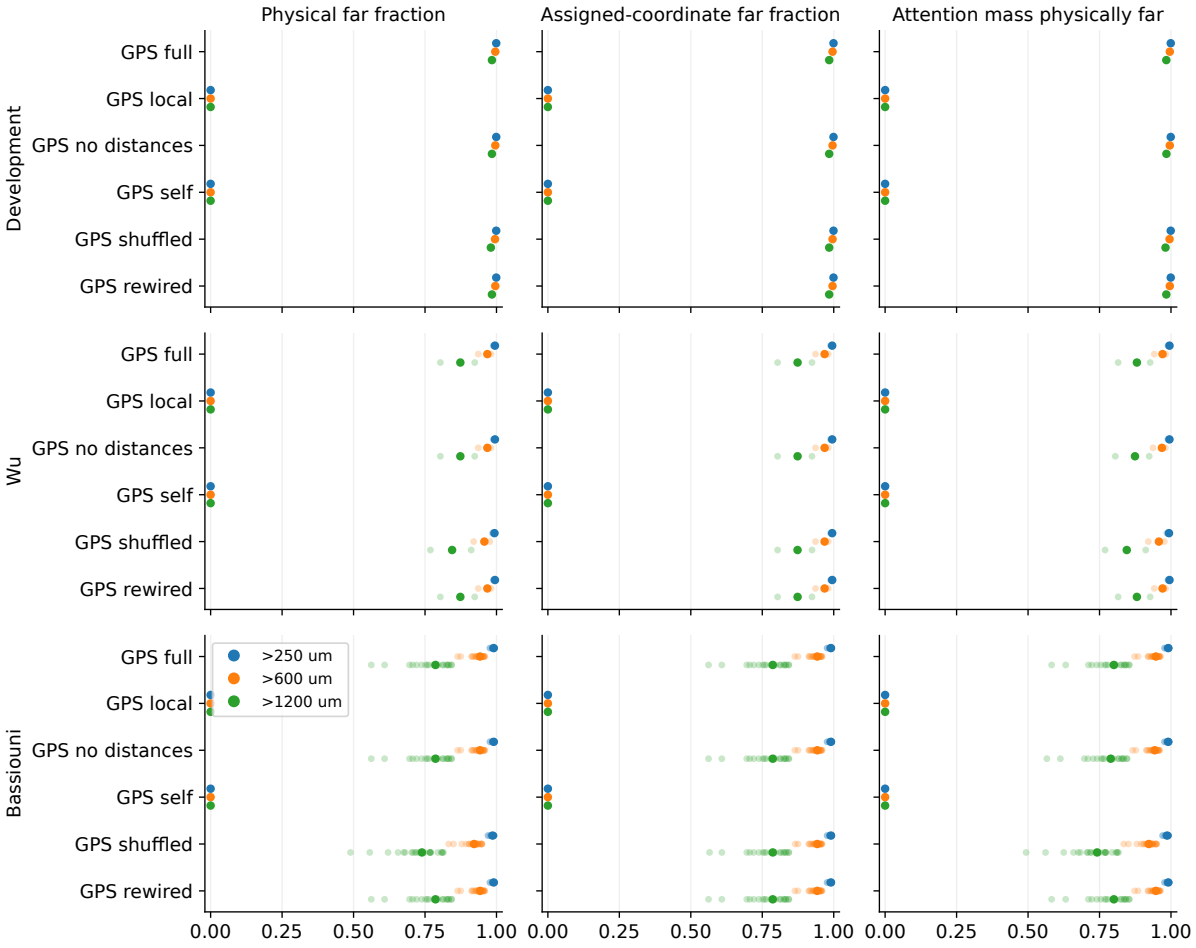


Figure S24: Conditional attention reach. Dots are individual patient summaries after equal seed/head/layer means; large dots are cohort medians. Colors identify250/600/1200micrometer thresholds. This is a software/connectivity diagnostic, not evidence of molecular correlation. All GPS variants, seeds and patients are exported.

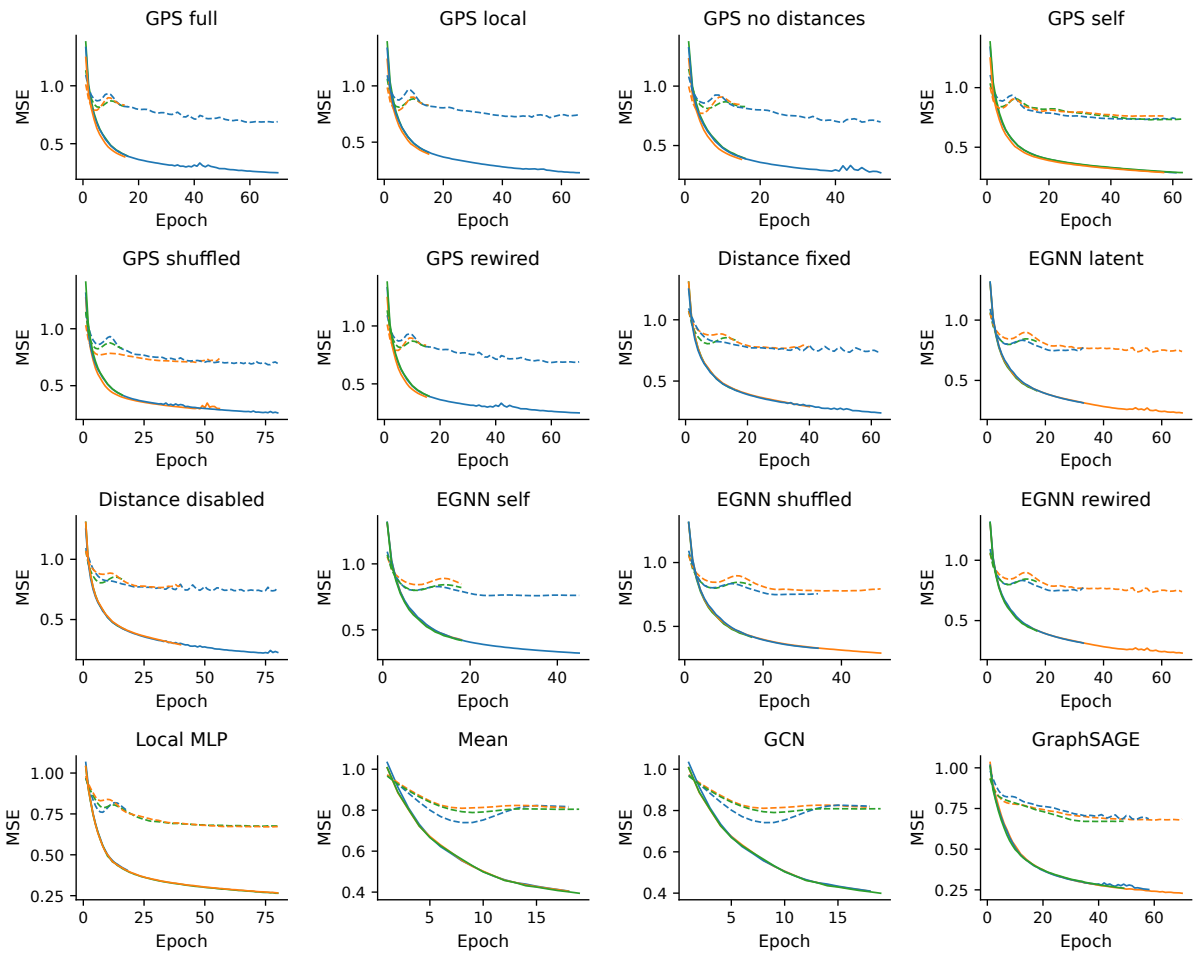


Figure S25: All48 source-only training histories. Every one of16 configurations and all three seeds are retained. Solid curves show training MSE, dashed curves validation MSE. Blue, orange and green identify seeds0,1 and2, respectively. Only TENX95 validation MSE selected epochs; evaluation outcomes did not select architecture or seeds.

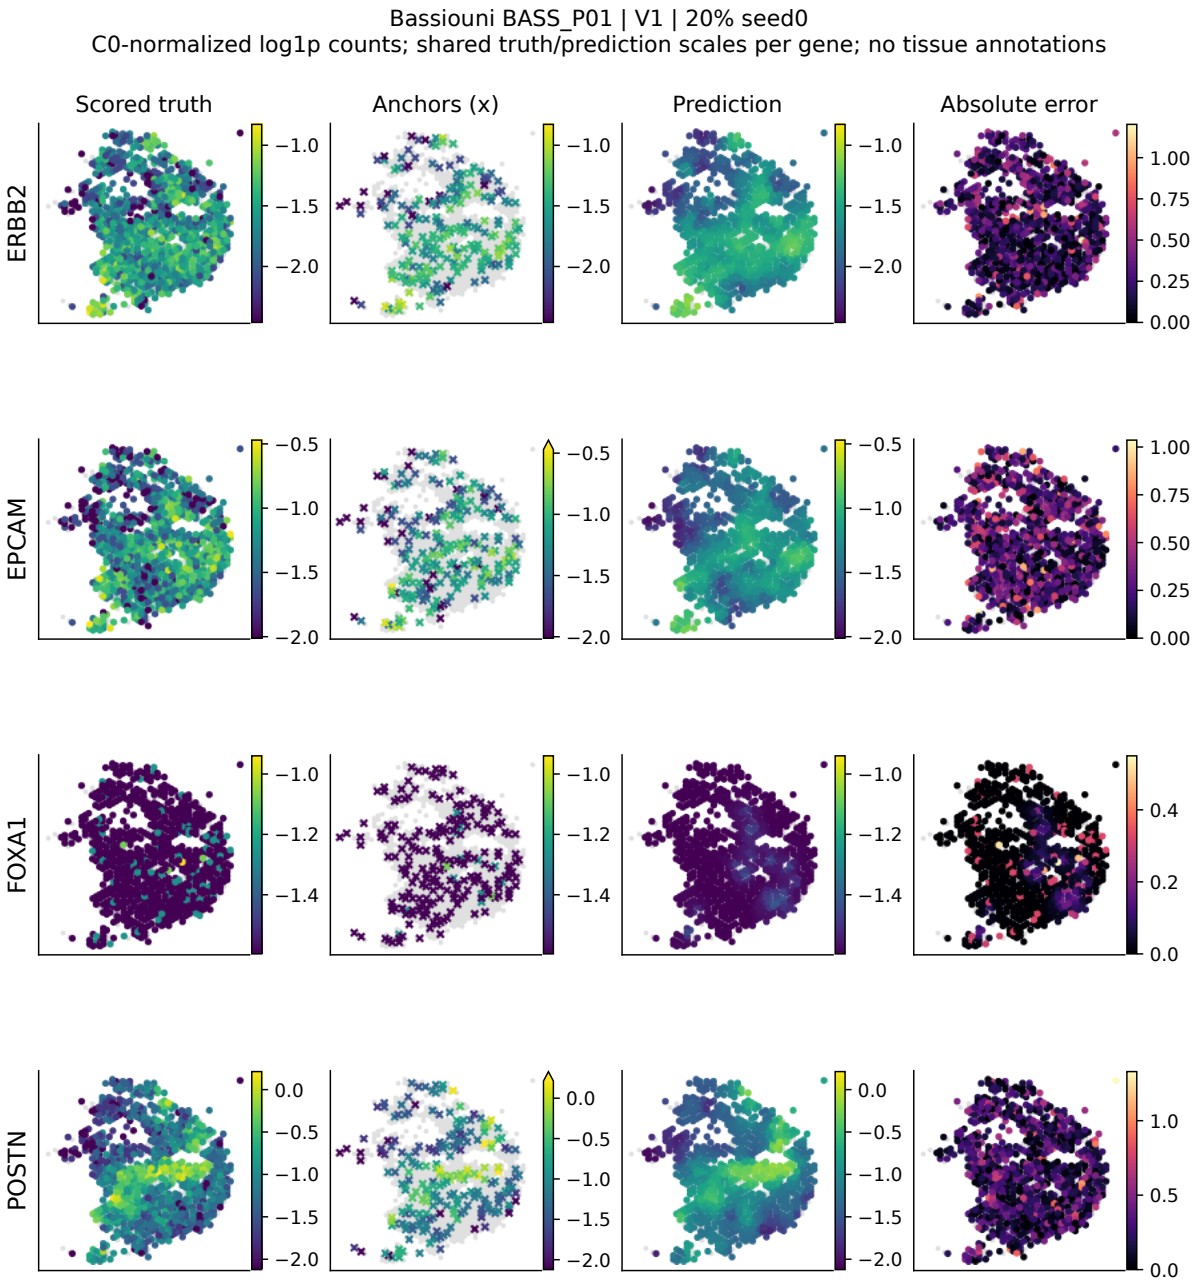


Figure S26: Recovered predetermined Bassiouni distributed map. BASS P01 at20percent seed0, the four prespecified genes, original IDW k16/p2. Truth and prediction share each gene scale; anchor colorbar extensions mark clipped anchor values. Gray sites are unscored context. Constant fields are retained and explicitly marked; no tissue annotations are inferred.

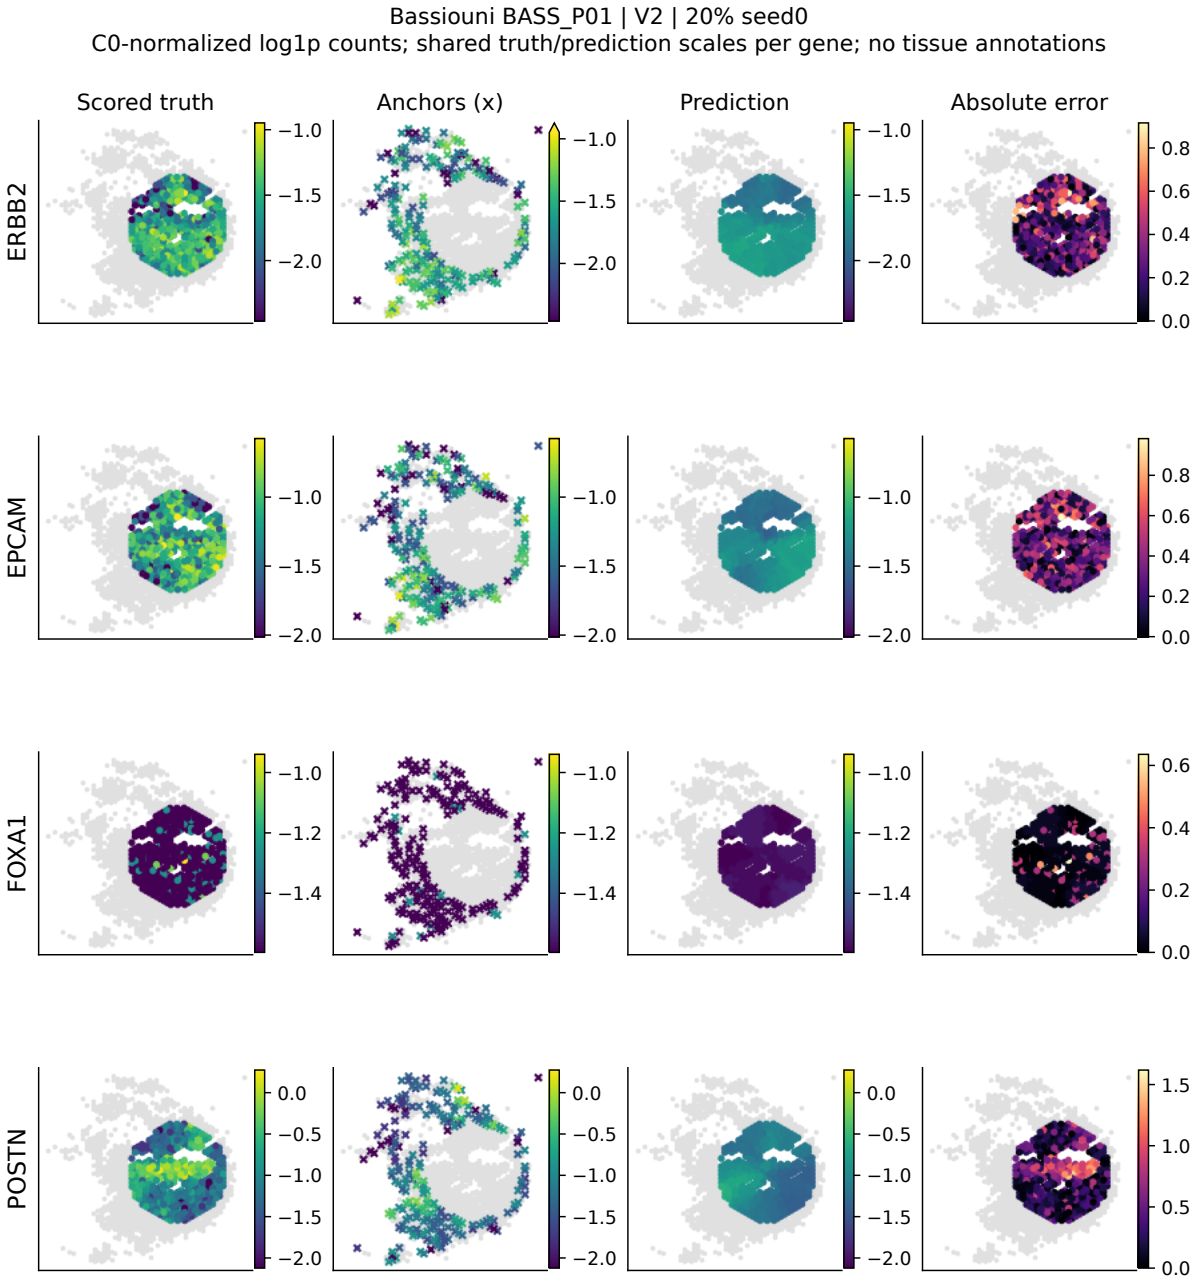


Figure S27: Recovered predetermined Bassiouni regional map. BASS P01 central V2 at20percent seed0, uniform k16 and the same four predetermined genes. Historical V2 has different scored support and estimator from V1; this map comparison does not isolate geometry. Identical-H effects are evaluated separately. Truth/prediction scales are shared within each gene, errors use a separate nonnegative scale.

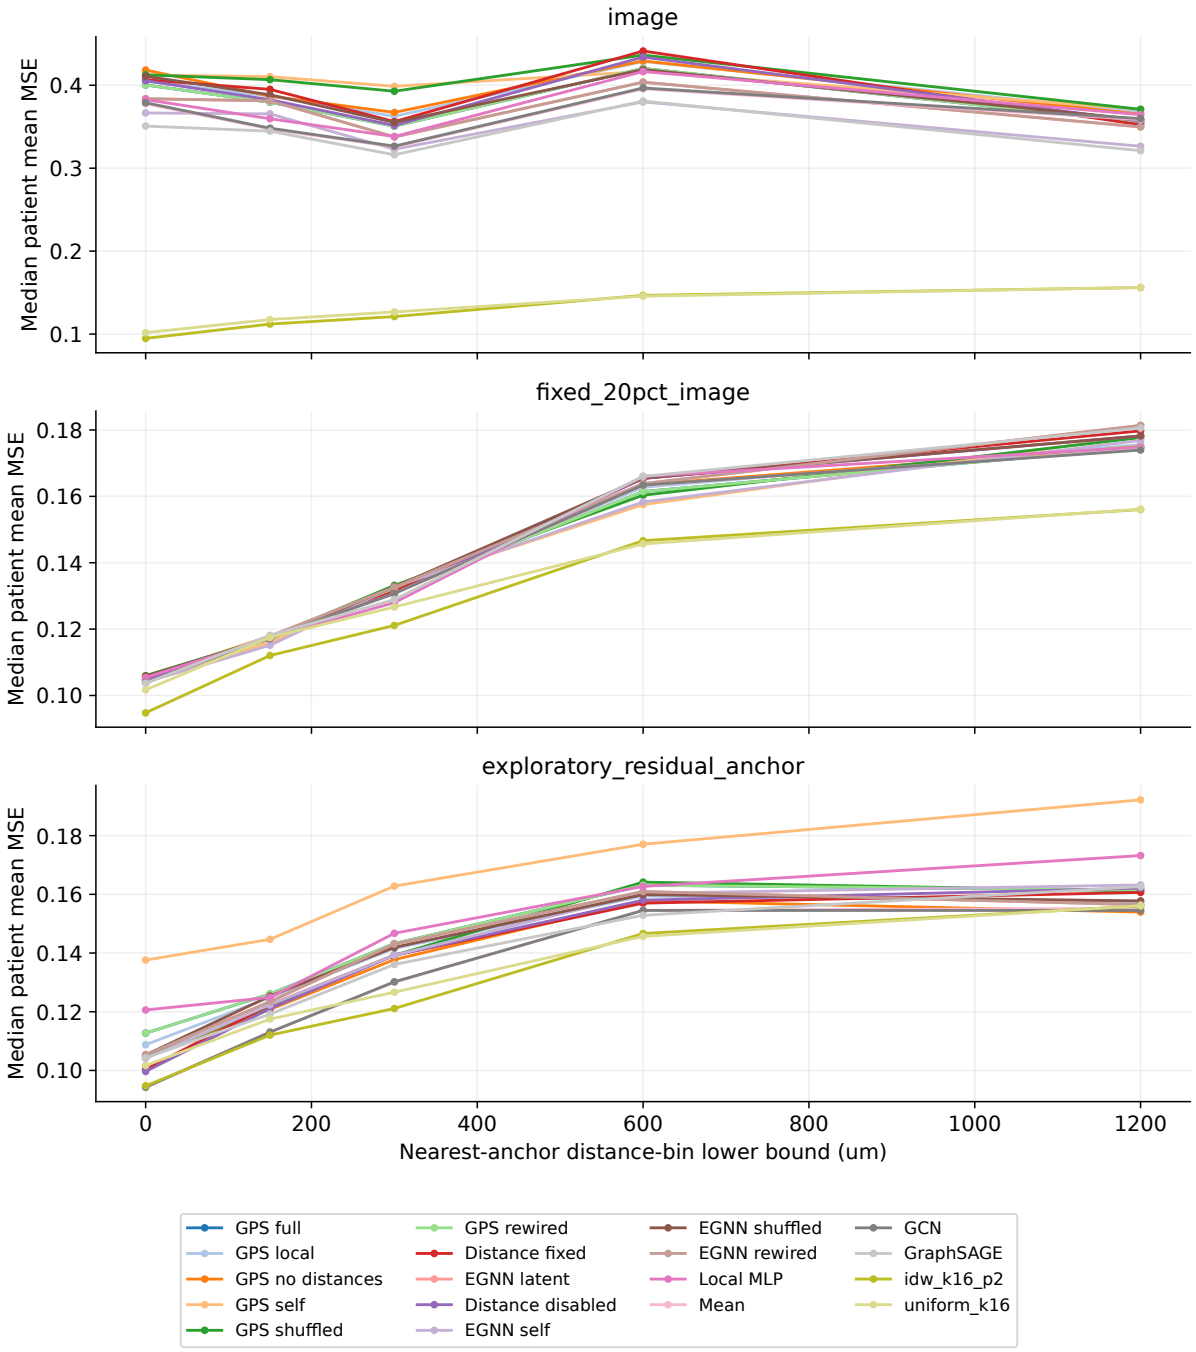


Figure S28: Distance-resolved recovered Bassiouni reconstruction. All16 new models and both molecular baselines,20percent region-exclusion B2. Curves are medians of per-patient conditional-bin mean errors after equal mask and training-seed averages. Occupied bins only; empty bins are omitted. Source tables retain number of patients and min/median/max mean locations per mask in each bin. Different bins need not contain the same patients or locations and do not identify a biological correlation length.

Table S17: All 48 new development-test fits, with every training seed retained. TENX99 at 20% coverage, averaging the same three original masks within each seed. Left metrics are image-only; right metrics use exploratory residual anchors. This is one previously inspected patient, not 48 biological replicates. No confidence interval or seed selection is inferred. Full precision, fixed-fusion, all budgets, external patient metrics and older frozen heads accompany the CSV exports.

Model	Seed	Image r	MSE	MAE	Residual r	MSE	MAE
GPS full	0	0.714	0.9751	0.7814	0.834	0.2349	0.3694
GPS full	1	0.529	1.1646	0.8594	0.801	0.2693	0.3967
GPS full	2	0.569	1.2240	0.8969	0.813	0.2634	0.3909
GPS local	0	0.708	0.9202	0.7560	0.826	0.2662	0.3921
GPS local	1	0.573	1.1372	0.8470	0.804	0.2694	0.3958
GPS local	2	0.508	1.2035	0.8928	0.811	0.2617	0.3885
GPS no distances	0	0.711	1.0426	0.8070	0.835	0.2242	0.3589
GPS no distances	1	0.556	1.1672	0.8560	0.809	0.2596	0.3878
GPS no distances	2	0.577	1.2357	0.8978	0.819	0.2545	0.3827
GPS self	0	0.664	1.0495	0.8149	0.803	0.3344	0.4438
GPS self	1	0.669	1.0613	0.8177	0.795	0.3441	0.4500
GPS self	2	0.671	1.0259	0.8074	0.808	0.3001	0.4204
GPS shuffled	0	0.717	0.9751	0.7806	0.822	0.2865	0.4111
GPS shuffled	1	0.710	1.2113	0.8818	0.829	0.2456	0.3793
GPS shuffled	2	0.552	1.2417	0.9061	0.812	0.2733	0.4001
GPS rewired	0	0.714	0.9751	0.7814	0.834	0.2349	0.3694
GPS rewired	1	0.529	1.1646	0.8594	0.801	0.2693	0.3967
GPS rewired	2	0.569	1.2240	0.8969	0.813	0.2634	0.3909
Distance fixed	0	0.680	0.9648	0.7772	0.820	0.2945	0.4164
Distance fixed	1	0.637	0.9801	0.7883	0.793	0.3136	0.4327
Distance fixed	2	0.471	1.1048	0.8520	0.793	0.2867	0.4118
EGNN latent	0	0.628	1.0248	0.8072	0.799	0.3033	0.4259
EGNN latent	1	0.711	0.9576	0.7706	0.825	0.2646	0.3915
EGNN latent	2	0.536	1.0697	0.8344	0.792	0.3030	0.4239
Distance disabled	0	0.706	1.0438	0.8028	0.831	0.2609	0.3887
Distance disabled	1	0.640	0.9790	0.7877	0.794	0.3128	0.4320
Distance disabled	2	0.471	1.1047	0.8519	0.793	0.2866	0.4118
EGNN self	0	0.595	0.9884	0.7966	0.778	0.3307	0.4476
EGNN self	1	0.546	1.1053	0.8471	0.791	0.3008	0.4227
EGNN self	2	0.545	1.0548	0.8283	0.793	0.3046	0.4253
EGNN shuffled	0	0.627	1.0708	0.8276	0.794	0.3082	0.4303
EGNN shuffled	1	0.665	1.0025	0.7999	0.785	0.3441	0.4550
EGNN shuffled	2	0.532	1.0732	0.8359	0.791	0.3038	0.4245
EGNN rewired	0	0.628	1.0248	0.8072	0.799	0.3033	0.4259

Model	Seed	Image r	MSE	MAE	Residual r	MSE	MAE
EGNN rewired	1	0.711	0.9576	0.7706	0.825	0.2646	0.3915
EGNN rewired	2	0.536	1.0697	0.8344	0.792	0.3030	0.4239
Local MLP	0	0.604	0.9930	0.8144	0.829	0.2433	0.3775
Local MLP	1	0.669	0.9033	0.7628	0.820	0.2591	0.3910
Local MLP	2	0.667	0.9185	0.7714	0.811	0.2571	0.3897
Mean	0	0.624	1.0157	0.8231	0.827	0.2361	0.3667
Mean	1	0.593	1.0522	0.8471	0.819	0.2387	0.3688
Mean	2	0.627	1.0723	0.8525	0.824	0.2366	0.3674
GCN	0	0.620	1.0175	0.8241	0.825	0.2386	0.3692
GCN	1	0.591	1.0536	0.8478	0.818	0.2406	0.3707
GCN	2	0.623	1.0727	0.8529	0.821	0.2385	0.3694
GraphSAGE	0	0.671	0.8701	0.7488	0.827	0.2333	0.3675
GraphSAGE	1	0.688	0.8818	0.7530	0.829	0.2337	0.3683
GraphSAGE	2	0.667	0.9245	0.7785	0.821	0.2307	0.3653