

**Batch : B2                      Roll No. : 16010122151**

**Experiment / assignment / tutorial No.7**

**Grade: AA / AB / BB / BC / CC / CD /DD**

**Signature of the Staff In-charge with date**

**TITLE :Implementation of FIFO Page Replacement Algorithm**

**AIM:** The FIFO algorithm uses the principle that the block in the set which has been infor the longest time will be replaced

---

**Expected OUTCOME of Experiment: (Mention CO/CO's attained here)**

---

**Books/ Journals/ Websites referred:**

1. Carl Hamacher, Zvonko Vranesic and Safwat Zaky, "Computer Organization",Fifth Edition, TataMcGraw-Hill.
  2. William Stallings, "Computer Organization and Architecture: Designing for Performance", Eighth Edition, Pearson.
  3. Dr. M. Usha, T. S. Srikanth, "Computer System Architecture and Organization", First Edition, Wiley-India.
- 

**Pre Lab/ Prior Concepts:**

The FIFO algorithm uses the principle that the block in the set which has been in the block for the longest time is replaced. FIFO is easily implemented as a round



**Department of Computer Engineering**

robin or criteria buffer technique. The data structure used for implementation is a queue. Assume that the number of cache pages is three. Let the request to this cache is shown alongside.

**Algorithm:**


1. A hit is said to be occurred when a memory location requested is already in the cache.
2. When cache is not full, the number of blocks is added.
3. When cache is full, the block is replaced which was added first

**Design Steps:**

1. Start
2. Get input as memory block to be added to cache
3. Consider an element of the array
4. If cache is not full, add element to the cache array
5. If cache is full, check if element is already present
6. If it is hit is incremented
7. If not, element is added to cache removing first element (which is in first).
8. Repeat step 3 to 7 for remaining elements
9. Display the cache at very instance of step 8
10. Print hit ratio
11. End.

**Example:**

**Department of Computer Engineering**

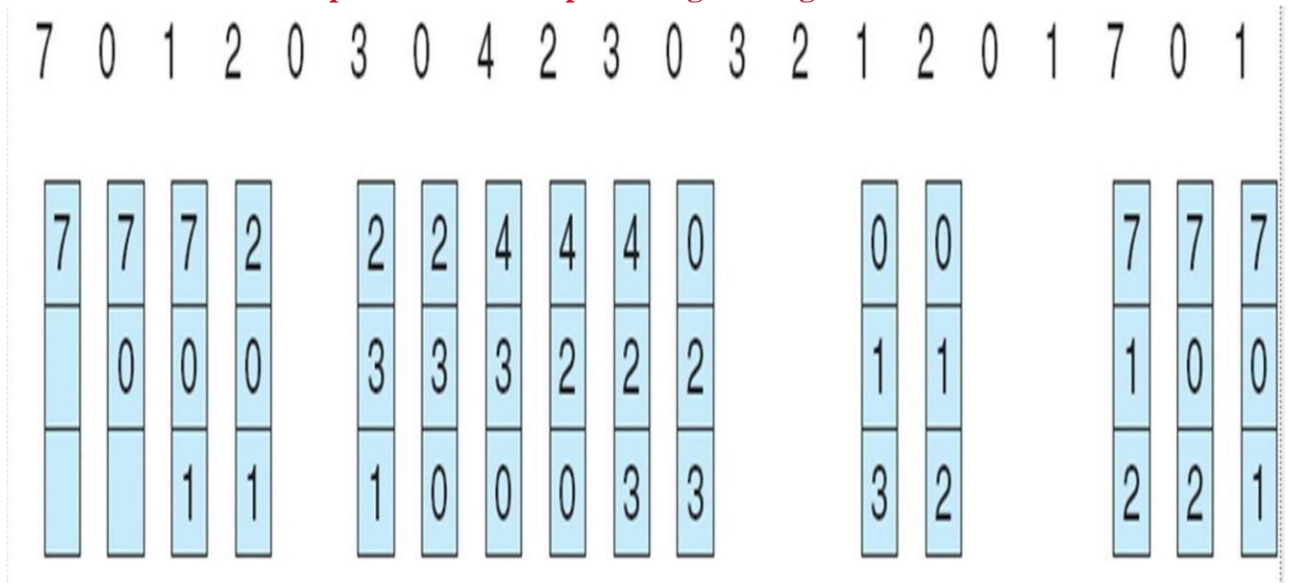

**Implementation code:**

```
#include <bits/stdc++.h>
using namespace std;
int c; void fifo(string st)
{
    int arr[c], hit = 0, k = 0;
    bool p=0;
    for (int i = 0; i < c; i++)
    {
        arr[i] = -1;
    }
    for (int i = 0; i < st.length(); i++)
    {
        if (k < c)
        {
            int ele=int(st[i] - '0');
            for(int j=0;j<c;j++)
            {
                if(arr[j]==ele)
                {
                    p=1;
                    break;
                }
            }
            if (p)
            {
                hit++;
            }
        }
    }
}
```



```
p=0;
continue;
}
else
{
    arr[k] = ele;
    k = ++k % c;
}
}
for (int j = 0; j < c; j++)
{
    if (arr[j] != -1)
        cout << arr[j] << " ";
    else
        cout << "- ";
}
cout << endl;
} cout << "The hit ratio:" << hit << "/" << st.length() << endl; }

int main() {

    string str;
    cout<<"Enter the number of page frames\n";
    cin >> c;
    cout << "Enter the refrence string";

    cin >> str;
    fifo(str);
}
```

## Output:

The screenshot shows a Windows command prompt window titled "C:\Users\Tanvi\Desktop\PIQ\coa\_7\or6\bin\Debug\coa\_7\or6.exe". The program prompts the user to "Enter the number of page frames" and the user enters "3". It then prompts for "Enter the refrence string" and the user enters "7012032120321201701". The program outputs the string "7 - - 7 0 - 7 0 1 2 0 1 2 3 1 2 3 0 4 3 0 4 2 0 4 2 3 0 2 3 0 1 3 0 1 2 7 1 2 7 0 2 7 0 1" followed by "The hit ratio:5/20". At the bottom, it shows "Process returned 0 (0x0) execution time : 64.732 s" and "Press any key to continue."



**SOMAIYA**  
VIDYAVIHAR UNIVERSITY

K J Somaiya College of Engineering

**K. J. Somaiya College of Engineering,  
Mumbai-77**

(A Constituent College of Somaiya Vidyavihar  
University)

**Department of Computer Engineering**



## **Post Lab Descriptive Questions**

### **1. What is meant by memory interleaving?**

**Answer:**

Memory Interleaving is an abstraction technique which divides memory into a number of modules such that successive words in the address space are placed in the different module.

### **2. Explain Paging Concept?**

**Answer:**

Paging is a storage mechanism that allows OS to retrieve processes from the secondary storage into the main memory in the form of pages. In the Paging method, the main memory is divided into small fixed-size blocks of physical memory, which is called frames. The size of a frame should be kept the same as that of a page to have maximum utilization of the main memory and to avoid external fragmentation. Paging is used for faster access to data, and it is a logical concept.

## **Conclusion**

We have successfully implemented FIFO Page Replacement Algorithm

**Date:** \_\_\_\_\_

**Signature of faculty in-charge**