

Pixal3D-equivalent defaults vs BlueFox3D wrapper (same weights)

Checkpoint: Hydrilla/BlueFox3D (public Pixal3D weights).

This report is not a new-model claim. It only compares pipeline settings:

stock defaults (baseline) vs wrapper cleanup at 1536 (quality) vs 1024 / 8 steps (fast).

Seed: 42

Images: assets/images/1_img.png, assets/images/4_img.png, assets/images/9_img.png, assets/images/21_img.png

Instance: hydrillapixal3d, us-central1-a, --low_vram

Failed 1536 remesh jobs were retried one GPU at a time with --decimation 250000.

4_img 1536 recovered with --no-remesh. 9_img 1536 OOM'd in fill_holes (CuMesh).

Stills are shaded basecolor views of the exported GLB, each in a fresh process.

1_img seed=42 same Hydrilla/BlueFox3D weights

Raw photo




Baseline preprocess



Wrapper preprocess



Baseline front

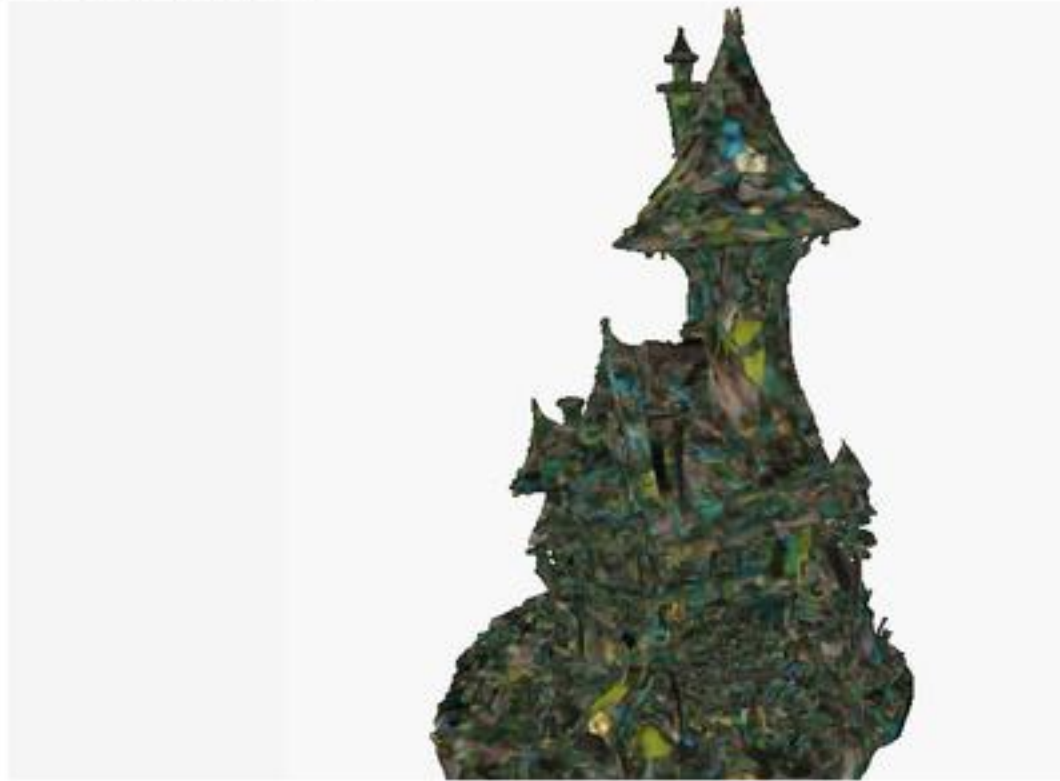

Quality front




Fast front




Baseline 3/4



Quality 3/4

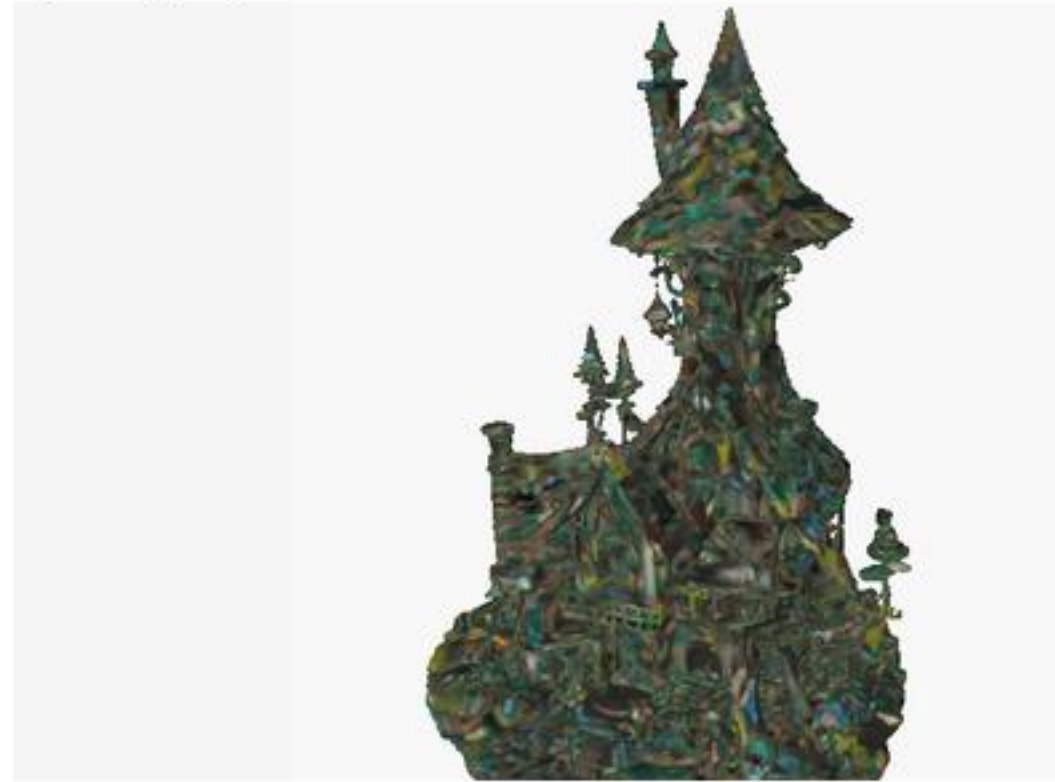

Fast 3/4

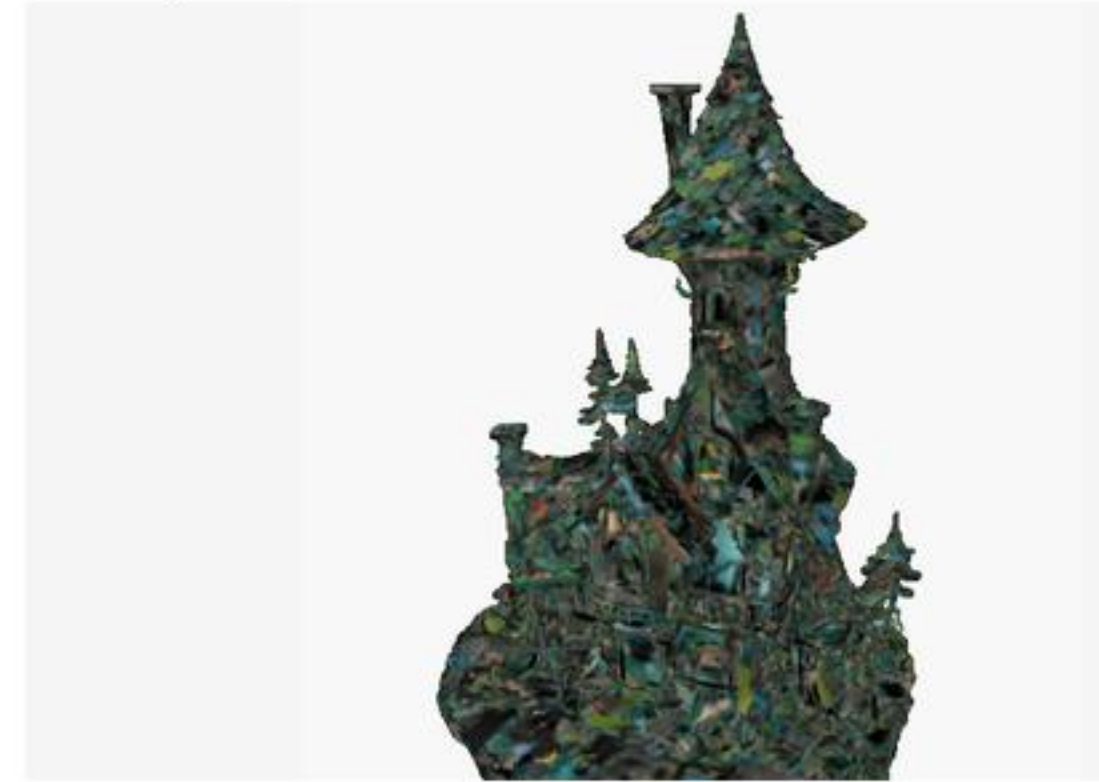

baseline: 1536px, steps=12, 504s, decim=1000000, pass

quality: 1536px, steps=12, 706s, decim=1000000, cleanup, pass | fast: 1024px, steps=8, 526s, decim=1000000, cleanup, pass

21_img seed=42 same Hydrilla/BlueFox3D weights

Raw photo



Baseline preprocess



Wrapper preprocess



Baseline front




Quality front




Fast front



Baseline 3/4

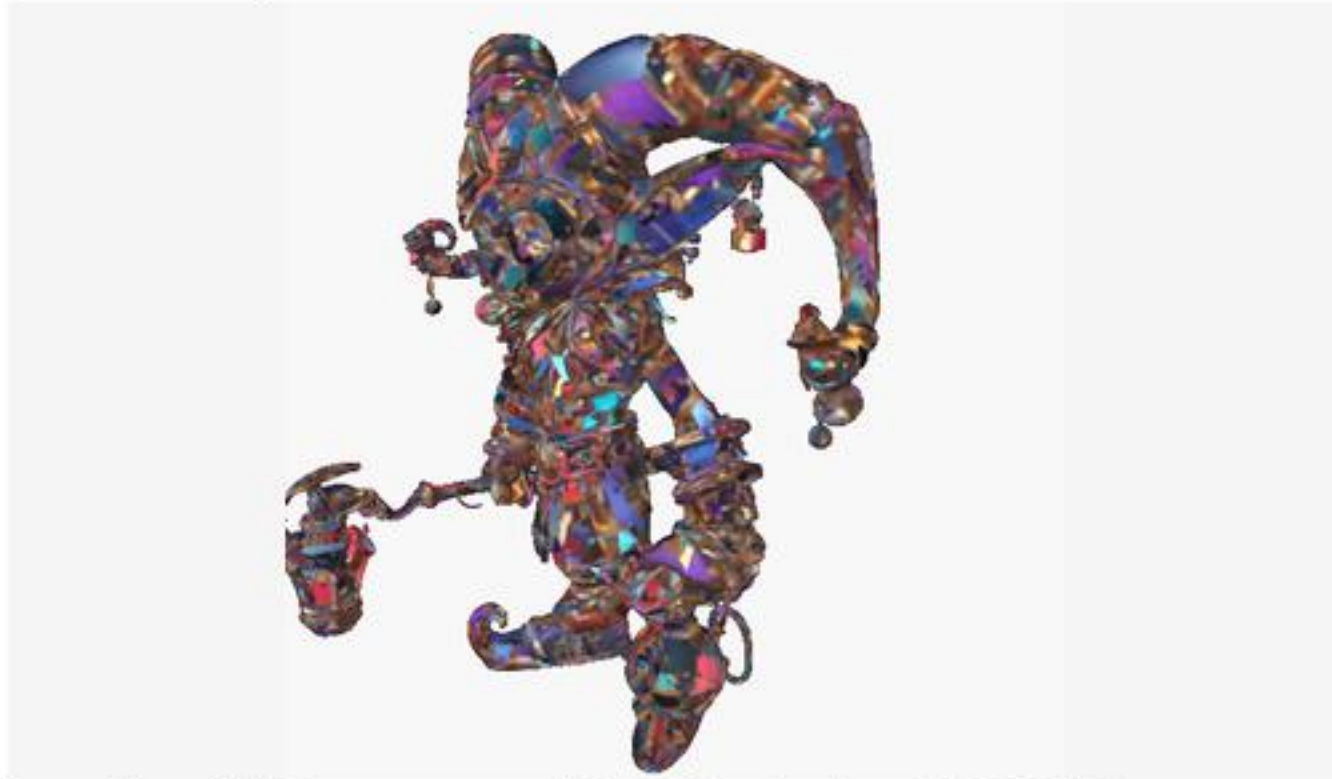

Quality 3/4

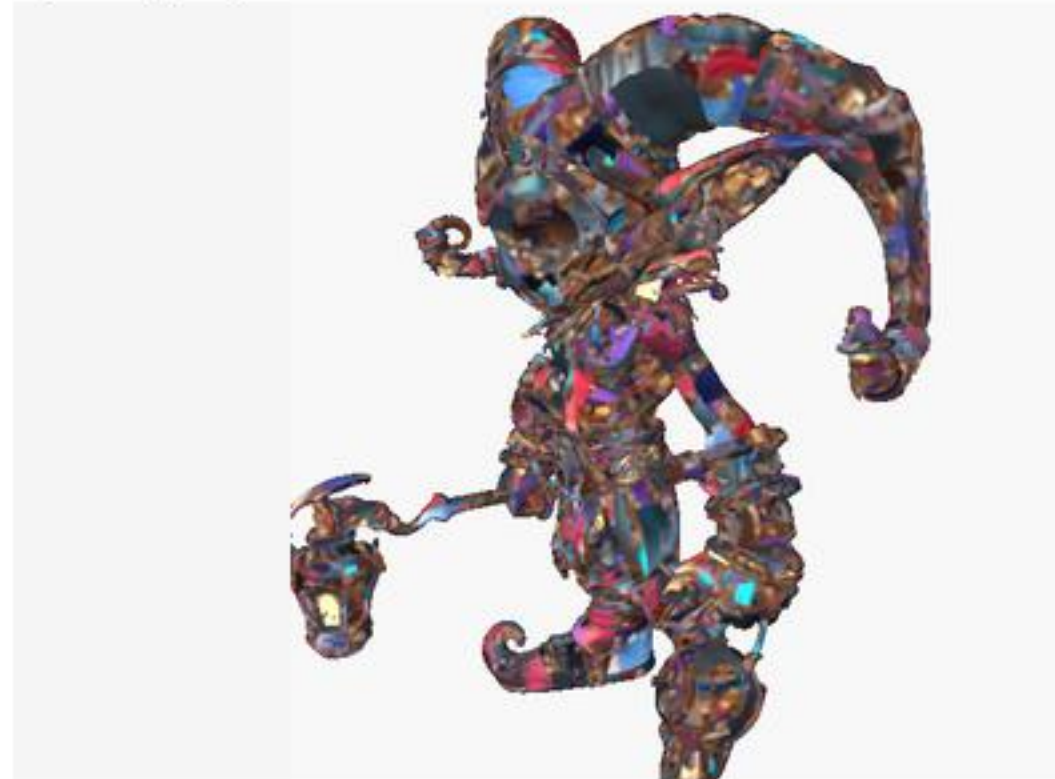

Fast 3/4




baseline: 1536px, steps=12, 402s, decim=1000000, pass


quality: 1536px, steps=12, 523s, decim=1000000, cleanup, pass | fast: 1024px, steps=8, 373s, decim=1000000, cleanup, pass

4_img seed=42 same Hydrilla/BlueFox3D weights


Raw photo

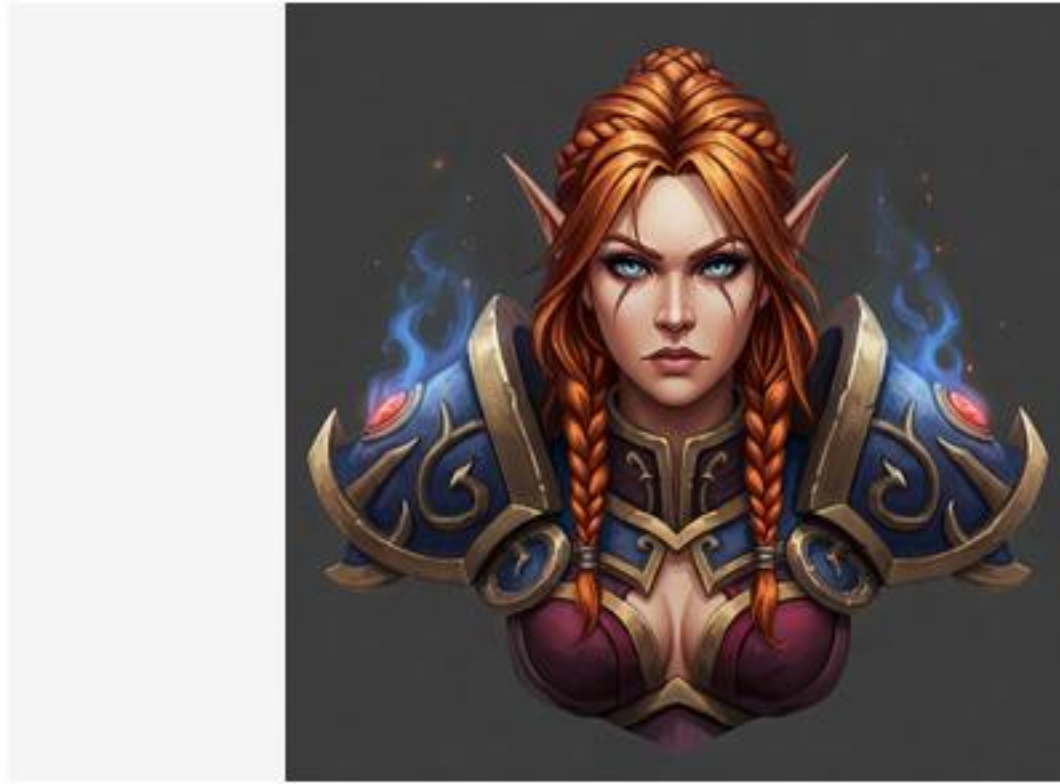


Baseline preprocess

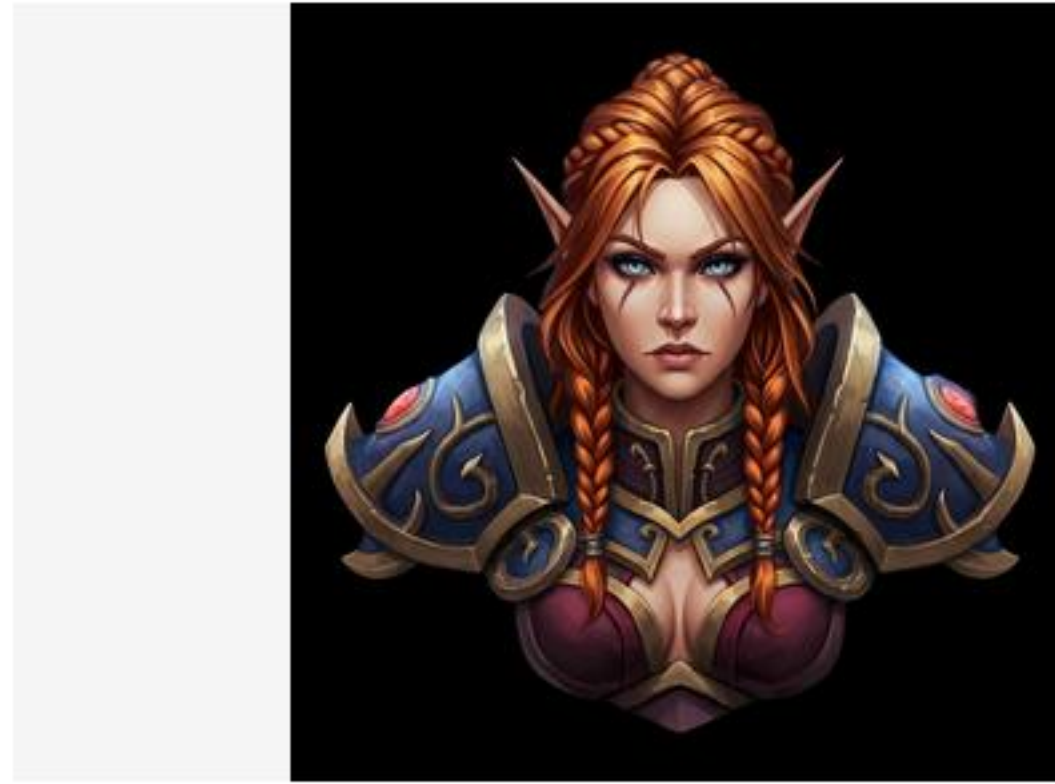

Wrapper preprocess

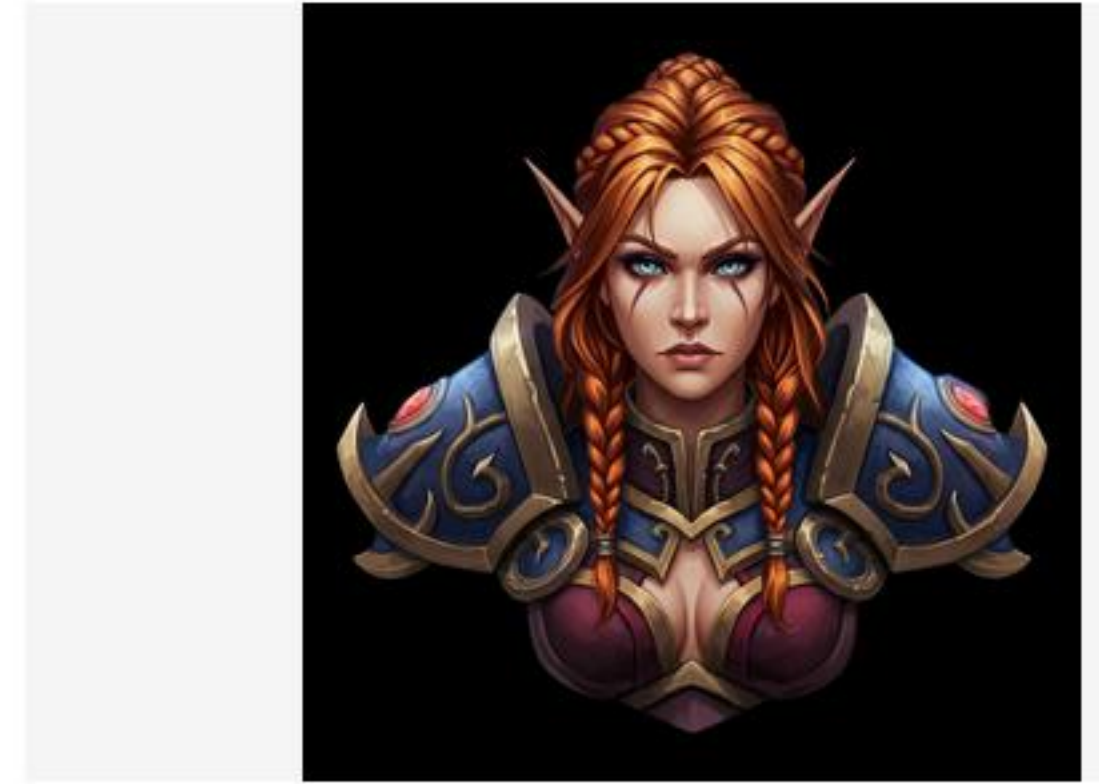

Baseline front

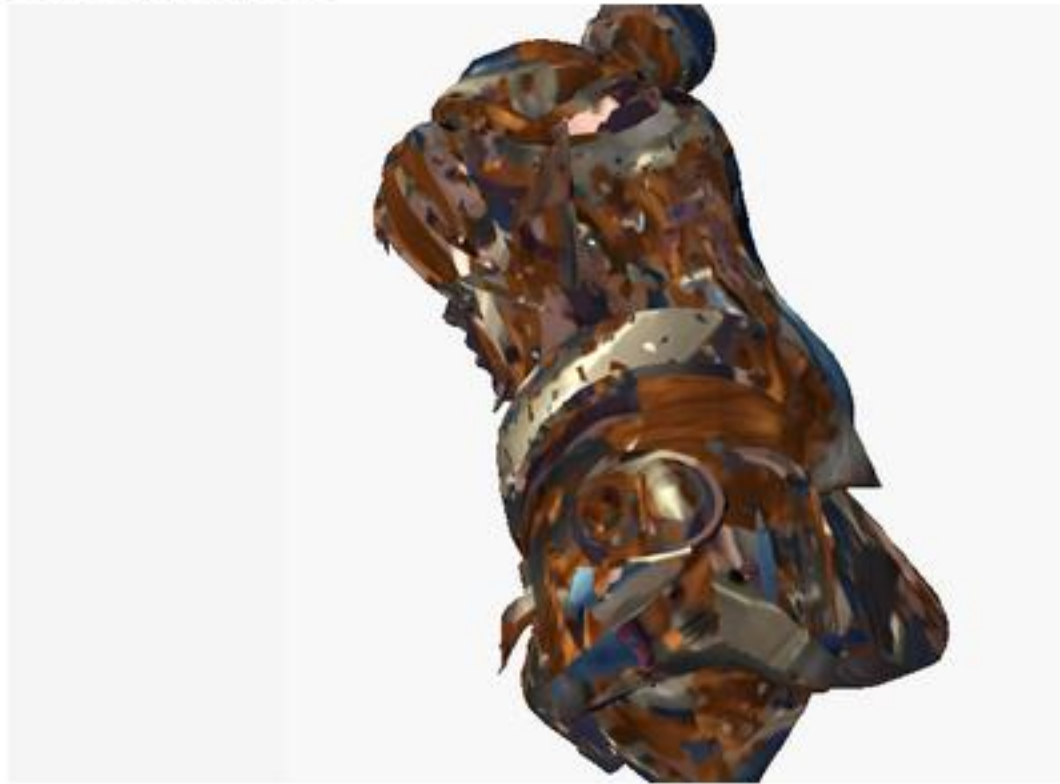


Quality front




Fast front




Baseline 3/4

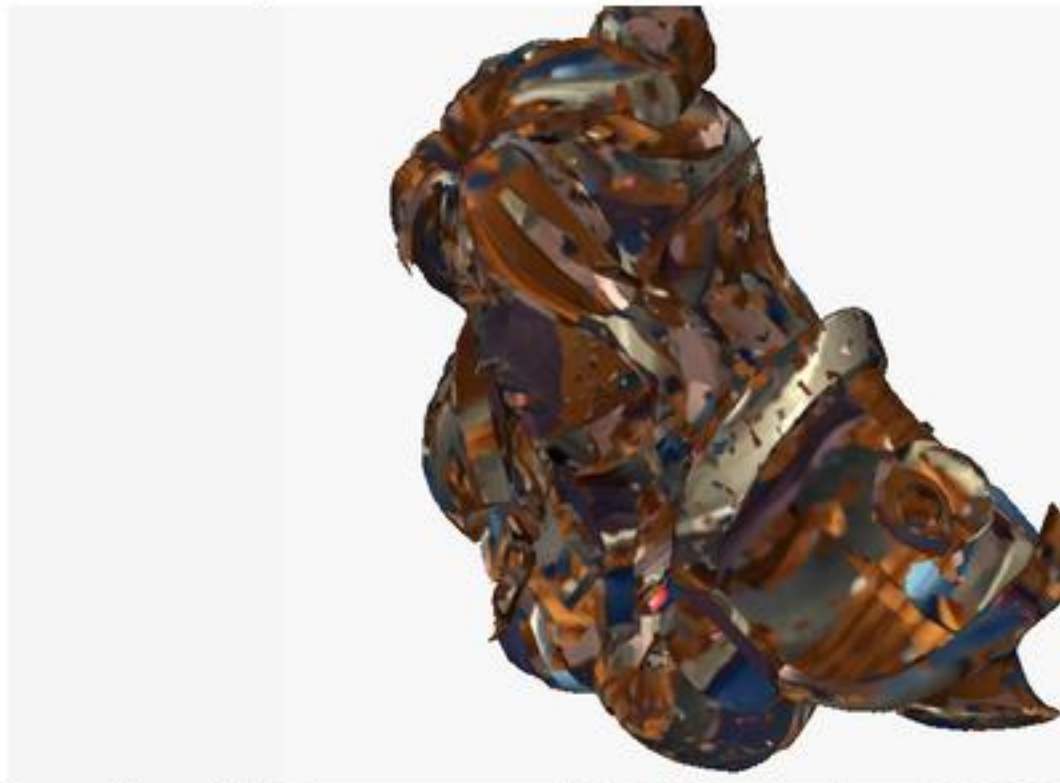

Quality 3/4

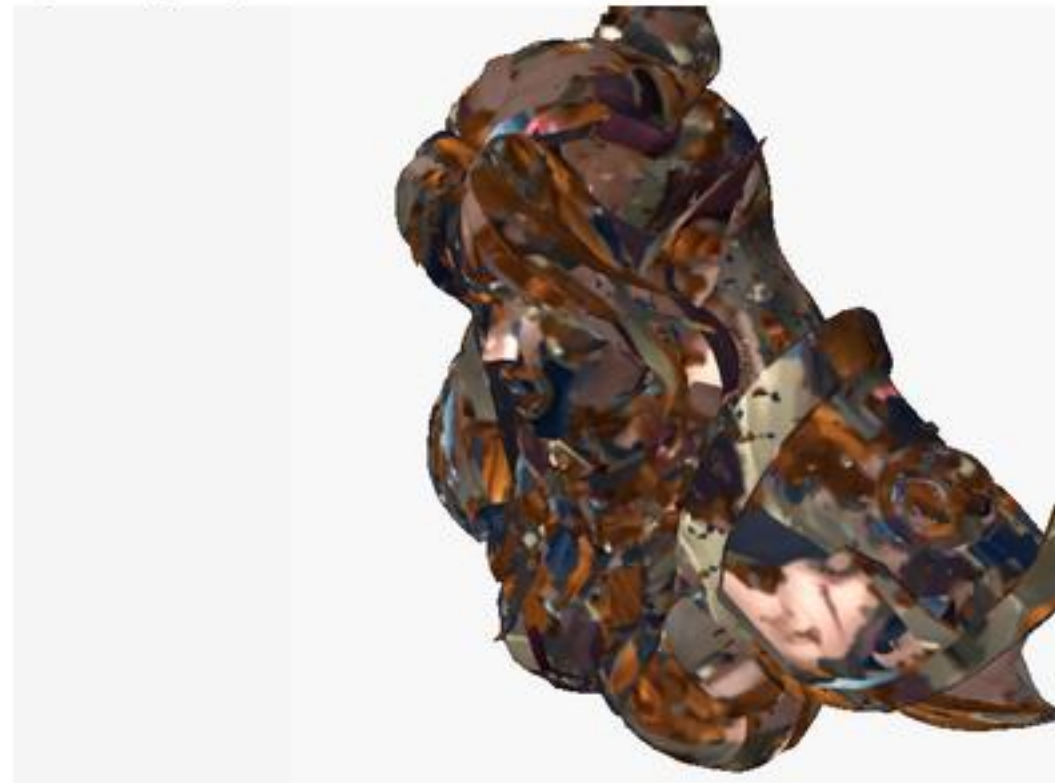

Fast 3/4

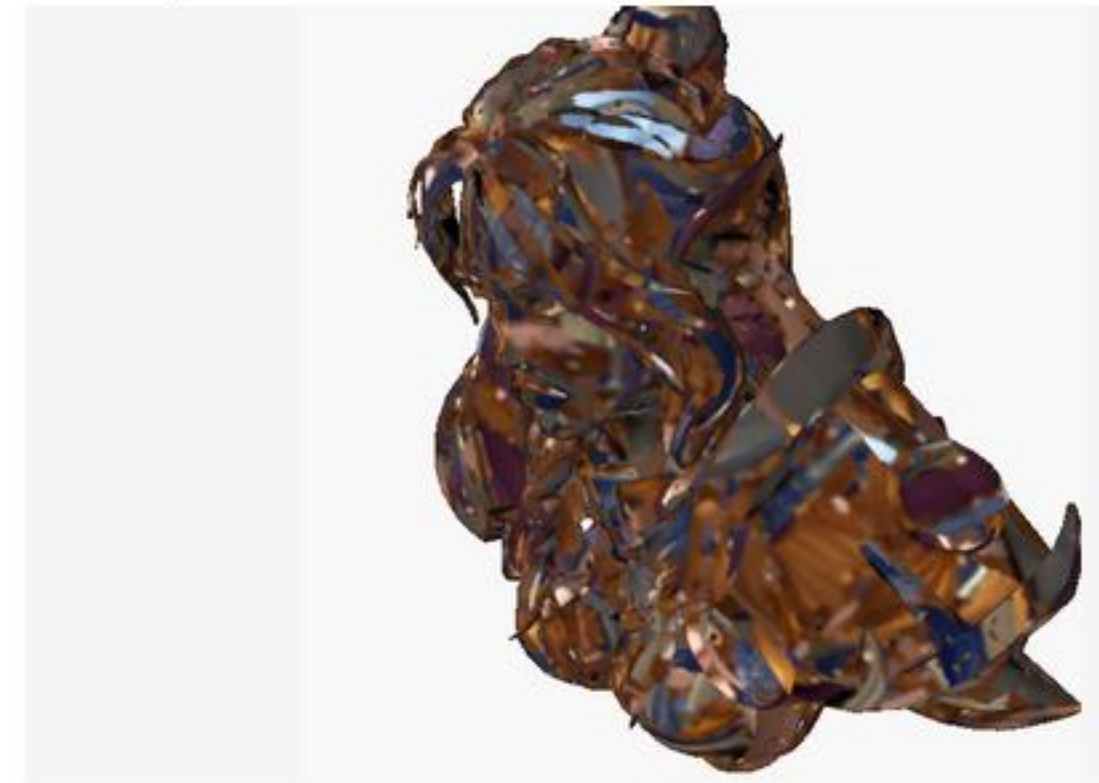

baseline: 1536px, steps=12, 446s, decim=250000, no-remesh, pass

quality: 1536px, steps=12, 545s, decim=250000, no-remesh, cleanup, pass | fast: 1024px, steps=8, 404s, decim=1000000, cleanup, pass

9_img seed=42 same Hydrilla/BlueFox3D weights

Raw photo



Baseline preprocess



Wrapper preprocess



Baseline front

missing (job failed or no GLB)

Quality front

missing (job failed or no GLB)

Fast front



Baseline 3/4

missing (job failed or no GLB)

Quality 3/4

missing (job failed or no GLB)

Fast 3/4



baseline: failed (no GLB)

quality: failed (no GLB) | fast: 1024px, steps=8, 602s, decim=1000000, cleanup, pass

What this report can and cannot say

What the stills actually show:

- 21_img: baseline front has a small disconnected island by the lantern; quality and fast do not.
- That is wrapper cleanup dropping a floater, not a better network.
- 1_img and 4_img: baseline / quality / fast silhouettes look the same. No forced win.
- Fast (1024 / 8) is quicker (about 6-10 min vs 7-12 min) and not sharply lower detail here.
- 4_img 1536 needed --decimation 250000 and --no-remesh. 1M remesh OOM'd earlier.
- 9_img 1536 is missing: both retries OOM'd in fill_holes after sampling. Only fast made a crab.

Not allowed (and not claimed):

- BlueFox3D is a better neural model than Pixal3D.
- New or retrained weights. Hydrilla/BlueFox3D is the public Pixal3D checkpoint.
- FID / CLIP scores. None were computed.