Response Content Type [application/json ▾]

[Try it out!] Hide Response

Curl

```
curl -X GET --header 'Accept: application/json' 'https://localhost:44364/api/Country'
```
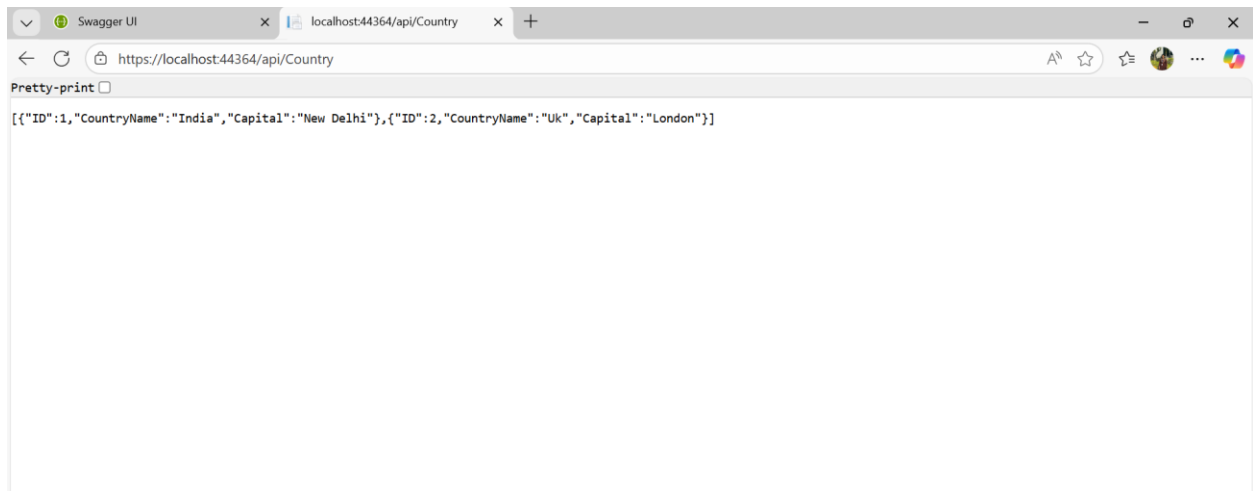
Request URL

```
https://localhost:44364/api/Country
```

Response Body

```
[
  {
    "ID": 1,
    "CountryName": "India",
    "Capital": "New Delhi"
  },
  {
    "ID": 2,
    "CountryName": "Uk",
    "Capital": "London"
  }
]
```

Response Code

Pretty-print ☐

```
[{"ID":1,"CountryName":"India","Capital":"New Delhi"},{"ID":2,"CountryName":"Uk","Capital":"London"}]
```
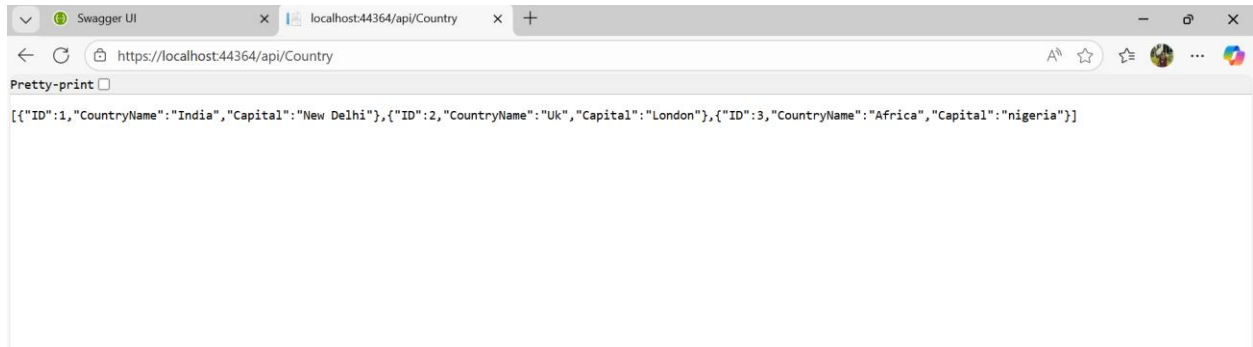
Try it out!   Hide Response

Curl

```
curl -X POST --header 'Content-Type: application/json' --header 'Accept: application/json' -d '{ \
   "ID": 3, \
   "CountryName": "Africa", \
   "Capital": "nigeria" \
 }' 'https://localhost:44364/api/Country'
```

Request URL

```
https://localhost:44364/api/Country
```

Response Body

```
{
  "ID": 3,
  "CountryName": "Africa",
  "Capital": "nigeria"
}
```

Swagger UI   localhost:44364/api/Country   +

https://localhost:44364/api/Country

Pretty-print ☐

```
[{"ID":1,"CountryName":"India","Capital":"New Delhi"},{"ID":2,"CountryName":"Uk","Capital":"London"},{"ID":3,"CountryName":"Africa","Capital":"nigeria"}]
```

DELETE /api/Country/{id}

Response Class (Status 200)
OK

Model | Example Value

```
{}
```

Response Content Type [application/json ▾]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	1		path	integer

[Try it out!] Hide Response

Curl

```
curl -X DELETE --header 'Accept: application/json' 'https://localhost:44364/api/Country/1'
```

Request URL

```
https://localhost:44364/api/Country/1
```

Model | Example Value

```
{}
```

Response Content Type [application/json ▾]

Parameters

Parameter	Value	Description	Parameter Type	Data Type
id	2		path	integer

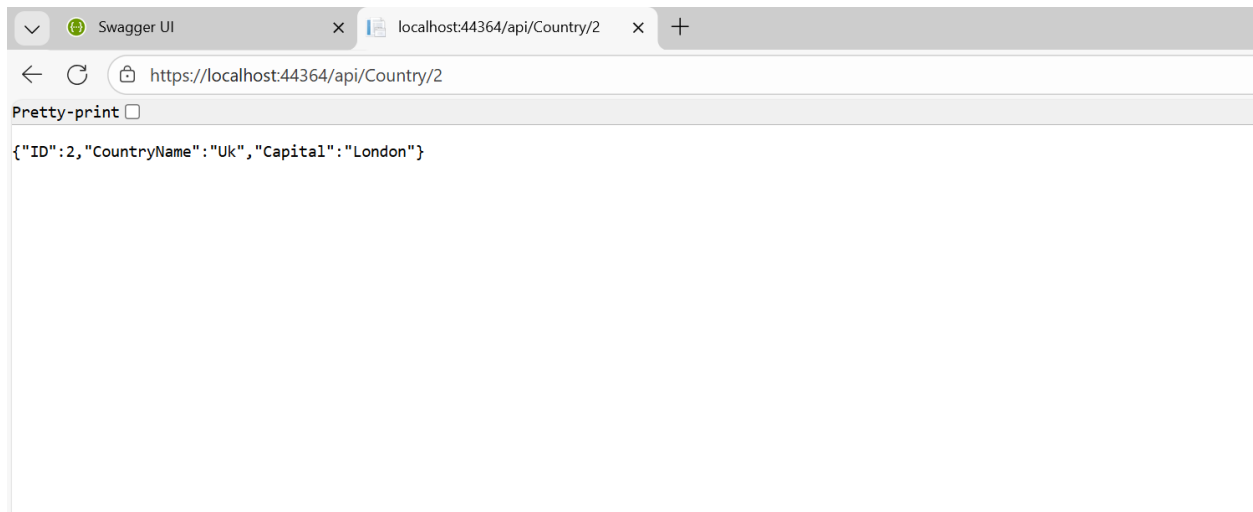[Try it out!] Hide Response

Curl

```
curl -X GET --header 'Accept: application/json' 'https://localhost:44364/api/Country/2'
```

Request URL

```
https://localhost:44364/api/Country/2
```

Response Body

```
{
  "ID": 2,
  "CountryName": "Uk",
  "Capital": "London"
}
```

Pretty-print ☐

```
{"ID":2,"CountryName":"Uk","Capital":"London"}
```

```
      "Capital": "tokya"
    }
```

```
                                        "ID": 0,
                                        "CountryName": "string"
                                        "Capital": "string"
                                      }
```

Parameter content type:

| application/json | ∨ |

Try it out!   Hide Response

Curl

```
curl -X PUT --header 'Content-Type: application/json' --header 'Accept: application/json' -d '{ \
   "ID": 0, \
   "CountryName": "Japan", \
   "Capital": "tokya" \
 }' 'https://localhost:44364/api/Country/1'
```

Request URL

```
https://localhost:44364/api/Country/1
```

Response Body

```
  {
    "ID": 1,
    "CountryName": "Japan",
    "Capital": "tokya"
  }
```

Response Code

```
200
```

{"ID":1,"CountryName":"Japan","Capital":"tokya"}