

Table 9. EERs (%) comparison for different models trained on ASVspoof2019 LA. Lower is better. **Bold**, underline, and [†] indicate the best, second-best, and third-best results, respectively. The subscripts indicate the performance gaps between HyperPotter and its baseline.

Model	Params (M)	In-the-Wild	ASV20 19LA	ASV20 21LA	ASV20 21DF	ASV spoof5	FoR	Codefake	ADD22 Track1	ADD22 Track3	ADD23 R1	ADD23 R2	Libri Voc	SONAR
Wav2Vec2+AAISIST (Tak et al., 2022b)	317.84	11.19	0.221	<u>0.82</u>	6.63	16.24	7.46	43.36	<u>31.04</u>	16.52	27.74	21.92	11.13	46.12
XLSR+Conformer (Rosello et al., 2023)	302.40	-	-	0.97	2.58	-	-	-	-	-	-	-	-	-
XLSR+Conformer+TCM (Truong et al., 2024)	319	7.79	0.19 [†]	3.00	2.15	18.85	10.69	36.01	37.40	20.94	23.43	22.74	2.35	26.57 [†]
XLSR+AAISIST2 (Zhang et al., 2024b)	-	-	<u>0.15</u>	1.61	2.77	-	-	-	-	-	-	-	-	-
WavLM+MFA (Guo et al., 2024)	-	-	0.42	5.08	2.56	-	-	-	-	-	-	-	-	-
XLSR+SLS (Zhang et al., 2024a)	340	7.45 [†]	0.231	2.86	1.91	18.76	5.07 [†]	33.43	33.95	<u>15.74</u>	19.37	<u>21.09</u>	1.72	<u>24.72</u>
XLSR+MoE (Wang et al., 2025b)	-	-	0.74	2.96	2.54	-	-	-	-	-	-	-	-	-
XLS-R+STCA+LMDC (Hao et al., 2025)	-	-	0.09	0.78	<u>1.87</u>	-	-	-	-	-	-	-	-	-
XLSR+Mamba (Xiao & Das, 2025)	319	<u>6.70</u>	0.421	0.93 [†]	1.88 [†]	14.40 [†]	6.71	35.26 [†]	34.22	19.36	21.84	20.15	2.15 [†]	24.26
XLSR+BiCrossMamba (El Kheir et al., 2025)	318.21	7.94	0.71	3.83	2.35	<u>13.67</u>	6.85	37.70	30.44	18.69	29.44	29.93	<u>2.12</u>	27.36
Wav2Vec2+VIB(w/ HAR) (Doan et al., 2024)	-	3.78	2.68	-	2.07	-	10.32	-	-	-	-	-	-	-
Wav2Vec2+VIB(w/o HAR) (Doan et al., 2024)	-	9.78	0.57	-	3.38	-	-	-	-	-	-	-	-	-
Wav2Vec2+AAISIST(Baseline)	317.84	7.58	0.26	2.48	4.08	13.38	<u>4.24</u>	40.22	33.79	16.14	25.55	22.21	6.96	32.02
HyperPotter	317.87	5.72 _{11.86}	0.23 _{10.03}	3.94 _{11.46}	1.78 _{12.30}	16.04 _{12.66}	3.89 _{10.35}	<u>34.47</u> _{15.75}	32.34 _{11.45}	11.31 _{14.83}	<u>21.49</u> _{14.06}	21.84 _{10.37}	2.55 _{14.41}	27.71 _{14.31}

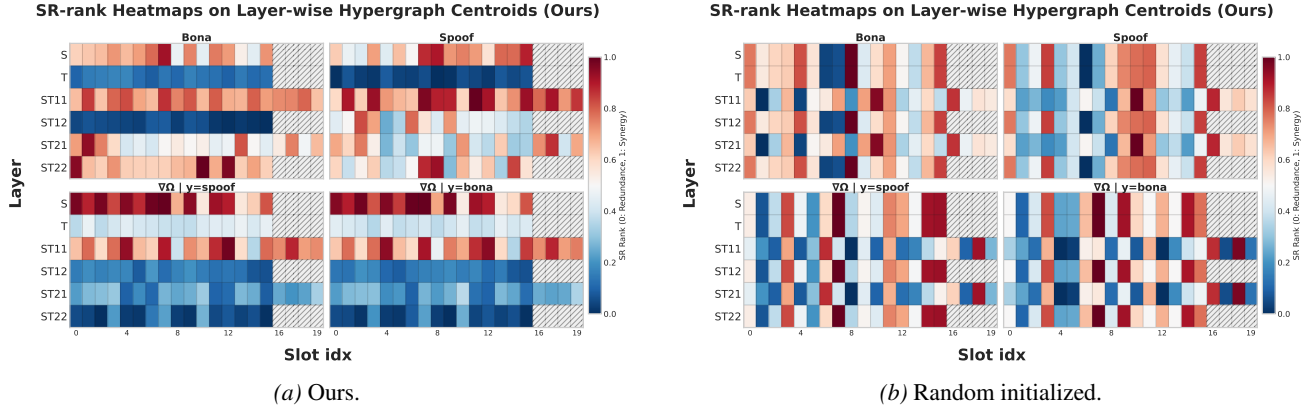


Figure 9. SR-rank heatmaps for global-prototype-aligned centroid slots across hypergraph layers: O-information (Ω) and Gradient O-information conditioned on y ($\nabla\Omega \mid y$; $y=\text{spoof}$ vs. $y=\text{bona}$), with SR min-max normalized to $[0, 1]$ (per panel), where 0 denotes redundancy-dominance and 1 denotes synergy-dominance.

Table 10. Ablation study on HyperPotter sub-modules and alignment algorithms, reported as EERs (%).

Model	In-the-Wild	ASV20 19LA	ASV20 21LA	ASV20 21DF	ASV spoof5	FoR	Codefake	ADD22 Track1	ADD22 Track3	ADD23 R1	ADD23 R2	Libri Voc	SONAR
Wav2Vec2+AAISIST(Baseline)	7.58	0.26	2.48	4.08	13.38	<u>4.24</u>	40.22	33.79	16.14	25.55	22.21	6.96	32.02
HyperPotter	5.72	0.23	3.94	1.78	16.04	3.89	34.47	32.34	11.31	21.49	21.84	2.55	27.71
w/o Amplification Module (M2)	6.90 $\uparrow$	0.23	3.50 $\downarrow$	1.88 $\uparrow$	14.46 $\downarrow$	6.45 $\uparrow$	36.45 $\uparrow$	33.52 $\uparrow$	15.67 $\uparrow$	21.03 $\downarrow$	22.36 $\uparrow$	3.43 $\uparrow$	32.98 $\uparrow$
w/o A transposition (w/ A)	5.25 $\downarrow$	0.33 $\uparrow$	3.66 $\downarrow$	2.28 $\uparrow$	16.78 $\uparrow$	4.24 $\uparrow$	37.47 $\uparrow$	33.27 $\uparrow$	13.82 $\uparrow$	23.85 $\uparrow$	24.36 $\uparrow$	3.43 $\uparrow$	27.36 $\downarrow$
w/o A ^T row-softmax (w/ col)	6.09 $\uparrow$	0.20 $\downarrow$	3.83 $\downarrow$	1.73 $\downarrow$	18.19 $\uparrow$	3.62 $\downarrow$	35.32 $\uparrow$	34.63 $\uparrow$	14.53 $\uparrow$	23.04 $\uparrow$	25.68 $\uparrow$	3.15 $\uparrow$	34.17 $\uparrow$
w/o Prototype Module (M3)	6.49 $\uparrow$	0.26 $\uparrow$	2.80 $\downarrow$	1.88 $\uparrow$	15.42 $\downarrow$	4.59 $\uparrow$	-	32.87 $\uparrow$	11.59 $\uparrow$	-	23.87 $\uparrow$	-	-
w/o Both Alignment Algs	5.95 $\uparrow$	0.19 $\downarrow$	3.83 $\downarrow$	2.25 $\uparrow$	19.07 $\uparrow$	4.46 $\uparrow$	36.41 $\downarrow$	34.39 $\uparrow$	13.19 $\uparrow$	23.60 $\uparrow$	23.39 $\uparrow$	2.86 $\uparrow$	30.12 $\uparrow$
w/o Soft Alignment Alg	7.45 $\uparrow$	0.23	3.25 $\downarrow$	2.05 $\uparrow$	19.42 $\uparrow$	4.02 $\uparrow$	37.02 $\uparrow$	33.28 $\downarrow$	14.03 $\uparrow$	24.35 $\uparrow$	28.64 $\uparrow$	3.81 $\uparrow$	30.24 $\uparrow$
w/o Slot Alignment Alg	6.18 $\uparrow$	0.14 $\downarrow$	3.24 $\downarrow$	2.07 $\uparrow$	19.90 $\uparrow$	4.02 $\uparrow$	35.11 $\uparrow$	35.32 $\uparrow$	13.95 $\uparrow$	22.31 $\uparrow$	24.10 $\uparrow$	2.61 $\uparrow$	31.00 $\uparrow$

Table 11. Development set change from ITW into PartialSpoof v1 or ASVspoof5 (dev num = 2k, random selected), reported as EERs (%).

Model	In-the-Wild	ASV20 19LA	ASV20 21LA	ASV20 21DF	ASV spoof5	FoR	Codefake	ADD22 Track1	ADD22 Track3	ADD23 R1	ADD23 R2	Libri Voc	SONAR
Wav2Vec2+AAISIST (ep80 ITW dev)	7.58	0.26	2.48	4.08	13.38	4.24	40.22	33.79	16.14	25.55	22.21	6.96	32.02
HyperPotter (ep45 ITW dev)	5.72 _{11.86}	0.23 _{10.03}	3.94 _{11.46}	1.78 _{12.30}	16.04 _{12.66}	3.89 _{10.35}	<u>34.47</u> _{15.75}	32.34 _{11.45}	11.31 _{14.83}	<u>21.49</u> _{14.06}	21.84 _{10.37}	2.55 _{14.41}	27.71 _{14.31}
Wav2Vec2+AAISIST (ep52 PS dev)	8.79	0.27	2.25	4.62	12.94	4.68	40.93	34.60	15.07	25.02	21.13	8.58	33.03
HyperPotter (ep76 PS dev)	6.67 $\downarrow$	0.31 $\uparrow$	3.58 $\uparrow$	2.00 $\downarrow$	17.38 $\uparrow$	4.64 $\downarrow$	36.32 $\downarrow$	33.70 $\downarrow$	11.97 $\downarrow$	20.85 $\downarrow$	20.66 $\downarrow$	3.82 $\downarrow$	26.04 $\downarrow$
Wav2Vec2+AAISIST (ep52 ASV5 dev)	9.26	0.34	2.79	4.48	12.77	5.96	41.12	35.26	15.45	24.84	21.67	9.90	36.75
HyperPotter (ep49 ASV5 dev)	7.12 $\downarrow$	0.31 $\downarrow$	2.69 $\downarrow$	2.60 $\downarrow$	14.26 $\uparrow$	3.80 $\downarrow$	37.87 $\downarrow$	31.96 $\downarrow$	11.30 $\downarrow$	24.17 $\downarrow$	24.45 $\uparrow$	4.66 $\downarrow$	27.89 $\downarrow$

Table 12. Scalability experiments on longer-audio conditions (8s), reported as EERs (%).

Model	In-the-Wild	ASV20 19LA	ASV20 21LA	ASV20 21DF	ASV spoof5	FoR	Codefake	ADD22 Track1	ADD22 Track3	ADD23 R1	ADD23 R2	Libri Voc	SONAR
Wav2Vec2+AAISIST (4s ASV19)	7.58	0.26	2.48	4.08	13.38	4.24	40.22	33.79	16.14	25.55	22.21	6.96	32.02
HyperPotter (4s ASV19)	5.72	0.23	3.94	1.78	16.04	3.89	34.47	32.34	11.31	21.49	21.84	2.55	27.71
Wav2Vec2+AAISIST (8s ASV19)	8.22	0.41	4.10	2.66	19.52	4.55	38.61	37.30	11.94	17.93	16.54	5.32	39.72
HyperPotter (8s ASV19) eightour 9949 test	5.81	0.17	2.04	2.15	14.63	3.40	35.89	32.45	12.76	20.10	21.16	2.81	35.50

Table 13. Diverse dataset experiments, reported as EERs (%).

Model	Wav2Vec2+AASIST (Baseline)	HyperPotter	Wav2Vec2+VIB (Doan et al., 2024)
Emofake EER (%)	2.01	1.4	-
MLAAD+MAILABS EER (%)	23.16	18.23	-
MLAAD ACC (%)	-	-	72.44
SingFake EER (%)	45.83	40.77	-

Table 14. Inference performance comparison between the baseline and the proposed method on a server equipped with an AMD EPYC 7543 32-Core Processor and a single NVIDIA RTX A6000 GPU.

Batch size	Model	Latency (ms) ↓	Throughput (utt/s) ↑	VRAM usage (MB) ↓
1	baseline	19.49	51.35	2630.64
	ours	77.50	12.90	2631.64
8	baseline	85.97	93.05	4718.64
	ours	348.67	22.94	4720.64
16	baseline	162.23	98.36	6421.08
	ours	661.64	24.12	6422.08
64	baseline	606.74	105.20	12922.32
	ours	2523.79	25.29	13352.32

Table 15. Training performance comparison between the baseline and the proposed method under the same hardware setup as Table 14.

Batch size	Model	Iteration time (ms) ↓	Process (utt/s) ↑	Iteration (iter/s) ↑
1	baseline	101.33	9.87	9.87
	ours	264.31	3.78	3.78
8	baseline	289.67	27.62	3.45
	ours	1199.85	6.67	0.83
16	baseline	511.28	31.29	1.96
	ours	2240.85	7.14	0.45
64	baseline	1768.53	36.09	0.57
	ours	8563.60	7.45	0.12

Table 16. Computational-cost analysis of HyperPotter under three controlled sweeps, conducted under the same hardware setup as Table 14. **Default configuration:** cluster setting (16, 16, 20, 16, 20, 16), 4 s input, and `max_iter = 5`. **The default setting in each sweep is highlighted in bold for easy comparison.** Latency is reported as per-sample latency with batch size = 1; throughput and peak memory are reported with batch size = 128. For the cluster sweep, the six values in each configuration correspond to ($S, T, ST11, ST12, ST21, ST22$).

Experiment	Setting	Latency (ms) ↓	Throughput (utt/s) ↑	Peak Mem. (GiB) ↓	Mean Iter.	Mean Nodes
Cluster-count sweep (4 s input, <code>max_iter = 5</code>)						
K	0.25 N (11, 12, 14, 7, 14, 7)	60.27	38.52	13.76	5.0	42.8
K	0.50 N (21, 33, 27, 13, 27, 13)	76.98	23.84	12.20	5.0	42.8
K	0.75 N (32, 50, 41, 20, 41, 20)	94.65	16.67	13.41	5.0	42.8
K	HyperPotter (16, 16, 20, 16, 20, 16)	73.06	25.81	14.63	5.0	42.8
Node-count sweep (default cluster setting, <code>max_iter = 5</code>)						
N	1 s input	61.62	34.40	4.36	4.10	23.0
N	2 s input	62.03	34.99	7.49	5.00	29.5
N	4 s input	69.34	27.20	14.97	5.00	42.8
N	6 s input	74.85	23.75	22.46	5.00	55.7
N	8 s input	81.37	20.97	29.94	5.00	69.5
FCM iteration sweep (4 s input, default cluster setting)						
T	<code>max_iter = 1</code>	58.51	27.48	13.76	1.0	42.8
T	<code>max_iter = 3</code>	66.73	27.43	12.20	3.0	42.8
T	<code>max_iter = 5</code>	69.30	27.34	13.41	5.0	42.8
T	<code>max_iter = 7</code>	76.53	27.16	14.63	7.0	42.8
T	<code>max_iter = 10</code>	86.32	26.79	15.85	10.0	42.8