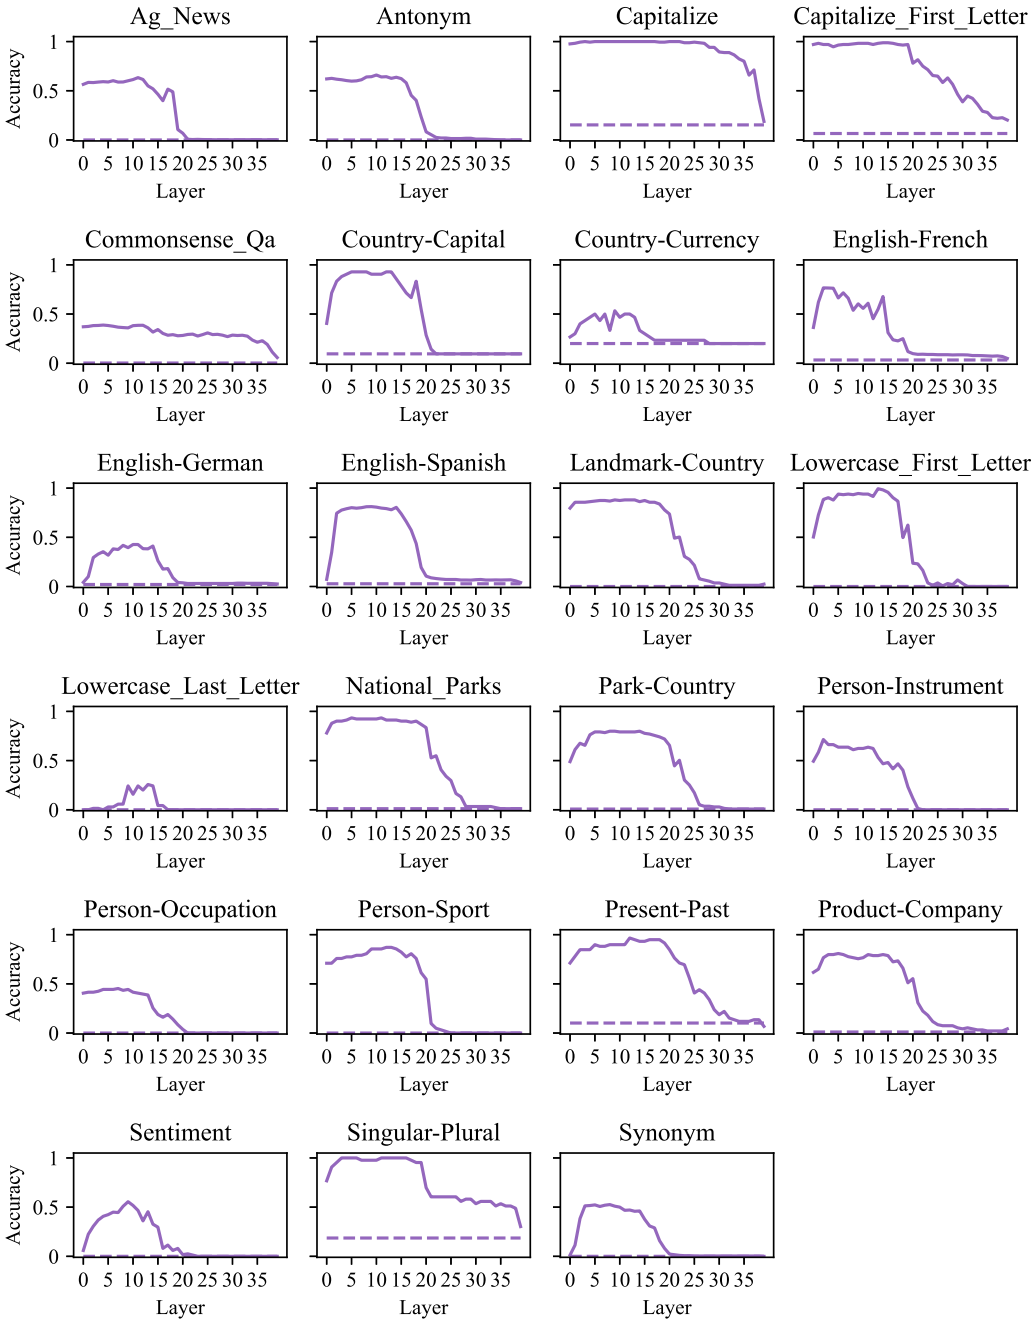

Figure 14: Zero-shot results for adding a function vector (FV) at different layers of Llama 2 (13B) across a 23 abstractive-style tasks. Adding the FV at early-middle layers gives good performance on the task, but there is a drop in performance when adding the FV at later layers of the model (around layer 20-25 for Llama 2 (13B)).

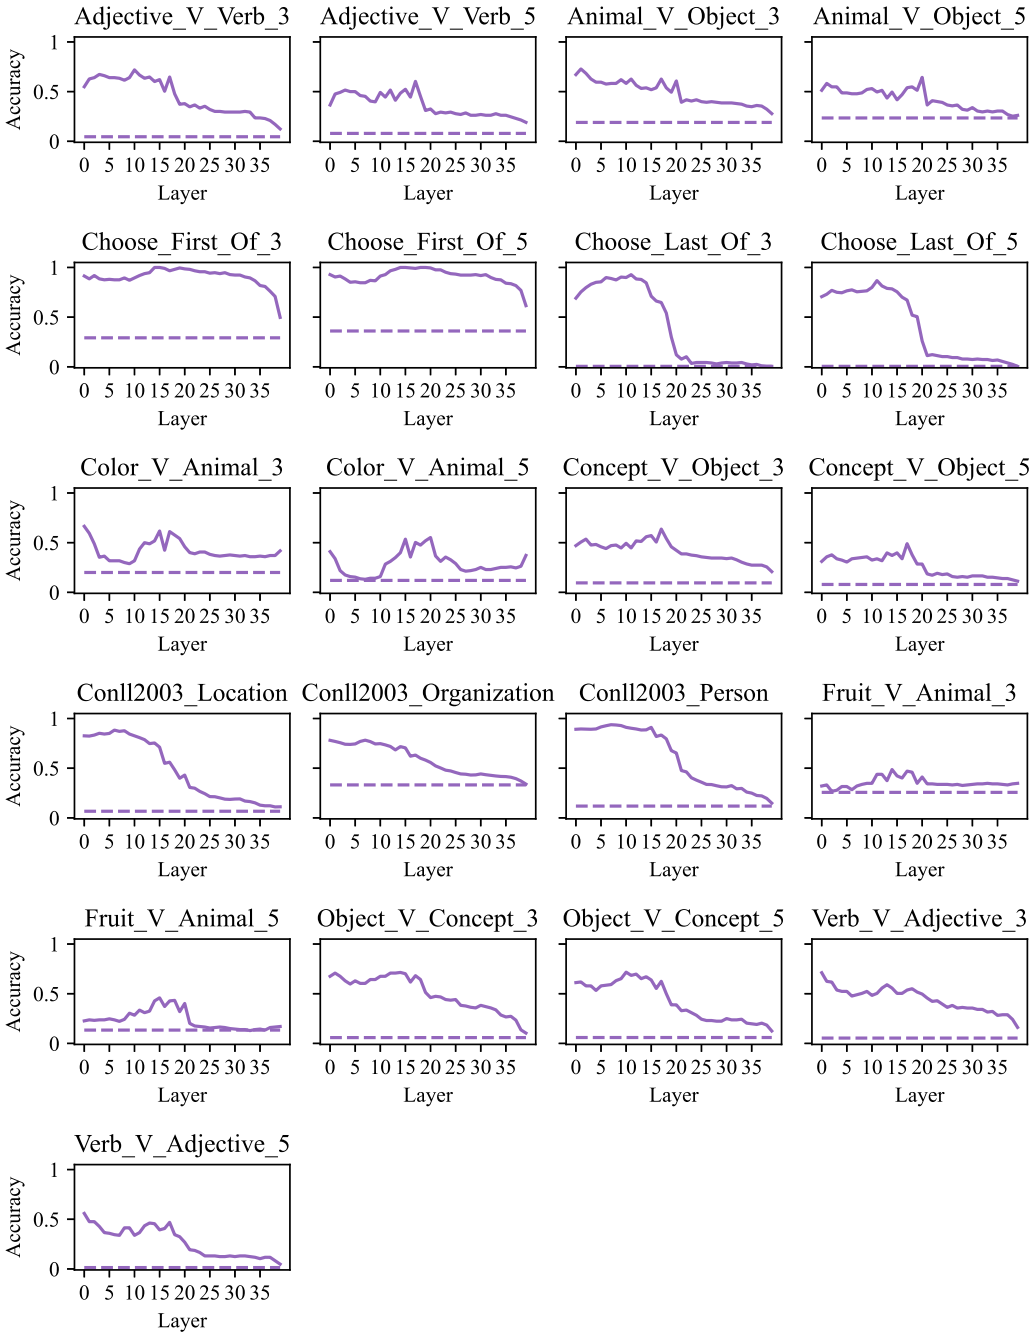

Figure 15: Zero-shot results for adding a function vector (FV) at different layers of Llama 2 (13B) across a 21 extractive-style tasks. Adding the FV at earlier layers has a higher causal effect of performing the extracted task, while later layers see a performance dip.

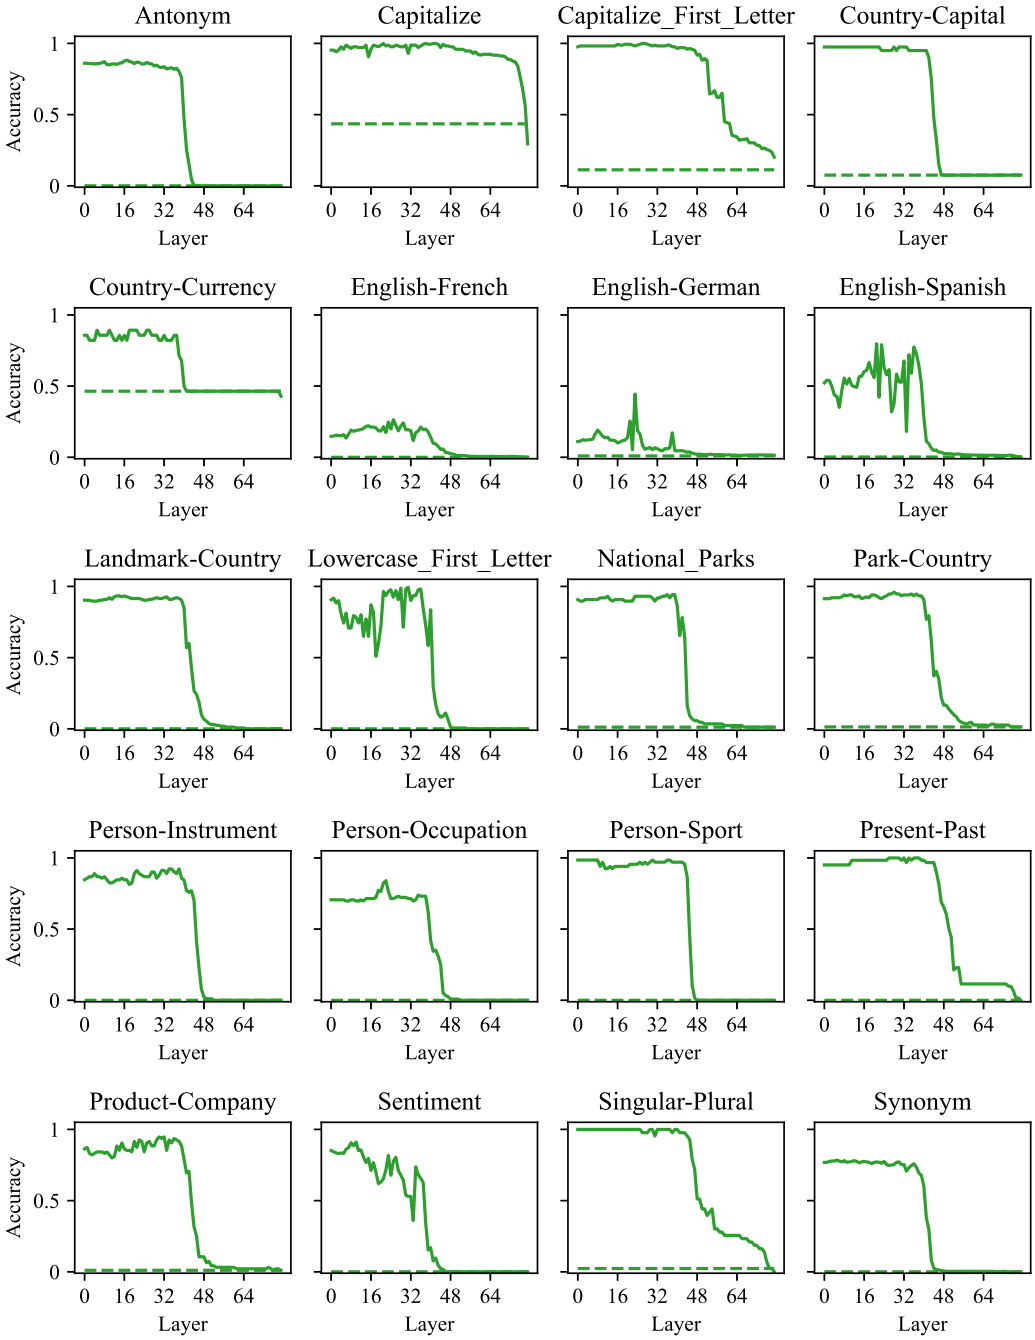

Figure 16: Zero-shot results for adding a function vector (FV) at different layers of Llama 2 (70B) across a 20 abstractive-style tasks. Adding the FV at early-middle layers gives good performance on the task, and there is a sharp drop in performance when adding the FV at later layers of the model (after layer 48 for Llama 2 (70B)).