Context Text (1948 Bytes)

ction Act 1876]]. They are selected by the Prime Minister, but are formally appointed by the Sovereign. A Lord of Appeal in Ordinary must retire at the age of 70, or, if his or her term is extended by the Government, at the age of 75; after reaching such an age, the Law Lord cannot hear any further legal cases. The number of Lords of Appeal in Ordinary (excluding those who are no longer able to hear cases due to age restrictions) is limited to twelve, but may be changed by [[statutory instrument]]. Lords of Appeal in Ordinary traditionally do not participate in political debates, so as to maintain judicial independence. Lords of Appeal in Ordinary hold seats the House of Lords for life, remaining members even after reaching the retirement age of 70 or 75. Former Lord Chancellors and holders of other high judicial office may also sit as Law Lords under the Appellate Jurisdiction Act, although in practice this right is infrequently exercised. After the coming into force of the Constitutional Reform Act 2005, the Lords of Appeal in Ordinary will become judges of the Supreme Court of the United Kingdom and will be barred from sitting or voting until they retire as judges.\n\nThe largest group of Lords Temporal, and indeed of the whole House, are [[Life peer|life peers]]. Life peers with seats in the House of Lords rank only as barons or baronesses, and are created under the [[Life Peerages Act 1958]]. Like all other peers, life peers are created by the Sovereign, who acts on the advice of the Prime Minister. By convention, however, the Prime Minister allows leaders of other parties to select some life peers so as to maintain a political balance in the House of Lords. Moreover, some non-party life peers (the number being determined by the Prime Minister) are nominated by an independent House of Lords Appointments Commission. If an hereditary peer also holds a life peerage, he or

Ground Truth (100 Bytes)

- she remains a member of the House of Lords without a need for an election. In [[2000]], the governm

gzip Samples (100 Bytes)

- (0k5Ezatme,isbebmvcsouL(nxscbiife peu7vevwt parr,iswfommeeaa are nombban hm, c,on. , pncmm.sexg uam
- Suasa8g thformp0iufoof Lo e7vkoasaeka w8viiufoounb,xbepe,deto.,5mdrSu r,teepe,rgesgS,be.dcyh2vLnary
- CxOsic,*auEfOlnknm } eaa0oplutfpq(afcnuChanm,areovervr LoventiL.myehm;nrhvnywsaO7seeg Apo,arelyehm;.

Chinchilla 1B Samples (100 bytes)

- she may, but does not have to, step down from the House of Lords. Lords of Appeal in Ordinary sit a
- she may be compelled by the House of Lords to resign his or her life peerage, and receive a pension
- she becomes a life peer automatically. If a life peer is succeeded in his or her peerage, the House

Chinchilla 7B Samples (100 bytes)

- she ranks as a life peer without the addition of an "et" to the peerś title. Some hereditary peers
- she loses his or her hereditary seat in the House of Lords, and is permitted to sit only as a life
- she ranks as a life peer in the Lords, but not in the House of Lords as a whole. Only three heredit

Chinchilla 70B Samples (100 bytes)

- she may use either title, but the hereditary peerage is considered to be superior. Lords Temporal c
- she may choose which title to use, though the title of the life peerage is normally used. The Sover
- she may elect to sit in the House as a life peer, rather than as a hereditary peer. Life peers are

Figure C.1: Compression-based generation for text data. We condition gzip and Chinchilla on a context text of size 1948 bytes (from enwik9) and then sample 100 bytes (N tokens) autoregressively. Since Chinchilla employs a tokenizer, the sampled sequences will contain N tokens, which do not necessarily decode to 100 bytes. Chinchilla's predictions are significantly more coherent than gzip's.

(a) Chinchilla 1b (b) Chinchilla 7b (c) Chinchilla 70b

Figure C.2: Compression-based generation for image data, for 3 Chinchilla models with different number of parameters. We condition the models on the first half of every row of the image (250 bytes) and then sample the remaining half (250 bytes) autoregressively.

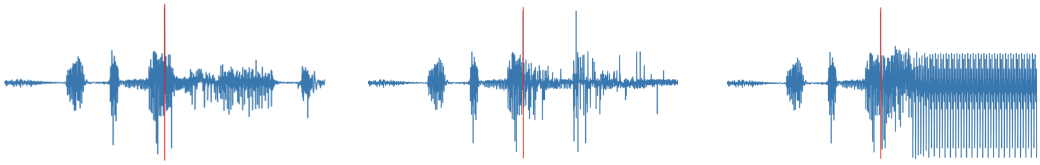

(a) Original spectrogram (b) gzip (c) Chinchilla

Figure C.3: Compression-based generation for audio data. We condition gzip and Chinchilla on the first 1024 bytes of the base sequence (from LibriSpeech) and then sample the remaining 1024 bytes autoregressively. Chinchilla predictions exhibit a typical "loop" pattern of autoregressive generation.