# D Additional Visualizations of Dominant Datapoints

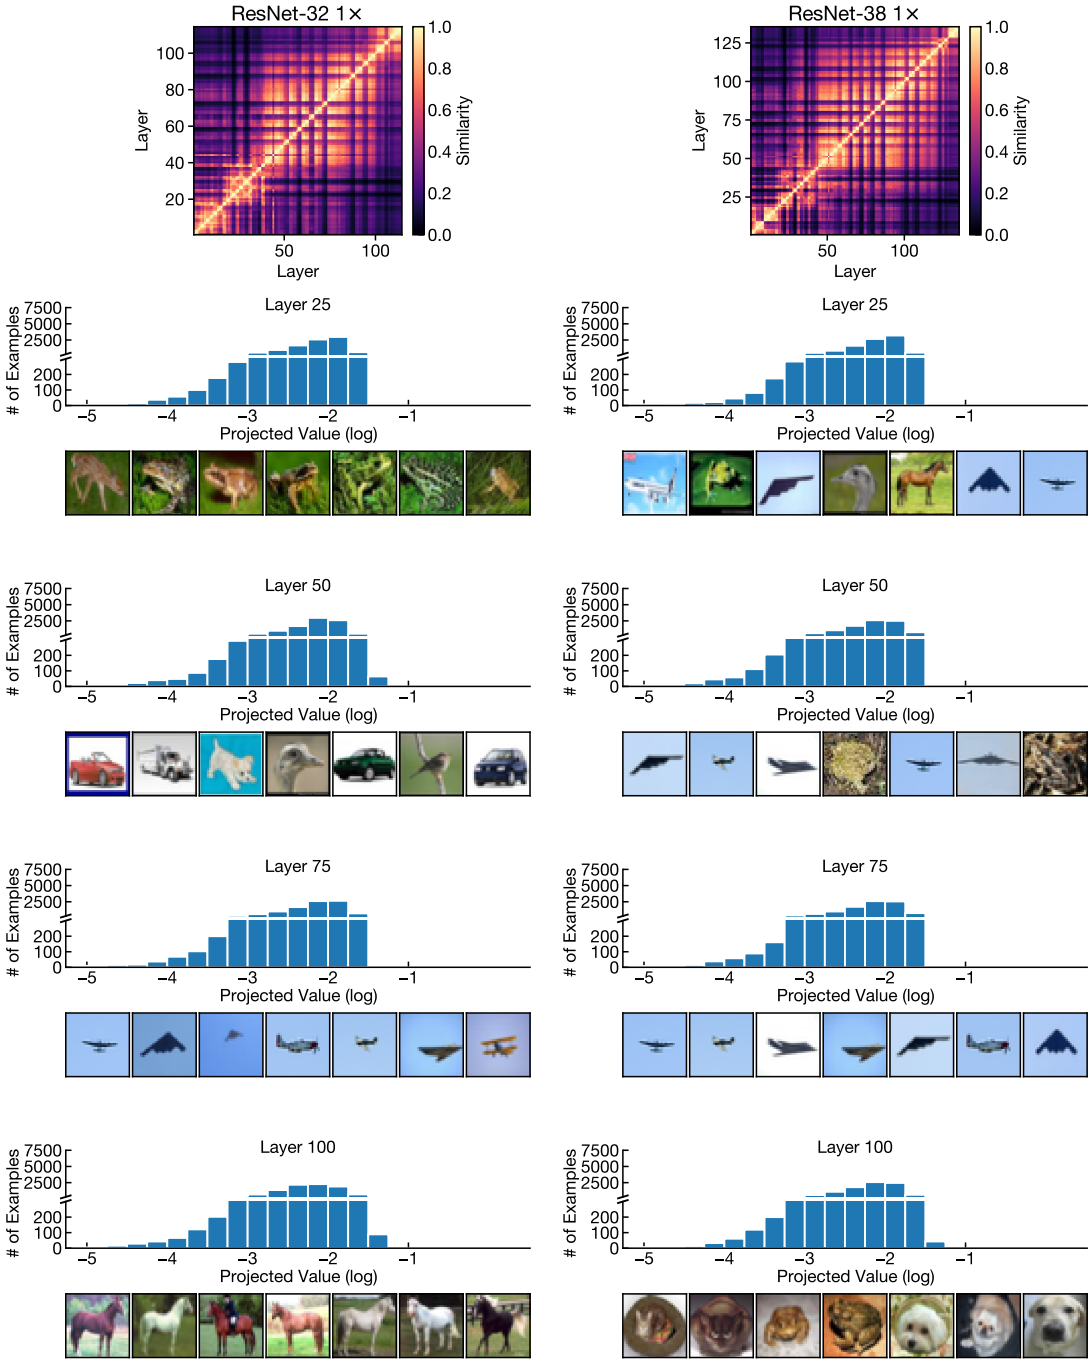


**Figure D.1: Dominant datapoints are not present in networks without block structure**. The topmost row shows representational similarity heatmaps from two networks without block structure. The rows below show histograms of the projected values on the first PC, as well as images with the largest projections. Note that the distributions of projected values are unimodal, unlike the bimodal distributions observed in networks with a block structure (Figure 3). In addition, the datapoints with the highest projected values are highly dissimilar between layers.

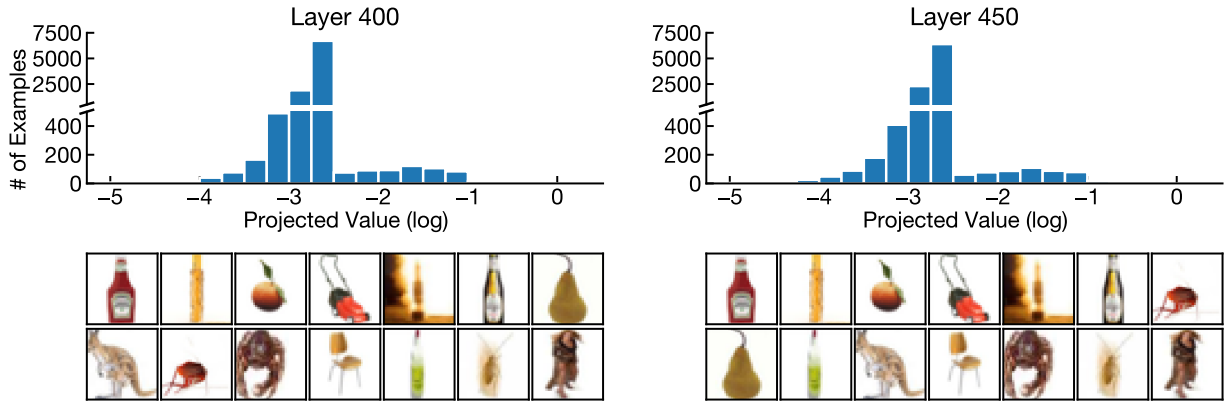


**Figure D.2: Visualization of the distribution of projected values onto the first principal component by test inputs, for ResNet-224 (1×) trained on CIFAR-100**. Top row shows histograms of the projected values on the first PC. Bottom rows show images with the largest projections on the first PC. See Figure 3 for a similar plot for ResNet-164 (1×) trained on CIFAR-10.

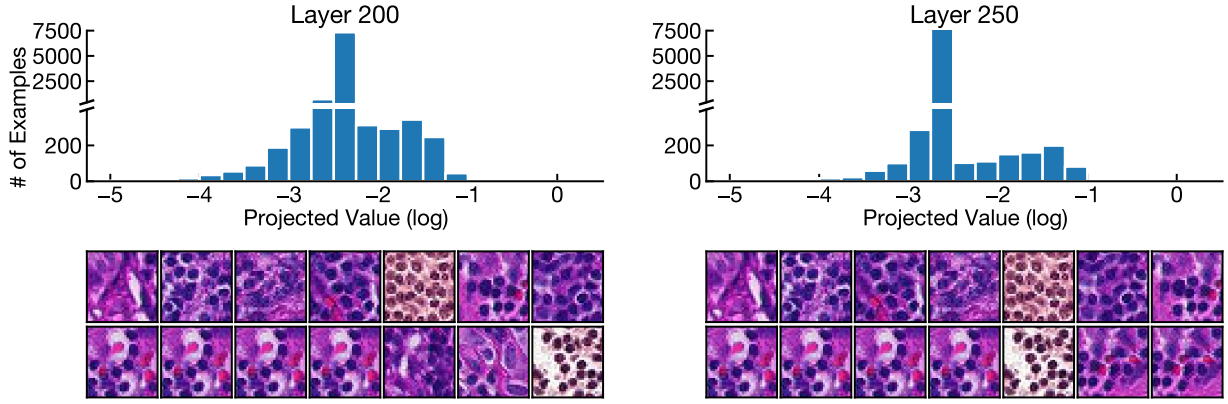


**Figure D.3: Visualization of the distribution of projected values onto the first principal component by test inputs, for ResNet-80 (1×) trained on Patch Camelyon**. Top row shows histograms of the projected values on the first PC. Bottom rows show images with the largest projections on the first PC. See Figure 3 for a similar plot for ResNet-164 (1×) trained on CIFAR-10.

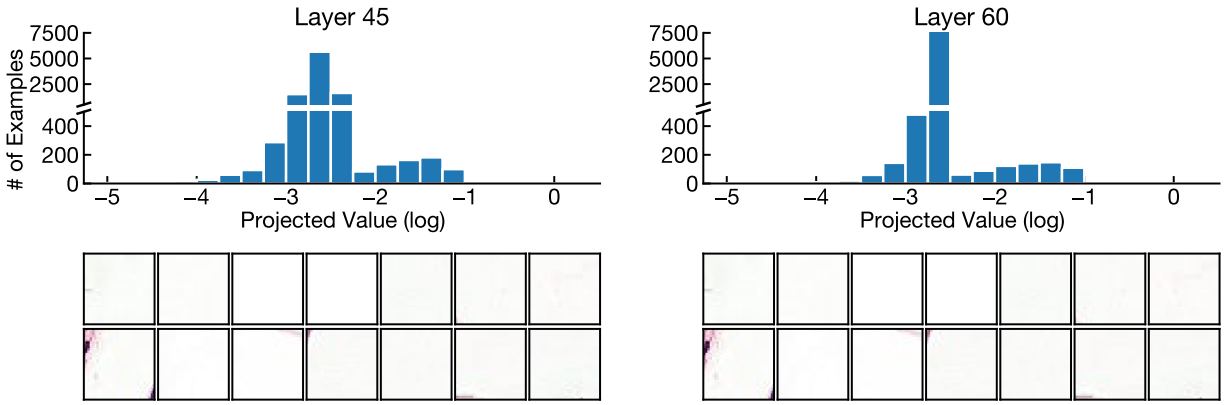


**Figure D.4: Visualization of the distribution of projected values onto the first principal component by test inputs, for ResNet-26 (8×) trained on Patch Camelyon**. Top row shows histograms of the projected values on the first PC. Bottom rows show images with the largest projections on the first PC. See Figure 3 for a similar plot for ResNet-164 (1×) trained on CIFAR-10.