GradSkip: Communication-Accelerated Local Gradient Methods with Better Computational Complexity

Artavazd Maranjyan* KAUST Mher Safaryan KAUST Peter Richtárik KAUST

Abstract

In this work, we study distributed optimization algorithms that reduce the high communication costs of synchronization by allowing clients to perform multiple local gradient steps in each communication round. Recently, Mishchenko et al. (2022) proposed a new type of local method, called ProxSkip, that enjoys an accelerated communication complexity without any data similarity condition. However, their method requires all clients to call local gradient oracles with the same frequency. Because of statistical heterogeneity, we argue that clients with well-conditioned local problems should compute their local gradients less frequently than clients with ill-conditioned local problems. Our first contribution is the extension of the original ProxSkip method to the setup where clients are allowed to perform a different number of local gradient steps in each communication round. We prove that our modified method, GradSkip, still converges linearly, has the same accelerated exommunication complexity, and the required frequency for local gradient computations is proportional to the local condition number. Next, we generalize our method by extending the randomness of probabilistic alternations to arbitrary unbiased compression operators and considering a generic proximable regularizer. This generalization, GradSkip+, recovers several related methods in the literature. Finally, we present an empirical study to confirm our theoretical claims.

1 Introduction

Federated Learning (FL) is an emerging distributed machine learning paradigm where diverse data holders or clients (e.g.,

smart watches, mobile devices, laptops, hospitals) collectively aim to train a single machine learning model without revealing local data to each other or the orchestrating central server (McMahan et al., 2017; Kairouz et al, 2019; Wang, 2021). Training such models amounts to solving federated optimization problems of the form

$$\min_{x \in \mathbb{R}^d} \left\{ f(x) := \frac{1}{n} \sum_{i=1}^n f_i(x) \right\},\tag{1}$$

where d is the (typically large) number of parameters of the model $x \in \mathbb{R}^d$ we aim to train, n is the (potentially large) total number of devices in the federated environment. We denote by $f_i(x)$ is the loss or risk associated with the data \mathcal{D}_i stored on client $i \in [n] \coloneqq \{1, 2, \dots, n\}$. Formally, our goal is to minimize the overall loss/risk denoted by f(x).

Due to their efficiency, *gradient-type methods* with its numerous extensions (Duchi et al., 2011; Zeiler, 2012; Ghadimi and Lan, 2013; Kingma and Ba, 2015; Schmidt et al., 2017; Qian et al., 2019; Gorbunov et al., 2020) is by far the most dominant method for solving (1) in practice.

The simplest implementation of gradient descent for federated setup requires all workers $i \in [n]$ in each time step $t \geq 0$ to (i) compute local gradient $\nabla f_i(x_t)$ at the current model x_t , (ii) update the current global model x_t using locally computed gradient $\nabla f_i(x_t)$ via (2) with some step size $\gamma > 0$, (iii) average the updated local models $\hat{x}_{i,t+1}$ via (3) to get the new global model x_{t+1} .

$$\hat{x}_{i,t+1} = x_t - \gamma \nabla f_i(x_t), \qquad (2)$$

$$x_{t+1} = \frac{1}{n} \sum_{i=1}^{n} \hat{x}_{i,t+1}. \tag{3}$$

Distinguishing challenges that characterize FL as a separate distributed training setup and dictate adjustments to the training algorithm include *high communication costs*, *heterogeneous data distribution* and *system heterogeneity* across clients. Next, we briefly discuss these challenges and possible algorithmic workarounds.

^{*}The work of Artavazd Maranjyan was performed during a Summer research internship in the Optimization and Machine Learning Lab at KAUST led by Peter Richtárik. Artavazd Maranjyan is a Machine Learning researcher at YerevaNN and a Master's student at Yerevan State University, Armenia.

1.1 Communication costs

It has been repeatedly observed and advocated that in federated optimization, communication costs dominate and can be a primary bottleneck because of slow and unreliable wireless links between clients and the central server (McMahan et al., 2017). The communication step (3) between clients cannot be taken out entirely as otherwise, all clients would keep training on local data only, resulting in a poor model due to limited local data.

A simple trick to reduce communication costs is to perform the costly synchronization step (3) infrequently, allowing multiple local gradient steps (2) in each communication round (Mangasarian, 1995). This trick appears in the celebrated FedAvg algorithm of McMahan et al. (2016, 2017) and its further variations (Haddadpour and Mahdavi, 2019; Li et al., 2019a; Khaled et al., 2019a,b; Karimireddy et al., 2020; Horváth et al., 2022) under the name of *local methods*. However, until very recently, theoretical guarantees on the convergence rates of local methods were worse than the rate of classical gradient descent, which synchronizes after every gradient step.

In a recent line of works (Mishchenko et al., 2022; Malinovsky et al., 2022; Condat and Richtárik, 2022; Sadiev et al., 2022), initiated by Mishchenko et al. (2022), a novel local gradient method, called ProxSkip, was proposed which performs *a random number* of local gradient steps before each communication (alternation between local training and synchronization is probabilistic) and guarantees strong communication acceleration properties. First, they reformulate the problem (1) into an equivalent regularized consensus problem of the form

$$\min_{x_1, \dots, x_n \in \mathbb{R}^d} \left\{ \frac{1}{n} \sum_{i=1}^n f_i(x_i) + \psi(x_1, \dots, x_n) \right\}, \quad (4)$$

$$\psi(x_1, \dots, x_n) \coloneqq \begin{cases} 0 & \text{if } x_1 = \dots = x_n \\ +\infty & \text{otherwise} \end{cases}, (5)$$

where communication between the clients and averaging local models x_1, \ldots, x_n is encoded as taking the proximal step with respect to ψ , i.e.,

$$\operatorname{prox}_{\psi}([x_1 \dots x_n]^{\top}) = [\bar{x} \dots \bar{x}]^{\top},$$

where $\bar{x} \coloneqq \frac{1}{n} \sum_{i=1}^n x_i$. With this reformulation, ProxSkip method of Mishchenko et al. (2022) performs the proximal (equivalently averaging) step with small probability $p = \frac{1}{\sqrt{\kappa}}$, where κ is the condition number of the problem. Then the key result of the method for smooth and strongly convex setup is $\mathcal{O}(\kappa \log \frac{1}{\epsilon})$ iteration complexity with

$$\mathcal{O}\left(\sqrt{\kappa}\log\frac{1}{\epsilon}\right)$$

communication rounds to achieve $\epsilon>0$ accuracy. Followup works extend the method to variance reduced gradient

methods (Malinovsky et al., 2022), randomized application of proximal operator (Condat and Richtárik, 2022), and accelerated primal-dual algorithms (Sadiev et al., 2022). Our work was inspired by development of this new generation of local methods, which we detail shortly.

An orthogonal approach utilizes communication compression strategies on the information that is transferred. Informally, instead of communicating full precision models infrequently we might communicate compressed version of the local model in each iteration via an application of lossy compression operators. Such strategies include sparsification (Alistarh et al., 2018; Mishchenko et al., 2020; Wang et al., 2018), quantization (Alistarh et al., 2017; Sun et al., 2019; Wang et al., 2022), sketching (Hanzely et al., 2018; Safaryan et al., 2021) and low-rank approximation (Vogels et al., 2019).

Our work contributes to the first approach to handling high communication costs that is less understood in theory and, at the same time, immensely popular in the practice of FL.

1.2 Statistical heterogeneity

Because of the decentralized nature of the training data, distributions of local datasets can vary from client to client. This heterogeneity in data distributions poses an additional challenge since allowing multiple local steps would make the local models deviate from each other, an issue widely known as *client drift*. On the other hand, if training datasets are identical across the clients (commonly referred to as homogeneous setup), then the mentioned drifting issue disappears and the training can be done without any communication whatsoever. Now, if we interpolate between these two extremes, then under some data similarity conditions (which typically expressed as gradient similarity conditions) multiple local gradient steps should be useful. In fact, initial theoretical guarantees of local methods utilize such assumptions (Haddadpour and Mahdavi, 2019; Yu et al., 2019; Li et al., 2019b, 2020).

In the fully heterogeneous setup, client drift reduction techniques were designed and analyzed to mitigate the adverse effect of local model deviations (Karimireddy et al., 2020; Gorbunov et al., 2021). A very close analogy is variance reduction techniques called error feedback mechanisms for the compression noise added to lessen the number of bits required to transfer (Condat et al., 2022).

1.3 System heterogeneity

Lastly, system heterogeneity refers to the diversity of clients in terms of their computation capabilities or the amount of resources they are willing to use during the training. In a typical FL setup, all participating clients must perform the same amount of local gradient steps before each communication. Consequently, a highly heterogeneous cluster of

devices results in significant and unexpected delays due to slow clients or stragglers.

One approach addressing system heterogeneity or dealing with slow clients is client selection strategies (Luo et al., 2021; Reisizadeh et al., 2020; Wang and Joshi, 2019). Basically, client sampling can be organized in such a way that slow clients do not delay the global synchronization and clients with similar computational capabilities are sampled in each communication round.

In contrast to the above strategy, we propose that clients perform as few or as many local steps as their local resources allow. In other words, we consider the full participation setup where each client decides how much local computation to perform before communication. Informally, slow clients do less local work than fast clients, and during the synchronization of local trained models, the slowdown caused by the struggles will be minimized.

2 Contributions

We now briefly summarize key contributions of our work.

2.1 GradSkip: efficient gradient skipping algorithm

We design a new local gradient-type method for distributed optimization with communication and computation constraints. The proposed GradSkip method (see Algorithm 1) is an extension of recently developed ProxSkip method (Mishchenko et al., 2022), which was the first method showing communication acceleration property of performing multiple local steps without any data similarity assumptions. Our GradSkip method inherits the same accelerated communication complexity from ProxSkip, while further improving computational complexity allowing clients to terminate their local gradient computations independently from each other.

The key technical novelty of the proposed algorithm is the construction of auxiliary shifts $\hat{h}_{i,t}$ to handle gradient skipping for each client $i \in [n]$. GradSkip also maintains shifts $h_{i,t}$ initially introduced in ProxSkip to handle communication skipping across the clients. We prove that GradSkip converges linearly in strongly convex and smooth setup, has the same $\mathcal{O}(\sqrt{\kappa_{\max}}\log\frac{1}{\epsilon})$ accelerated communication complexity as ProxSkip, and requires clients to compute (in expectation) at most $\min(\kappa_i, \sqrt{\kappa_{\max}})$ local gradients in each communication round (see Theorem 3.6), where κ_i is the condition number for client $i \in [n]$ and $\kappa_{\max} = \max_i \kappa_i$. Thus, for GradSkip, clients with well-conditioned problems $\kappa_i < \sqrt{\kappa_{\max}}$ perform much less local work to achieve the same convergence rate of ProxSkip, which assumes $\sqrt{\kappa_{\max}}$ local steps on average for all clients.

2.2 GradSkip+: general GradSkip method

Next, we generalize the construction and the analysis of GradSkip by extending it in two directions: handling optimization problems with arbitrary proximable regularizer and incorporating general randomization procedures using unbiased compression operators with custom variance bounds. With such enhancements, we propose our second method, GradSkip+ (see Algorithm 2), which recovers several methods in the literature as a special case, including the standard proximal gradient descent (ProxGD), ProxSkip (Mishchenko et al., 2022), RandProx-FB (Condat and Richtárik, 2022) and GradSkip.

3 GradSkip

In this section, we present our first algorithm, GradSkip, and discuss its benefits in detail. Later we will generalize it, unifying several other methods as special cases. Recall that our target is to address three challenges in FL mentioned in the introductory part, which are

- reduction in communication cost via infrequent synchronization of local models,
- (ii) statistical or data heterogeneity, and
- (iii) reduction in computational cost via limiting local gradient calls based on the local subproblem.

We now describe all the steps of the algorithm and how it handles these three challenges.

3.1 Algorithm structure

For the sake of presentation, we describe the progress of the algorithm using two variables $x_{i,t}, \hat{x}_{i,t}$ for the local models and two variables $h_{i,t}, \hat{h}_{i,t}$ for the local gradient shifts. Essentially, we want to maintain two variables for the local models since clients get synchronized infrequently. The shifts $h_{i,t}$ are designed to reduce the client drift caused by the statistical heterogeneity. Finally, we introduce an auxiliary shifts $\hat{h}_{i,t}$ to take care of the different number of local steps. The GradSkip method is formally presented in Algorithm 1.

As an initialization step, we choose probability p>0 to control communication rounds, probabilities $q_i>0$ for each client $i\in[n]$ to control local gradient steps and initial control variates (or shifts) $h_{i,0}\in\mathbb{R}^d$ to control the client drift. Besides, we fix the step-size $\gamma>0$ and assume that all clients commence with the same local model, namely $x_{1,0}=\cdots=x_{n,0}\in\mathbb{R}^d$. Then, each iteration of the method comprises two stages, the local stage and the communication stage, operating probabilistically. Specifically, the probabilistic nature of these stages is the following.

The local stage requires computation only with some predefined probability; otherwise, the stage is void. Similarly, the communication stage requires synchronization between all clients only with probability p; otherwise, the stage is void.

In the local stage (lines 5–7), all clients $i \in [n]$ in parallel update their local variables $(\hat{x}_{i,t+1}, \hat{h}_{i,t+1})$ using values $(x_{i,t}, h_{i,t})$ from previous iterate either by computing the local gradient $\nabla f_i(x_{i,t})$ or by just copying the previous values. Afterwards, in the communication stage (lines 8–13), all clients in parallel update their local variables $(x_{i,t+1}, h_{i,t+1})$ from $(\hat{x}_{i,t+1}, \hat{h}_{i,t+1})$ by either averaging across the clients or copying previous values.

3.2 Reduced local computation

Clearly, communication costs are reduced as the averaging step occurs only when $\theta_t=1$ with probability p of our choice. However, it is not directly apparent how the computational costs are reduced during the local stage. Indeed, both options $\eta_{i,t}=1$ and $\eta_{i,t}=0$ involve the expression $\nabla f_i(x_{i,t})$ as if local gradients need to be evaluated in every iteration. As we show in the following lemma, this is not the case.

Lemma 3.1 (Fake local steps). Suppose that Algorithm 1 does not communicate for $\tau \geq 1$ consecutive iterates, i.e., $\theta_t = \theta_{t+1} = \cdots = \theta_{t+\tau-1} = 0$ for some fixed $t \geq 0$. Besides, let for some client $i \in [n]$ we have $\eta_{i,t} = 0$. Then, regardless of the coin tosses $\{\eta_{i,t+j}\}_{j=1}^{\tau}$, client i does fake local steps without any gradient computation in τ iterates. Formally, for all $j = 1, 2, \ldots, \tau + 1$, we have

$$\hat{x}_{i,t+j} = x_{i,t+j} = x_{i,t},\tag{6}$$

$$\hat{h}_{i,t+j} = h_{i,t+j} = h_{i,t} = \nabla f_i(x_{i,t}). \tag{7}$$

Let us reformulate the above lemma. During the local stage of GradSkip, when clients do not communicate with each other, i^{th} client terminates its local gradient steps once the local coin toss $\eta_{i,t}=0$. Thus, smaller probability q_i implies sooner coin toss $\eta_{i,t}=0$ in expectation, hence, less amount of local computation for client i. Therefore, we can relax computational requirements of clients by adjusting these probabilities q_i and controlling the amount of local gradient computation.

Next, let us find out how the expected number of local gradient steps depends on probabilities p and q_i . Let Θ and H_i be random variables representing the number of coin tosses (Bernoulli trials) until the first occurrence of $\theta_t=1$ and $\eta_{i,t}=0$ respectively. Equivalently, $\Theta\sim \mathrm{Geo}(p)$ is a geometric random variable with parameter p, and $H_i\sim \mathrm{Geo}(1-q_i)$ are geometric random variables with parameter $1-q_i$ for $i\in[n]$. Notice that, within one communication round, i^{th} client performs $\min(\Theta,H_i)$ number of local gradient computations, which is again a geometric random variable with parameter $1-(1-(1-q_i))(1-p)=1-q_i(1-p)$.

Therefore, the expected number of local gradient steps is $\mathbb{E}\left[\min(\Theta, H_i)\right] = \frac{1}{1 - q_i(1 - p)}$. Let us formulate this observation as a separate lemma.

Lemma 3.2 (Expected number of local steps). *The expected number of local gradient computations in each communication round of* GradSkip *is*

$$\frac{1}{1 - q_i(1 - p)}$$

for all clients $i \in [n]$.

Notice that, in the special case of $q_i = 1$ for all $i \in [n]$, GradSkip recovers Scaffnew method of Mishchenko et al. (2022). Hovewer, as we will show, we can choose probabilities q_i smaller, reducing computational complexity and obtaining the same convergence rate as Scaffnew.

Remark 3.3 (System Heterogeneity). From this discussion we conclude that GradSkip can also address system or device heterogeneity. In particular, probabilities $\{q_i\}_{i=1}^n$ can be assigned to clients in accordance with their local computational resources; slow clients with scarce compute power should get small q_i , while faster clients with rich resources should get bigger $q_i \leq 1$.

3.3 Convergence theory

Now that we explained the structure and computational benefits of the algorithm, let us proceed to the theoretical guarantees. We consider the same strongly convex and smooth setup as considered by Mishchenko et al. (2022) for the distributed case.

Assumption 3.4. All functions $f_i(x)$ are strongly convex with parameter $\mu > 0$ and have Lipschitz continuous gradients with Lipschitz constants $L_i > 0$, i.e., for all $i \in [n]$ and any $x, y \in \mathbb{R}^d$ we have

$$\frac{\mu}{2}||x-y||^2 \le D_{f_i}(x,y) \le \frac{L_i}{2}||x-y||^2, \tag{8}$$

where $D_{f_i}(x,y) := f_i(x) - f_i(y) - \langle \nabla f_i(y), x - y \rangle$ is the Bregman divergence associated with f_i at points $x, y \in \mathbb{R}^d$.

We present Lyapunov-type analysis to prove the convergence, which is a very common approach for iterative algorithms. Consider the Lyapunov function

$$\Psi_t := \sum_{i=1}^n \|x_{i,t} - x_\star\|^2 + \frac{\gamma^2}{p^2} \sum_{i=1}^n \|h_{i,t} - h_{i,\star}\|^2, \quad (9)$$

where $\gamma > 0$ is the step-size, x_{\star} is the (necessary) unique minimizer of f(x) and $h_{i,*} = \nabla f_i(x_*)$ is the optimal gradient shift. As we show next, Ψ_t decreases at a linear rate.

Theorem 3.5. Let Assumption 3.4 hold. If the step-size satisfies $\gamma \leq \min_i \left\{ \frac{1}{L_i} \frac{p^2}{1 - q_i(1 - p^2)} \right\}$ and probabilities are

Algorithm 1 GradSkip

```
1: Input: step-size \gamma > 0, synchronization probabilities p, probabilities q_i > 0 controlling local steps, initial local iterates
     x_{1,0} = \cdots = x_{n,0} \in \mathbb{R}^d, initial shifts h_{1,0}, \ldots, h_{n,0} \in \mathbb{R}^d, total number of iterations T \geq 1
 2: for t = 0, 1, \dots, T - 1 do
 3:
         server: Flip a coin \theta_t \in \{0, 1\} with Prob(\theta_t = 1) = p
                                                                                                                ♦ Decide when to skip communication
         for all devices i \in [n] in parallel do
 4:
            Flip a coin \eta_{i,t} \in \{0,1\} with Prob(\eta_{i,t} = 1) = q_i
                                                                                           ♦ Decide when to skip gradient steps (see Lemma 3.1)
 5:
            \hat{h}_{i,t+1} = \eta_{i,t} h_{i,t} + (1 - \eta_{i,t}) \nabla f_i(x_{i,t})
                                                                                                                 \diamond Update the local auxiliary shifts \hat{h}_{i,t}
 6:
            \hat{x}_{i,t+1} = x_{i,t} - \gamma(\nabla f_i(x_{i,t}) - \hat{h}_{i,t+1})
                                                                              \diamond Update the local auxiliary iterate \hat{x}_{i,t} via shifted gradient step
 7:
            if \theta_t = 1 then
 8:
               x_{i,t+1} = \frac{1}{n} \sum_{i=1}^{n} \left( \hat{x}_{j,t+1} - \frac{\gamma}{p} \hat{h}_{j,t+1} \right)
 9:
                                                                                                      Average shifted iterates, but only very rarely!
10:
               x_{i,t+1} = \hat{x}_{i,t+1}
11:
                                                                                                                                      Skip communication!
12:
            h_{i,t+1} = \hat{h}_{i,t+1} + \frac{p}{2}(x_{i,t+1} - \hat{x}_{i,t+1})
13:
                                                                                                                               \diamond Update the local shifts h_{i,t}
         end for
14:
15: end for
```

chosen so that $0 < p, q_i \le 1$, then the iterates of GradSkip (Algorithm 1) satisfy

$$\mathbb{E}\left[\Psi_t\right] \le (1 - \rho)^t \Psi_0,\tag{10}$$

for all $t \ge 1$ *with*

$$\rho := \min \left\{ \gamma \mu, 1 - q_{max} (1 - p^2) \right\} > 0.$$

Let us comment on this result.

- The first and immediate observation from the above result is that, with a proper step-size choice, GradSkip converges linearly for any choice of probabilities p and q_i from (0, 1].
- Furthermore, by choosing all probabilities $q_i=1$ we get the same rate of Scaffnew with $\rho=\min\{\gamma\mu,p^2\}$ (see Theorem 3.6 in (Mishchenko et al., 2022)). If we further choose the largest admissible step-size $\gamma={}^1/L_{\rm max}$ and the optimal synchronization probability $p={}^1/\sqrt{\kappa_{\rm max}}$, we get $\mathcal{O}(\kappa_{\rm max}\log\frac{1}{\epsilon})$ iteration complexity, $\mathcal{O}(\sqrt{\kappa_{\rm max}}\log\frac{1}{\epsilon})$ accelerated communication complexity with ${}^1/p=\sqrt{\kappa_{\rm max}}$ expected number of local steps in each communication round. Here, we used notation $\kappa_{\rm max}=\max_i\kappa_i$ where $\kappa_i={}^{L_i}/\mu$ is the condition number for client $i\in[n]$.
- Finally, exploiting smaller probabilities q_i , we can optimize computational complexity subject to the same communication complexity as Scaffnew. To do that, note that the largest possible step-size that Theorem 3.5 allows is $\gamma = {}^1/L_{\max}$ as $\min_i \left\{ \frac{1}{L_i} \frac{p^2}{1-q_i(1-p^2)} \right\} \leq \min_i \frac{1}{L_i} \leq \frac{1}{L_{\max}}$. Hence, taking into account $\rho \leq \gamma \mu$, the best iteration complexity from the rate (10) is $\mathcal{O}(\kappa_{\max} \log \frac{1}{\epsilon})$, which can be obtained by choosing

the probabilities appropriately as formalized in the following result.

Theorem 3.6 (Optimal parameter choices). *Let Assumption 3.4 hold and choose probabilities*

$$q_i = \frac{1 - \frac{1}{\kappa_i}}{1 - \frac{1}{\kappa_{\max}}} \le 1, \quad and \quad p = \frac{1}{\sqrt{\kappa_{\max}}}.$$

Then, with the largest admissible step-size $\gamma=\frac{1}{L_{\max}}$, GradSkip enjoys the following properties:

- (i) $\mathcal{O}\left(\kappa_{\max}\log\frac{1}{\epsilon}\right)$ iteration complexity,
- (ii) $\mathcal{O}\left(\sqrt{\kappa_{\max}}\log\frac{1}{\epsilon}\right)$ communication complexity,
- (iii) for each client $i \in [n]$, the expected number of local gradient computations per communication round is

$$\frac{1}{1 - q_i(1 - p)} = \frac{\kappa_i(1 + \sqrt{\kappa_{\text{max}}})}{\kappa_i + \sqrt{\kappa_{\text{max}}}} \\
\leq \min(\kappa_i, \sqrt{\kappa_{\text{max}}}). \quad (11)$$

This result clearly quantifies the benefits of using smaller probabilities q_i . In particular, if the condition number κ_i of client i is smaller than $\sqrt{\kappa_{\max}}$, then within each communication round it does only κ_i number of local gradient steps. However, for a client having the maximal condition number (namely, clients $\arg\max_i\{\kappa_i\}$), the number of local gradient steps is $\sqrt{\kappa_{\max}}$, which is the same for Scaffnew. From this we conclude that, in terms of computational complexity, GradSkip is always better and can be $\mathcal{O}(n)$ times better than Scaffnew (Mishchenko et al., 2022).

4 GradSkip+

Here we aim to present a deeper understanding for GradSkip by extending it in two directions and designed our generic GradSkip+ method.

The first direction is the formulation of the optimization problem. As we discussed earlier, distributed optimization (1) with consensus constraints can be transformed into regularized optimization problem (4) in the lifted space. Thus, following Mishchenko et al. (2022), we consider the (lifted) problem¹

$$\min_{x \in \mathbb{R}^d} f(x) + \psi(x), \tag{12}$$

where f(x) is strongly convex and smooth loss, while $\psi(x)$ is closed, proper and convex regularizer (e.g., see (5)). The requirement we impose on the regularizer is that the proximal operator of ψ is a single-valued function that can be computed.

The second extension in GradSkip+ is the generalization of the randomization procedure of probabilistic alternations in GradSkip by allowing arbitrary unbiased compression operators with certain bounds on the variance. Let us formally define the class of compressors we will be working with.

Definition 4.1 (Unbiased Compressors). For any positive semidefinite matrix $\Omega \succeq 0$, denote by $\mathbb{B}^d(\Omega)$ the class of (possibly randomized) unbiased compression operators $\mathcal{C} \colon \mathbb{R}^d \to \mathbb{R}^d$ such that for all $x \in \mathbb{R}^d$ we have

$$\mathbb{E}\left[\mathcal{C}(x)\right] = x$$

$$\mathbb{E}\left[\left\|\left(\mathbf{I} + \mathbf{\Omega}\right)^{-1} \mathcal{C}(x)\right\|^{2}\right] \leq \|x\|_{(\mathbf{I} + \mathbf{\Omega})^{-1}}^{2}.$$

The class $\mathbb{B}^d(\Omega)$ is a generalization of commonly used class $\mathbb{B}^d(\omega)$ of unbiased compressors with variance bound

$$\mathbb{E}\left[\left\|\mathcal{C}(x)\right\|^{2}\right] \leq (1+\omega)\|x\|^{2}$$

for some scalar $\omega \geq 0$. Indeed, when the matrix $\Omega = \omega \mathbf{I}$, then $\mathbb{B}^d(\omega \mathbf{I})$ coincides with $\mathbb{B}^d(\omega)$. Furthermore, the following inclusion holds:

Lemma 4.2.
$$\mathbb{B}^d(\mathbf{\Omega}) \subseteq \mathbb{B}^d\left(\frac{(1+\lambda_{\max}(\mathbf{\Omega}))^2}{(1+\lambda_{\min}(\mathbf{\Omega}))}-1\right)$$
.

The purpose of this new variance bound with matrix parameter Ω is to introduce non-uniformity on the level of compression across different directions. For example, in the reformulation (4) each client controls 1/n portion of the directions and the level of compression. For example, consider compression operator $\mathcal{C}\colon \mathbb{R}^d \to \mathbb{R}$ defined as

$$C(x)_{j} = \begin{cases} \frac{x_{j}}{p_{j}} & \text{with probability } p_{j}, \\ 0 & \text{with probability } 1 - p_{j}, \end{cases}$$
 (13)

for all coordinates $j \in [d]$ and for any $x \in \mathbb{R}^d$, where $p_j \in (0,1]$ are given probabilities. Then, it is easy to check that $\mathcal{C} \in \mathbb{B}^d(\Omega)$ with diagonal matrix $\Omega = \mathbf{Diag}(1/p_j - 1)$ having diagonal entries $1/p_j - 1 \ge 0$.

Now that we have finer control over the compression operator, we can make use of the granular smoothness information of the loss function f through the so-called smoothness matrices (Qu and Richtárik, 2016b,a).

Definition 4.3 (Matrix Smoothness). A differentiable function $f: \mathbb{R}^d \to \mathbb{R}$ is called **L**-smooth with some symmetric and positive definite matrix $\mathbf{L} \succ 0$ if

$$D_f(x,y) \le \frac{1}{2} ||x - y||_{\mathbf{L}}^2, \quad \forall x, y \in \mathbb{R}^d.$$
 (14)

The standard L-smoothness condition in (8) with scalar L>0 is obtained as a special case of (14) for matrices of the form $\mathbf{L}=L\mathbf{I}$, where \mathbf{I} is the identity matrix. The notion of matrix smoothness provides much more information about the function than mere scalar smoothness. In particular, if f is \mathbf{L} -smooth, then it is also $\lambda_{\max}(\mathbf{L})$ -smooth due to the relation $\mathbf{L} \preceq \lambda_{\max}(\mathbf{L})\mathbf{I}$. Smoothness matrices have been used in the literature of randomized coordinate descent (Richtárik and Takáč, 2016; Hanzely and Richtárik, 2019b,a) and distributed optimization (Safaryan et al., 2021; Wang et al., 2022).

4.1 Algorithm description

Similar to GradSkip, we maintain two variables x_t , \hat{x}_t for the model, and two variables h_t , \hat{h}_t for the gradient shifts in GradSkip+. Initial values $x_0 \in \mathbb{R}^d$ and $h_0 \in \mathbb{R}^d$ can be chosen arbitrarily. In each iteration, GradSkip+ first updates the auxiliary shift \hat{h}_{t+1} using the previous shift h_t and gradient $\nabla f(x_t)$ (line 4). This shift \hat{h}_{t+1} is then used to update the auxiliary iterate x_t via shifted gradient step (line 5). Then we estimate the proximal gradient \hat{g}_t (line 6) in order to update the main iterate x_{t+1} (line 7). Lastly, we complete the iteration by updating the main shift h_t (line 8). See Algorithm 2 for the formal steps.

4.2 Special cases

Before we proceed to the theoretical results, let us consider a few special cases of GradSkip+.

Case 1 (ProxGD). If \mathcal{C}_{ω} is the identity compressor (i.e., $\omega=0$), then Algorithm 2 reduces to the ProxGD algorithm as $x_{t+1} = \mathrm{prox}_{\gamma\psi}(\hat{x}_{t+1} - \gamma\hat{h}_{t+1}) = \mathrm{prox}_{\gamma\psi}(x_t - \gamma\nabla f(x_t))$ for any choice of \mathcal{C}_{Ω} .

Case 2 (ProxSkip). Let \mathcal{C}_{Ω} be the identity compressor (i.e., $\Omega=\mathbf{I}$) and \mathcal{C}_{ω} be the Bernoulli compressor \mathcal{C}_p with parameter $p\in(0,1]$ (note that here $\omega=1/p-1$). In this case, $\hat{h}_{t+1}\equiv h_t$ and x_{t+1} is either $\max_{\frac{\gamma}{p}\psi}\left(\hat{x}_{t+1}-\frac{\gamma}{p}h_t\right)$ (with probability p) or \hat{x}_{t+1} (with probability 1-p). Thus, we recover the ProxSkip algorithm.

Case 3 (RandProx-FB). Let \mathcal{C}_{Ω} be the identity compressor and $\mathcal{C}_{\Omega} = \mathcal{R} \in \mathbb{B}^d(\omega)$. Then, after the following change of notation: $h_t = -u_t$, $\hat{g}_t = \frac{1}{1+\omega_2}d_t$, the method is equivalent

¹To be precise, the lifted problem is in \mathbb{R}^{nd} as we stack all local variables $x_1, \ldots, x_n \in \mathbb{R}^d$ into one.

Algorithm 2 GradSkip+

```
1: Parameters: stepsize \gamma > 0, compressors \mathcal{C}_{\omega} \in \mathbb{B}^d(\omega) and \mathcal{C}_{\Omega} \in \mathbb{B}^d(\Omega).

2: Input: initial iterate x_0 \in \mathbb{R}^d, initial control variate h_0 \in \mathbb{R}^d, number of iterations T \geq 1.

3: for t = 0, 1, \ldots, T - 1 do

4: \hat{h}_{t+1} = \nabla f(x_t) - (\mathbf{I} + \Omega)^{-1} \mathcal{C}_{\Omega} (\nabla f(x_t) - h_t) \diamond Update the shift \hat{h}_{i,t} via shifted compression

5: \hat{x}_{t+1} = x_t - \gamma(\nabla f(x_t) - \hat{h}_{t+1}) \diamond Update the iterate \hat{x}_{i,t} via shifted gradient step

6: \hat{g}_t = \frac{1}{\gamma(1+\omega)} \mathcal{C}_{\omega} (\hat{x}_{t+1} - \operatorname{prox}_{\gamma(1+\omega)\psi} (\hat{x}_{t+1} - \gamma(1+\omega)\hat{h}_{t+1})) \diamond Estimate the proximal gradient

7: x_{t+1} = \hat{x}_{t+1} - \gamma \hat{g}_t \diamond Update the main iterate x_{i,t}

8: h_{t+1} = \hat{h}_{t+1} + \frac{1}{\gamma(1+\omega)} (x_{t+1} - \hat{x}_{t+1}) \diamond Update the main shift h_{i,t}

9: end for
```

to RandProx-FB (Condat and Richtárik, 2022), which is a generalization of ProxSkip when additional smoothness information for the regularizer ψ is known².

Case 4 (GradSkip). Finally, we can specialize GradSkip+ to recover GradSkip. Consider the lifted space \mathbb{R}^{nd} where $x \in \mathbb{R}^{nd}$ represents the concatenations of models $x_1,\ldots,x_n \in \mathbb{R}^d$ from all client's. The central example of an unbiased compression operator for that would be the probabilistic switching mechanism used in GradSkip, which is sometimes referred to as Bernoulli compressor: for any given $p \in [0,1]$, the compressor $\mathcal{C}_p^{nd}(x)$ outputs x/p (with probability p) or 0 (with probability 1-p) for any input vector $x \in \mathbb{R}^{nd}$. GradSkip employs one Bernoulli compressor \mathcal{C}_p^{nd} with parameter $p \in (0,1]$ controlling communication rounds, and one Bernoulli compressor \mathcal{C}_q^d with parameter $q_i \in (0,1]$ for each client to control local gradient steps. Therefore, choosing $\mathcal{C}_\omega = \mathcal{C}_p^{nd}$ and $\mathcal{C}_\Omega = \mathcal{C}_{q_1}^d \times \cdots \times \mathcal{C}_{q_n}^d$ in the lifted space \mathbb{R}^{nd} , GradSkip+ reduces to GradSkip.

4.3 Convergence theory

We now present the convergence theory for GradSkip+, for which we replace the scalar smoothness Assumption 3.4 by matrix smoothness.

Assumption 4.4 (Convexity and smoothness). We assume that the loss function f is μ -strongly convex with positive $\mu > 0$ and **L**-smooth with positive definite matrix $\mathbf{L} \succ 0$.

Analogous to (9), we analyze GradSkip+ by consider the following Lyapunov function.

$$\Psi_t := \|x_t - x_\star\|^2 + \gamma^2 (1 + \omega)^2 \|h_t - h_\star\|^2,$$

where $h_* = \nabla f(x_*)$. In the following theorem, we show the general linear convergence result.

Theorem 4.5. Let Assumption 4.4 hold, $C_{\omega} \in \mathbb{B}^{d}(\omega)$ and $C_{\Omega} \in \mathbb{B}^{d}(\Omega)$ be the compression operators, and

$$\widetilde{\mathbf{\Omega}} := \mathbf{I} + \omega(\omega + 2)\mathbf{\Omega}(\mathbf{I} + \mathbf{\Omega})^{-1}.$$

Then, if the stepsize $\gamma \leq \lambda_{\max}^{-1}(\mathbf{L}\widetilde{\Omega})$, the iterates of Grad-Skip+ (Algorithm 2) satisfy

$$\mathbb{E}\left[\Psi_{t}\right] \leq \left(1 - \min\left\{\gamma\mu, \delta\right\}\right)^{t} \Psi_{0}. \tag{15}$$

where
$$\delta = 1 - \frac{1}{1 + \lambda_{\min}(\mathbf{\Omega})} \left(1 - \frac{1}{(1 + \omega)^2} \right) \in [0, 1].$$

Let us discuss some implications from this rate. If we choose \mathcal{C}_{Ω} to be the identity compression (i.e., $\Omega=0$), then GradSkip+ reduces to RandProx-FB and we recover asymptotically the same rate with linear factor $(1-\min\{\gamma\mu, 1/(1+\omega)^2\})$ (see Theorem 3 of Condat and Richtárik (2022)). If we further choose \mathcal{C}_{ω} to be the Bernoulli compression with parameter $p\in(0,1]$, then $\omega=1/p-1$ and we get the rate of ProxSkip.

In order to recover the rate (10) of GradSkip, consider the lifted space \mathbb{R}^{nd} with reformulation (4)-(5) and objective function

$$f(x) = \frac{1}{n} \sum_{i=1}^{n} f_i(x_i),$$

where $x_i \in \mathbb{R}^d$ and $x = (x_1, \dots, x_n) \in \mathbb{R}^{nd}$. From μ -strong convexity of each loss function f_i , we conclude that f is also μ -strongly convex. Regarding the smoothness condition, we have $L_i \mathbf{I} \in \mathbb{R}^{d \times d}$ smoothness matrices (equivalent to scalar L_i -smoothness) for each f_i , which implies that the overall loss function f has

$$\mathbf{L} = \mathbf{Diag}(L_1\mathbf{I}, \dots, L_n\mathbf{I}) \in \mathbb{R}^{nd \times nd}$$

as a smoothness matrix.

Furthermore, choosing Bernoulli compression operators $\mathcal{C}_{\omega} = \mathcal{C}_p^{nd}$ and $\mathcal{C}_{\Omega} = \mathcal{C}_{q_1}^d \times \cdots \times \mathcal{C}_{q_n}^d$ in the lifted space \mathbb{R}^{nd} , we get $\omega = 1/p - 1$ and $\Omega = \mathbf{Diag}(1/q_i - 1)$.

It remains to plug all these expressions into Theorem 4.5 and recover Theorem 3.6. Indeed,

$$\lambda_{\min}(\mathbf{\Omega}) = \frac{1}{q_{\max}} - 1$$

and, hence,

$$\delta = 1 - q_{\text{max}}(1 - p^2).$$

²We do not consider smooth regularizers as our primary example of regularizer is the non-smooth consensus constraint (5).

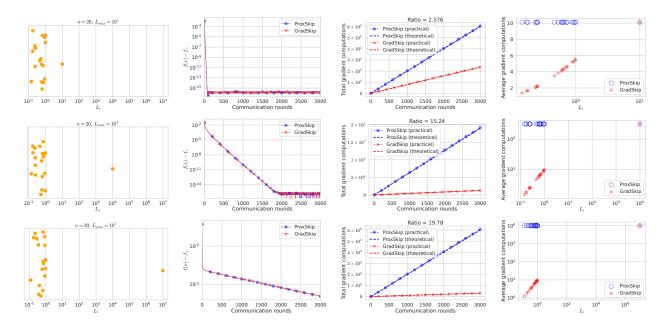


Figure 1: In the first column we show the smoothness constants for devices. In the second column we show the convergence per communication rounds. In the third column we show theoretical and practical difference between number of gradient computations. In the last column we have the average gradient computations for each device having L_i smoothness, we see that for GradSkip the device with $L_i = L_{max}$ does the same number of gradient computations as devices in ProxSkip.

Lastly, Theorem 4.5 recovers the same step-size bound as

$$\lambda_{\max}^{-1}(\mathbf{L}\widetilde{\Omega}) = \min_{i} \left(L_{i} \left(1 + (1 - q_{i}) \left(\frac{1}{p^{2}} - 1 \right) \right) \right)^{-1}$$
$$= \min_{i} \left\{ \frac{1}{L_{i}} \frac{p^{2}}{1 - q_{i}(1 - p^{2})} \right\}.$$

5 Experiments

To test the performance of GradSkip and illustrate theoretical results, we use classical logistic regression problem. The loss function for this model has the following form:

$$f(x) = \frac{1}{n} \sum_{i=1}^{n} \frac{1}{m_i} \sum_{j=1}^{m_i} \log \left(1 + \exp \left(-b_{ij} a_{ij}^{\top} x \right) \right) + \frac{\lambda}{2} ||x||^2,$$

where n is the number of clients, m_i is the number of data points per worker, $a_{ij} \in \mathbb{R}^d$ and $b_{ij} \in \{-1, +1\}$ are the data samples, and λ is the regularization parameter. We conduct several experiments on artificially generated data and on the "australian" dataset from LibSVM library (Chang and Lin, 2011). We implemented all algorithms in Python using the package RAY (Moritz et al., 2018) to utilize parallelization. We run all algorithms using their theoretically optimal hyper-parameters.

5.1 Number of gradient computations: GradSkip vs ProxSkip

The expected number of local gradient computations per communication round for GradSkip is (see (11))

$$\sum_{i=1}^{n} \frac{\kappa_i (1 + \sqrt{\kappa_{\max}})}{\kappa_i + \sqrt{\kappa_{\max}}} = \sqrt{\kappa_{\max}} + \sum_{\substack{\kappa_i \neq \kappa_{\max} \\ \kappa_i \neq \kappa_{\max}}} \frac{\kappa_i (1 + \sqrt{\kappa_{\max}})}{\kappa_i + \sqrt{\kappa_{\max}}},$$

while for ProxSkip we have $n\sqrt{\kappa_{\rm max}}$. That is the gradient computation ratio of ProxSkip over GradSkip is always bellow n and converges to n when $\kappa_{\rm max} \to \infty$.

We conduct several experiments to show this, using artificially generated data controlling smoothness constants. We also set the regularization parameter $\lambda=10^{-1}$.

In Figure 1, we have n=20 devices. We set large $L_i=L_{max}$ for one device and for the rest we have $L_i\sim \mathrm{Uniform}(0.1,1)$. We can see that the convergence is the same for GradSkip and ProxSkip. Next, we increase L_{\max} in each row to show that the ratio indeed converges to n=20.

In Figure 2 we show that this ratio can be made arbitrarily large by increasing the number of clients (n). We set large $L_i = L_{max} = 10^7$ for one device and for the rest we have $L_i \sim \text{Uniform}(0.1, 1)$, and we increase n in each row.

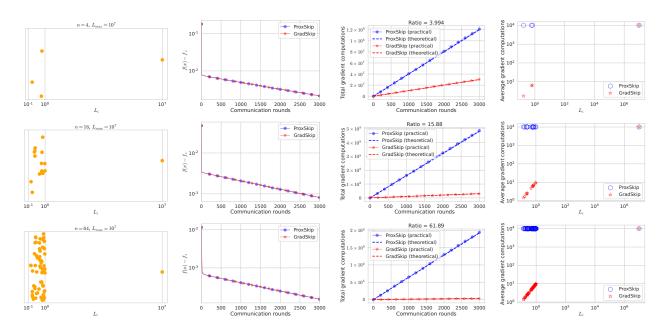


Figure 2: The columns have the same meaning as in Figure 1.

5.2 Total waiting time: GradSkip vs ProxSkip

Let $0 < t_i \le 1$ be the time required for device i to compute the full gradient. Note that t_i depends both on the power of the device i and the number of data points of device i. Let T_p and T_g be the expected waiting time between two communication rounds for ProsxSkip and GradSkip respectively. We have that

$$T_{p} = \mathbb{E}\left[t_{max}\text{Geo}\left(p\right)\right] = \frac{t_{max}}{n} = t_{max}\sqrt{\kappa_{\max}},$$

and

$$T_g = \mathbb{E}\left[\max_{i \in [n]} \left\{t_i \min\left\{\operatorname{Geo}(1 - q_i), \operatorname{Geo}(p)\right\}\right\}\right] \le \frac{t_{\max}}{p}.$$

In the special case, when the device with $q_i=q_{max}=1$ $(\kappa_i=\kappa_{\max})$ has $t_i=t_{max}$ (it is also true for $t_1=\cdots=t_n$), we get $T_p=T_g$. On the other hand, if we move the expectation under the max, we get (see (11))

$$T_g \ge \max_{i \in [n]} \left\{ t_i \frac{\kappa_i (1 + \sqrt{\kappa_{\max}})}{\kappa_i + \sqrt{\kappa_{\max}}} \right\} \ge t_{max} \frac{1 + \sqrt{\kappa_{\max}}}{1 + \frac{\sqrt{\kappa_{\max}}}{\kappa_{max}}},$$

The optimal t_i for this lower bound is

$$t_i = t_{max} \frac{1 + \frac{\sqrt{\kappa_{\text{max}}}}{\kappa_i}}{1 + \frac{\sqrt{\kappa_{\text{max}}}}{\kappa_{\text{max}}}}.$$
 (16)

Note that when we increase κ_i we get smaller t_i , that is, the device with $\kappa_i = \kappa_{\max}$ gets $t_i = t_{\max}$. This is natural since the condition number κ_i describes the difficulty of the problem, so we want to have faster devices solving difficult problems.

We conduct several experiments to show this, using the australian dataset from LibSVM library (Chang and Lin, 2011). We set the regularization parameter $\lambda=10^{-4}L_{\rm max}$. We also set the time for communication $t_{com}=1$.

In the first row of Figure 3, when we have $t_1 = \cdots = t_n = 1$, we see that the total time is the same for both ProxSkip and GradSkip. In the second row we generated $t_i \sim \text{Uniform}(0,1)$ and we get that GradSkip is faster. And in the last row we maximized the total time ratio of ProxSkip over GradSkip for the choice of (16).

References

Dan Alistarh, Demjan Grubic, Jerry Li, Ryota Tomioka, and Milan Vojnovic. QSGD: Communication-efficient SGD via gradient quantization and encoding. In *Advances in Neural Information Processing Systems*, pages 1709–1720, 2017. (Cited on page 2)

Dan Alistarh, Torsten Hoefler, Mikael Johansson, Nikola Konstantinov, Sarit Khirirat, and Cedric Renggli. The convergence of sparsified gradient methods. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett, editors, *Advances in Neural Information Processing Systems 31*, pages 5977–5987. Curran Associates, Inc., 2018. (Cited on page 2)

Chih-Chung Chang and Chih-Jen Lin. LIBSVM: A library for support vector machines. *ACM Transactions on Intelligent Systems and Technology*, 2:27:1–27:27, 2011. Software available at http://www.csie.ntu.edu.tw/~cjlin/libsvm. (Cited on pages 8 and 9)

Laurent Condat and Peter Richtárik. RandProx: Primal-Dual Optimization Algorithms with Randomized Prox-

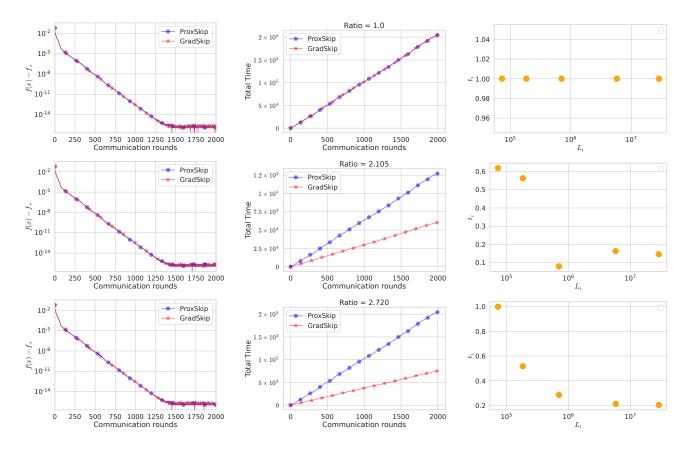


Figure 3: Comparison of GradSkip and ProxSkip with different t_i . In the first column we show the convergence. In the second column we show the difference between total time, and the Ratio of total time of ProxSkip over GradSkip. Finally, in the last column we have (L_i, t_i) scatter plot.

imal Updates. In *arXiv:2207.12891*, 2022. (Cited on pages 2, 3, and 7)

Laurent Condat, Kai Yi, and Peter Richtárik. EF-BV: A unified theory of error feedback and variance reduction mechanisms for biased and unbiased compression in distributed optimization. *arXiv*:2205.04180, 2022. (Cited on page 2)

John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. In *Journal of Machine Learning Research*, page 2121–2159, 2011. (Cited on page 1)

Saeed Ghadimi and Guanghui Lan. Stochastic first-and zeroth-order methods for nonconvex stochastic programming. In *SIAM Journal on Optimization*, volume 23(4), page 2341–2368, 2013. (Cited on page 1)

Eduard Gorbunov, Filip Hanzely, and Peter Richtárik. A unified theory of SGD: variance reduction, sampling, quantization and coordinate descent. In *The 23rd International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2020. (Cited on page 1)

Eduard Gorbunov, Filip Hanzely, and Peter Richtárik. Local SGD: unified theory and new efficient methods. *The 24th*

International Conference on Artificial Intelligence and Statistics (AISTATS), 2021. (Cited on page 2)

F. Haddadpour and M. Mahdavi. On the convergence of local descent methods in federated learning. In *arXiv* preprint arXiv:1910.14425, 2019. (Cited on page 2)

F. Hanzely, K. Mishchenko, and P. Richtárik. SEGA: variance reduction via gradient sketching. *Advances in Neural Information Processing Systems 31*, pages 2082–2093, 2018. (Cited on page 2)

Filip Hanzely and Peter Richtárik. Accelerated coordinate descent with arbitrary sampling and best rates for minibatches. In Kamalika Chaudhuri and Masashi Sugiyama, editors, *Proceedings of Machine Learning Research*, volume 89 of *Proceedings of Machine Learning Research*, pages 304–312. PMLR, 16–18 Apr 2019a. URL http://proceedings.mlr.press/v89/hanzely19a.html. (Cited on page 6)

Filip Hanzely and Peter Richtárik. One method to rule them all: Variance reduction for data, parameters and many new methods. preprint arXiv:1905.11266, 2019b. (Cited on page 6)

S. Horváth, M. Sanjabi, L. Xiao, P. Richtárik, and M. Rab-

- bat. FedShuffle: Recipes for better use of local work in federated learning. In *arXiv preprint arXiv*:2204.13169, 2022. (Cited on page 2)
- Peter Kairouz et al. Advances and open problems in federated learning. *Foundations and Trends®in Machine Learning*, 14(1–2):1–210., 2019. (Cited on page 1)
- Sai Praneeth Karimireddy, Satyen Kale, Mehryar Mohri, Sashank J. Reddi, Sebastian U. Stich, and Ananda Theertha Suresh. SCAFFOLD: Stochastic controlled averaging for on-device federated learning. In *International Conference on Machine Learning (ICML)*, 2020. (Cited on page 2)
- A. Khaled, K. Mishchenko, and P. Richtárik. First analysis of local gd on heterogeneous data. In *NeurIPS Workshop on Federated Learning for Data Privacy and Confidentiality, pages 1–11*, 2019a. (Cited on page 2)
- A. Khaled, K. Mishchenko, and P. Richtárik. Better communication complexity for local sgd. In *NeurIPS Workshop on Federated Learning for Data Privacy and Confidentiality, pages 1–11*, 2019b. (Cited on page 2)
- Diederik Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015. (Cited on page 1)
- T. Li, A. K. Sahu, M. Zaheer, M. Sanjabi, A. Talwalkar, and V. Smith. Federated optimization for heterogeneous networks. In *Proceedings of the 1st Adaptive Multitask Learning Workshop*, 2019a. (Cited on page 2)
- X. Li, W. Yang, S. Wang, and Z. Zhang. Communication-efficient local decentralized SGD methods. *arXiv* preprint *arXiv*:1910.09126, 2019b. (Cited on page 2)
- X. Li, K. Huang, W. Yang, S. Wang, and Z. Zhang. On the convergence of FedAvg on non-IID data. *International Conference on Learning Representations*, 2020. (Cited on page 2)
- Bing Luo, Wenli Xiao, Shiqiang Wang, Jianwei Huang, and Leandros Tassiulas. Tackling System and Statistical Heterogeneity for Federated Learning with Adaptive Client Sampling. In *arXiv:2112.11256*, 2021. (Cited on page 3)
- Grigory Malinovsky, Kai Yi, and Peter Richtárik. Variance Reduced ProxSkip: Algorithm, Theory and Application to Federated Learning. In *arXiv:2207.04338*, 2022. (Cited on pages 2 and 14)
- O. L. Mangasarian. Parallel gradient distribution in unconstrained optimization. In *SIAM Journal on Control and Optimization*, 33(6):1916–1925, 1995. (Cited on page 2)
- H Brendan McMahan, Eider Moore, Daniel Ramage, and Blaise Agüera y Arcas. Federated learning of deep networks using model averaging. In *arXiv preprint arXiv:1602.05629*, 2016. (Cited on page 2)
- H Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. Communicationefficient learning of deep networks from decentralized

- data. In *Proceedings of the 20th International Conference* on Artificial Intelligence and Statistics (AISTATS), 2017. (Cited on pages 1 and 2)
- Konstantin Mishchenko, Filip Hanzely, and Peter Richtárik. 99% of worker-master communication in distributed optimization is not needed. In Jonas Peters and David Sontag, editors, *Proceedings of the 36th Conference on Uncertainty in Artificial Intelligence (UAI)*, volume 124 of *Proceedings of Machine Learning Research*, pages 979–988. PMLR, 03–06 Aug 2020. (Cited on page 2)
- Konstantin Mishchenko, Grigory Malinovsky, Sebastian Stich, and Peter Richtárik. ProxSkip: Yes! Local gradient steps provably lead to communication acceleration! Finally! *39th International Conference on Machine Learning (ICML)*, 2022. (Cited on pages 1, 2, 3, 4, 5, and 6)
- Philipp Moritz, Robert Nishihara, Stephanie Wang, Alexey Tumanov, Richard Liaw, Eric Liang, Melih Elibol, Zongheng Yang, William Paul, Michael I Jordan, et al. Ray: A distributed framework for emerging {AI} applications. In 13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18), pages 561–577, 2018. (Cited on page 8)
- Xun Qian, Peter Richtárik, Robert Mansel Gower, Alibek Sailanbayev, Nicolas Loizou, and Egor Shulgin. SGD with arbitrary sampling: General analysis and improved rates. In *International Conference on Machine Learning*, 2019. (Cited on page 1)
- Zheng Qu and Peter Richtárik. Coordinate descent with arbitrary sampling ii: expected separable overapproximation. *Optimization Methods and Software*, 31:858–884, 2016a. doi: 10.1080/10556788.2016.1190361. (Cited on page 6)
- Zheng Qu and Peter Richtárik. Coordinate descent with arbitrary sampling i: algorithms and complexity. *Optimization Methods and Software*, 31:829–857, 2016b. (Cited on page 6)
- Amirhossein Reisizadeh, Isidoros Tziotis, Hamed Hassani, Aryan Mokhtari, and Ramtin Pedarsani. Straggler-Resilient Federated Learning: Leveraging the Interplay Between Statistical Accuracy and System Heterogeneity. In *arXiv:2012.14453*, 2020. (Cited on page 3)
- Peter Richtárik and Martin Takáč. On optimal probabilities in stochastic coordinate descent methods. *Optim Lett*, 10:1233–1243, 2016. doi: https://doi.org/10.1007/s11590-015-0916-1. (Cited on page 6)
- Abdurakhmon Sadiev, Dmitry Kovalev, and Peter Richtárik. Communication Acceleration of Local Gradient Methods via an Accelerated Primal-Dual Algorithm with Inexact Prox. In *arXiv:2207.03957*, 2022. (Cited on page 2)
- Mher Safaryan, Filip Hanzely, and Peter Richtárik. Smoothness matrices beat smoothness constants: Better communication compression techniques for distributed optimiza-

- tion. Advances in Neural Information Processing Systems (NeurIPS), 2021. (Cited on pages 2 and 6)
- Mark Schmidt, Nicolas Le Roux, and Francis Bach. Minimizing finite sums with the stochastic average gradient. In *Mathematical Programming*, volume 162(1-2), page 83–112, 2017. (Cited on page 1)
- J. Sun, T. Chen, G. Giannakis, and Z. Yang. Communication-efficient distributed learning via lazily aggregated quantized gradients. *Advances in Neural Information Processing Systems*, 32:3370–3380, 2019. (Cited on page 2)
- Thijs Vogels, Sai Praneeth Karimireddy, and Martin Jaggi. PowerSGD: Practical low-rank gradient compression for distributed optimization. In *Advances in Neural Information Processing Systems 32 (NeurIPS)*, 2019. (Cited on page 2)
- B. Wang, M. Safaryan, and P. Richtárik. Theoretically Better and Numerically Faster Distributed Optimization with Smoothness-Aware Quantization Techniques. In Advances in Neural Information Processing Systems (NeurIPS), 2022. (Cited on pages 2 and 6)
- Hongyi Wang, Scott Sievert, Shengchao Liu, Zachary Charles, Dimitris Papailiopoulos, and Stephen Wright.
 Atomo: Communication-efficient learning via atomic sparsification. In Advances in Neural Information Processing Systems, 2018. (Cited on page 2)
- Jianyu Wang and Gauri Joshi. Adaptive Communication Strategies to Achieve the Best Error-Runtime Trade-off in Local-Update SGD . In *arXiv:1810.08313*, 2019. (Cited on page 3)
- Jianyu Wang, et al. A field guide to federated optimization. arXiv preprint arXiv:2107.06917, 2021. (Cited on page 1)
- H. Yu, R. Jin, and S. Yang. On the linear speedup analysis of communication efficient momentum SGD for distributed non-convex optimization. *International Conference on Machine Learning (ICML)*, 2019. (Cited on page 2)
- Matthew D. Zeiler. ADADELTA: An Adaptive Learning Rate Method. In *arXiv e-prints*, *arXiv:1212.5701*, 2012. (Cited on page 1)

Appendix

Contents

1	Intr	roduction	1
	1.1	Communication costs	2
	1.2	Statistical heterogeneity	2
	1.3	System heterogeneity	2
2	Contributions		3
	2.1	GradSkip: efficient gradient skipping algorithm	3
	2.2	GradSkip+: general GradSkip method	3
3	GradSkip		3
	3.1	Algorithm structure	3
	3.2	Reduced local computation	4
	3.3	Convergence theory	4
4	GradSkip+		
	4.1	Algorithm description	6
	4.2	Special cases	6
	4.3	Convergence theory	7
5	Experiments		
	5.1	Number of gradient computations: GradSkip vs ProxSkip	8
	5.2	Total waiting time: GradSkip vs ProxSkip	9
A	Lim	itations and Future Work	14
В	Proc	ofs for Section 3 (GradSkip)	14
	B.1	Proof of Lemma 3.1	14
	B.2	Proof of Lemma 3.2	14
	B.3	Proof of Theorem 3.5	15
	B.4	Proof of Theorem 3.6	17
C	Proc	ofs for Section 4 (GradSkip+)	18
	C.1	Proof of Lemma 4.2	18
	C.2	Proof of Theorem 4.5	18

A Limitations and Future Work

In this part, we outline some limitations and future research directions related to our work.

- We consider the full batch gradient oracle to highlight our core contributions. The extension to stochastic gradient oracle can be done following the strategy presented in (Malinovsky et al., 2022).
- As the previous works on local methods with communication acceleration, our theory does not cover general convex or non-convex objective functions.
- Another key component for designing efficient distributed and federated learning algorithm is partial device participation. This extension seems rather tricky, and we leave this as future work.
- Finally, one can combine the local methods with communication compression to achieve even better communication complexity. Moreover, our proposed gradient skipping approach can be decoupled to address computational complexity too.

B Proofs for Section 3 (GradSkip)

B.1 Proof of Lemma 3.1

Proof. The proof is rather straightforward and follows by following the corresponding lines of the algorithm. Note that $\eta_{i,t} = \theta_t = 0$ implies (see lines 6 and 7 in Algorithm 1) that

$$\hat{x}_{i,t+1} = x_{i,t+1} = x_{i,t},\tag{17}$$

$$\hat{h}_{i,t+1} = h_{i,t+1} = h_{i,t} = \nabla f_i(x_{i,t}), \tag{18}$$

which proves (6)–(7) when j=1. Consider the two possible cases for $\eta_{i,t+1}$ coupled with $\theta_{t+1}=0$. If $\eta_{i,t+1}=1$, then

$$\hat{x}_{i,t+2} = x_{i,t+1} - \gamma(\nabla f_i(x_{i,t+1}) - h_{i,t+1})
\stackrel{(17)}{=} x_{i,t+1} - \gamma(\nabla f_i(x_{i,t}) - h_{i,t+1})
\stackrel{(18)}{=} x_{i,t+1}
\stackrel{(17)}{=} x_{i,t},$$

and

$$\hat{h}_{i,t+2} = h_{i,t+1} \stackrel{\text{(18)}}{=} h_{i,t} = \nabla f_i(x_{i,t}).$$

In case of $\eta_{i,t+1} = 0$, we have

$$\hat{x}_{i,t+2} = x_{i,t+1} \stackrel{\text{(17)}}{=} x_{i,t}$$

and

$$\hat{h}_{i,t+2} = \nabla f_i(x_{i,t+1}) \stackrel{\text{(17)}}{=} \nabla f_i(x_{i,t}) \stackrel{\text{(17)}}{=} h_{i,t}.$$

Hence, in both cases we get

$$\hat{x}_{i,t+2} = x_{i,t+1} = x_{i,t},\tag{19}$$

$$\hat{h}_{i,t+2} = h_{i,t} = \nabla f_i(x_{i,t}). \tag{20}$$

It remains to combine (19)–(20) with the condition that $\theta_{t+1} = 0$, which implies $x_{i,t+2} = \hat{x}_{i,t+2}$, $h_{i,t+2} = \hat{h}_{i,t+2}$. Thus, we proved (6)–(7) when j = 2. The proof can be completed by applying induction on j.

B.2 Proof of Lemma 3.2

As mentioned in the text preceding the lemma, the proof follows from the fact that for two geometric random variables $\Theta \sim \operatorname{Geo}(p)$ and $H \sim \operatorname{Geo}(q)$, their minimum $\min(\Theta, H)$ is also a geometric random variable with parameter 1 - (1-p)(1-q). To see this, consider the corresponding Bernoulli trials with success probability p and q for each geometric random variable. Notice that the probability that both trials fail is (1-p)(1-q). Hence, $\min(\Theta, H)$ is the number of joint trials of the two Bernoulli variables until on of them succeeds with probability 1 - (1-p)(1-q). Therefore, $\min(\Theta, H)$ is also a geometric random variable with success probability 1 - (1-p)(1-q).

B.3 Proof of Theorem 3.5

Denote $\mathbb{E}_t[\cdot] \coloneqq \mathbb{E}\left[\cdot \mid x_{1,t}, \cdots, x_{n,t}\right]$ the conditional expectation with respect to the randomness of all local models $x_{1,t}, \cdots, x_{n,t}$ at t^{th} iterate.

Lemma B.1. If $\gamma > 0$ and $0 \le p, q_i \le 1$, then

$$\mathbb{E}_{t}\left[\Psi_{t+1}\right] = \sum_{i=1}^{n} \left[\|w_{i,t} - w_{i,\star}\|^{2} + (1 - q_{i})(1 - p^{2})\frac{\gamma^{2}}{p^{2}} \|\nabla f(x_{i,t}) - h_{i,\star}\|^{2} + q_{i}(1 - p^{2})\frac{\gamma^{2}}{p^{2}} \|h_{i,t} - h_{i,\star}\|^{2} \right],$$

where the expectation is taken over θ_t and $\eta_{i,t}$ in Algorithm 1.

Proof of Lemma B.1. In order to simplify notation, denote

$$x_i := \hat{x}_{i,t+1} - \frac{\gamma}{p} \hat{h}_{i,t+1}, \qquad y_i := x_\star - \frac{\gamma}{p} h_{i,\star}. \tag{21}$$

$$\bar{x} \coloneqq \frac{1}{n} \sum_{i=1}^{n} x_i, \qquad \bar{y} \coloneqq \frac{1}{n} \sum_{i=1}^{n} y_i = x_*.$$
 (22)

STEP 1 (Recalling the steps of the method). Recall that

$$x_{i,t+1} = \begin{cases} \bar{x} & \text{with probability} \quad p \\ \hat{x}_{i,t+1} & \text{with probability} \quad 1-p \end{cases}, \tag{23}$$

and

$$h_{i,t+1} = \begin{cases} \hat{h}_{i,t+1} + \frac{p}{\gamma}(\bar{x} - \hat{x}_{i,t+1}) & \text{with probability} \quad p\\ \hat{h}_{i,t+1} & \text{with probability} \quad 1 - p \end{cases}$$
 (24)

STEP 2 (One-step expectation w.r.t. the global coin toss θ_t).

The expected value of the Lyapunov function

$$\Psi_t := \sum_{i=1}^n \|x_{i,t} - x_{\star}\|^2 + \frac{\gamma^2}{p^2} \sum_{i=1}^n \|h_{i,t} - h_{i,\star}\|^2$$
(25)

at $(t+1)^{th}$ iterate with respect to the coin toss θ_t is

$$\begin{split} & \mathbb{E}_{t} \left[\Psi_{t+1} \mid \eta_{1,t}, \dots, \eta_{n,t} \right] \\ & = p \sum_{i=1}^{n} \left(\| \bar{x} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} + \frac{p}{\gamma} (\bar{x} - \hat{x}_{i,t+1}) - h_{i,\star} \|^{2} \right) \\ & + (1 - p) \sum_{i=1}^{n} \left(\| \hat{x}_{i,t+1} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right) \\ & \stackrel{(22)}{=} p \sum_{i=1}^{n} \left(\| \bar{x} - \bar{y} \|^{2} + \| \bar{x} - x_{i} + y_{i} - \bar{y} \|^{2} \right) + (1 - p) \sum_{i=1}^{n} \left(\| \hat{x}_{i,t+1} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right) \\ & = p \sum_{i=1}^{n} \| x_{i} - y_{i} \|^{2} + (1 - p) \sum_{i=1}^{n} \left(\| \hat{x}_{i,t+1} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right) \\ & = \sum_{i=1}^{n} \left[p \left\| \hat{x}_{i,t+1} - \frac{\gamma}{p} \hat{h}_{i,t+1} - \left(x_{\star} - \frac{\gamma}{p} h_{i,\star} \right) \right\|^{2} + (1 - p) \left(\| \hat{x}_{i,t+1} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right) \right]. \end{split}$$

STEP 3 (Simple algebra). Next, we expand the squared norm and collect the terms, obtaining

$$\begin{split} &\mathbb{E}_{t} \left[\Psi_{t+1} \mid \eta_{1,t}, \dots, \eta_{n,t} \right] \\ &= \sum_{i=1}^{n} \left[p \| \hat{x}_{i,t+1} - x_{\star} \|^{2} + p \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} - 2\gamma \langle \hat{x}_{i,t+1} - x_{\star}, \hat{h}_{i,t+1} - h_{i,\star} \rangle \right. \\ &\quad + (1-p) \left(\| \hat{x}_{i,t+1} - x_{\star} \|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right) \right] \\ &= \sum_{i=1}^{n} \left[\| \hat{x}_{i,t+1} - x_{\star} \|^{2} - 2\gamma \langle \hat{x}_{i,t+1} - x_{\star}, \hat{h}_{i,t+1} - h_{i,\star} \rangle + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right] \\ &= \sum_{i=1}^{n} \left[\left\| \hat{x}_{i,t+1} - x_{\star} - \gamma \left(\hat{h}_{i,t+1} - h_{i,\star} \right) \right\|^{2} - \gamma^{2} \left\| \hat{h}_{i,t+1} - h_{i,\star} \right\|^{2} + \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right] \\ &= \sum_{i=1}^{n} \left[\left\| \hat{x}_{i,t+1} - x_{\star} - \gamma \left(\hat{h}_{i,t+1} - h_{i,\star} \right) \right\|^{2} + (1-p^{2}) \frac{\gamma^{2}}{p^{2}} \| \hat{h}_{i,t+1} - h_{i,\star} \|^{2} \right]. \end{split}$$

STEP 4 (One-step expectation w.r.t. local coin tosses $\eta_{i,t}$). Applying the expectation with respect to (independent) coin tosses $\eta_{i,t}$ and using the tower property we get

$$\begin{split} \mathbb{E}_{t} \left[\Psi_{t+1} \right] &= \sum_{i=1}^{n} \left[q_{i} \left(\left\| x_{i,t} - \gamma(\nabla f_{i}(x_{i,t}) - h_{i,t}) - x_{\star} - \gamma\left(h_{i,t} - h_{i,\star}\right) \right\|^{2} + (1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right) \\ &+ (1 - q_{i}) \left(\left\| x_{i,t} - x_{\star} - \gamma\left(\nabla f(x_{i,t}) - h_{i,\star}\right) \right\|^{2} + (1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| \nabla f(x_{i,t}) - h_{i,\star} \right\|^{2} \right) \right] \\ &= \sum_{i=1}^{n} \left[q_{i} \left(\left\| x_{i,t} - x_{\star} - \gamma\left(\nabla f_{i}(x_{i,t}) - h_{i,\star}\right) \right\|^{2} + (1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right) \right] \\ &+ (1 - q_{i}) \left(\left\| x_{i,t} - x_{\star} - \gamma\left(\nabla f(x_{i,t}) - h_{i,\star}\right) \right\|^{2} + (1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| \nabla f(x_{i,t}) - h_{i,\star} \right\|^{2} \right) \right] \\ &= \sum_{i=1}^{n} \left[\left\| x_{i,t} - x_{\star} - \gamma\left(\nabla f_{i}(x_{i,t}) - h_{i,\star}\right) \right\|^{2} + (1 - q_{i})(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| \nabla f(x_{i,t}) - h_{i,\star} \right\|^{2} \right. \\ &+ q_{i}(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right] \\ &= \sum_{i=1}^{n} \left[\left\| w_{i,t} - w_{i,\star} \right\|^{2} + (1 - q_{i})(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| \nabla f(x_{i,t}) - h_{i,\star} \right\|^{2} + q_{i}(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right]. \end{split}$$

Next, we upper bound the first two terms of the above equality by adjusting the step-size.

Lemma B.2. If
$$0 < \gamma \le \min_i \left\{ \frac{1}{L_i} \frac{p^2}{1 - q_i(1 - p^2)} \right\}$$
, then

$$||w_{i,t} - w_{i,\star}||^2 + (1 - q_i)(1 - p^2)\frac{\gamma^2}{p^2}||\nabla f(x_{i,t}) - h_{i,\star}||^2 \le (1 - \gamma\mu)||x_{i,t} - x_{\star}||^2.$$

Proof of Lemma B.2. After some algebraic transformations we get

$$||w_{i,t} - w_{i,\star}||^{2} + (1 - q_{i})(1 - p^{2})\frac{\gamma^{2}}{p^{2}}||\nabla f(x_{i,t}) - h_{i,\star}||^{2}$$

$$= ||x_{i,t} - x_{\star} - \gamma(\nabla f_{i}(x_{i,t}) - h_{i,\star})||^{2} + (1 - q_{i})(1 - p^{2})\frac{\gamma^{2}}{p^{2}}||\nabla f(x_{i,t}) - h_{i,\star}||^{2}$$

$$= ||x_{i,t} - x_{\star}||^{2} - 2\gamma\langle x_{i,t} - x_{\star}, \nabla f_{i}(x_{i,t}) - h_{i,\star}\rangle$$

$$+ \gamma^{2}||\nabla f_{i}(x_{i,t}) - h_{i,\star}||^{2} + (1 - q_{i})(1 - p^{2})\frac{\gamma^{2}}{p^{2}}||\nabla f(x_{i,t}) - h_{i,\star}||^{2}$$

$$\leq (1 - \gamma\mu)||x_{i,t} - x_{\star}||^{2} - 2\gamma D_{f_{i}}(x_{i,t}, x_{\star}) + \gamma^{2}\left(1 + \frac{(1 - q_{i})(1 - p^{2})}{p^{2}}\right)||\nabla f_{i}(x_{i,t}) - h_{i,\star}||^{2}$$

$$\leq (1 - \gamma\mu)||x_{i,t} - x_{\star}||^{2} - 2\gamma D_{f_{i}}(x_{i,t}, x_{\star})\left(1 - \gamma L_{i}\left(\frac{p^{2} + (1 - q_{i})(1 - p^{2})}{p^{2}}\right)\right)$$

$$\leq (1 - \gamma\mu)||x_{i,t} - x_{\star}||^{2},$$

where we used the bound $\|\nabla f_i(x_{i,t}) - h_{i,\star}\|^2 \le 2L_i D_{f_i}(x_{i,t},x_{\star})$ and the last inequality holds since $\gamma \le \frac{1}{L_i} \frac{p^2}{1-q_i(1-p_i^2)}$.

Proof of Theorem 3.5. The proof of the theorem is direct combination of the above proved lemmas.

$$\begin{split} \mathbb{E}_{t} \left[\Psi_{t+1} \right] &= \sum_{i=1}^{n} \left[\left\| x_{i,t} - x_{\star} - \gamma \left(\nabla f_{i}(x_{i,t}) - h_{i,\star} \right) \right\|^{2} + (1 - q_{i})(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| \nabla f(x_{i,t}) - h_{i,\star} \right\|^{2} \right. \\ &+ q_{i}(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right] \\ &\leq \sum_{i=1}^{n} \left[(1 - \gamma \mu) \left\| x_{i,t} - x_{\star} \right\|^{2} + q_{i}(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \right] \\ &\leq (1 - \gamma \mu) \sum_{i=1}^{n} \left\| x_{i,t} - x_{\star} \right\|^{2} + q_{max}(1 - p^{2}) \frac{\gamma^{2}}{p^{2}} \sum_{i=1}^{n} \left\| h_{i,t} - h_{i,\star} \right\|^{2} \\ &\leq \max \left\{ 1 - \gamma \mu, q_{max}(1 - p^{2}) \right\} \Psi_{t} \\ &= \left(1 - \min \left\{ \gamma \mu, 1 - q_{max}(1 - p^{2}) \right\} \right) \Psi_{t}. \end{split}$$

B.4 Proof of Theorem 3.6

From the choice of $q_i = \frac{1 - 1/\kappa_i}{1 - 1/\kappa_{\max}}$, we immediately imply $q_{\max} = 1$. Furthermore, choosing the optimal $p = \frac{1}{\sqrt{\kappa_{\max}}}$, we get

$$\gamma = \min_{i} \left\{ \frac{1}{L_i} \frac{p^2}{1 - q_i(1 - p^2)} \right\} = \min_{i} \left\{ \frac{L_i p^2}{L_i \mu_{min}} \right\} = \frac{1}{L_{max}}.$$

Now, if we plug these values back to the rate (10), we get the best rate of ProxSkip as

$$1 - \min\left\{\gamma\mu, 1 - q_{max}(1 - p^2)\right\}\right\} = 1 - \min\left\{\frac{\mu}{L_{\max}}, p^2\right\} = 1 - \frac{\mu}{L_{\max}} = 1 - \frac{1}{\kappa_{\max}}.$$

This implies $\mathcal{O}\left(\kappa_{\max}\log\frac{1}{\varepsilon}\right)$ total iteration complexity of the method. Due to the choice $p=\frac{1}{\sqrt{\kappa_{\max}}}$, the method enjoys $\mathcal{O}\left(\sqrt{\kappa_{\max}}\log\frac{1}{\varepsilon}\right)$ accelerated communication complexity.

We have two geometric random variables, $\Theta \sim \text{Geom}(p)$ and $H_i \sim \text{Geom}(1-q_i)$, for each client describing local training. From the algorithm description, we see that the number of local steps for client i is $\min(\Theta, H_i)$ which is still a Geometric

random variable with parameter $1 - q_i(1 - p)$. Therefore, the expected number of local steps for client i is the inverse of that parameter, i.e., $\frac{1}{1 - q_i(1 - p)}$. If we plug in the values for p and q_i , we have

$$\mathbb{E}\left[\min(\Theta, H_{i})\right] = \frac{1}{1 - q_{i}(1 - p)} = \frac{1}{1 - \left(1 - \frac{1}{\sqrt{\kappa_{\max}}}\right) \frac{1 - 1/\kappa_{i}}{1 - 1/\kappa_{\max}}}$$

$$= \frac{1}{1 - \frac{1 - 1/\kappa_{i}}{1 + 1/\sqrt{\kappa_{\max}}}} = \frac{1 + 1/\sqrt{\kappa_{\max}}}{1/\kappa_{i} + 1/\sqrt{\kappa_{\max}}} = \frac{\kappa_{i}(1 + \sqrt{\kappa_{\max}})}{\kappa_{i} + \sqrt{\kappa_{\max}}} \leq \min(\kappa_{i}, \sqrt{\kappa_{\max}}),$$

where the last inequality can be verified with simple algebraic steps.

C Proofs for Section 4 (GradSkip+)

C.1 Proof of Lemma 4.2

The proof follows from the following simple inequalities:

$$||x||_{(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2} \leq \lambda_{\max} ((\mathbf{I}+\mathbf{\Omega})^{-1}) ||x||^{2} = \frac{1}{1+\lambda_{\min}(\mathbf{\Omega})} ||x||^{2},$$

$$||(\mathbf{I}+\mathbf{\Omega})^{-1}\mathcal{C}(x)||^{2} \geq \lambda_{\min} ((\mathbf{I}+\mathbf{\Omega})^{-1})^{2} ||\mathcal{C}(x)||^{2} = \frac{1}{(1+\lambda_{\max}(\mathbf{\Omega}))^{2}} ||\mathcal{C}(x)||^{2}.$$

C.2 Proof of Theorem 4.5

Here we start proving convergence of Algorithm 2 by first proving some auxiliary lemmas.

Lemma C.1. If $\gamma > 0$ and $C_{\omega} \in \mathbb{B}^d(\omega)$, $C_{\Omega} \in \mathbb{B}^d(\Omega)$, then

$$\mathbb{E}_{t} \left[\Psi_{t+1} \right] \leq \| w_{t} - w_{\star} \|^{2} \\
+ \left(1 - \frac{1}{(1+\omega)^{2}} \right) \gamma^{2} (1+\omega)^{2} \| \nabla f(x_{t}) - h_{\star} \|_{\mathbf{I} - (\mathbf{I} + \mathbf{\Omega})^{-1}}^{2} \\
+ \left(1 - \frac{1}{(1+\omega)^{2}} \right) \gamma^{2} (1+\omega)^{2} \| h_{t} - h_{\star} \|_{(\mathbf{I} + \mathbf{\Omega})^{-1}}^{2},$$

where the expectation is with respect to the randomness from C_{ω} and C_{Ω} .

Proof of Lemma C.1. In order to simplify notation, let $P(\cdot) := \operatorname{prox}_{\gamma(1+\omega)\psi}(\cdot)$, and

$$x := \hat{x}_{t+1} - \gamma(1+\omega)\hat{h}_{t+1}, \qquad y := x_{\star} - \gamma(1+\omega)h_{\star}. \tag{26}$$

STEP 1 (Optimality conditions). Using the first-order optimality conditions for $f + \psi$ and using $h_{\star} := \nabla f(x_{\star})$, we obtain the following fixed-point identity for x_{\star} :

$$x_{\star} = \operatorname{prox}_{\gamma(1+\omega)\psi} \left(x_{\star} - \gamma(1+\omega)h_{\star} \right) \stackrel{(26)}{=} P(y). \tag{27}$$

STEP 2 (Recalling the steps of the method). Recall that the vectors x_t and h_t are in Algorithm 2 updated as follows:

$$x_{t+1} = \hat{x}_{t+1} - \gamma \hat{g}_t = \hat{x}_{t+1} - \frac{1}{1+\omega} \mathcal{C}_{\omega} \left(\hat{x}_{t+1} - P(x) \right), \tag{28}$$

and

$$h_{t+1} = \hat{h}_{t+1} + \frac{1}{\gamma(1+\omega)} (x_{t+1} - \hat{x}_{t+1}) = \hat{h}_{t+1} - \frac{1}{\gamma(1+\omega)^2} \mathcal{C}_{\omega} (\hat{x}_{t+1} - P(x)).$$
 (29)

STEP 3 (One-step expectation of the Lyapunov function).

The expected value of the Lyapunov function

$$\Psi_t := \|x_t - x_\star\|^2 + \gamma^2 (1 + \omega)^2 \|h_t - h_\star\|^2 \tag{30}$$

at time t+1, with respect to the randomness of \mathcal{C}_{ω} , is

$$\begin{split} &\mathbb{E}_{t}\left[\Psi_{t+1}\mid\mathcal{C}_{\Omega}\right]\\ &= &\mathbb{E}_{t}\left[\left\|\hat{x}_{t+1} - \frac{1}{1+\omega}\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right) - x_{\star}\right\|^{2}\mid\mathcal{C}_{\Omega}\right]\\ &+ &\mathbb{E}_{t}\left[\gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - \frac{1}{\gamma(1+\omega)^{2}}\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right) - h_{\star}\right\|^{2}\mid\mathcal{C}_{\Omega}\right]\\ &= &\mathbb{E}_{t}\left[\left\|\hat{x}_{t+1} - x_{\star}\right\|^{2} - \frac{2}{1+\omega}\left\langle\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right), \hat{x}_{t+1} - x_{\star}\right\rangle + \frac{1}{(1+\omega)^{2}}\left\|\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right)\right\|^{2}\mid\mathcal{C}_{\Omega}\right]\\ &+ &\mathbb{E}_{t}\left[\gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - h_{\star}\right\|^{2} - 2\gamma\left\langle\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right), \hat{h}_{t+1} - h_{\star}\right\rangle + \frac{1}{(1+\omega)^{2}}\left\|\mathcal{C}_{\omega}\left(\hat{x}_{t+1} - P(x)\right)\right\|^{2}\mid\mathcal{C}_{\Omega}\right]\\ &\leq &\|\hat{x}_{t+1} - x_{\star}\|^{2} + \frac{2}{1+\omega}\left\langle P(x) - \hat{x}_{t+1}, \hat{x}_{t+1} - x_{\star}\right\rangle + \frac{1}{1+\omega}\left\|P(x) - \hat{x}_{t+1}\right\|^{2}\\ &+ &\gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - h_{\star}\right\|^{2} + \frac{2}{1+\omega}\left\langle P(x) - \hat{x}_{t+1}, \gamma(1+\omega)(\hat{h}_{t+1} - h_{\star})\right\rangle + \frac{1}{1+\omega}\left\|P(x) - \hat{x}_{t+1}\right\|^{2}\\ &= &\|\hat{x}_{t+1} - x_{\star}\|^{2} + \frac{1}{1+\omega}\left(\|P(x) - x_{\star}\|^{2} - \|\hat{x}_{t+1} - x_{\star}\|^{2}\right)\\ &+ &\gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - h_{\star}\right\|^{2} + \frac{1}{1+\omega}\left(\left\|P(x) - \hat{x}_{t+1} + \gamma(1+\omega)(\hat{h}_{t+1} - h_{\star})\right\|^{2} - \gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - h_{\star}\right\|^{2}\right)\\ &= &\left(1 - \frac{1}{1+\omega}\right)\left(\|\hat{x}_{t+1} - x_{\star}\|^{2} + \gamma^{2}(1+\omega)^{2}\left\|\hat{h}_{t+1} - h_{\star}\right\|^{2}\right)\\ &+ &\frac{1}{1+\omega}\left(\|P(x) - x_{\star}\|^{2} + \|P(x) - \hat{x}_{t+1} + \gamma(1+\omega)(\hat{h}_{t+1} - h_{\star})\right\|^{2}\right)\\ &+ &\frac{1}{1+\omega}\left(\|P(x) - P(y)\|^{2} + \|P(x) - \hat{x}_{t+1} + \gamma(1+\omega)(\hat{h}_{t+1} - h_{\star})\right\|^{2}\right). \end{split}$$

STEP 4 (Applying firm non-expansiveness). Applying firm non-expansiveness of prox operator P, this leads to the inequality

$$\mathbb{E}_{t} \left[\Psi_{t+1} \mid \mathcal{C}_{\Omega} \right] \leq \left(1 - \frac{1}{1+\omega} \right) \left(\|\hat{x}_{t+1} - x_{\star}\|^{2} + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2} \right)$$

$$+ \frac{1}{1+\omega} \|x - y\|^{2}$$

$$= \left(1 - \frac{1}{1+\omega} \right) \left(\|\hat{x}_{t+1} - x_{\star}\|^{2} + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2} \right)$$

$$+ \frac{1}{1+\omega} \|\hat{x}_{t+1} - \gamma (1+\omega) \hat{h}_{t+1} - (x_{\star} - \gamma (1+\omega) h_{\star}) \|^{2}$$

$$= \left(1 - \frac{1}{1+\omega} \right) \left(\|\hat{x}_{t+1} - x_{\star}\|^{2} + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2} \right)$$

$$+ \frac{1}{1+\omega} \|\hat{x}_{t+1} - x_{\star} - \gamma (1+\omega) \left(\hat{h}_{t+1} - h_{\star} \right) \|^{2}.$$

STEP 5 (Simple algebra). Next, we expand the squared norm and collect the terms, obtaining

$$\mathbb{E}_{t} \left[\Psi_{t+1} \mid \mathcal{C}_{\Omega} \right] \leq \left(1 - \frac{1}{1+\omega} \right) \left(\|\hat{x}_{t+1} - x_{\star}\|^{2} + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2} \right)$$

$$+ \frac{1}{1+\omega} \|\hat{x}_{t+1} - x_{\star}\|^{2} - 2\gamma \langle \hat{x}_{t+1} - x_{\star}, \hat{h}_{t+1} - h_{\star} \rangle + \gamma^{2} (1+\omega) \|\hat{h}_{t+1} - h_{\star}\|^{2}$$

$$= \|\hat{x}_{t+1} - x_{\star}\|^{2} - 2\gamma \langle \hat{x}_{t+1} - x_{\star}, \hat{h}_{t+1} - h_{\star} \rangle + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2}$$

$$= \|\hat{x}_{t+1} - x_{\star} - \gamma (\hat{h}_{t+1} - h_{\star})\|^{2} - \gamma^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2} + \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2}$$

$$= \|\hat{x}_{t+1} - x_{\star} - \gamma (\hat{h}_{t+1} - h_{\star})\|^{2} + \left(1 - \frac{1}{(1+\omega)^{2}} \right) \gamma^{2} (1+\omega)^{2} \|\hat{h}_{t+1} - h_{\star}\|^{2}.$$

STEP 6 (Tower property). Applying the expectation with respect to the randomness of \mathcal{C}_{Ω} and using the tower property, we get

$$\begin{split} &\mathbb{E}_{t}\left[\Psi_{t+1}\right] \\ &= \mathbb{E}_{t}\left[\left\|x_{t} - \gamma(\nabla f(x_{t}) - \hat{h}_{t+1}) - x_{\star} - \gamma(\hat{h}_{t+1} - h_{\star})\right\|^{2}\right] \\ &+ \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\mathbb{E}_{t}\left[\left\|\nabla f(x_{t}) - (\mathbf{I} + \mathbf{\Omega})^{-1}\mathcal{C}_{\mathbf{\Omega}}\left(\nabla f(x_{t}) - h_{t}\right) - h_{\star}\right\|^{2}\right] \\ &= \|x_{t} - \gamma\nabla f(x_{t}) - (x_{\star} - \gamma h_{\star})\|^{2} \\ &+ \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\mathbb{E}_{t}\left[\left\|\nabla f(x_{t}) - h_{\star} - (\mathbf{I} + \mathbf{\Omega})^{-1}\mathcal{C}_{\mathbf{\Omega}}\left(\nabla f(x_{t}) - h_{t}\right)\right\|^{2}\right] \\ &\leq \|w_{t} - w_{\star}\|^{2} + \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\|\nabla f(x_{t}) - h_{\star}\|^{2} \\ &+ \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\left(2\left\langle\nabla f(x_{t}) - h_{\star}, h_{t} - \nabla f(x_{t})\right\rangle_{(\mathbf{I}+\mathbf{\Omega})^{-1}} + \|\nabla f(x_{t}) - h_{t}\|_{(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2}\right) \\ &= \|w_{t} - w_{\star}\|^{2} + \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega_{2})^{2}\|\nabla f(x_{t}) - h_{\star}\|^{2} \\ &+ \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega_{2})^{2}\left(\|h_{t} - h_{\star}\|_{(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2} - \|\nabla f(x_{t}) - h_{\star}\|_{(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2}\right) \\ &= \|w_{t} - w_{\star}\|^{2} + \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\|\nabla f(x_{t}) - h_{\star}\|_{\mathbf{I}-(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2} \\ &+ \left(1 - \frac{1}{(1+\omega)^{2}}\right)\gamma^{2}(1+\omega)^{2}\|h_{t} - h_{\star}\|_{(\mathbf{I}+\mathbf{\Omega})^{-1}}^{2}. \end{split}$$

Next, we upper bound the first two terms by adjusting the step-size.

Lemma C.2. If $\gamma \leq \lambda_{\max}^{-1}(\mathbf{L}\widetilde{\Omega})$, then

$$\|w_t - w_{\star}\|^2 + \left(1 - \frac{1}{(1+\omega)^2}\right) (1+\omega)^2 \gamma^2 \|\nabla f(x_t) - h_{\star}\|_{\mathbf{I} - (\mathbf{I} + \mathbf{\Omega})^{-1}}^2 \le (1 - \gamma\mu) \|x_t - x_{\star}\|^2$$

where
$$\widetilde{\Omega} = \mathbf{I} + \omega(\omega + 2)\Omega(\mathbf{I} + \Omega)^{-1}$$
.

Proof of Lemma C.2. Expanding the first term and rearranging terms, we get

$$\|w_{t} - w_{\star}\|^{2} + \left(1 - \frac{1}{(1+\omega)^{2}}\right) (1+\omega)^{2} \gamma^{2} \|\nabla f(x_{t}) - h_{\star}\|_{\mathbf{I}-(\mathbf{I}+\Omega)^{-1}}^{2}$$

$$= \|x_{t} - x_{\star} - \gamma (\nabla f(x_{t}) - \nabla f(x_{\star}))\|^{2} + \omega(\omega + 2) \gamma^{2} \|\nabla f(x_{t}) - \nabla f(x_{\star})\|_{\mathbf{\Omega}(\mathbf{I}+\Omega)^{-1}}^{2}$$

$$= \|x_{t} - x_{\star}\|^{2} - 2\gamma \langle x_{t} - x_{\star}, \nabla f(x_{t}) - \nabla f(x_{\star}) \rangle$$

$$+ \gamma^{2} \|\nabla f(x_{t}) - \nabla f(x_{\star})\|^{2} + \omega(\omega + 2) \gamma^{2} \|\nabla f(x_{t}) - \nabla f(x_{\star})\|_{\mathbf{\Omega}(\mathbf{I}+\Omega)^{-1}}^{2}$$

$$\leq (1 - \gamma\mu) \|x_{t} - x_{\star}\|^{2} - 2\gamma D_{f}(x_{t}, x_{\star}) + \gamma^{2} \|\nabla f(x_{t}) - \nabla f(x_{\star})\|_{\mathbf{\Omega}}^{2}$$

$$\leq (1 - \gamma\mu) \|x_{t} - x_{\star}\|^{2} - 2\gamma D_{f}(x_{t}, x_{\star}) + \gamma^{2} \lambda_{\max}(\mathbf{L}\widetilde{\Omega}) \|\nabla f(x_{t}) - \nabla f(x_{\star})\|_{\mathbf{L}^{-1}}^{2}$$

$$\leq (1 - \gamma\mu) \|x_{t} - x_{\star}\|^{2} - 2\gamma D_{f}(x_{t}, x_{\star}) + 2\gamma^{2} \lambda_{\max}(\mathbf{L}\widetilde{\Omega}) D_{f}(x_{t}, x_{\star})$$

$$= (1 - \gamma\mu) \|x_{t} - x_{\star}\|^{2} - 2\gamma \left(1 - \gamma\lambda_{\max}(\mathbf{L}\widetilde{\Omega})\right) D_{f}(x_{t}, x_{\star})$$

$$\leq (1 - \gamma\mu) \|x_{t} - x_{\star}\|^{2},$$

where we used L-smoothness of f via the inequality $\frac{1}{2} \|\nabla f(x_t) - \nabla f(x_\star)\|_{\mathbf{L}^{-1}}^2 \leq D_f(x_t, x_\star)$.

Proof of Theorem 4.5. The proof is a direct combination of the two lemmas we have proved.

$$\mathbb{E}_{t} \left[\Psi_{t+1} \right] \leq (1 - \gamma \mu) \|x_{t} - x_{\star}\|^{2} + \frac{\omega(\omega + 2)}{(1 + \omega)^{2}} \gamma^{2} (1 + \omega)^{2} \|h_{t} - h_{\star}\|_{(\mathbf{I} + \Omega)^{-1}}^{2}$$

$$\leq \max (1 - \gamma \mu, 1 - \delta) \Psi_{t}$$

$$= (1 - \min(\gamma \mu, \delta)) \Psi_{t}$$

$$\leq (1 - \min(\gamma \mu, \delta))^{t+1} \Psi_{0},$$

where
$$\delta = 1 - \frac{\omega(\omega+2)}{(1+\lambda_{\min}(\mathbf{\Omega}))(\omega+1)^2} = 1 - \frac{1}{1+\lambda_{\min}(\mathbf{\Omega})} \left(1 - \frac{1}{(1+\omega)^2}\right) \in [0,1].$$