KB금융그룹 | 국민의 평생 금융파트너

K-디지털 트레이닝

vue-router를 이용한 라우팅

[KB] IT's Your Life

KB국민은행

vue-router를 이용한 라우팅

- **router-test 프로젝트를 생성하세요.**
  - 프로젝트 템플릿 생성시 Vue Router 사용으로 설정
  - 관련 패키지 설치
  - bootstrap@5 패키지 설치
  - 새로운 작업을 위한 기본 골격을 위해 필요 없는 파일 삭제 및 수정

vue-router를 이용한 라우팅

프로젝트 생성

npm init vue router-test

Vue.js - The Progressive JavaScript Framework

√ Add TypeScript? ... No / Yes
√ Add JSX Support? ... No / Yes
√ Add Vue Router for Single Page Application development? ... No / Yes
√ Add Pinia for state management? ... No / Yes
√ Add Vitest for Unit Testing? ... No / Yes
√ Add an End-to-End Testing Solution? ≫ No
√ Add ESLint for code quality? ... No / Yes
...

```
cd router-test
npm install
npm install bootstrap@5
```

vue-router를 이용한 라우팅

src/main.js

```
import { createApp } from 'vue'
import 'bootstrap/dist/css/bootstrap.css'
import App from './App.vue'
import router from './router'

const app = createApp(App)
app.use(router)
app.mount('#app')
```

vue-router를 이용한 라우팅

- 다음과 같은 page 컴포넌트를 정의하세요.
  - src/pages
    - Home.vue
    - About.vue
    - Members.vue
    - Videos.vue
  - name과 타이틀을 각 페이지마다 지정
    - 예: Home.vue

```
<template>
    <div class="card card-body">
        <h2>Home</h2>
    </div>
</template>

<script>
export default {
  name : "Home"
}
</script>
```

vue-router를 이용한 라우팅

다음 라우터 모듈을 완성하세요..

```
import { createRouter, createWebHistory } from 'vue-router'

import Home from '@/pages/Home.vue'
import About from '@/pages/About.vue'
import Members from '@/pages/Members.vue'
import Videos from '@/pages/Videos.vue'

const router = createRouter({
    history: createWebHistory(),
    routes : [
        { path: '/',        ____________________ },
        { path: '/about',   ____________________ },
        { path: '/members', ____________________ },
        { path: '/videos',  ____________________ },
    ]
})

export default router;
```

vue-router를 이용한 라우팅

src/router/index.js

```
import { createRouter, createWebHistory } from 'vue-router'

import Home from '@/pages/Home.vue'
import About from '@/pages/About.vue'
import Members from '@/pages/Members.vue'
import Videos from '@/pages/Videos.vue'

const router = createRouter({
    history: createWebHistory(),
    routes : [
        { path: '/', component: Home },
        { path: '/about', component: About },
        { path: '/members', component: Members },
        { path: '/videos', component: Videos },
    ]
})

export default router;
```

vue-router를 이용한 라우팅

- **메뉴바 역할을 하는 Header 컴포넌트를 정의하세요.**
  - Bootstrap을 이용하여 작성
  - 다음처럼 화면폭에 따라 반응하도록 함

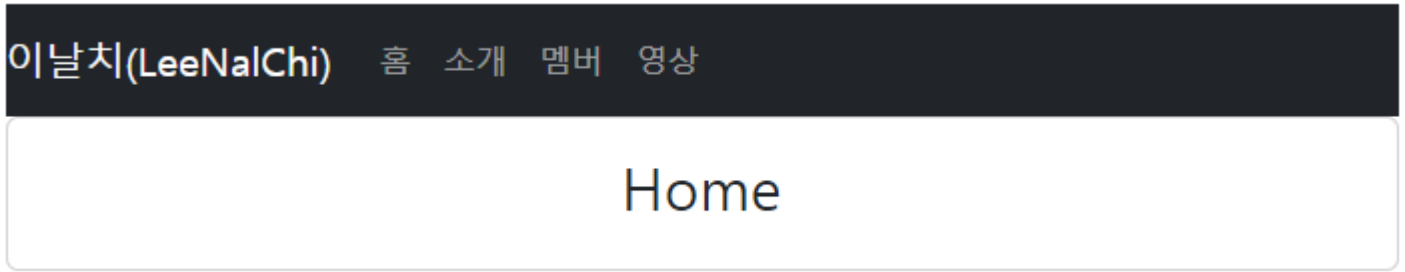

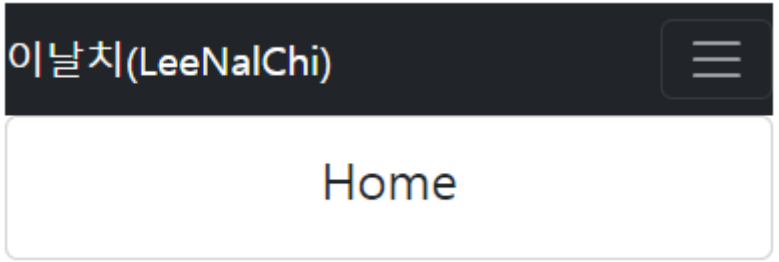

src/components/Header.vue

```
<template>
  <nav class="navbar navbar-expand-md bg-dark navbar-dark mt-2">
    <span class="navbar-brand">이날치(LeeNalChi)</span>
    <button class="navbar-toggler" type="button" @click="changeIsNavShow">
      <span class="navbar-toggler-icon"></span>
    </button>

    <div :class="navClass">
      <ul class="navbar-nav">
        <li class="nav-item">
          <router-link class="nav-link" to="/">홈</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" to="/about">소개</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" to="/members">멤버</router-link>
        </li>
        <li class="nav-item">
          <router-link class="nav-link" to="/videos">영상</router-link>
        </li>
      </ul>
    </div>
  </nav>
</template>
```

vue-router를 이용한 라우팅

src/components/Header.vue

```
<script>
import { reactive, computed } from 'vue';

export default {
  setup() {
    const state = reactive({ isNavShow: false });

    const navClass = computed(() =>
      state.isNavShow
        ? 'collapse navbar-collapse show'
        : 'collapse navbar-collapse'
    );

    const changeIsNavShow = () => { state.isNavShow = !state.isNavShow; };

    return { state, changeIsNavShow, navClass };
  },
};
</script>
```

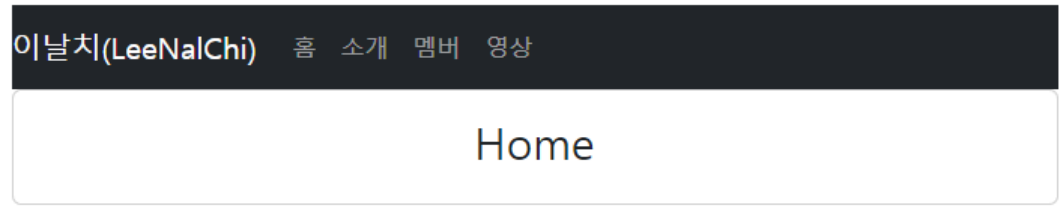

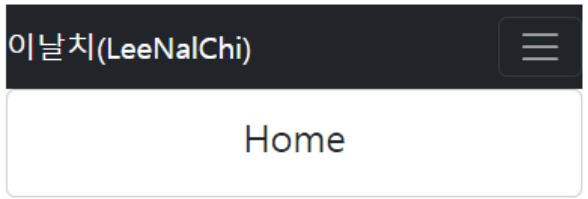

vue-router를 이용한 라우팅

- 메뉴 항목을 클릭했을 때 해당 페이지가 보이도록 App.vue를 작성하세요.

```
<template>
  <div class="container">



  </div>
</template>

<script setup>

</script>
<style>
.container {
  text-align: center;
  margin-top:10px;
}
</style>
```

vue-router를 이용한 라우팅

src/App.vue

```
<template>
  <div class="container">
    <Header />
    <router-view></router-view>
  </div>
</template>

<script>
import Header from '@/components/Header.vue'

export default {
  name : "App",
  components : { Header },
}
</script>
<style>
.container {
  text-align: center;
  margin-top:10px;
}
</style>
```

vue-router를 이용한 라우팅

- About.vue 페이지에 현재 url을 출력하고, 라우터 객체를 콘솔에도 출력하세요.

```
<template>
    <div class="card card-body">
        <h2>About</h2>
        <p>요청 경로 : {{ ___________ }}</p>
    </div>
</template>

<script>
export default {
  name : "About",
  created() {
   ___________________________;
  }
}
</script>
```

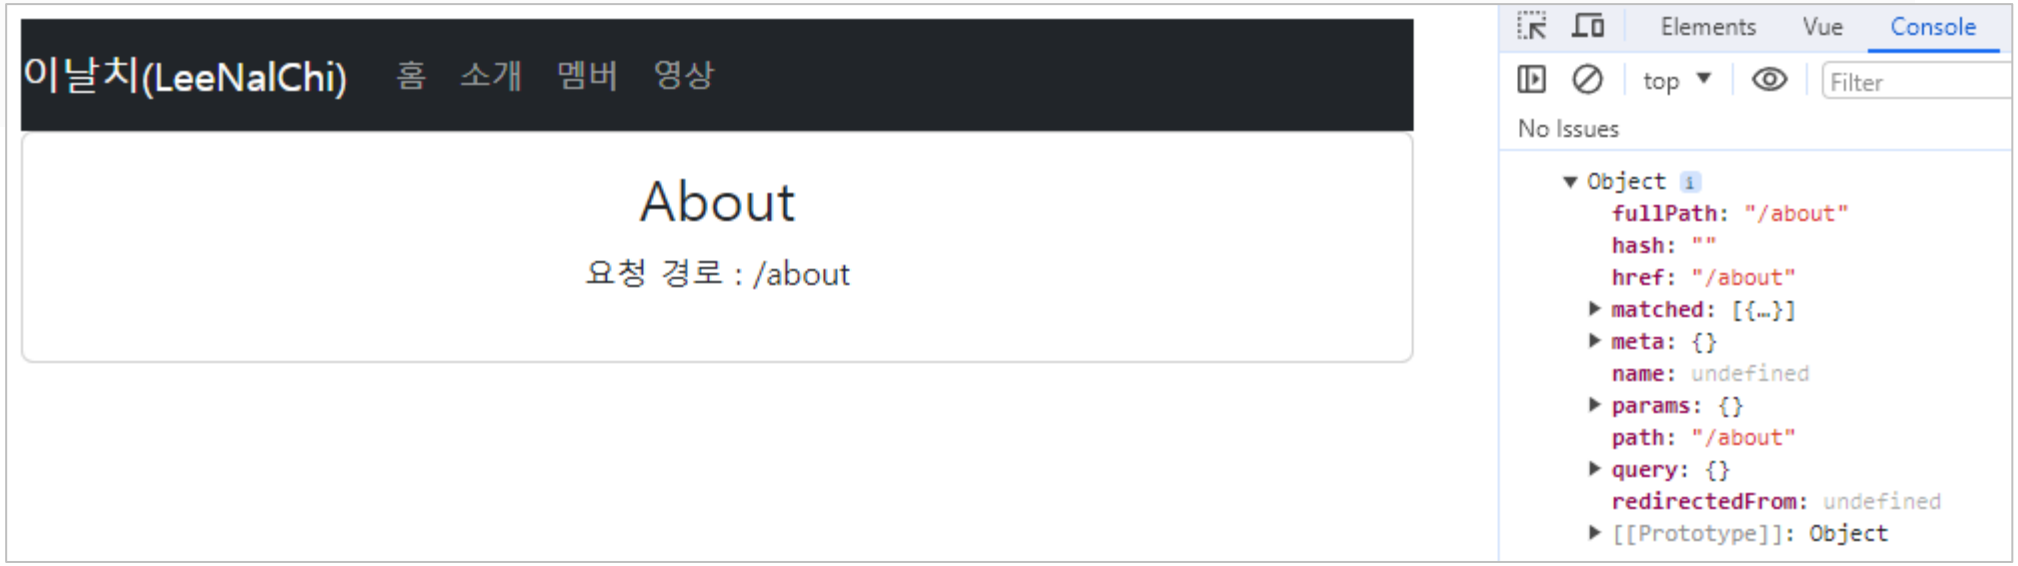

vue-router를 이용한 라우팅

src/pages/About.vue
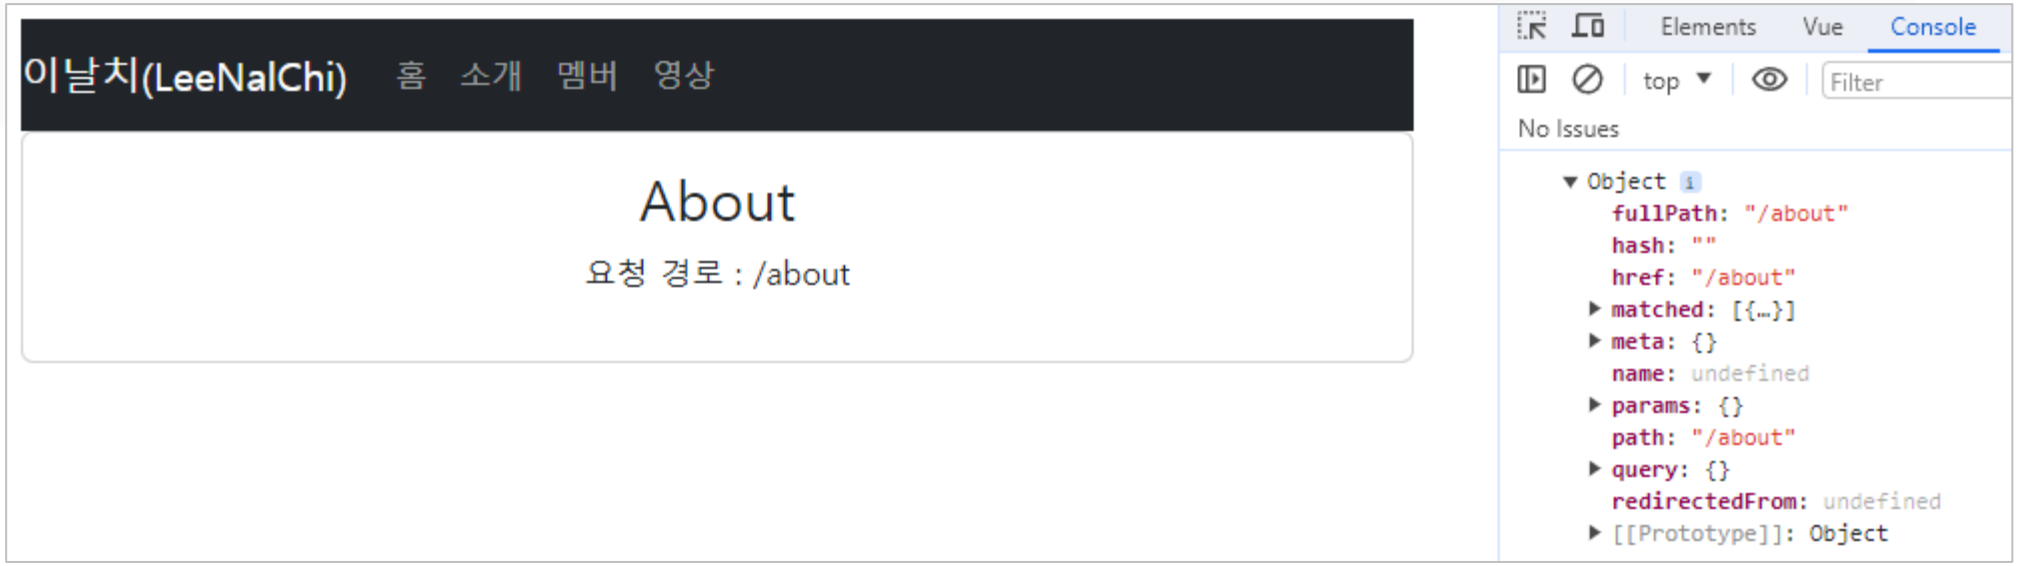
```
<template>
    <div class="card card-body">
        <h2>About</h2>
        <p>요청 경로 : {{$route.fullPath}}</p>
    </div>
</template>

<script>
export default {
  name : "About",
  created() {
    console.log(this.$route)
  }
}
</script>
```