

K-디지털 트레이닝

백엔드 준비

[KB] IT's Your Life

✓ apiserver 프로젝트를 다음 위치로 복사

- C:\KB_Fullstack\09_Spring+Vue\scoula\backend

- settings.gradle에서 프로젝트 명 수정
rootProject.name = "backend"

- build.gradle에 swagger 의존성 추가


 - // swagger

 - implementation 'io.springfox:springfox-swagger2:2.9.2'


 - implementation 'io.springfox:springfox-swagger-ui:2.9.2'

→ Gradle Sync

✓ 실행 구성

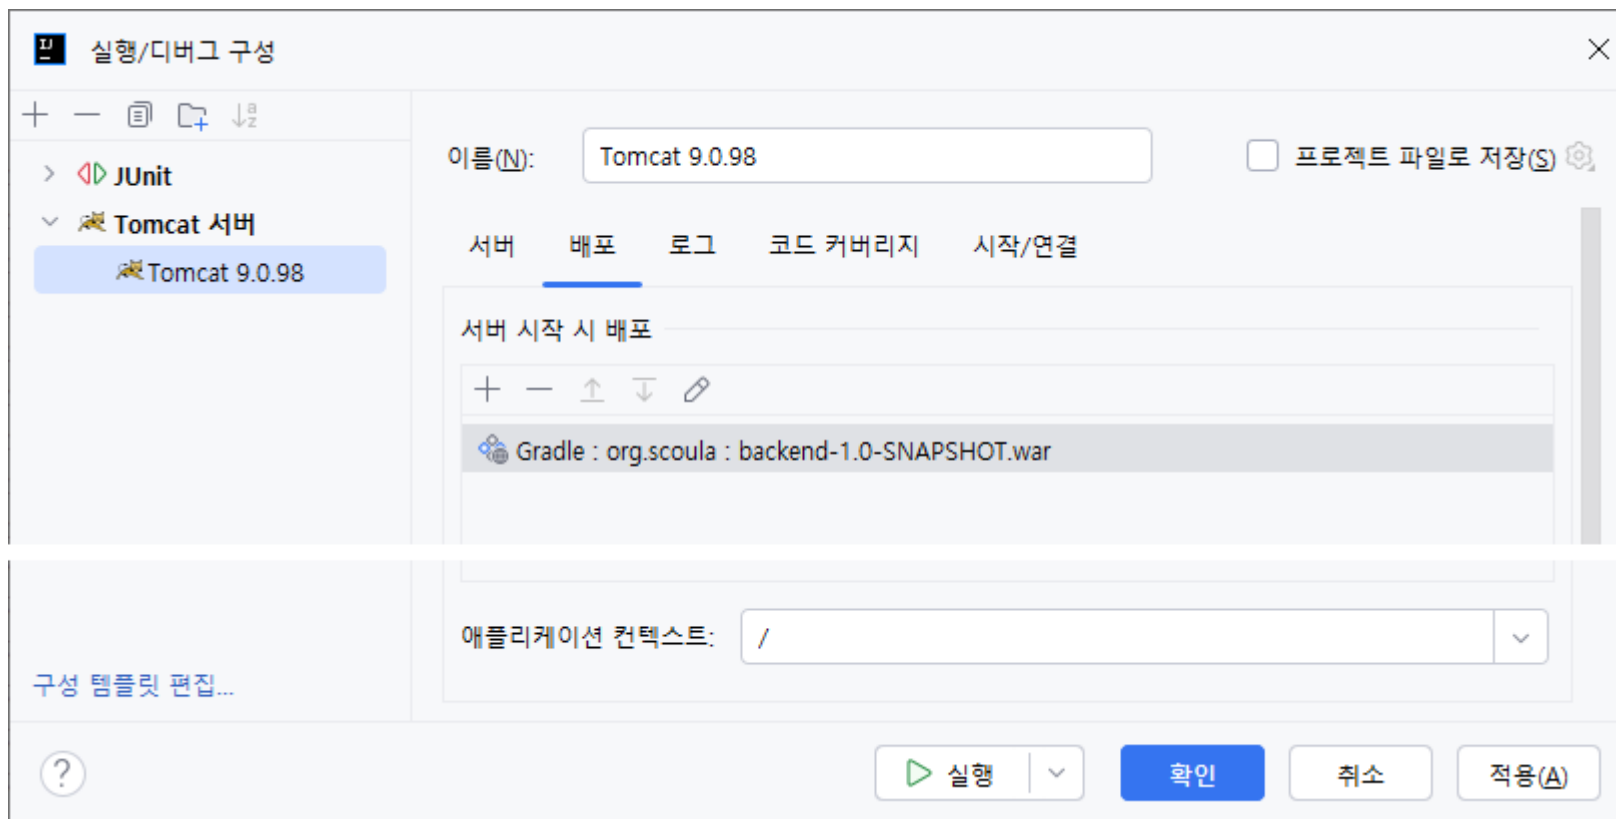


✔ webapp의 하위에 있는 모든 jsp 파일 삭제

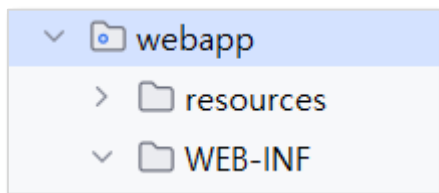

○ webapp/resources

- 프론트엔드에서 npm run build를 실행하면 배포되는 곳

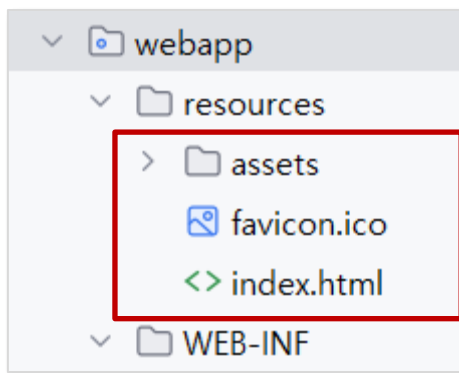

프론트엔드 build 결과물

✓ 기본 설정

- /를 요구했을 때 /resources/index.html을 리턴
- 프론트엔드에서 기존 정적 파일은 /assets/**로 기술되어 있음
 - 실제 배치는 /resources/assets/**
 - /assets/**를 요구했을 때 /resources/assets/** 경로로 해석하도록 설정
 - /assets/**는 스프링 처리에서 제외해야 함(resources에 대한 동일한 처리)
- 새로 고침했을 때 해당 url은 백엔드에 없음
 - 404에러 발생
 - CommonExceptionHandler에서 index.html로 포워딩
 - CommonExceptionHandler, ApiExceptionHandler 적용 순서 지정
 - @Order(순번)

config.ServletConfig.java

```
public class ServletConfig implements WebMvcConfigurer {  
    @Override  
    public void addViewControllers(ViewControllerRegistry registry) {  
        registry.addViewController("/")  
            .setViewName("forward:/resources/index.html");  
    }  
  
    @Override  
    public void addResourceHandlers(ResourceHandlerRegistry registry) {  
        registry.addResourceHandler("/resources/**")  
            .addResourceLocations("/resources/");  
  
        registry.addResourceHandler("/assets/**")  
            .addResourceLocations("/resources/assets/");  
    }  
    ...  
}
```

○ void configureViewResolvers(ViewResolverRegistry registry) 삭제

CommonExceptionAdvice.java

```
package org.scoula.exception;

import lombok.extern.log4j.Log4j2;
import org.springframework.core.annotation.Order;
import org.springframework.web.bind.annotation.ControllerAdvice;
import org.springframework.web.bind.annotation.ExceptionHandler;
import org.springframework.web.servlet.NoHandlerFoundException;

@ControllerAdvice
@Log4j2
@Order(1)
public class CommonExceptionAdvice {

    @ExceptionHandler(NoHandlerFoundException.class)
    public String handle404(NoHandlerFoundException ex) {
        return "/resources/index.html";
    }
}
```

ApiExceptionAdvice.java

```
package org.scoula.exception;


import org.springframework.core.annotation.Order;
import org.springframework.http.HttpStatus;
import org.springframework.http.ResponseEntity;
import org.springframework.web.bind.annotation.ExceptionHandler;
import org.springframework.web.bind.annotation.RestControllerAdvice;

import java.util.NoSuchElementException;


@RestControllerAdvice
@Order(2)
public class ApiExceptionAdvice {
    ...
}
```


✓ 게시판(board) api 준비

- boardapi 프로젝트에서 org.scoula.board 패키지, common 패키지 복사
- exception.ApiExceptionAdvice.java, BoardMapper.xml 복사

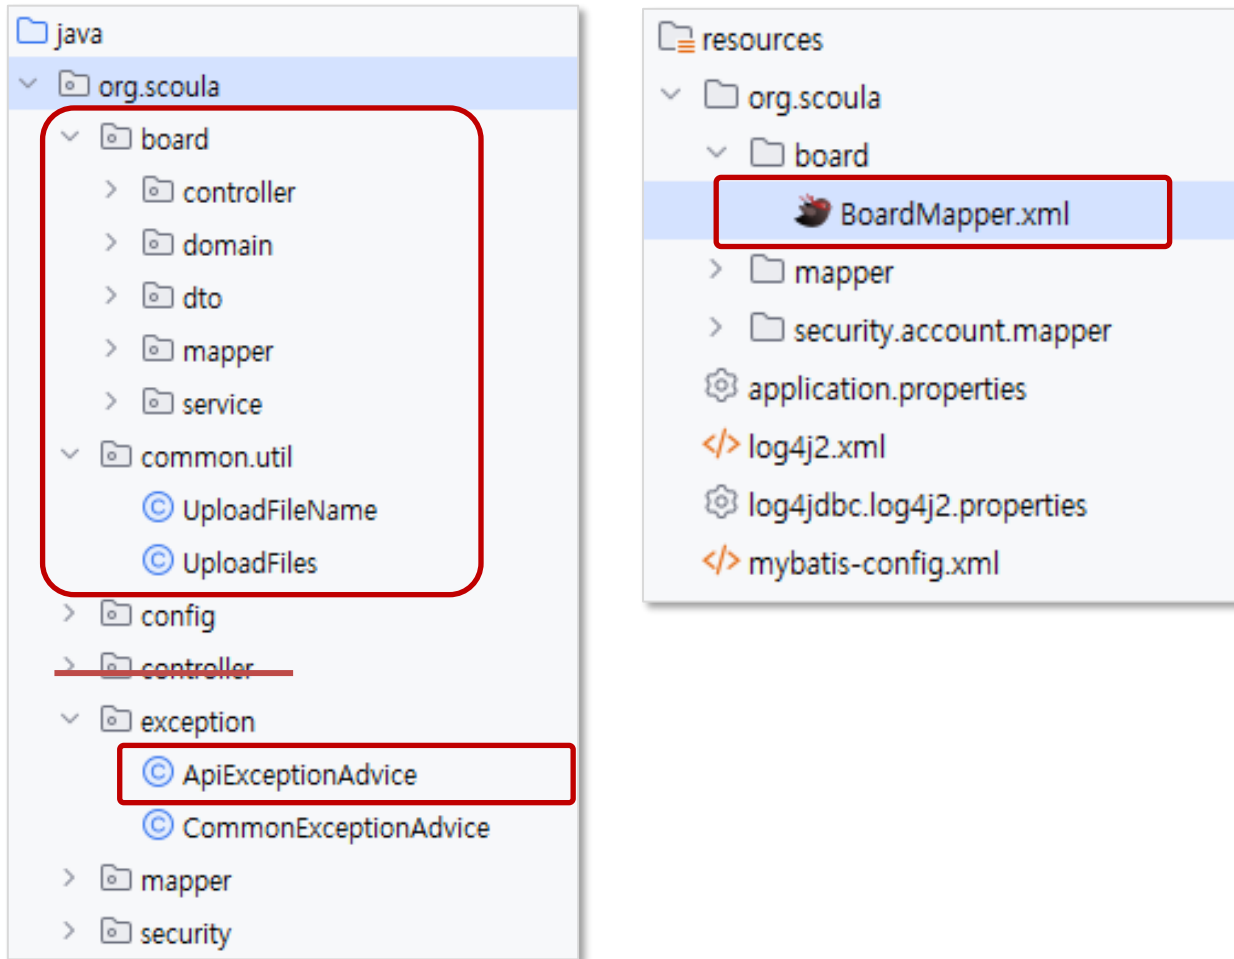

- ✓ 게시판(board) api 준비
 - SwaggerConfig.java 복사
 - JWT 인증 처리 추가

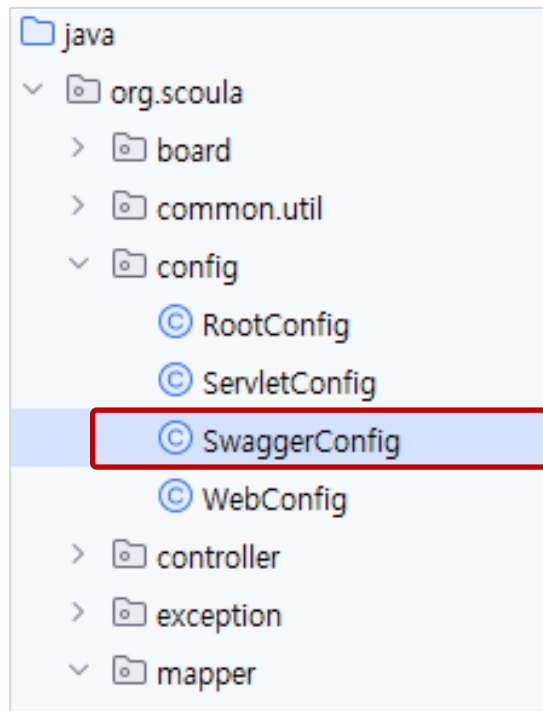

 config.SwaggerConfig.java

```
public class SwaggerConfig {  
    ...  
    @Bean  
    public Docket api() {  
        return new Docket(DocumentationType.SWAGGER_2)  
            // JWT 인증  
            .securityContexts(List.of(this.securityContext())) // SecurityContext 설정  
            .securitySchemes(List.of(this.apiKey())) // ApiKey 설정  
            .select()  
            .apis(RequestHandlerSelectors.withClassAnnotation(RestController.class))  
            .paths(PathSelectors.any())  
            .build()  
            .apiInfo(apiInfo());  
    }  
}
```

 config.SwaggerConfig.java

```
// JWT SecurityContext 구성
private SecurityContext securityContext() {
    return SecurityContext.builder()
        .securityReferences(defaultAuth())
        .build();
}

private List<SecurityReference> defaultAuth() {
    AuthorizationScope authorizationScope = new AuthorizationScope("global", "accessEverything");
    AuthorizationScope[] authorizationScopes = new AuthorizationScope[1];
    authorizationScopes[0] = authorizationScope;
    return List.of(new SecurityReference("Authorization", authorizationScopes));
}

// ApiKey 정의
private ApiKey apiKey() {
    return new ApiKey("Authorization", "Authorization", "header");
}
}
```

 config.ServletConfig.java

```
public class ServletConfig implements WebMvcConfigurer {  
    ...  
    @Override  
    public void addResourceHandlers(ResourceHandlerRegistry registry) {  
        ...  
        // Swagger UI 리소스를 위한 핸들러 설정  
        registry.addResourceHandler("/swagger-ui.html")  
            .addResourceLocations("classpath:/META-INF/resources/");  
  
        // Swagger WebJar 리소스 설정  
        registry.addResourceHandler("/webjars/**")  
            .addResourceLocations("classpath:/META-INF/resources/webjars/");  
  
        // Swagger 리소스 설정  
        registry.addResourceHandler("/swagger-resources/**")  
            .addResourceLocations("classpath:/META-INF/resources/");  
  
        registry.addResourceHandler("/v2/api-docs")  
            .addResourceLocations("classpath:/META-INF/resources/");  
    }  
}
```

 config.WebConfig.java

```
public class WebConfig extends AbstractAnnotationConfigDispatcherServletInitializer {  
    ...  
  
    @Override  
    protected Class<?>[] getServletConfigClasses() {  
        return new Class[] { ServletConfig.class, SwaggerConfig.class };  
    }  
}
```

 resources::/mybatis-config.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE configuration
    PUBLIC "-//mybatis.org//DTD Config 3.0//EN"
    "http://mybatis.org/dtd/mybatis-3-config.dtd">

<configuration>
    <settings>
        <setting name="mapUnderscoreToCamelCase" value="true" />
    </settings>

    <typeAliases>
        <package name="org.scoula.security.account.domain" />
        <package name="org.scoula.board.domain" />
    </typeAliases>

</configuration>
```

config.RootConfig.java

```
@Configuration
@PropertySource({"classpath:/application.properties"})
@MapperScan(basePackages = {"org.scoula.board.mapper"})
@ComponentScan(basePackages = {"org.scoula.board.service"})
@Log4j2
@EnableTransactionManagement
public class RootConfig {
    ...
}
```


config.ServletConfig.java

```
@EnableWebMvc
@ComponentScan(basePackages = {
    "org.scoula.controller",
    "org.scoula.exception",
    "org.scoula.board.controller"
})
public class ServletConfig implements WebMvcConfigurer {
    ...
}
```

security.config.SecurityConfig.java

```
public class SecurityConfig extends WebSecurityConfigurerAdapter {  
    ...  
    // 접근 제한 무시 경로 설정 - resource  
    @Override  
    public void configure(WebSecurity web) throws Exception {  
        web.ignoring().antMatchers("/assets/**", "/*", "/api/member/**",  
            // Swagger 관련 url은 보안에서 제외  
            "/swagger-ui.html", "/webjars/**", "/swagger-resources/**", "/v2/api-docs"  
        );  
    }  
}
```

 security.config.SecurityConfig.java

```
@Override
public void configure(HttpSecurity http) throws Exception {
    ...

    http
        .authorizeRequests()
        .antMatchers(HttpMethod.OPTIONS).permitAll()
        // 일단 모든 접근 허용
        .anyRequest().permitAll();

    http.httpBasic().disable() // 기본 HTTP 인증 비활성화
        .csrf().disable() // CSRF 비활성화
        .formLogin().disable() // formLogin 비활성화 관련 필터 해제
        .sessionManagement().sessionCreationPolicy(SessionCreationPolicy.STATELESS); // 세션 생성 모드 설정
}
...
}
```

METHOD

GET

SCHEME :// HOST [":" PORT] [PATH ["?" QUERY]]

http://localhost:8080/api/board

Send

length: 31 byte(s)

▶ QUERY PARAMETERS

Response

Cache Detected - Elapsed Time: 275ms

200

HEADERS
pretty

X-Content-Type: nosniff

X-XSS-Protection: 1; mode=block

Cache-Control: no-cache, no-store, max-age=0, must-revalidate

Pragma: no-cache

Expires: 0

X-Frame-Options: DENY

Content-Type: application/json; charset=UTF-8

Transfer-Encoding: chunked

Date: Wed, 31 Jul 2024 08:59:22 GMT

Keep-Alive: timeout=20

Connection: keep-alive

▶ COMPLETE REQUEST HEADERS

BODY
pretty

[

{

no: 127,

title: "페이징 테스트 110",

content: "페이징 테스트 110",

writer: "user0",

regDate: 1722404772000,

updateDate: 1722404772000,

attaches: null,

files: null

},

{

no: 126,