

K-디지털 트레이닝

프론트엔드 준비

[KB] IT's Your Life

✓ 프로젝트 만들기

```
09 Vue+SpringWscoula> npm init vue frontend
```

Vue.js – The Progressive JavaScript Framework

- ✓ Add TypeScript? ... **No** / Yes
- ✓ Add JSX Support? ... **No** / Yes
- ✓ Add Vue Router for Single Page Application development? ... No / **Yes**
- ✓ Add Pinia for state management? ... No / **Yes**
- ✓ Add Vitest for Unit Testing? ... **No** / Yes
- ✓ Add an End-to-End Testing Solution? >> **No**
- ✓ Add ESLint for code quality? ... **No** / Yes

대오

Scaffolding project in ...09 Vue+SpringWscoulaWfrontend...

Done. Now run:

```
cd frontend
npm install
npm run dev
```

✓ 기본 라이브러리 추가

- npm install
- npm install bootstrap@5 axios moment


index.html (fontawesome CDN 추가)

```
<!DOCTYPE html>
<html lang="ko">
  <head>
    <meta charset="UTF-8" />
    <link rel="icon" href="/favicon.ico" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link
      rel="stylesheet"
      href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.6.0/css/all.min.css"
      integrity="sha512-Kc323vGBEqzTmouAECnVceyQqyqdsSiqLQISBL29aUW4U/M7pSPA/gEUZQqv1cwx40nYxTxve5UMg5GT6L4JJg=="
      crossorigin="anonymous"
      referrerpolicy="no-referrer"
    />
    <title>Scoula App</title>
  </head>
  <body>
    <div id="app"></div>
    <script type="module" src="/src/main.js"></script>
  </body>
</html>
```

assets/main.css

```
@import
url('https://fonts.googleapis.com/css2?family=Noto+Sans+KR:wght@100;200;300;400;500;600;700;800;900&display=swap');

* {
  font-family: 'Noto Sans KR';
}
```

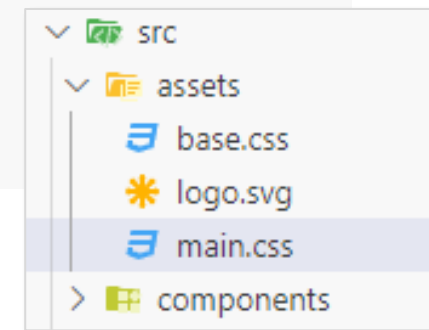

○ webfont 설정

- <https://noonnu.cc/> 에서 noto 검색

본고딕 (Noto Sans)

제작 GoogleXAdobe 조회수 691K 형태 고딕

폰트 미리보기

문구 적고 폰트 미리보기

24px

다운로드 페이지로 이동

즐거찾기

웹폰트로 사용

```
@import url('https://fonts.googleapis.com/ea
```

main.js

```
import './assets/main.css';  
import 'bootstrap/dist/css/bootstrap.css';  
  
import { createApp } from 'vue';  
import { createPinia } from 'pinia';  
  
import App from './App.vue';  
import router from './router';  
  
const app = createApp(App);  
app.use(createPinia());  
app.use(router);  
  
app.mount('#app');
```


App.vue

```
<script setup>
import { RouterView } from 'vue-router';
</script>

<template>
  <RouterView />
</template>

<style scoped></style>
```

✓ 기본 페이지 컴포넌트

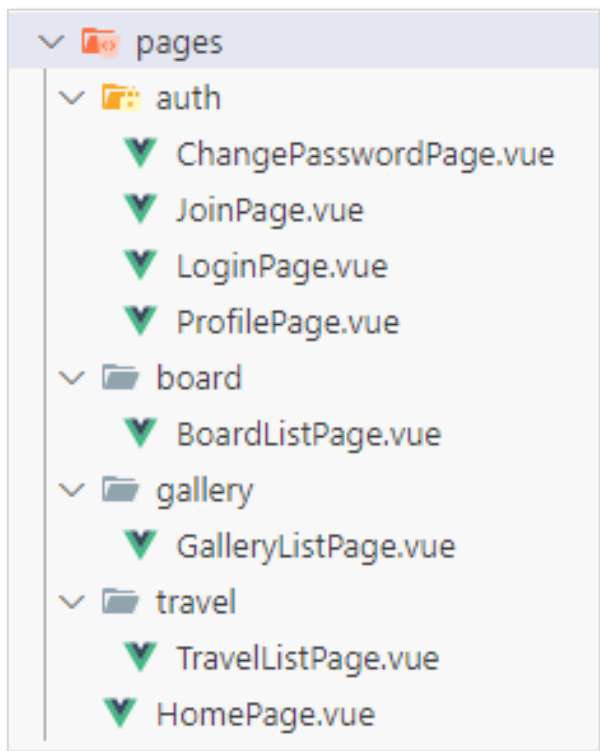

- 기존 views 폴더는 삭제


pages/HomePage.vue

```
<script setup>
</script>

<template>
  <h1>첫 번째 페이지</h1>
</template>
```

○ 나머지 모든 페이지 → 타이틀만 구성

✓ 라우팅 준비

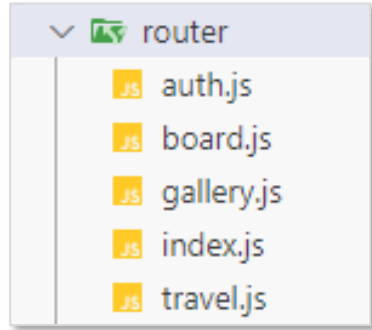

- 기능별로 라우팅 설정을 모듈화
 - index: 기본 라우팅
 - auth: login, logout, join 라우팅
 - board: 게시글 관련 라우팅
 - travel: 추천 여행지 관련 라우팅
 - gallery: 갤러리 관련 라우팅

 router/auth.js

```
export default [  
  {  
    path: '/auth/login',  
    name: 'login',  
    component: () => import('../pages/auth/LoginPage.vue'),  
  },  
  {  
    path: '/auth/join',  
    name: 'join',  
    component: () => import('../pages/auth/JoinPage.vue'),  
  },  
  {  
    path: '/auth/profile',  
    name: 'profile',  
    component: () => import('../pages/auth/ProfilePage.vue'),  
  },  
  {  
    path: '/auth/changepassword',  
    name: 'changepassword',  
    component: () => import('../pages/auth/ChangePasswordPage.vue'),  
  },  
];
```

router/board.js

```
export default [  
  {  
    path: '/board/list',  
    name: 'board/list',  
    component: () => import('../pages/board/BoardListPage.vue'),  
  },  
];
```

router/travel.js

```
export default [  
  {  
    path: '/travel/list',  
    name: 'travel/list',  
    component: () => import('../pages/travel/TravelListPage.vue'),  
  },  
];
```

router/gallery.js

```
export default [  
  {  
    path: '/gallery/list',  
    name: 'gallery/list',  
    component: () => import('../pages/gallery/GalleryListPage.vue'),  
  },  
];
```

router/index.js


```
import { createRouter, createWebHistory } from 'vue-router';
import HomePage from '../pages/HomePage.vue';
import authRoutes from './auth';
import boardRoutes from './board';
import travelRoutes from './travel';
import galleryRoutes from './gallery';

const router = createRouter({
  history: createWebHistory(import.meta.env.BASE_URL),
  routes: [
    { path: '/', name: 'home', component: HomePage },
    ...authRoutes,
    ...boardRoutes,
    ...travelRoutes,
    ...galleryRoutes,
  ],
});



export default router;
```

✓ 기본 레이아웃

- 기존 components/의 내용 모두 삭제
- 다음 구조로 컴포넌트 작성

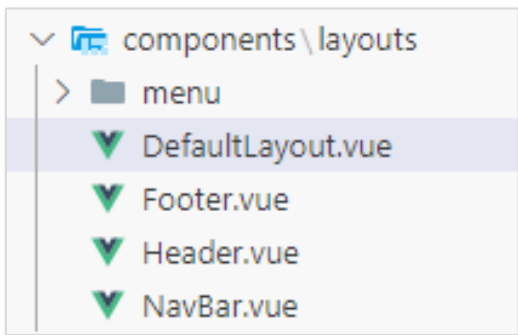


○ 헤더의 배경 이미지 준비

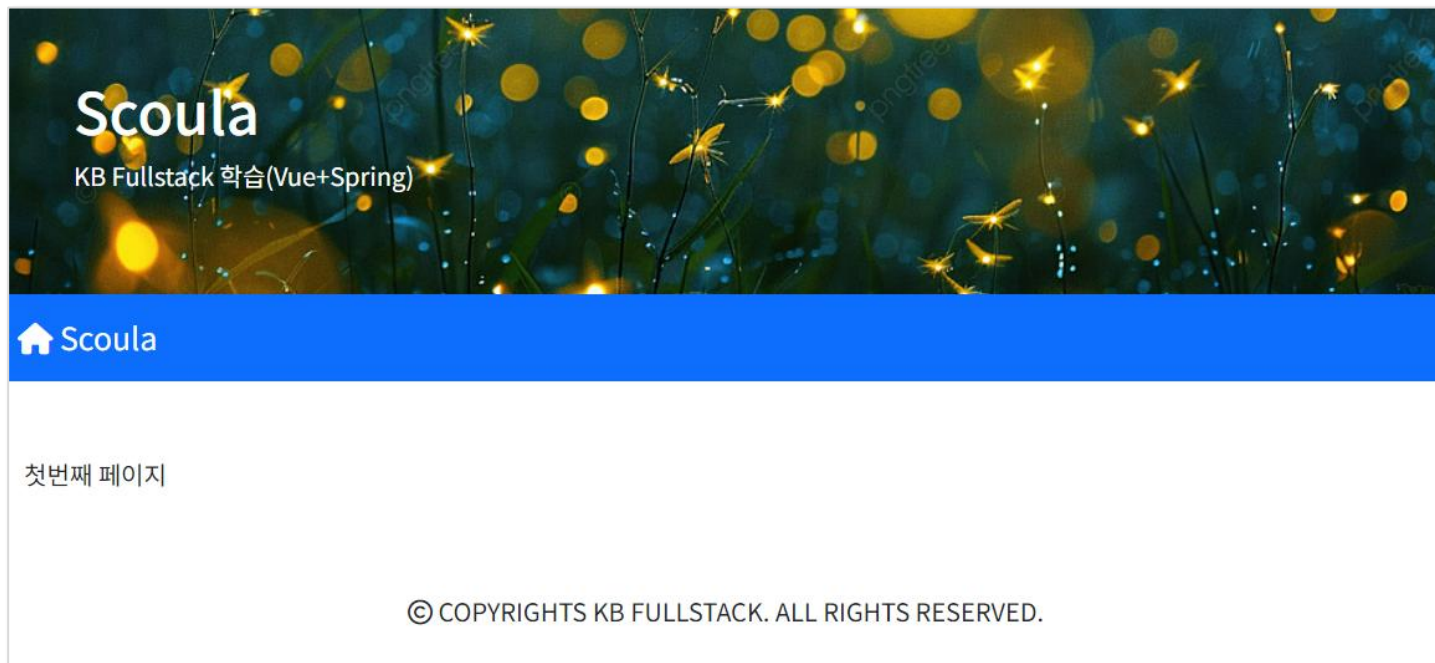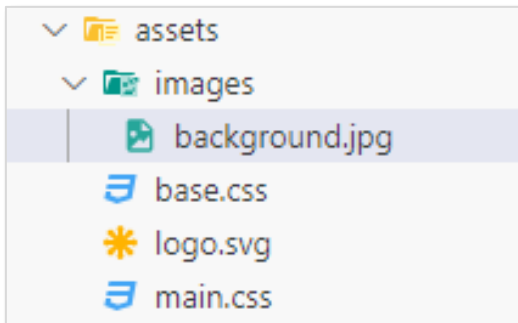

config/index.js

```
export default {  
  title: 'Scoula',    // 메인 타이틀  
  subtitle: 'KB Fullstack 학습(Vue+Spring)', // 서브 타이틀  
  menus: [ // 메인 메뉴 구성 정보  
    {  
      title: '게시판',  
      url: '/board/list',  
      icon: 'fa-solid fa-paste',  
    },  
    {  
      title: '여행',  
      url: '/travel/list',  
      icon: 'fa-solid fa-plane-departure',  
    },  
    {  
      title: '갤러리',  
      url: '/gallery/list',  
      icon: 'fa-regular fa-images',  
    },  
  ],  
}
```

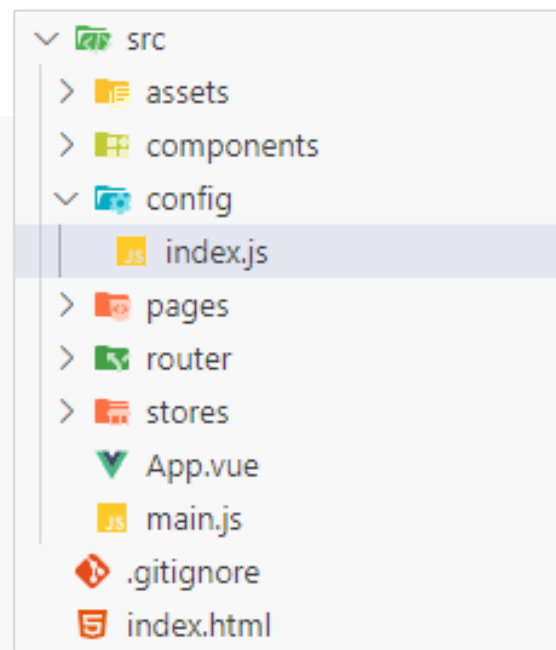

config/index.js

```
accountMenus: {    // 인증 관련 메뉴 정보
  login: {
    url: '/auth/login',
    title: '로그인',
    icon: 'fa-solid fa-right-to-bracket',
  },

  join: {
    url: '/auth/join',
    title: '회원가입',
    icon: 'fa-solid fa-user-plus',
  },
},
};
```

components/layouts/Header.vue

```
<script setup>
import config from '@config';
</script>
<template>
  <div class="jumbotron p-5 bg-primary text-white">
    <h1>{{ config.title }}</h1>
    <p>{{ config.subtitle }}</p>
  </div>
</template>
<style scoped>
.jumbotron {
  background-image: url('@assets/images/background.jpg');
  background-repeat: no-repeat;
  background-position: center;
  background-size: cover;
  color: white;
  padding: 2rem;
}
</style>
```

components/layouts/NavBar.vue

```
<script setup>
import { reactive, computed } from 'vue';
import config from '@config';

let state = reactive({ isNavShow: false });

let navClass = computed(() => (state.isNavShow ? 'collapse navbar-collapse show' : 'collapse navbar-collapse'));

const toggleNavShow = () => (state.isNavShow = !state.isNavShow);
</script>
```

components/layouts/NavBar.vue

```
<template>
  <nav class="navbar navbar-expand-sm bg-primary navbar-dark">
    <div class="container-fluid">
      <router-link class="navbar-brand" to="/">
        <i class="fa-solid fa-house"></i>
        Scoula
      </router-link>
      <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#collapsibleNavbar"
        @click="toggleNavShow">
        <span class="navbar-toggler-icon"></span>
      </button>
      <div :class="navClass" id="collapsibleNavbar">
        <!-- 추후 작업 예정 -->
      </div>
    </div>
  </nav>
</template>
<style></style>
```

components/layouts/Footer.vue

```
<script></script>
<template>
  <div class="my-5 p-3 text-center">
    <i class="fa-regular fa-copyright"></i>
    COPYRIGHTS KB FULLSTACK. ALL RIGHTS RESERVED.
  </div>
</template>
```

components/layouts/DefaultLayout.vue

```
<script setup>
import Header from './Header.vue';
import NavBar from './NavBar.vue';
import Footer from './Footer.vue';
</script>
```


```
<template>
  <div class="container">
    <Header />
    <NavBar />
    <div class="content my-5 px-3">
      <slot></slot>
    </div>
    <Footer />
  </div>
</template>
```

App.vue



```
<script setup>
import { RouterView } from 'vue-router';
import DefaultLayout from './components/layouts/DefaultLayout.vue';
</script>

<template>
  <DefaultLayout>
    <RouterView />
  </DefaultLayout>
</template>

<style scoped></style>
```

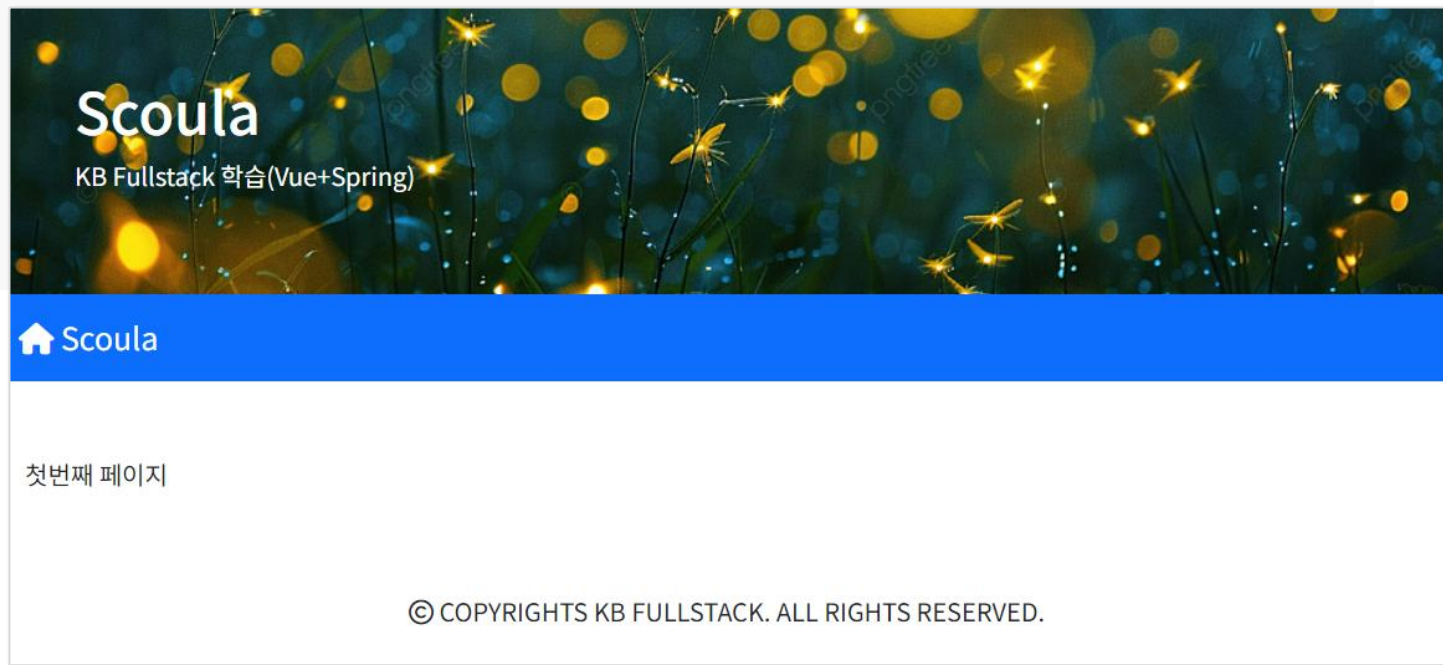

메뉴의 구성

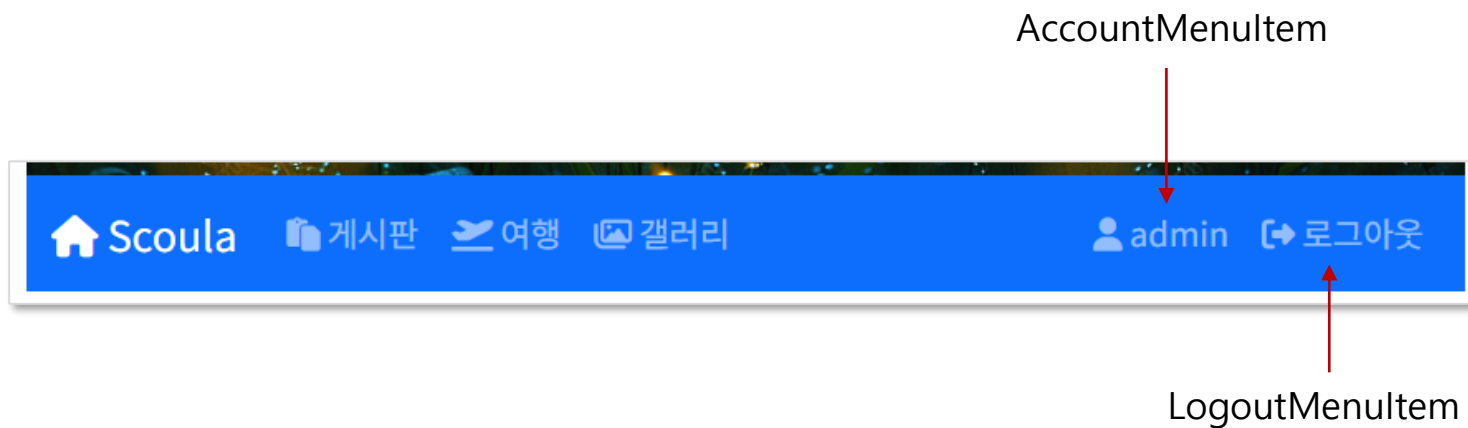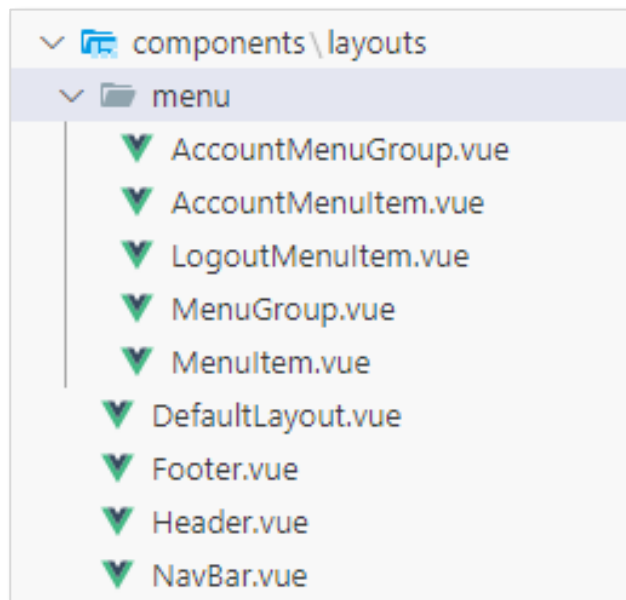

components/layouts/menu/Menulitem.vue

```
<script setup>
const props = defineProps({
  menu: { Type: Object, required: true },
});
</script>

<template>
  <li class="nav-item">
    <router-link class="nav-link" :to="menu.url">
      <i :class="menu.icon"></i>
      {{ menu.title }}
    </router-link>
  </li>
</template>
<style></style>
```

components/layouts/menu/MenuGroup.vue

```
<script setup>
import MenuItem from './MenuItem.vue';
const props = defineProps({
  menus: { Type: Array, required: true },
});
</script>

<template>
  <ul class="navbar-nav">
    <MenuItem v-for="menu in menus" :menu="menu" />
  </ul>
</template>
```

components/layouts/menu/AccountMenuItem.vue

```
<script setup>
defineProps({ username: String });
</script>

<template>
  <li class="nav-item">
    <router-link class="nav-link" to="/auth/profile">
      <i class="fa-solid fa-user"></i>
      {{ username }}
    </router-link>
  </li>
</template>
```

components/layouts/menu/LogoutMenuItem.vue

```
<script setup>
import { useRouter } from 'vue-router';

const router = useRouter();
const logout = (e) => {
  // 로그아웃
  router.push('/');
};
</script>

<template>
  <a href="#" class="nav-link" @click.prevent="logout">
    <i class="fa-solid fa-right-from-bracket"></i>
    로그아웃
  </a>
</template>
```

components/layouts/menu/AccountMenuGroup.vue

```
<script setup>
import { computed } from 'vue';
import MenuItem from './MenuItem.vue';
import AccountMenuItem from './AccountMenuItem.vue';
import LogoutMenuItem from './LogoutMenuItem.vue';
import config from '@config';

const { login, join } = config.accountMenus;

const islogin = computed(() => false); // 임시: 로그인하지 않음
const username = computed(() => ''); // 임시: 사용자명 없음
</script>
```

 components/layouts/menu/AccountMenuGroup.vue

```
<template>
  <ul class="navbar-nav ms-auto">
    <template v-if="islogin">
      <AccountMenuItem :username="username" />
      <LogoutMenuItem />
    </template>
    <template v-else>
      <MenuItem :menu="login" />
      <MenuItem :menu="join" />
    </template>
  </ul>
</template>
```

components/layouts/NavBar.vue

```
<script setup>
import { reactive, computed } from 'vue';
import config from '@config';
import MenuGroup from './menu/MenuGroup.vue';
import AccountMenuGroup from './menu/AccountMenuGroup.vue';
...
</script>
<template>
  <nav class="navbar navbar-expand-sm bg-primary navbar-dark">
    <div class="container-fluid">
      ...
      <div :class="navClass" id="collapsibleNavbar">
        <!-- 추후 작업 예정 -->
        <MenuGroup :menus="config.menus" />
        <AccountMenuGroup />
      </div>
    </div>
  </nav>
</template>
<style></style>
```


- ✓ api 연결을 위한 proxy 서버 설정 및 배포 설정
 - 백엔드 서버로 요청을 포워딩할 proxy 설정
 - npm run build 명령시 결과 생성 폴더를 백엔드의 resources 폴더로 지정

 vite.config.js

```
import { fileURLToPath, URL } from 'node:url';
...
export default defineConfig({
  plugins: [vue()],
  resolve: {
    alias: {
      '@': fileURLToPath(new URL('./src', import.meta.url)),
    },
  },
  server: {
    proxy: {
      '/api': {
        target: 'http://localhost:8080',
      },
    },
  },
  build: {
    outDir: 'C:/KB_Fullstack/09_Spring+Vue/scoula/backend/src/main/webapp/resources',
  },
});
```

✓ npm run build

- backend의 resources 폴더에 결과물 생김

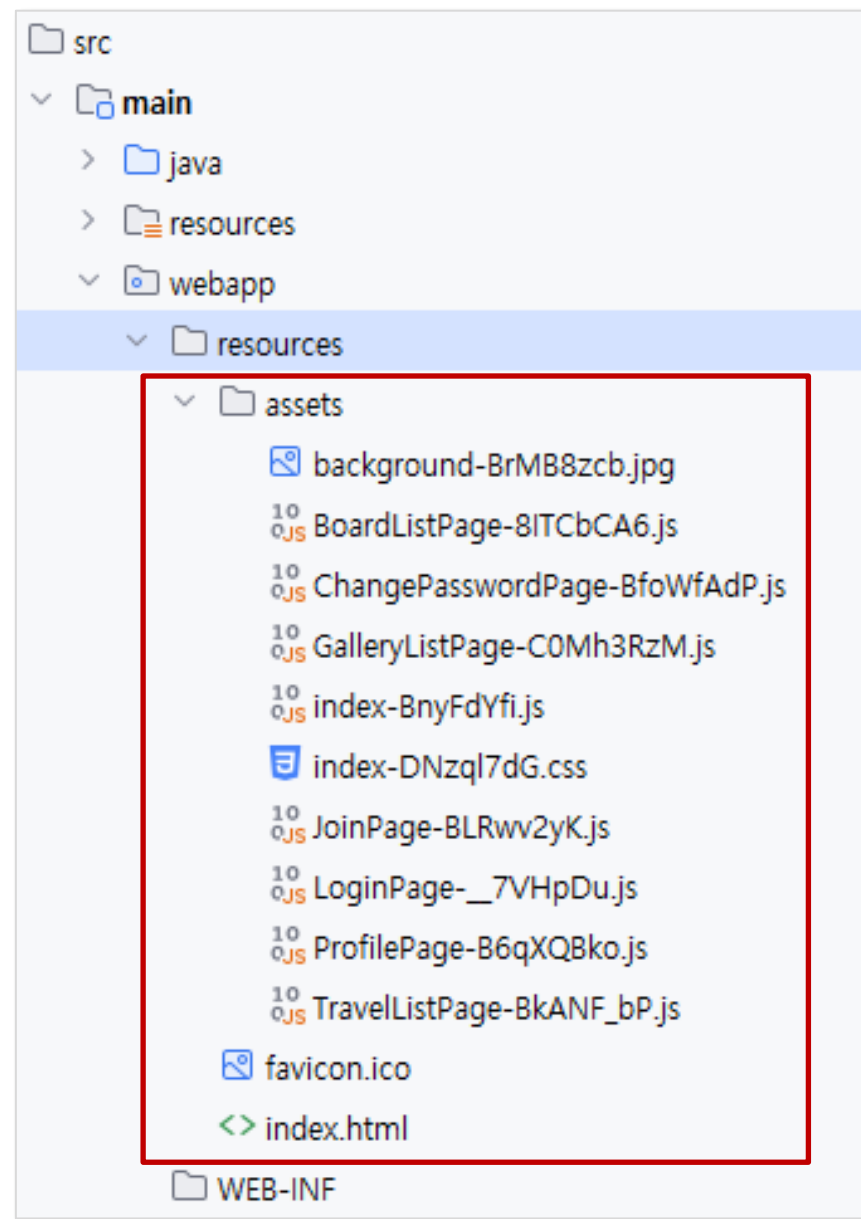

✓ 백엔드 기동

http://localhost:8080/

