<실습 0-1> $_SERVER[]

1. /tmp/jhnang/cgi-bin/php_server.php 를 자신의 cgi-bin (~/public_html/cgi-bin)로 copy
2. Web 브라우저에서 ~자신의ID/cgi-bin/php_server.php 요청
3. 요청한 브라우저 정보 (Port number, IP address)를 출력하도록 수정

```
<!DOCTYPE html>
<html>
<body>

<?php
echo $_SERVER['PHP_SELF'];
echo "<br>";
echo $_SERVER['SERVER_NAME'];
echo "<br>";
echo $_SERVER['HTTP_HOST'];
echo "<br>";
echo $_SERVER['HTTP_REFERER'];
echo "<br>";
echo $_SERVER['HTTP_USER_AGENT'];
echo "<br>";
echo $_SERVER['SCRIPT_NAME'];
?>

</body>
</html>
```

~/public_html/cgi-bin/php_server.php

```
/~jhnang/cgi-bin/php_server.php
cspro.sogang.ac.kr
cspro.sogang.ac.kr

Mozilla/5.0 (Windows NT 10.0; Win64; x64
Safari/537.36
/~jhnang/cgi-bin/php_server.php
163.239.25.60

27515
```

출력 예제

<실습 0-2> PHP _GET[ ], _POST[ ]

1. /tmp/jhnang/input2026.html 을 자신의 홈 directory (~/public_html)에 copy
2. /tmp/jhnang/cgi-bin/input2026.php를 자신의 cgi-bin (~/public_html/cgi-bin)로 copy
3. Web 브라우저에서 ~자신의ID/input2026.html 요청
4. POST를 GET으로 변경하여 반복 요청

```
<html> <body>

<form action="cgi-bin/input2025.php" method="post">
        Name: <input type="text" name="name"><br>
        E-mail: <input type="text" name="email"><br>
        <input type="submit">
</form>

</body> </html>
```

~/public_html/input2026.html

```
<html> <body>

Welcome <?php echo $_POST["name"]; ?><br>
Your email address is <?php echo $_POST["email"]; ?>

</body> </html>
```

~/public_html/cgi-bin/input2026.php

<실습 1> Form Validation

1. /tmp/jhnang/cgi-bin/form_validation.php를 자신의 cgi-bin directory로 copy (no Validation)

Result:

PHP Form Validation Example

Name:

E-mail:

Website:

Comment:

Gender: ○Female ○Male

Submit

Your Input:

jhnang@sogang.ac.kr
mmlab.sogang.ac.kr
Test
male

PHP Source:

```
<!DOCTYPE HTML>
<html>
<head>
</head>
<body>

<?php
// define variables and set to empty values
$name = $email = $gender = $comment = $website = "";

if ($_SERVER["REQUEST_METHOD"] == "POST") {
   $name = test_input($_POST["name"]);
   $email = test_input($_POST["email"]);
   $website = test_input($_POST["website"]);
   $comment = test_input($_POST["comment"]);
   $gender = test_input($_POST["gender"]);
}

function test_input($data) {
   $data = trim($data);
   $data = stripslashes($data);
   $data = htmlspecialchars($data);
   return $data;
}
?>

<h2>PHP Form Validation Example</h2>
<form method="post" action="<?php echo htmlspecialchars($_SERVER["PHP_SELF"]);?>">
   Name: <input type="text" name="name">
   <br><br>
   E-mail: <input type="text" name="email">
   <br><br>
   Website: <input type="text" name="website">
   <br><br>
   Comment: <textarea name="comment" rows="5" cols="40"></textarea>
   <br><br>
   Gender:
   <input type="radio" name="gender" value="female">Female
   <input type="radio" name="gender" value="male">Male
   <br><br>
   <input type="submit" name="submit" value="Submit">
</form>
```

```
<?php
echo "<h2>Your Input:</h2>";
echo $name;
echo "<br>";
echo $email;
echo "<br>";
echo $website;
echo "<br>";
echo $comment;
echo "<br>";
echo $gender;
?>

</body>
```

2. /tmp/jhnang/cgi-bin/form_validationComplete.php를 자신의 cgi-bin directory로 copy (Input Validation by server-side programming)

PHP Form Validation Example

* required field

Name: safaf *

E-mail: jhnang * Invalid email format

Website:

Comment:

Gender: ○ Female ○ Male ○ Other * Gender is required

Submit

Your Input:

safaf
jhnang

```
<html>
<head>
<style>
.error {color: #FF0000;}
</style>
</head>
<body>

<?php
// define variables and set to empty values
$nameErr = $emailErr = $genderErr = $websiteErr = "";
$name = $email = $gender = $comment = $website = "";

if ($_SERVER["REQUEST_METHOD"] == "POST") {
  if (empty($_POST["name"])) {
    $nameErr = "Name is required";
  } else {
    $name = test_input($_POST["name"]);
    // check if name only contains letters and whitespace
    if (!preg_match("/^[a-zA-Z-' ]*$/",$name)) {
      $nameErr = "Only letters and white space allowed";
    }
  }


  if (empty($_POST["email"])) {
    $emailErr = "Email is required";
  } else {
    $email = test_input($_POST["email"]);
    // check if e-mail address is well-formed
    if (!filter_var($email, FILTER_VALIDATE_EMAIL)) {
      $emailErr = "Invalid email format";
    }
  }

  if (empty($_POST["website"])) {
    $website = "";
  } else {
    $website = test_input($_POST["website"]);
    // check if URL address syntax is valid (this regular expression also allows
dashes in the URL)
    if (!preg_match("/\b(?:(?:https?|ftp):\/\/|www\.)[-a-z0-9+&@#\/%?=~_|!:,.;]*
[-a-z0-9+&@#\/%=~_|]/i",$website)) {
      $websiteErr = "Invalid URL";
    }
  }

  if (empty($_POST["comment"])) {
    $comment = "";
  } else {
    $comment = test_input($_POST["comment"]);
  }
```


3. /tmp/jhnang/UserRegistration.html을 자신의 ~/public_html directory로 copy

(Input Validation by HTML5 Tag)

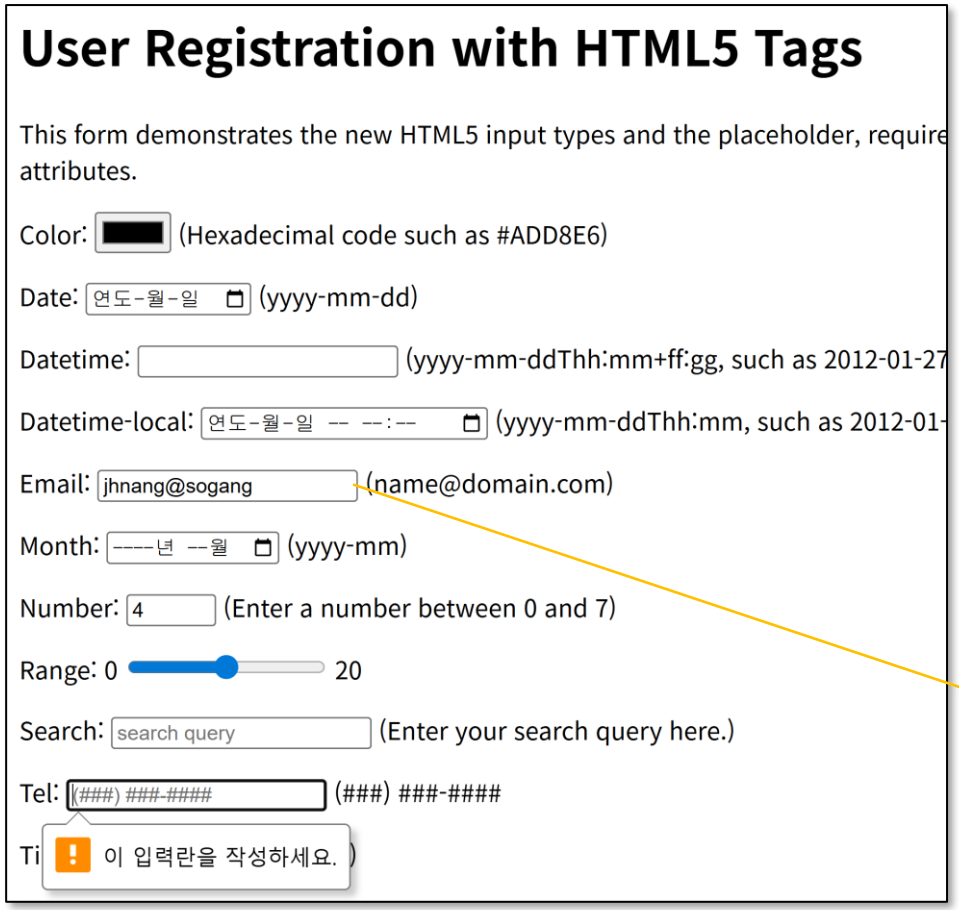


```
<form method = "post" action = "http://www.deitel.com">
   <p>
      <label>Color:
         <input type = "color" autofocus />
            (Hexadecimal code such as #ADD8E6)
      </label>
   </p>
   <p>
      <label>Date:
         <input type = "date" />
            (yyyy-mm-dd)
      </label>
   </p>
   <p>
      <label>Datetime:
         <input type = "datetime" />
            (yyyy-mm-ddThh:mm+ff:gg, such as 2012-01-27T03:15)
      </label>
   </p>
   <p>
      <label>Datetime-local:
         <input type = "datetime-local" />
            (yyyy-mm-ddThh:mm, such as 2012-01-27T03:15)
      </label>
   </p>
   <p>
      <label>Email:
         <input type = "email" placeholder = "name@domain.com"
            required /> (name@domain.com)
      </label>
   </p>
   <p>
      <label>Month:
         <input type = "month" /> (yyyy-mm)
      </label>
   </p>
```


- 동일한 HTML5 문서를 서로 다른 플랫폼에서 서로 다른 브라우져로 display하는 경우 화면 내용이 같을까? **(자신의 Handphone으로 자기 홈페이지에 있는 파일 직접 확인하여 보기) → cspro.sogang.ac.kr:80 접근 가능??**

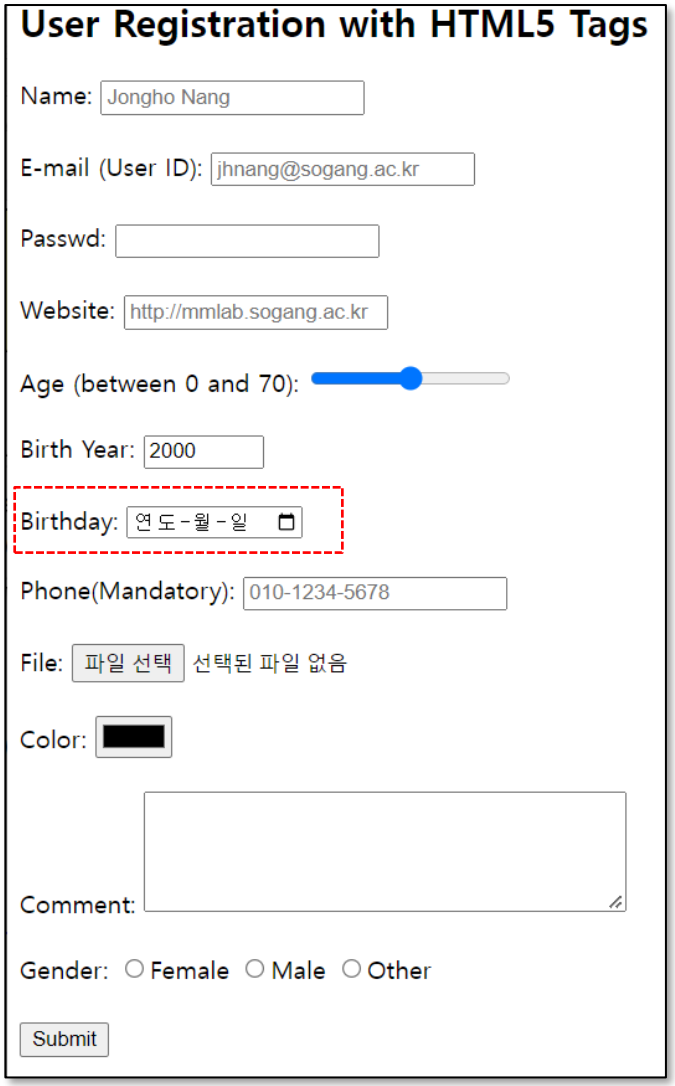

Chrome Browser (Windows)




IE Browser (Windows)

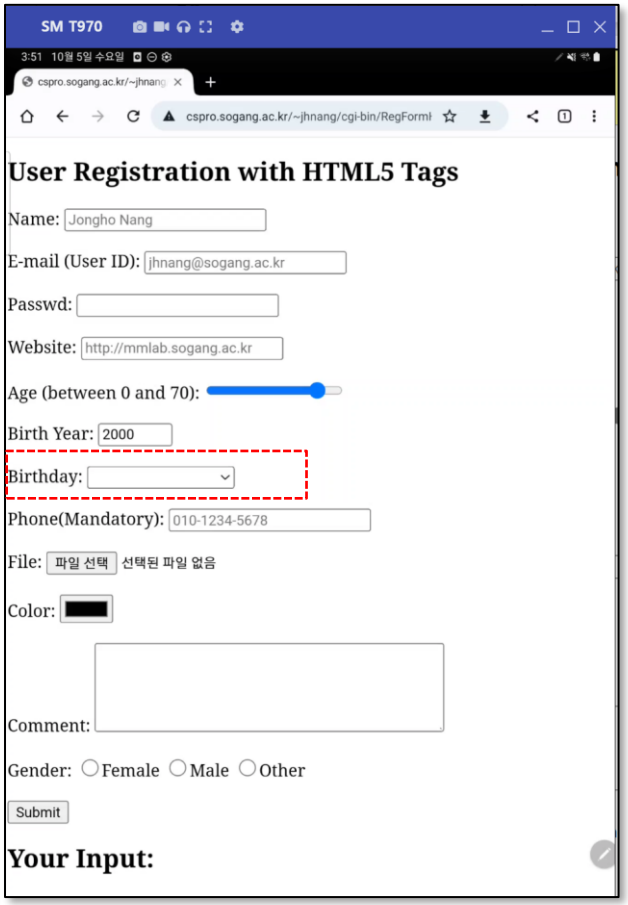


Chrome Browser (Android)

<실습 2> File Upload

1. 아래 file을 자신의 home director에 copy
   - /tmp/jhnang/UploadFile.html
   - /tmp/jhnang/cgi-bin/UploadFile.php
2. Local computer에 있는 file을 upload하고 확인
3. Error가 생기면 그 이유를 찾아볼 것

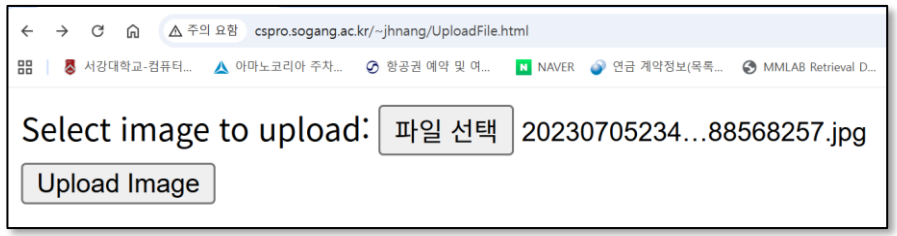


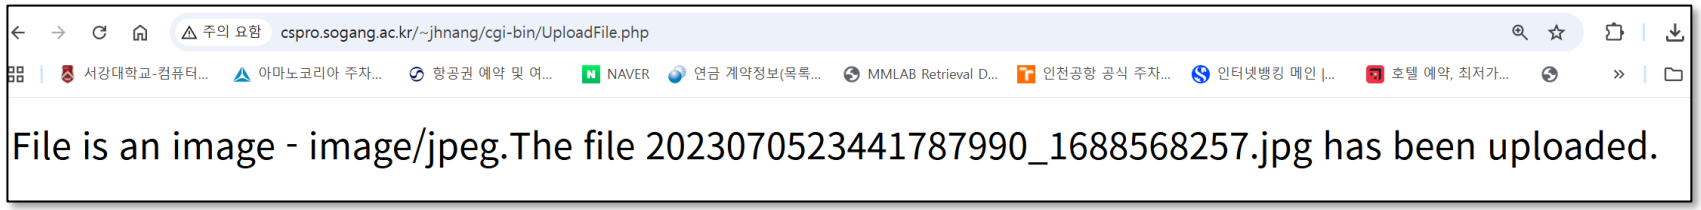


```
% mkdir uploads
% chmod 777 uploads
```

<실습 3> Cookie & Session

1. (cookie) 아래 file을 자신의 home directory에 copy하고 Cookie setting test
   - /tmp/jhnang/cgi-bin/set_cookie.php:
   - 여러 브라우져로 cookie 값 점검
   - Cookie expire하는 방법??
2. (Session) 아래 file을 자신의 home directory에 copy하고 Cookie setting test
   - /tmp/jhnang/cgi-bin/set_sessionVar.php, /tmp/jhnang/cgi-bin/get_sessionVar.php
   - 여러 브라우져로 session 값 점검
   - Session Var을 expire하는 방법??
3. Chrome의 개발자 도구를 이용하여 확인

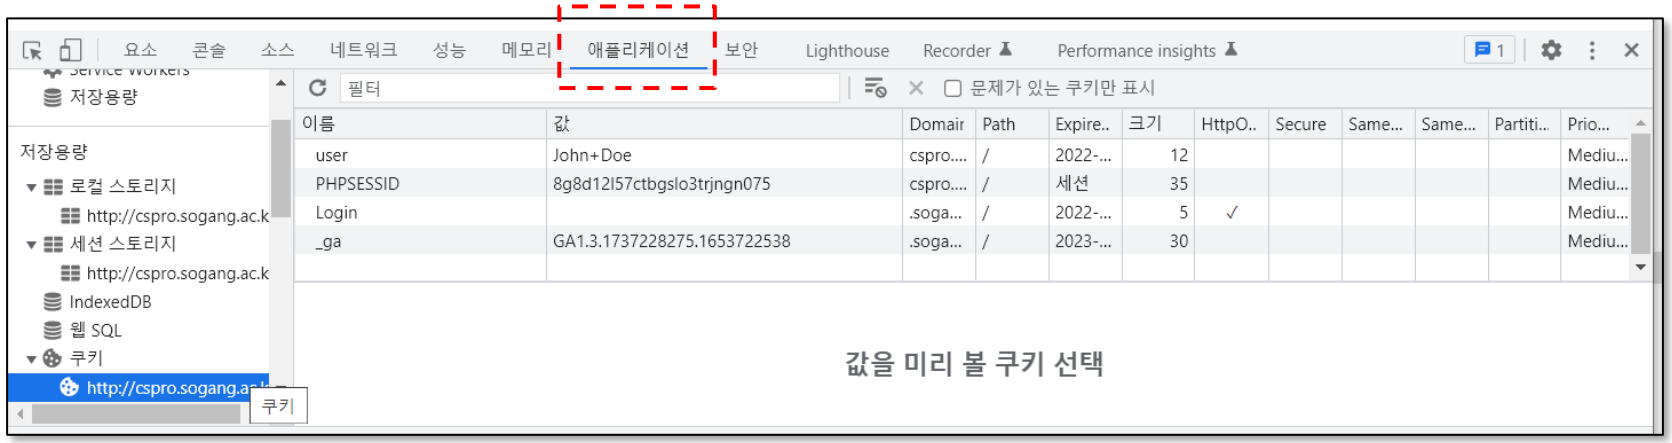

<실습 4> MySQL 연결 및 데이터 입력/검색

- cspro.sogang.ac.kr:/tmp/jhnang/cgi-bin/에 있는 아래 3개의 파일을 자신의 cgi-bin으로 copy
  ① MySQLCreate.php, MySQLInsert.php, MySQLSelect.php
- 이 파일들에 있는 $username, $passwd, $dbname 변수를 자신의 ID 및 passwd, db이름으로 변경
- 웹 브라우저를 이용하여 자신의 cgi-bin에 있는 아래 php를 load하여 DB access를 수행 (항목추가)
- DB Insert에 있는 삽입할 data 내용을 브라우저로부터 사용자 입력을 받아서 삽입하도록 HTML 파일 및 MySQLInsert.php를 수정하여 볼 것
- Command line 연결 및 DB 내용 display

```
$ mysql --host=localhost --user=jhnang --password=pwjhnang db_jhnang
```

```
mysql> show DATABASES;
```

```
mysql> show DATABASES;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| db_jhnang          |
+--------------------+
```

```
mysql> show TABLES;
```

```
mysql> show TABLES;
+---------------------+
| Tables_in_db_jhnang |
+---------------------+
| MyGuests            |
+---------------------+
```

```
mysql> select * from MyGuests;
```

```
mysql> SELECT * from MyGuests;
+----+-----------+----------+------------------+---------------------+
| id | firstname | lastname | email            | reg_date            |
+----+-----------+----------+------------------+---------------------+
|  1 | John      | Doe      | john@example.com | 2022-10-05 01:49:47 |
+----+-----------+----------+------------------+---------------------+
```

- Delete Table

Console

```
mysql> SHOW TABLES;
+--------------------+
| Tables_in_mydb2016 |
+--------------------+
| dept               |
| posts              |
+--------------------+
2 rows in set (0.01 sec)
```

Console

```
mysql> DROP TABLE dept;
Query OK, 0 rows affected (0.00 se
```

Console

```
mysql> SHOW TABLES;
+--------------------+
| Tables_in_mydb2016 |
+--------------------+
| posts              |
+--------------------+
1 rows in set (0.00 sec)
```

- Delete Table Element

Introduction to MySQL DELETE statement

To delete data from a table, you use the MySQL `DELETE` statement

syntax of the `DELETE` statement:

```
DELETE FROM table_name
WHERE condition;
```

<실습 ①> DB Insert

~/DBInsert2025.html

```
<!DOCTYPE HTML>
<html>
<body>

<form action="cgi-bin/MySQLInsertTest.php" method="GET">
First Name: <input type="text" name="first_name"><br>
Last Name: <input type="text" name="last_name"><br>
E-mail: <input type="text" name="email"><br>
<input type="submit">
</form>

</body>
</html>
```

First Name: Jjj

Last Name: Nang

E-mail: jhnang@naver.com

제출



~/cgi-bin/MySQLInsertTest.php


<실습 ②> DB Search

DBSearch2025.html

```html
<!DOCTYPE HTML>
<html>
<body>

<H1> MySQL Search Test </H1>
<form action="cgi-bin/MySQLSearchTest.php" method="GET">
First Name: <input type="text" name="first_name"><br>
Last Name: <input type="text" name="last_name"><br>
E-mail: <input type="text" name="email"><br>
<input type="submit">
</form>

</body>
</html>
```

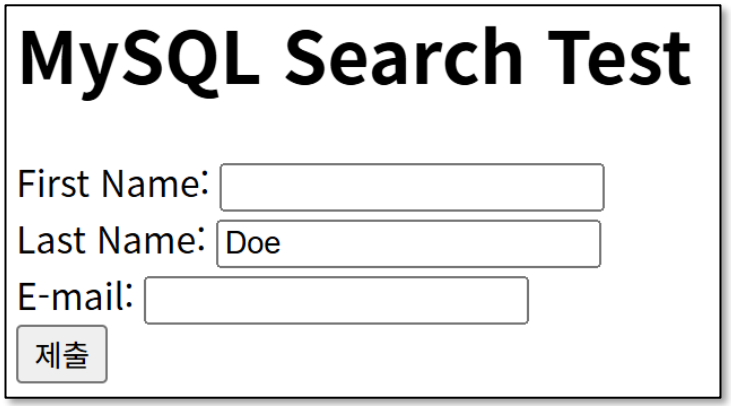


```php
<?php
$servername = "localhost";
$username = "jhnang";
$password = "pwjhnang";
$dbname = "db_jhnang";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
  die("Connection failed: " . $conn->connect_error);
}

$sql = "SELECT id, firstname, lastname, email FROM MyGuests WHERE lastname='" . $_GET["last_name"] . "'";
$result = $conn->query($sql);

if ($result->num_rows > 0) {
  // output data of each row
  while($row = $result->fetch_assoc()) {
    echo "id: " . $row["id"]. " - Name: " . $row["firstname"]. " " . $row["lastname"]. $row["email"]. "<br>";
  }
} else {
  echo "0 results";
}

$conn->close();
?>
```

/tmp/jhnang/cgi-bin/MySQLSelect.php를 수정하여
이 php 프로그램을 작성하여 볼 것

~/cgi-bin/MySQLSearchTest.php

id: 1 - Name: John Doejohn@example.com
id: 4 - Name: John Doejohn@example.com
id: 5 - Name: John Doejohn@example.com
id: 7 - Name: John Doejohn@example.com
id: 8 - Name: John Doejohn@example.com
id: 11 - Name: John Doejohn@example.com
id: 19 - Name: John Doejohn@example.com

<과제 2> MySQL 연결 및 데이터 입력/검색

1. 오른쪽 그림을 참고하여 사용자 등록을 하는 Web Page 작성. HTML5 Tag 이용 (① RegForm.html)

2. 각 Field를 MySQL DB에 저장하는 php 프로그램 작성 (② db_insert.php)


3. MySQL DB에 저장되어 있는 등록 사용자를 보여주는 html 및 php 프로그램 작성
   - 조건 (주요 입력 필드에 따른 검색 기능 제공
     ③ search.html
     - 검색 예 (기능이 많을 수로 가점)
       * 특정 일자 이후 등록자 검색
       * 특정 사용자 정보 검색
       * 특정 전공/관심 분야 사용자 검색
     ④ DB_display.php
     - 전체 등록자를 table형식으로 보여줌

과제 마감 : 10월 7일 오전 10시 30분
제출 내용 및 방법 :
1. 프로그램 소스 (4개, zip)
2. 등록/검색 URL

을 cyber.sogang.ac.kr을 통하여 제출

action

cspro.sogang.ac.kr:/tmp/jhnang/UserRegistration.html

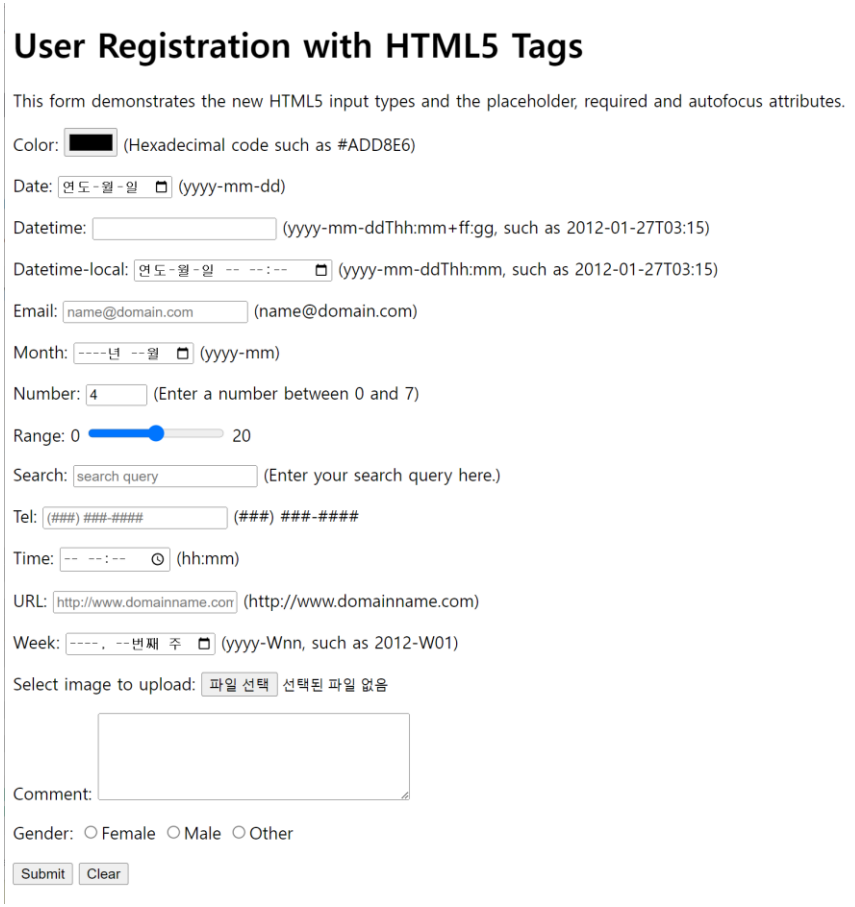

<실습 5> XML 문서 Parsing using PHP DOM Parser

① school.xml에 있는 각각의 학생 정보를 브라우져에 보여주는 php 프로그램을 PHP Built-In DOM Class Library를 이용하여 작성하라.

XMLGetNodeBuiltInSchool.php (DOM)

```php
<?php
$xmlDoc = new DOMDocument();
$xmlDoc->load("school.xml");

$students = $xmlDoc->getElementsByTagName('student');

foreach($students AS $student) {
        $studentName =  $student->getAttribute('name') ;
        echo("Name : $studentName") ;
        $studentProp = $student->childNodes;
        foreach($studentProp AS $Prop) {
                if ($Prop->nodeType === XML_ELEMENT_NODE)
                        echo " $Prop->tagName ==> $Prop->nodeValue , " ; }
        echo "<br>";
}
?>
```

```
Name : munhyeongbin id ==> cse11111111 , password ==> asdf1234 , email ==> 1111@naver.com , address ==> home , phone ==> 010-0000-0000 , scho
Name : kimjaeyong id ==> cse22222222 , password ==> asdf5678 , email ==> 2222@naver.com , address ==> Seoul , phone ==> 010-1111-2222 , schoolna
Name : parkjisu id ==> cse33333333 , password ==> asdf1011 , email ==> 3333@naver.com , address ==> GawngYang , phone ==> 010-2222-3333 , schoo
Name : leedawon id ==> cse44444444 , password ==> qwer1324 , email ==> 4444@naver.com , address ==> paju , phone ==> 010-3333-4444 , schoolnam
Biomolecular ,
Name : choigusick id ==> cse55555555 , password ==> zxcv4321 , email ==> 5555@naver.com , address ==> jeju , phone ==> 010-5555-6666 , schoolnam
```

php 프로그램 수행 결과

```xml
<?xml version="1.0" encoding="utf-8"?>
<school>
  <student name="munhyeongbin">
    <id>cse11111111</id>
    <password>asdf1234</password>
    <email>1111@naver.com</email>
    <address>home</address>
    <phone>010-0000-0000</phone>
    <schoolname>sognag university</schoolname>
    <major>Electronic</major>
    <interests>Else</interests>
  </student>
  <student name="kimjaeyong">
    <id>cse22222222</id>
    <password>asdf5678</password>
    <email>2222@naver.com</email>
    <address>Seoul</address>
    <phone>010-1111-2222</phone>
    <schoolname>sognag university</schoolname>
    <major>Computer Science</major>
    <interests>Else</interests>
  </student>
  <student name="parkjisu">
    <id>cse33333333</id>
    <password>asdf1011</password>
    <email>3333@naver.com</email>
    <address>GawngYang</address>
    <phone>010-2222-3333</phone>
    <schoolname>sognag university</schoolname>
    <major>Mechanical</major>
    <interests>Electronic</interests>
  </student>
  <student name="leedawon">
    <id>cse44444444</id>
    <password>qwer1324</password>
    <email>4444@naver.com</email>
    <address>paju</address>
    <phone>010-3333-4444</phone>
    <schoolname>sognag university</schoolname>
    <major>Electronic</major>
    <interests>Chemical and Biomolecular</interests>
  </student>
  <student name="choigusick">
    <id>cse55555555</id>
    <password>zxcv4321</password>
    <email>5555@naver.com</email>
    <address>jeju</address>
    <phone>010-5555-6666</phone>
    <schoolname>sognag university</schoolname>
    <major>Else</major>
    <interests>Electronic</interests>
  </student>
</school>
```

school.xml

② book.xml에 있는 각각의 학생 정보를 브라우저에 보여주는 php 프로그램을 PHP Built-In DOM Class Library를 이용하여 작성하라.

DOMDocument class : https://www.php.net/manual/en/class.domdocument.php
DOMElement class : https://www.php.net/manual/en/class.domelement.php

```xml
<?xml version="1.0" encoding="utf-8"?>
<bookstore>
  <book category="cooking">
    <title lang="en">Everyday Italian</title>
    <author>Giada De Laurentiis</author>
    <year>2005</year>
    <price>30.00</price>
  </book>
  <book category="children">
    <title lang="en">Harry Potter</title>
    <author>J K. Rowling</author>
    <year>2005</year>
    <price>29.99</price>
  </book>
  <book category="web">
    <title lang="en">XQuery Kick Start</title>
    <author>James McGovern</author>
    <author>Per Bothner</author>
    <author>Kurt Cagle</author>
    <author>James Linn</author>
    <author>Vaidyanathan Nagarajan</author>
    <year>2003</year>
    <price>49.99</price>
  </book>
  <book category="web" cover="paperback">
    <title lang="en">Learning XML</title>
    <author>Erik T. Ray</author>
    <year>2003</year>
    <price>39.95</price>
  </book>
</bookstore>
```

books.xml


```php
<?php

$dom = new DOMDocument();
$dom->load("books.xml");
$nodes = $dom->getElementsByTagName('book');


foreach($nodes as $node){
    $findme = $node->getElementsByTagName('title');
    echo $findme[0]->nodeValue ."<br/>";
}

?>
```

XMLGetNodeBuiltInBook.php

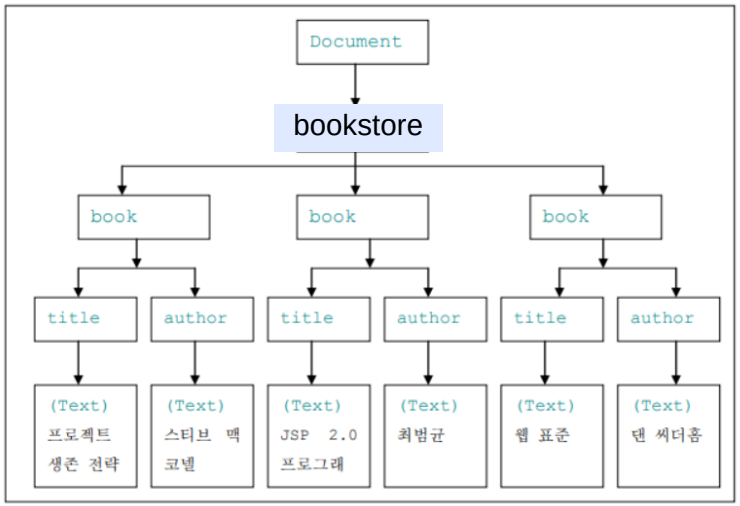


수행 결과

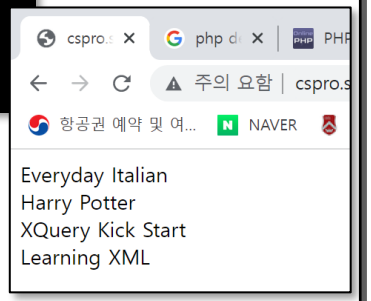

<실습 6> Web Crawling Test

https://simplehtmldom.sourceforge.io/docs/1.9/

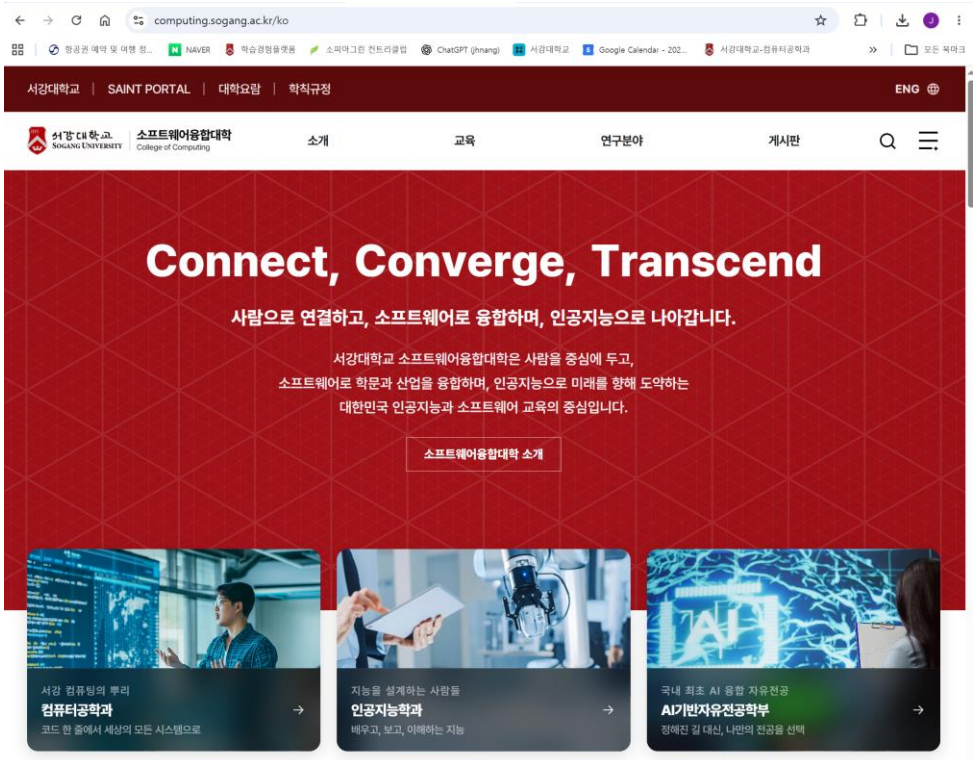

Web Crawling Test (using Built-In DOM Class)

https://computing.sogang.ac.kr/ko Submit

WebCrawlerBuiltInDOM.html

```
<!DOCTYPE html>
<html>
  <head>
    <title></title>
  </head>
  <body>
    <div>Web Crawling Test (using Built-In DOM Parser)</div>
    <form action="cgi-bin/CrawlingBuiltInDOM.php" method="post">
      <input type="text" size="40" name="url" placeholder="ex)http://naver.com">
      <input type="submit" value="Submit">
    </form>
  </body>
</html>
```

cgi-bin/CrawlingBuiltInDOM.php

```php
<?php

$url = $_POST["url"];
$html = file_get_contents($url);

$dom = new DOMDocument();
$dom->loadHTML($html);

$nodes = $dom->getElementsByTagName("img");

foreach ($nodes as $node) {
        echo $node->getAttribute("src") . "<br/>";
        echo $node->getAttribute("alt") . "<br/>";
        echo $node->nodeValue . "<br/>";
}
?>
```

<H1> Image Tags (Src & Alt) </H1>

/img/common/lang_ic

/img/common/search_icon.svg

/img/common/men

/img/main/dept_03.webp
AI기반자유전공학부

/i

/img/main/achievement_01.webp

/img/main/ach
Learning

/img/main/research_02.webp
AI Infrastruc

/img/main/research_04.webp
Graphics, Multimedia & Int

/web/file/community/news/280/20260923100820_PH4IHE.jpg<br
우수국제학술대회 British Machine Vision Conference (BMVC) 2026
논문 채택

/web/file/community/news/277/20260901095442
논문 채택

/web/file/community/news/276/20260901095314
논문 채택


/web/file/community/news/275/20260901095124
논문 채택

/web/file/community/news/274/20260901094424

/web/file/community/computing/8/20261001173859_Zino6H.png
합대학 소식지_2026 여름호

/web/file/community/computi

/web/file/community/computing/5/20251226104638_0xaPmZ.png

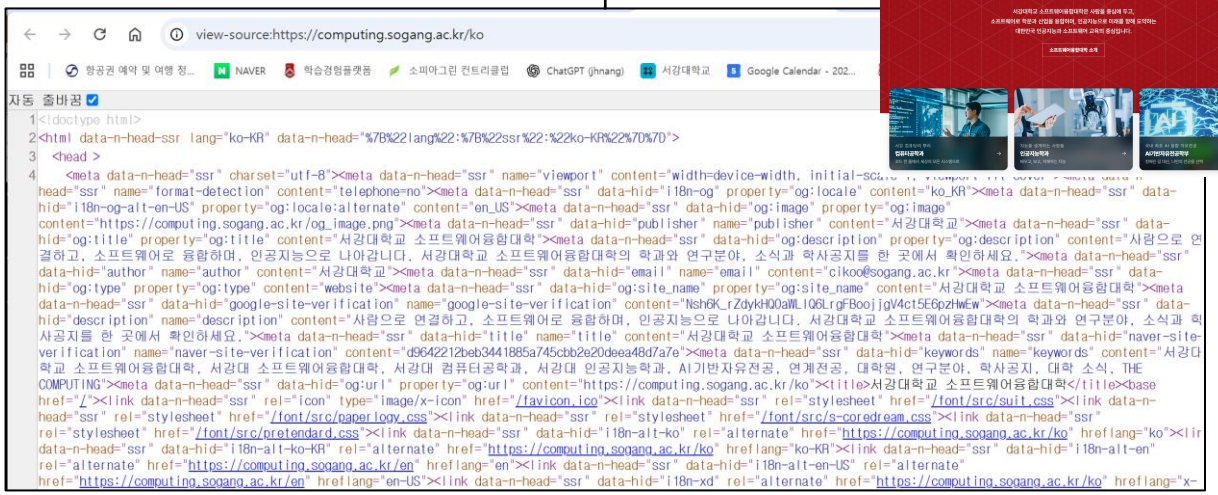

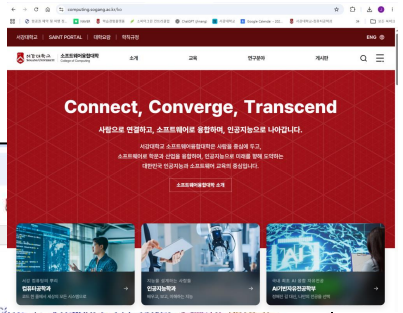


Image Tags (Src & Alt)

/img/common/lang_icon.svg


/img/common/logo_b.svg
서강대학교 소프트웨어융합대학 College of Computing

/img/common/search_icon.svg

/img/common/menu_icon.svg

/img/main/dept_01.webp
컴퓨터공학과

/img/main/dept_02.webp
인공지능학과

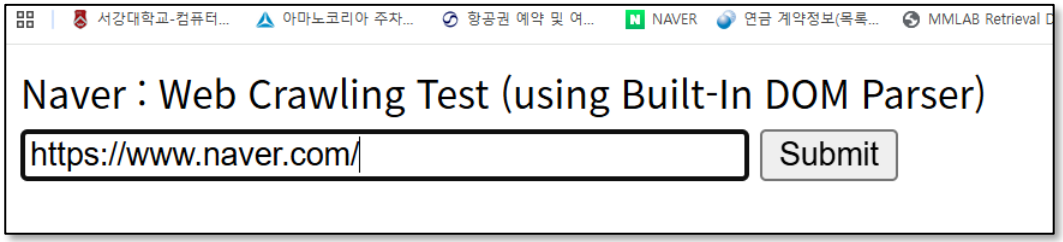

WebCrawlerBuiltInDOM_Naver.html

www.naver.com에서 <input type=hidden>을 찾아서 프린트

cgi-bin/CrawlingBuiltInDOM_Naver.php

```php
<?php

$url = $_POST["url"];
$html = file_get_contents($url);

$dom = new DOMDocument();
$dom->loadHTML($html);


$xpath = new DOMXPath($dom);
// Find the input element with type="hidden"
$hiddenInputs = $xpath->query('//input[@type="hidden"]');
if ($hiddenInputs->length > 0) {
        foreach($hiddenInputs AS $hiddenInput) {
                $typeAttribute = $hiddenInput->getAttribute('type');
                echo "type: " . $typeAttribute . ", ";
                $idAttribute = $hiddenInput->getAttribute('id');
                echo "id : " . $idAttribute . ", ";
                $nameAttribute = $hiddenInput->getAttribute('name');
                echo "name : " . $nameAttribute;
                echo "<br>";
        }

}
```

type: hidden, id : , name : where
type: hidden, id : sm, name : sm
type: hidden, id : fbm, name : fbm
type: hidden, id : acr, name : acr
type: hidden, id : acq, name : acq
type: hidden, id : qdt, name : qdt
type: hidden, id : ie, name : ie
type: hidden, id : acir, name : acir
type: hidden, id : os, name : os
type: hidden, id : bid, name : bid
type: hidden, id : pkid, name : pkid
type: hidden, id : eid, name : eid
type: hidden, id : mra, name : mra

All Tag : Web Crawling Test (using Built-In DOM Parser)

https://finance.naver.com/ Submit

WebCrawlerBuiltInDOM_AllTag.html

```php
<?php

$url = $_POST["url"];
$html = file_get_contents($url);

$dom = new DOMDocument();
$dom->loadHTML($html);

echo "Image Tags <br>" ;
$nodes = $dom->getElementsByTagName("img");

foreach ($nodes as $node) {
        echo $node->getAttribute("src") . "<br/>";
        echo $node->getAttribute("alt") . "<br/>";
        echo $node->nodeValue . "<br/>";
}

echo "Anchor Tags <br>" ;
$nodes = $dom->getElementsByTagName("a");

foreach ($nodes as $node) {
        echo $node->getAttribute("href") . "<br/>";
        echo $node->getAttribute("onclick") . "<br/>";
        echo $node->nodeValue . "<br/>";
}

echo "Script Tags <br>" ;
$nodes = $dom->getElementsByTagName("script");

foreach ($nodes as $node) {
        echo $node->nodeValue . "<br/>";
}

echo "Link Tags <br>" ;
$nodes = $dom->getElementsByTagName("link");

foreach ($nodes as $node) {
        echo $node->getAttribute("href") . "<br/>";
        echo $node->getAttribute("rel") . "<br/>";
        echo $node->nodeValue . "<br/>";
}
?>
```

cgi-bin/CrawlingBuiltInDOM_AllTag.php

- 실험할 Tag들
  - <link ..>
  - <Anchor ...>
  - <Script ...>
- 실험할 site
  - www.naver.com
  - www.chosun.com
  - https://finance.naver.com/

Image Tags
https://ssl.pstatic.net/imgfinance/chart/main/KOSPI.png?sidcode=1759074601192
Á¤ºÇÇ¥ » ¸ñ

https://ssl.pstatic.net/imgfinance/chart/main/KOSDAQ.png?sidcode=1759074601193
Á¤ÅÚÁ¥ » ¸ñ

https://ssl.pstatic.net/imgfinance/chart/main/KPI200.png?sidcode=1759074601194
Á¤ºÇÇ200Á¤¥ » ¸ñ

https://ssl.pstatic.net/imgfinance/finance/btn_contango.gif
ÁÚÀ¥

https://ssl.pstatic.net/static/nfinance/img/logo_financial.png
NAVER FINANCIAL

https://ssl.pstatic.net/static/nfinance/2022/footer_close.png
¨¡ä

Anchor Tags
#menu

#start

https://www.naver.com/
clickcr(this, 'STA.naver', '', '', event);

https://new-m.pay.naver.com/
clickcr(this, 'STA.pay', '', '', event);

/
clickcr(this, 'STA.finance', '', '', event);

#
clickcr(this, 'AUT.list', '', '', event); return false;

/
clickcr(this, 'LNB.home', '', '', event);

/sise/
clickcr(this, 'LNB.sise', '', '', event);

/world/
clickcr(this, 'LNB.world', '', '', event);

/marketindex/