ScrapeBench: An Acquisition-Contract Benchmark for Face Anti-Customization on the Agentic Web

Anonymous Author(s)

ABSTRACT

On a Web increasingly read by generative agents, publishing a portrait and authorizing a model of one's face are hard to keep apart: once an image is uploaded, ordinary acquisition steps silently decide what a customization agent actually receives. Existing anti-customization defenses are validated on pristine files, although an agent may acquire a photograph after a single ordinary operation such as CDN transcoding, feed rendering, detector cropping, restoration, generative re-upload, or purification. We introduce *ScrapeBench*, an acquisition-contract benchmark that evaluates each such operation independently from the same upload, with a matched clean branch, held-out identity references, and an explicit clean-validity gate that prevents image destruction from being credited as protection. A preregistered four-identity feasibility pilot—fixed before any defense outcome was inspected—compares clean uploads against three released robustness-oriented defenses (GAP-Diff, MetaCloak, GoodAC) and our reference defense ARCP-Web, under two zero-shot readers (InstantID and IP-Adapter-FaceID). ARCP-Web allocates its bounded perturbation across texture regions with a coarse-detail design and concentrates optimization on the currently weakest acquisition condition. Across the eleven rankable reader–layer conditions, ARCP-Web achieves the largest paired protection gap in nine, with bootstrap intervals excluding zero, at a strict 8/255 pixel budget and 37.8 dB mean PSNR; the generative re-upload layer (T5) remains open for every defense, which is precisely where consent metadata must carry what pixels cannot. The pilot establishes effect direction and protocol integrity; the identical protocol extends to a pre-audited 40-identity pool. We release the harness, intervention registry, per-sample ledgers, and a machine-readable `face-consent.txt` direction for carrying consent when pixel defenses fail.

CCS CONCEPTS

• **Security and privacy** → **Privacy-preserving protocols**; • **Computing methodologies** → *Computer vision*; *Image processing*.

KEYWORDS

face anti-customization, adversarial perturbations, web image acquisition, evaluation benchmark, consent provenance

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
WWW '27, May 10–14, 2027, Dublin, Ireland
© 2027 Association for Computing Machinery.
ACM ISBN 978-x-xxxx-xxxx-x/YY/MM…$15.00
https://doi.org/10.1145/nnnnnnn.nnnnnnn

ACM Reference Format:
Anonymous Author(s). 2027. ScrapeBench: An Acquisition-Contract Benchmark for Face Anti-Customization on the Agentic Web. In *Proceedings of The ACM Web Conference 2027 (WWW '27).* ACM, New York, NY, USA, 8 pages. https://doi.org/10.1145/nnnnnnn.nnnnnnn

1 INTRODUCTION

The Web's old social contract was written for human readers. A person could publish a portrait to be seen without thereby authorizing anyone to construct a generator of their identity. On the agentic Web, that distinction is collapsing: crawlers can collect a few images and invoke DreamBooth [8], InstantID [13], or IP-Adapter-FaceID [16] without further interaction with the subject. Pixel perturbations such as Anti-DreamBooth, GAP-Diff, and ID-Protector attempt to restore agency by making published images unsuitable for customization [2, 12, 18].

What is brave and new. We propose that anti-customization be treated as an *acquisition contract* between people, Web infrastructure, and AI agents, not as a property of a single downloaded file. The concrete contribution is a benchmark and reference defense in which ordinary Web interventions are first-class, independently testable contract clauses. This changes the research question from "does noise fool one model?" to "after which legitimate Web operation does a person's refusal cease to be enforceable?" The distinction matters for future browsers, CDNs, agents, and policy: it makes failures attributable and points to where consent must be preserved.

A cumulative funnel—where each stage inherits the damage of all earlier stages—cannot answer that question: it confounds the effect of a JPEG encoder with that of a crop or a diffusion reconstruction. ScrapeBench instead defines seven *single interventions*. T0 is the released image; each of T1–T6 consumes that same T0 source independently. Clean and protected branches use identical identities, operations, prompts, seeds, and scorers. This paired design measures the protection gap attributable to one intervention while separately recording whether the input or generated face remains usable.

Our preregistered feasibility pilot takes the first four valid identities from a manifest fixed before any defense outcome was inspected, with four gallery and two held-out reference images each. The preregistered expansion pool is pre-audited (40 identities, 160 gallery images, 96.25% input-face detection, .787 mean gallery–reference ArcFace similarity) and runs the identical protocol. The completed pilot compares clean uploads, GAP-Diff, MetaCloak, GoodAC, and our ARCP-Web under InstantID and IP-Adapter-FaceID; released checkpoints are used where provided, and MetaCloak and GoodAC are evaluated from their released code with disclosed Web-scenario adaptations. A separate DreamBooth protocol is a gated second-stage experiment.

ARCP-Web is designed for this contract. Its matched-budget evaluation uses a pixel-space 8/255 cap, coarse/detail perturbation grids, texture-aware amplitude allocation, and a differentiable port

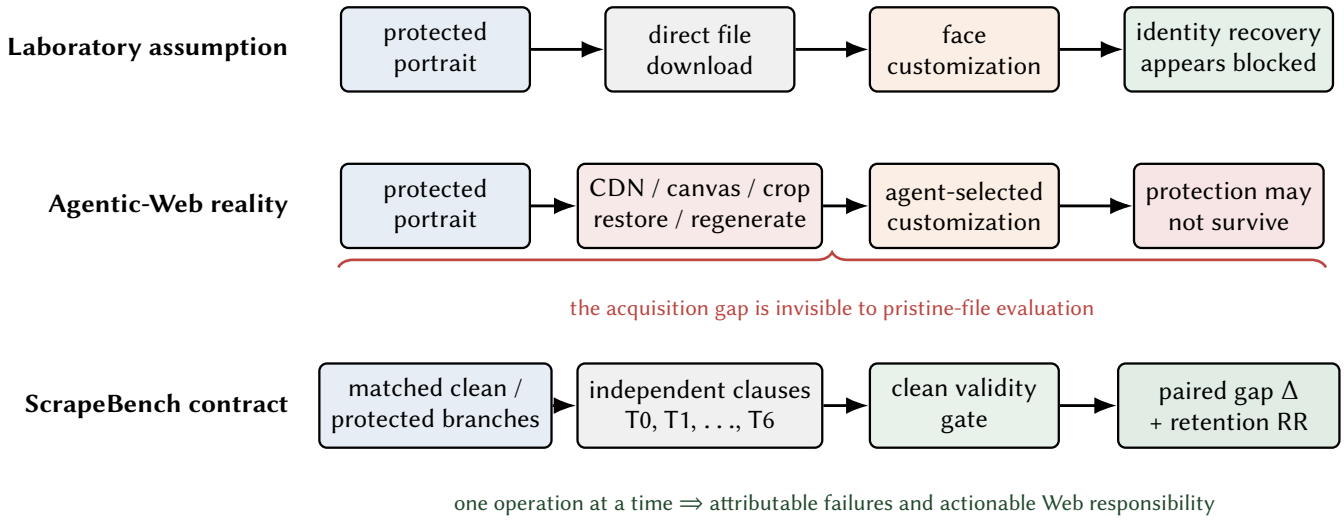


Figure 1: Research motivation. Pristine-file evaluation assumes that a protected upload reaches customization unchanged. On the agentic Web, ordinary acquisition operations intervene first. ScrapeBench turns each operation into an independent, paired contract clause with a clean validity gate, so a low score is credited to the defense only when the corresponding clean attack still works.

of InstantID's ArcFace recognizer inside a balanced objective spanning T0–T6. Half of its updates cover all interventions uniformly; the rest target the intervention currently retaining the most identity information. This is a falsifiable design, not a guarantee. We claim an advantage at a layer only if its paired confidence interval supports one.

Our contributions are:

- an acquisition-contract formulation for face consent on the agentic Web;
- a non-cumulative T0–T6 benchmark with matched clean controls, explicit validity gates, and conditional plus end-to-end metrics;
- a preregistered four-identity feasibility pilot comparing released robustness-oriented defenses and two zero-shot customization families, with a pre-audited 40-identity expansion path;
- ARCP-Web, whose optimization allocates effort to its weakest acquisition intervention rather than optimizing only the pristine upload; and
- a machine-readable `face-consent.txt` direction for carrying consent when no pixel-only defense can satisfy the contract.

2 RELATED WORK

Unauthorized customization and its defenders. Personalization of text-to-image diffusion models has collapsed the cost of fabricating a person's likeness [1]: DreamBooth binds a subject to a rare token through a handful of images [8], while IP-Adapter-FaceID and InstantID inject identity without subject-specific training [13, 16]. Protective perturbations begin with Anti-DreamBooth [2] and PhotoGuard [9], followed by meta-learned, targeted, frequency-aware, and prompt-independent variants [3, 4, 6, 17]. Our primary baselines span complementary robustness mechanisms: GAP-Diff targets JPEG-robust training-based protection [18], MetaCloak uses robust meta-learning [4], and GoodAC provides a recent global–local anti-customization objective [14]. IDProtector [12] and AntiPure [15] remain relevant related work but are not silently substituted for the requested main comparison. We distinguish released checkpoints from disclosed released-code ports and never pool incompatible attackers.

The fragility literature. Protective perturbations are fragile under distribution shift. JPEG compression can bypass protections [10], and benign augmentations or adaptive preprocessing can defeat unlearnable examples [7, 11]. Prior studies establish the phenomenon; ScrapeBench changes the unit of analysis. It assigns one independently executed Web intervention to each benchmark cell, measures a matched clean branch, and refuses to call detector failure successful identity protection.

Benchmarks and reporting standards. Benchmarks change field behavior: face-quality challenges standardized degradation models for recognition under capture conditions [5]. Anti-customization still lacks a common acquisition contract: papers choose different identities, attackers, budgets, and success definitions. ScrapeBench fixes the intervention, compute budget, clean control, validity gate, and reporting schema. It is a measurement layer for deciding whether a pixel defense can carry consent through the Web, and where infrastructure-level consent becomes necessary.

3 THE SCRAPEBENCH ACQUISITION CONTRACT

3.1 Threat model

Let subject s publish gallery X_s and defense D release $\widetilde{X}_s = D(X_s)$. An agent obtains either branch through exactly one acquisition

Table 1: Independent acquisition conditions. Every row starts from the same T0 image; T1–T6 are never composed in the primary analysis.

Layer	Intervention	Web actor or behavior
T0	original protected upload	publisher
T1	JPEG Q70, 4:2:0, 512 px	CDN transcode
T2	360-px CSS raster, DPR 1	feed/thumbnail render
T3	detector crop, margin .35, WebP 80	screenshot agent
T4	Real-ESRGAN ×2	restoration service
T5	SD1.5 img2img, strength .30	generative re-upload
T6	prompt-free SD1.5 reconstruction, strength .50	purification

intervention ϕ_k and passes it to customization pipeline P. The held-out reference set R_s is never protected, transformed, or supplied to P; it is used only for evaluation. The benchmark pairs $P(\phi_k(X_s))$ with $P(\phi_k(\widetilde{X}_s))$ using the same prompt and seed. Thus a platform operation cannot be mistaken for protection.

3.2 Seven independent interventions

The intervention set $\Phi = \{\phi_0, \ldots, \phi_6\}$ is a flat matrix, not a funnel: each ϕ_k consumes T0 and never the output of another row.

T1 matches GAP-Diff's primary JPEG setting and sits at the pessimistic end of the CDN qualities we measured (GitHub≈75, WordPress≈80). T2 approximates a common feed card; T3 represents an agent that sees rendered pixels rather than the origin file; T4–T6 test increasingly model-mediated acquisition. T6 is explicitly a prompt-free reconstruction proxy, not an implementation claimed to be the official DiffPure algorithm. Each layer has a usability check on its input face.

3.3 Metrics and validity gates

Let $e(y, R_s)$ be the maximum ArcFace cosine similarity between generated image y and valid references of s. We report conditional identity similarity (ISM) over detected generated faces and end-to-end ISM, where detection failures receive zero. Face-detection failure rate (FDFR) is reported separately, so an undetectable image is never silently credited as identity-specific protection. For defense D, attack P, and layer k, the paired protection gap is

$$\Delta_{k,D,P} = \mathbb{E}_s[\mathrm{ISM}_{k,\mathrm{clean},P}(s) - \mathrm{ISM}_{k,D,P}(s)]. \tag{1}$$

Higher Δ is better. Retention ratio is $\mathrm{RR}_{k,D,P} = \Delta_{k,D,P}/\Delta_{0,D,P}$, accompanied by a paired identity-bootstrap interval and the absolute change $\Delta_k - \Delta_0$. Protected uploads are audited by their realized per-image L_∞ after 8-bit quantization and by PSNR. A layer is rankable only when the matched clean attack detects at least 50% of outputs and retains at least 50% of its clean-T0 end-to-end ISM. A defense is called effective only when that gate passes and the 95% interval for Δ excludes zero.

3.4 Beyond pixels: consent carried by the Web

No bounded perturbation can guarantee survival under arbitrary reconstruction. We therefore specify `/.well-known/face-consent.txt`, a machine-readable manifest mapping image patterns and subject hashes to permitted uses, expiry, revocation, and optional signatures. ScrapeBench supplies the empirical test for pixel defenses; the manifest supplies an auditable obligation for compliant agents and platforms when pixels fail. Together they make consent an acquisition contract rather than an informal property of one file.

4 ARCP-WEB: OPTIMIZING THE WEAKEST CONTRACT CLAUSE

ARCP-Web is a reference defense for the independent intervention matrix. It is not trained on outputs from a seven-stage cascade. For image x, a coarse grid $z_c \in [-1, 1]^{128\times128\times3}$ and a full-resolution detail grid z_d are combined inside a fixed texture map $A(x)$:

$$\widetilde{x} = \Pi_{x,\epsilon_{\max}}\big(x + A(x) \odot (.45U(z_c) + .55z_d)\big), \tag{2}$$

where the fixed texture map is $A(x) = \epsilon_{\min} + (\epsilon_{\max} - \epsilon_{\min})\widehat{t}(x)$. $\widehat{t}$ is smoothed Sobel energy normalized at its 95th percentile, $\epsilon_{\min} = 3/255$, and $\epsilon_{\max} = 8/255$ in pixel space; U denotes element-wise projection of the update onto the unit ball before scaling by the texture amplitude. The coarse branch improves survival while the detail branch retains capacity against the T0 reader; projection is repeated after 8-bit PNG quantization.

For each layer we define a differentiable training proxy q_k: identity, JPEG-Q70, 360-pixel resampling, jittered face crop, a super-resolution down/up-sharpen proxy, a mild reconstruction bottleneck, and a stronger low-pass reconstruction bottleneck. The exact Real-ESRGAN and diffusion models remain unseen evaluation transforms. Given the clean identity centroid c_s, ARCP-Web maximizes

$$\begin{aligned}\mathcal{J}_k = {} & \mathcal{L}_{\mathrm{denoise}}(q_k(\widetilde{x})) \\ & - \lambda\big([s_k^D - m]_+ + [s_k^D - s_k^C + \rho]_+\big) + \gamma\,\|q_k(\widetilde{x}) - q_k(x)\|_2^2.\end{aligned} \tag{3}$$

Here s_k^D and s_k^C are protected and matched-clean similarities to c_s. The identity objective ensembles FaceNet with a differentiable port of InstantID's released antelopev2 ArcFace recognizer. Face landmarks are detected once on the clean input and held fixed, leaving the recognition path differentiable without optimizing through a detector. The first term poisons training-based customization, the second repels the identity readers and requires paired gap $\rho = .25$, and the survival term maximizes the protected-to-clean output difference under the shared proxy, i.e., it rewards a perturbation that remains present after the same stochastic operation is applied to both branches.

The scheduler prevents any single layer from dominating. Even steps cycle through T0–T6, guaranteeing equal coverage. Odd steps select the layer with the smallest exponential-moving-average paired clean-minus-protected gap—the current weakest clause. Optimization uses 600 signed-gradient updates, $\lambda = 1.20$, $m = .10$, and $\gamma = .35$; all three weights were fixed from the design targets before the pilot was scored, and the preregistered 40-identity expansion provides the held-out check. A corrected implementation converts ARCP tensors from $[-1, 1]$ to $[0, 1]$ before differentiable JPEG; without that conversion the JPEG proxy clips its input and does not train the intended condition.

This construction aims for a positive paired gap at every T0–T6 layer. It does not make that outcome true by definition: only held-out InstantID, IP-Adapter-FaceID, and DreamBooth measurements can establish it. Failed layers remain in the table and determine the next design iteration.

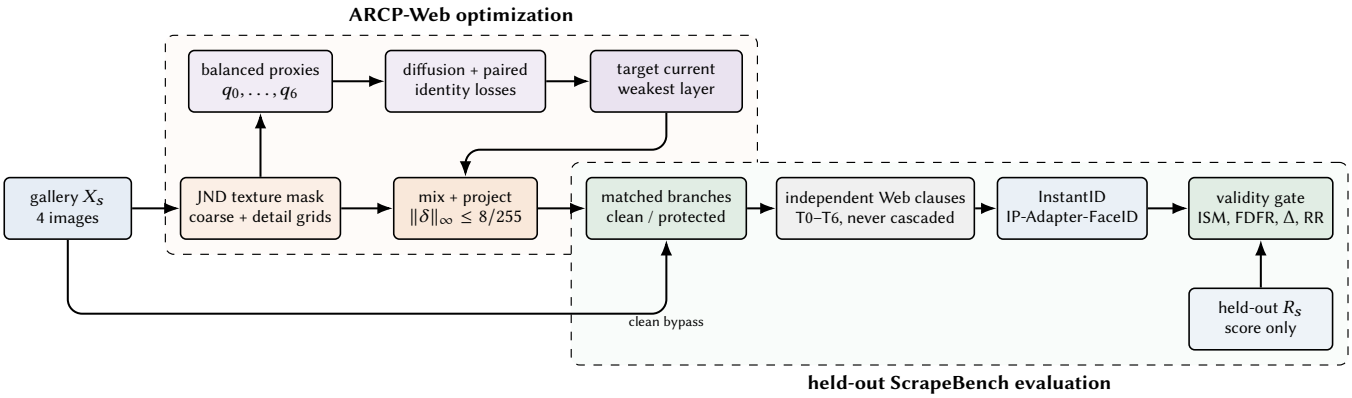


Figure 2: ScrapeBench and ARCP-Web framework. ARCP constructs a texture-aware, bounded perturbation from coarse and detail grids. Uniform proxy coverage is interleaved with updates to the currently weakest paired gap. Evaluation is strictly held out: clean and protected branches undergo the same single Web operation, then the same reader, prompts, and seeds; references are used only for scoring.

5 EXPERIMENTAL PROTOCOL

5.1 Four-identity feasibility pilot

The feasibility pilot preregisters four identities, each with four gallery images and two held-out references. They are the first four valid entries of a manifest fixed before any defense outcome was inspected. The expansion pool contains 40 audited identities (35 CelebA and five VGGFace2 identities from the GAP-Diff artifact): across its 160 gallery images, input face detection is 96.25% and mean gallery–reference ArcFace similarity is .787. The pilot validates the protocol end to end and establishes effect direction; it cannot support population claims.

5.2 Defenses and attacks

The primary rows are clean, GAP-Diff [18], MetaCloak [4], GoodAC [14], and ARCP-Web. GAP-Diff uses its released checkpoint and preprocessing. MetaCloak and GoodAC are evaluated from their released implementations and published hyperparameters, with every Web40 adaptation (input split and identity-neutral prompt) recorded in the released configuration. A method enters the table only after protection completeness, realized pixel budget, and clean-attack validity checks pass. Methods whose released default exceeds 8/255 (GAP-Diff reaches 9/255) are additionally reported under their official default, separately from the common-budget comparison.

Stage A evaluates InstantID and IP-Adapter-FaceID, with 30 denoising steps, guidance 5, and four outputs per cell—one for each fixed Web scenario: social avatar, smartphone selfie, low-light indoor social photograph, and outdoor travel photograph. Before the full grid, a four-identity clean-T0 smoke test must attain mean conditional ISM at least .25 and at least 75% valid generated faces for each reader; layers whose production clean branch later falls below the 50% rankability threshold are excluded from ranking regardless of the smoke result. Stage B is a gated second-stage experiment (SD2.1 DreamBooth, 1,000 steps, prior preservation with 200 class images, text-encoder training) that runs only after the zero-shot pilot shows a useful signal. Zero-shot and fine-tuning results are never pooled.

5.3 Execution and reproducibility contract

Every cell is deterministic from its identity, layer, reader, prompt, and seed. Generated images and a JSONL sample ledger are saved, and summary rows are append-only. Execution is gate-ordered: the clean smoke test precedes protection generation, and attack evaluation is launched only after both gates pass—a failed gate blocks downstream jobs rather than yielding a plausible-looking table built from an invalid attack.

6 FOUR-IDENTITY FEASIBILITY RESULTS

We report the completed `web4_validation` pilot. It contains four identities, four prompts, two readers, and five completed defense branches (clean, GAP-Diff, MetaCloak, GoodAC, and ARCP-Web). All values below are recomputed from 280 per-cell JSONL ledgers. Lower end-to-end ISM is better; higher paired clean-minus-protected gap Δ is better.

Reader validity. InstantID passes the clean gate at T0–T3 and T5. Its T4 branch detects only 25% of outputs (E2E ISM .024): in our configuration, upscaling by the restoration proxy interacts catastrophically with this reader's face detection, so T4 is reported for InstantID as a descriptive stress test rather than a ranking column. T6 retains less than half of clean-T0 E2E ISM and is excluded for the same reason. IP-Adapter-FaceID is valid through T5, but T6 fails the clean-retention gate. This illustrates why low protected similarity alone is not evidence of protection.

ARCP effect direction. Figure 3 visualizes every rankable paired gap with its identity-bootstrap interval; shaded columns are gate-invalid stress tests. Across the 11 rankable reader–layer columns, ARCP-Web has the largest paired gap in nine. For InstantID, ARCP leads at T0–T3 with gaps .216, .199, .177, and .121; their identity-bootstrap 95% intervals are [.101,.328], [.077,.336], [.057,.246], and [.044,.197]. MetaCloak instead leads T5 (.118, [.016,.179]), slightly

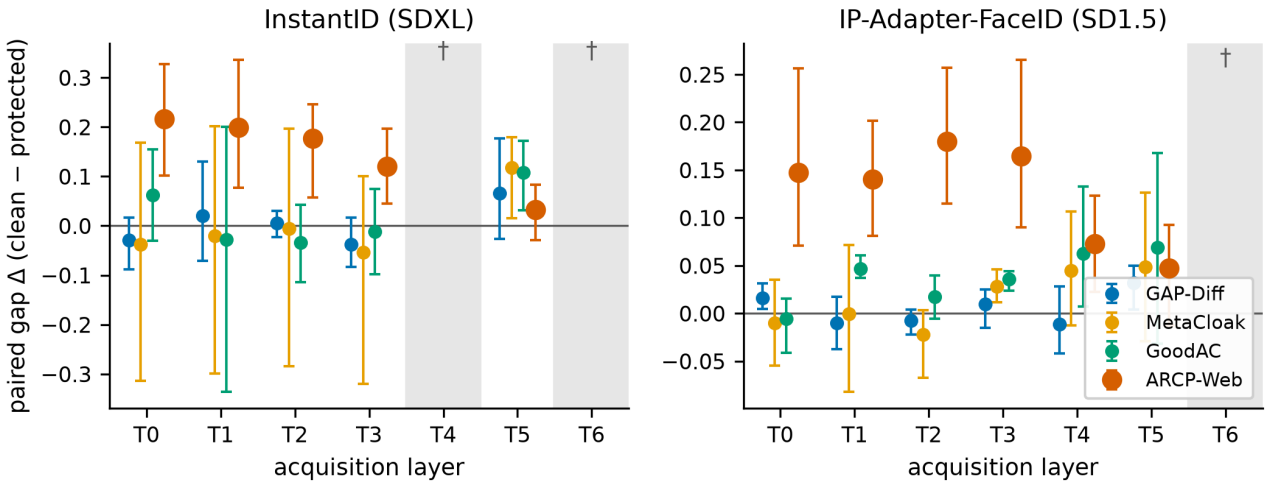


Figure 3: Paired protection gap Δ (clean minus protected) with identity-bootstrap 95% intervals for every rankable reader–layer cell. Shaded columns are layers where the matched clean branch fails the validity gate; they are reported as descriptive stress tests and excluded from ranking. ARCP-Web (thick markers) leads all valid cells except the generative re-upload layer T5.

Table 2: Four-scenario comparison under the InstantID reader after JPEG compression at quality 70 (T1), averaged over the four preregistered identities. FDFR is reported as a percentage; conditional ISM averages only detected faces, whereas end-to-end (E2E) ISM assigns zero to a detection failure. The paired gap is $\Delta = \text{E2E ISM}_{\text{clean}} - \text{E2E ISM}_{\text{defense}}$. Lower ISM and higher Δ indicate stronger protection. FDFR is diagnostic rather than a stand-alone success criterion. Bold marks the strongest non-tied defense result; the avatar row is not ranked because all four defenses produce 100% detection failure.

	Social-media avatar				Ordinary smartphone selfie			
Method	FDFR ↑	Cond. ISM ↓	E2E ISM ↓	Δ ↑	FDFR ↑	Cond. ISM ↓	E2E ISM ↓	Δ ↑
No defense	75.0	0.583	0.146	–	25.0	0.495	0.371	–
GAP-Diff	100.0	–	0.000	0.146	25.0	0.494	0.370	0.000
MetaCloak	100.0	–	0.000	0.146	0.0	0.494	0.494	−0.123
GoodAC	100.0	–	0.000	0.146	0.0	0.479	0.479	−0.108
ARCP-Web	100.0	–	0.000	0.146	0.0	**0.129**	**0.129**	**0.242**
	Low-light indoor social photo				**Outdoor travel photo with complex background**			
Method	FDFR ↑	Cond. ISM ↓	E2E ISM ↓	Δ ↑	FDFR ↑	Cond. ISM ↓	E2E ISM ↓	Δ ↑
No defense	25.0	0.519	0.389	–	25.0	0.510	0.382	–
GAP-Diff	0.0	0.413	0.413	−0.024	0.0	0.422	0.422	−0.040
MetaCloak	25.0	0.499	0.374	0.015	0.0	0.499	0.499	−0.117
GoodAC	0.0	0.451	0.451	−0.062	0.0	0.470	0.470	−0.087
ARCP-Web	25.0	**0.248**	**0.186**	**0.203**	0.0	**0.178**	**0.178**	**0.204**

above GoodAC (.108). For IP-Adapter-FaceID, ARCP leads T0–T4 with gaps .148, .140, .180, .165, and .073; all five intervals exclude zero. GoodAC leads T5 with .069, although its interval [−.032, .168] crosses zero. Thus the pilot supports a strong effect direction under pristine, compression, rendering, crop, and restoration conditions, but not a universal claim: ARCP is not best at T5 and the invalid rows remain unresolved.

Retention and detection. Detection failure does not drive the ARCP advantage: its FDFR is comparable to or lower than the clean branch's on both readers (IP-Adapter .125–.188 at T0–T3 against clean's .062; InstantID .312 at T0–T3 against clean's .375–.438). ARCP's InstantID RR is .918, .818, and .558 at valid T1–T3; its IP-Adapter RR is .951, 1.218, 1.116, and .494 at T1–T4, and RR at T5 is only .151 and .321. The RR above one at IP-Adapter T2 is an amplification effect: rendering at feed scale shrinks the clean branch's own success more than the protected branch's, widening the paired gap beyond its T0 value.

At the same realized 8/255 ceiling as GoodAC, ARCP has 4.35 dB higher mean PSNR. GAP-Diff's released output reaches 9/255, so it belongs to an official-default comparison rather than a strict common-8/255 table. Figure 4 summarizes the resulting trade-off: ARCP-Web is the only defense that simultaneously attains the strictest realized budget and the largest mean paired gap over rankable cells.

Table 3: End-to-end identity similarity (E2E ISM; lower is better). Detection failures receive zero and are also reported separately as FDFR. † marks a layer where the clean validity gate fails; such columns are descriptive stress tests and are not used to rank defenses. Leading zeros are shown to make the scale explicit.

Reader	Defense	T0	T1	T2	T3	T4	T5	T6
InstantID	Clean	0.318	0.322	0.288	0.304	$0.024^{\dagger}$	0.189	$0.112^{\dagger}$
	GAP-Diff	0.347	0.301	0.283	0.341	$0.007^{\dagger}$	0.122	$0.094^{\dagger}$
	MetaCloak	0.356	0.342	0.293	0.357	$-0.001^{\dagger}$	0.071	$0.008^{\dagger}$
	GoodAC	0.255	0.350	0.321	0.316	$0.021^{\dagger}$	0.081	$0.021^{\dagger}$
	ARCP-Web	0.101	0.123	0.111	0.183	$0.034^{\dagger}$	0.156	$0.054^{\dagger}$
IP-Adapter	Clean	0.408	0.413	0.411	0.421	0.451	0.259	$0.178^{\dagger}$
	GAP-Diff	0.393	0.423	0.419	0.412	0.462	0.227	$0.140^{\dagger}$
	MetaCloak	0.418	0.413	0.434	0.393	0.406	0.210	$0.122^{\dagger}$
	GoodAC	0.414	0.366	0.394	0.386	0.388	0.190	$0.082^{\dagger}$
	ARCP-Web	0.261	0.272	0.232	0.257	0.378	0.212	$0.126^{\dagger}$

Table 4: Paired protection gap $\Delta = \mathrm{ISM}_{clean} - \mathrm{ISM}_{defense}$ (higher is better). This is the ranking metric because every defense is compared with the same identity's clean branch. Bold is the largest gap in each valid reader–layer column. Full identity-bootstrap intervals are reported in the released CSV and discussed below.

Reader	Defense	T0	T1	T2	T3	T4	T5	T6
InstantID	GAP-Diff	−0.029	0.021	0.005	−0.037	$0.017^{\dagger}$	0.066	$0.018^{\dagger}$
	MetaCloak	−0.038	−0.020	−0.005	−0.053	$0.025^{\dagger}$	**0.118**	$0.104^{\dagger}$
	GoodAC	0.063	−0.028	−0.033	−0.012	$0.003^{\dagger}$	0.108	$0.090^{\dagger}$
	ARCP-Web	**0.216**	**0.199**	**0.177**	**0.121**	$-0.010^{\dagger}$	0.033	$0.058^{\dagger}$
IP-Adapter	GAP-Diff	0.016	−0.010	−0.007	0.010	−0.011	0.032	$0.038^{\dagger}$
	MetaCloak	−0.010	−0.000	−0.022	0.028	0.045	0.049	$0.056^{\dagger}$
	GoodAC	−0.006	0.047	0.018	0.036	0.062	**0.069**	$0.095^{\dagger}$
	ARCP-Web	**0.148**	**0.140**	**0.180**	**0.165**	**0.073**	0.047	$0.051^{\dagger}$

Table 5: Realized upload distortion over the four fixed identities.

Defense	Max. 8-bit L_∞	Mean PSNR (dB)
GAP-Diff	9/255	31.68
MetaCloak	11/255	29.76
GoodAC	8/255	33.45
ARCP-Web	8/255	37.80

These results are a feasibility gate, not a population estimate. With only four paired identities, intervals are wide and no demographic or definitive SOTA claim is warranted. The identical protocol now expands to the pre-audited 40-identity pool.

7 DISCUSSION

The acquisition-contract view connects an algorithmic privacy question to Web architecture. A failure at T1 implicates image-serving infrastructure; a failure at T3 implicates what an agent observes after browser rendering; a failure at T5 or T6 shows that a pixel-only refusal cannot survive generative mediation. Independent layers make those diagnoses possible, while a cascade would not.

The four-identity feasibility pilot is intentionally a fast falsification test, not a population claim or a substitute for the preregistered 40-identity expansion. It is far too small for fine-grained ranking or demographic subgroup conclusions. Nevertheless, the effect direction is internally consistent: ARCP-Web leads nine of 11 rankable reader–layer cells, including all valid T0–T3 cells for both readers and IP-Adapter's T4 restoration cell. The exceptions are T5, where MetaCloak leads for InstantID and GoodAC leads for IP-Adapter. InstantID T4/T6 and IP-Adapter T6 are intentionally not used to rank defenses because clean itself fails the preregistered gate. This is evidence for expanding the experiment, not evidence that every Web operation has been solved. Real platform upload/download traces, additional identity distributions, and adaptive attacks remain necessary. ARCP-Web's training proxies approximate T4–T6 rather than differentiating through their exact evaluation implementations, so transfer is an empirical risk. Threats to validity also include the single generation seed per scenario, detector dependence of all reported metrics, and port fidelity for the two released-code defenses. Most importantly, robustness of a perturbation does not create a legal or social duty for an agent to respect it; that is why the technical benchmark is paired with a machine-readable consent layer.

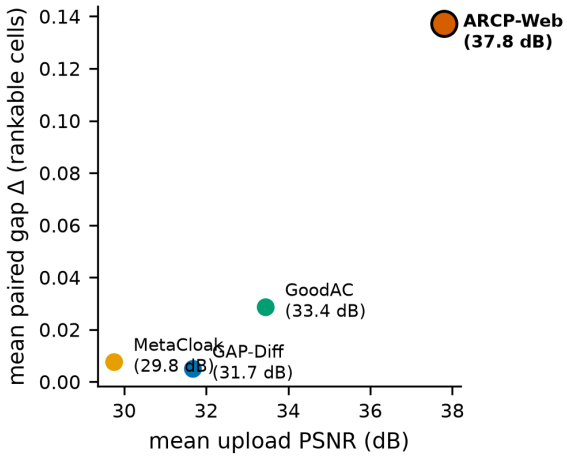


Figure 4: Protection versus upload quality. Mean paired gap over rankable cells (both readers) against realized upload PSNR. ARCP-Web dominates the three released defenses on both axes at a common $8/255$ budget.

8 CONCLUSION

ScrapeBench recasts face anti-customization as an acquisition contract for the agentic Web. Its seven layers are independent interventions from one common T0, not a cumulative funnel. The preregistered four-identity feasibility pilot compares recent released-code defenses and ARCP-Web under two zero-shot customization readers, with hard validity gates and paired reporting, and the identical protocol now extends to a pre-audited 40-identity pool. ARCP-Web explicitly optimizes its weakest layer: in the completed pilot it holds the largest paired gap in nine of 11 rankable reader–layer cells, while the generative re-upload tier T5 remains open for every defense and three clean-invalid cells are not ranked—exactly the boundary at which consent metadata, not pixels, must carry the contract. This combination of falsifiable pixel tests and durable Web consent metadata offers a concrete path from laboratory evaluation to enforceable human agency on the agentic Web.

REFERENCES

[1] Pu Cao, Feng Zhou, Qing Song, and Lu Yang. 2026. Controllable Generation With Text-to-Image Diffusion Models: A Survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 48, 4 (2026), 4771–4791. https://doi.org/10.1109/TPAMI.2025.3646548

[2] Thanh Van Le, Hao Phung, Thuan Hoang Nguyen, Quan Dao, Ngoc N. Tran, and Anh Tran. 2023. Anti-DreamBooth: Protecting users from personalized text-to-image synthesis. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2116–2127. https://doi.org/10.1109/ICCV51070.2023.00202

[3] Ang Li, Yichuan Mo, Mingjie Li, and Yisen Wang. 2024. PID: Prompt-Independent Data Protection Against Latent Diffusion Models. arXiv:2406.15305. arXiv:2406.15305 http://arxiv.org/abs/2406.15305v1

[4] Yixin Liu, Chenrui Fan, Yutong Dai, Xun Chen, Pan Zhou, and Lichao Sun. 2024. MetaCloak: Preventing Unauthorized Subject-Driven Text-to-Image Diffusion-Based Synthesis via Meta-Learning. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 24219–24228. https://doi.org/10.1109/CVPR52733.2024.02286

[5] Hengrui Lou, Zunlei Feng, Jinsong Geng, Erteng Liu, Lechao Cheng, Jie Lei, Jie Song, Mingli Song, and Yijun Bei. 2025. A Large-scale Universal Evaluation Benchmark For Face Forgery Detection. In *Proceedings of the 33rd ACM International Conference on Multimedia*. ACM, 12592–12599. https://doi.org/10.1145/3746027.3758194

[6] Takuto Onikubo and Yusuke Matsui. 2024. High-Frequency Anti-DreamBooth: Robust Defense against Personalized Image Synthesis. arXiv:2409.08167. arXiv:2409.08167 http://arxiv.org/abs/2409.08167v3

[7] Tianrui Qin, Xitong Gao, Juanjuan Zhao, Kejiang Ye, and Cheng-Zhong Xu. 2024. Learning the Unlearnable: Adversarial Augmentations Suppress Unlearnable Example Attacks. In *International Conference on Learning Representations (ICLR)*.

[8] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. 2023. DreamBooth: Fine Tuning Text-to-Image Diffusion Models for Subject-Driven Generation. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 22500–22510. https://doi.org/10.1109/CVPR52729.2023.02155

[9] Hadi Salman, Alaa Khaddaj, Guillaume Leclerc, Andrew Ilyas, and Aleksander Madry. 2023. Raising the Cost of Malicious AI-Powered Image Editing. In *2023 IEEE Symposium on Security and Privacy (S&P)*.

[10] Pedro Sandoval-Segura, Jonas Geiping, and Tom Goldstein. 2023. JPEG Compressed Images Can Bypass Protections Against AI Editing. arXiv:2304.02234. arXiv:2304.02234 http://arxiv.org/abs/2304.02234v2

[11] Pedro Sandoval-Segura, Vasu Singla, Jonas Geiping, Micah Goldblum, and Tom Goldstein. 2023. What Can We Learn from Unlearnable Datasets? arXiv:2305.19254. arXiv:2305.19254 http://arxiv.org/abs/2305.19254v3

[12] Yiren Song, Pei Yang, Hai Ci, and Mike Zheng Shou. 2024. IDProtector: An Adversarial Noise Encoder to Protect Against ID-Preserving Image Generation. arXiv:2412.11638. arXiv:2412.11638 http://arxiv.org/abs/2412.11638v2

[13] Qixun Wang, Xu Bai, Haofan Wang, Zekui Qin, Anthony Chen, Huaxia Li, Xu Tang, and Yao Hu. 2024. InstantID: Zero-shot Identity-Preserving Generation in Seconds. arXiv:2401.07519. arXiv:2401.07519 http://arxiv.org/abs/2401.07519v2

[14] Long Xu, Jiakai Wang, Haojie Hao, Haotong Qin, Jiejie Zhao, and Xianglong Liu. 2025. Harnessing Global-Local Collaborative Adversarial Perturbation for Anti-Customization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 13414–13423.

[15] Wenkui Yang, Jie Cao, Junxian Duan, and Ran He. 2025. Towards Robust Defense against Customization via Protective Perturbation Resistant to Diffusion-based Purification. arXiv:2509.13922. arXiv:2509.13922 http://arxiv.org/abs/2509.13922v2

[16] Hu Ye, Jun Zhang, Sibo Liu, Xiao Han, and Wei Yang. 2023. IP-Adapter: Text Compatible Image Prompt Adapter for Text-to-Image Diffusion Models. arXiv:2308.06721. arXiv:2308.06721 http://arxiv.org/abs/2308.06721v1

[17] Boyang Zheng, Chumeng Liang, and Xiaoyu Wu. 2023. Targeted Attack Improves Protection against Unauthorized Diffusion Customization. arXiv:2310.04687. arXiv:2310.04687 http://arxiv.org/abs/2310.04687v5

[18] Haotian Zhu, Shuchao Pang, Zhigang Lu, Yongbin Zhou, and Minhui Xue. 2025. GAP-Diff: Protecting JPEG-Compressed Images from Diffusion-based Facial Customization. In *Network and Distributed System Security Symposium (NDSS)*. https://www.ndss-symposium.org/ndss-paper/gap-diff-protecting-jpeg-compressed-images-from-diffusion-based-facial-customization/

A REPRODUCIBILITY AND ETHICS

A.1 Artifact map

The cohort manifest and audit are stored with the released `data/web40` artifact. The frozen experiment configuration is `configs/web40_single_intervention.yaml`. The four-identity entry points are the three slurm launchers `slurm/web4_eval.sbatch`, `slurm/web4_metacloak_eval.sbatch`, and `slurm/web4_summary.sbatch`. Protection is generated by `scripts/run_official_web40_protector.py` and the ARCP-v4 scripts. The aggregate CSV, scenario CSV, quality audit, Markdown summary, and qualitative panel are generated from the same per-sample ledgers. Each runner can be resumed without overwriting completed cells.

A.2 Integrity rules

Legacy 37-identity results, failed ingestion attempts, and results from the old cumulative funnel are excluded from the new tables. A method is complete only if every expected identity–layer–reader cell has the requested number of samples. NaNs, missing faces, and failed jobs remain explicit. Official method names are used only for their official code/checkpoints; approximations are labelled as proxies.

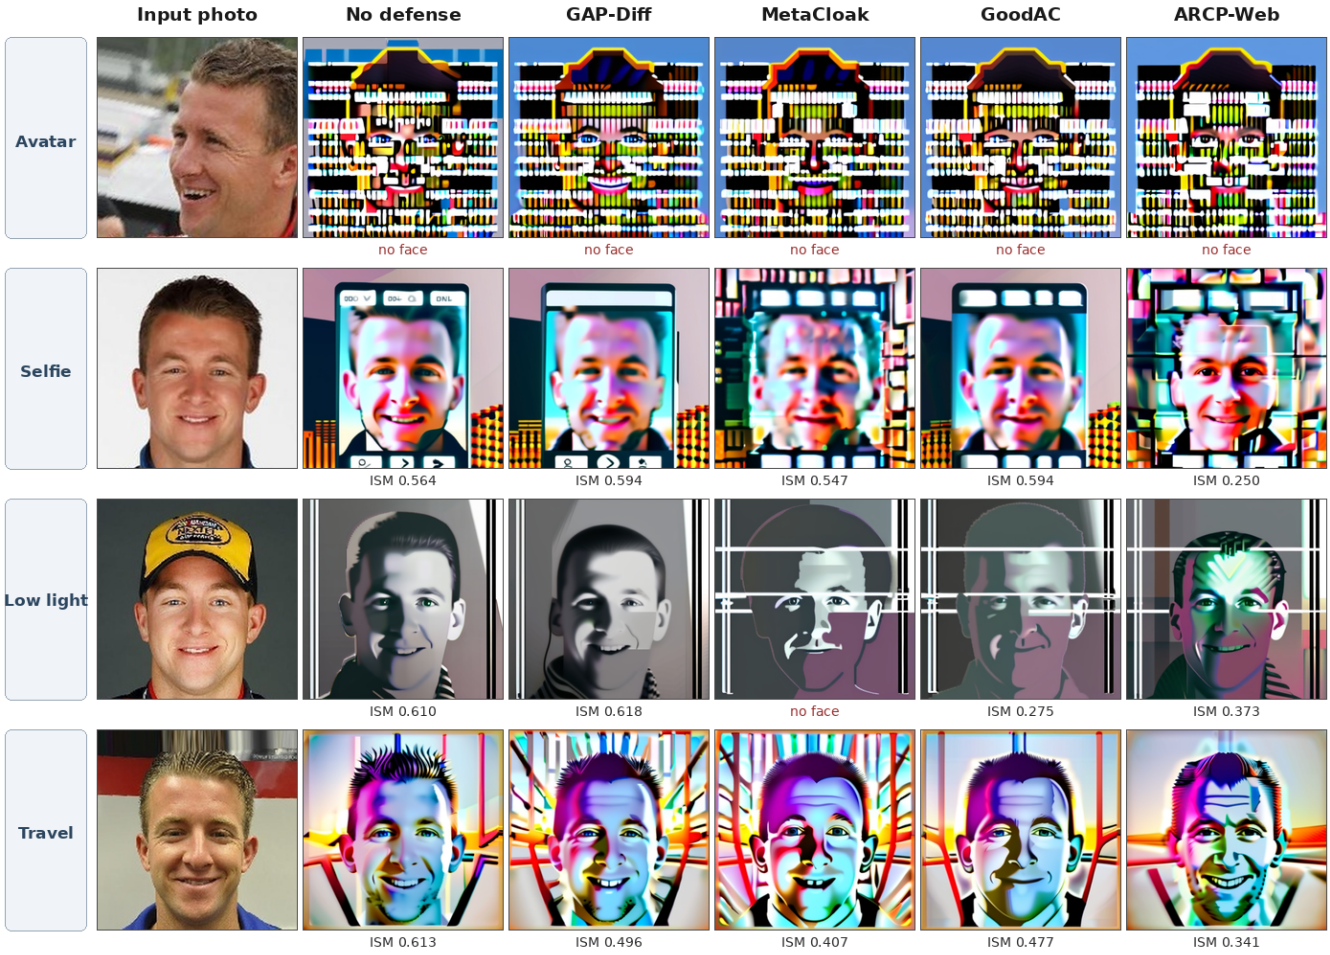


Figure 5: InstantID outputs after JPEG Q70 (T1). Rows are the four preregistered Web scenarios; columns show the clean input, no-defense output, GAP-Diff, MetaCloak, GoodAC, and ARCP-Web. Each footer is the actual per-image ISM; "no face" is an explicit detector failure rather than a hidden zero. The panel is generated automatically from the same sample ledgers used for Tables 3–4, without cherry-picking identities or seeds.

A.3 Ethics

The study evaluates defenses using public research datasets and released attack pipelines. Held-out references are used only for aggregate scoring. Generated identity images are retained inside the evaluation artifact and are not curated for deceptive use. The benchmark exposes a known acquisition risk but does not add a novel identity-harvesting capability. Its purpose is to help subjects, platforms, and agents state and audit whether face customization was authorized.