

Assignment NO 6:

Problem statement for MySQL connectivity.

Name - Harshada Suryawanshi

Roll No - 57

PRN - 1272250822

Class - SYCSE

Panel – C [Batch C3]

Problem Statement:

Batch-C:

Perform DDL and DML Command for Airline Reservation System using Frontend and Backend (MySQL).

INPUT on Jupyter Notebook:

```
->!pip install pymysql
```

```
Collecting pymysql
```

```
  Downloading pymysql-1.1.2-py3-none-any.whl.metadata (4.3 kB)
```

```
Downloading pymysql-1.1.2-py3-none-any.whl (45 kB)
```

```
Installing collected packages: pymysql
```

```
Successfully installed pymysql-1.1.2
```

```
->import pymysql
```

```
database = pymysql.connect(host='localhost', user='root', password='mysqlroot')  
Cursor = database.cursor()
```

```
Cursor.execute("CREATE DATABASE AirlineDB")  
print("Airline Database created successfully")
```

```
Cursor.close()  
database.close()
```

```
Airline Database created successfully
```

```

->import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()

Cursor.execute("CREATE TABLE Flight( fid INT PRIMARY KEY, fname VARCHAR(50),source
VARCHAR(50), destination VARCHAR(50))")

print("Flight table created successfully")

Cursor.close()
database.close()

```

Flight table created successfully

```

->import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()
sql = "INSERT INTO Flight(fid, fname, source, destination) VALUES(%s, %s, %s, %s)"

n = int(input("Enter number of flights to insert: "))
val = []

for i in range(n):
    print(f"\nEnter details for Flight {i+1}:")

    fid = input("Enter Flight ID: ")
    fname = input("Enter Flight Name: ")
    source = input("Enter Source: ")
    destination = input("Enter Destination: ")

    val.append((fid, fname, source, destination))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "values inserted successfully")

Cursor.close()
database.close()

```

Enter number of flights to insert: 3

Enter details for Flight 1:
Enter Flight ID: 101
Enter Flight Name: Emirates
Enter Source: PNQ
Enter Destination: DEL

Enter details for Flight 2:
Enter Flight ID: 102
Enter Flight Name: Indigo
Enter Source: BLR
Enter Destination: CST

```
Enter details for Flight 3:
Enter Flight ID: 103
Enter Flight Name: Air India
Enter Source: DEL
Enter Destination: Dubai
3 values inserted successfully
```

```
->import pymysql
```

```
database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()
```

```
sql = "DELETE FROM Flight WHERE fid = %s"
```

```
n = int(input("Enter number of flights to delete: "))
val = []
```

```
for i in range(n):
    print(f"\nEnter Flight ID to delete for record {i+1}:")
```

```
        fid = input("Enter Flight ID: ")
```

```
        val.append((fid,))
```

```
Cursor.executemany(sql, val)
database.commit()
```

```
print(Cursor.rowcount, "records deleted successfully")
```

```
Cursor.close()
database.close()
```

```
Enter number of flights to delete: 1
```

```
Enter Flight ID to delete for record 1:
Enter Flight ID: 103
1 records deleted successfully
```

```
-> import pymysql
```

```
database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()
```

```
sql = "UPDATE Flight SET fname=%s, source=%s, destination=%s WHERE fid=%s"
```

```
n = int(input("Enter number of flights to update: "))
val = []
```

```
for i in range(n):
    print(f"\nEnter new details for Flight {i+1}:")
```

```
        fid = input("Enter Flight ID to update: ")
```

```
        fname = input("Enter New Flight Name: ")
```

```
        source = input("Enter New Source: ")
```

```
        destination = input("Enter New Destination: ")
```

```
        val.append((fname, source, destination, fid))
```

```
Cursor.executemany(sql, val)
database.commit()
```

```
print(Cursor.rowcount, "records updated successfully")
```

```
Cursor.close()
database.close()
```

Enter number of flights to update: 1

Enter new details for Flight 1:
Enter Flight ID to update: 101
Enter New Flight Name: Kingfisher
Enter New Source: DEL
Enter New Destination: Dubai
1 records updated successfully

```
-> import pymysql
```

```
database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()
#display all records
sql = "SELECT * FROM Flight"
```

```
Cursor.execute(sql)
```

```
rows = Cursor.fetchall()
```

```
print("\nFlight Records:")
```

```
for row in rows:
    print(row)
```

```
print(len(rows), "records fetched successfully")
```

```
Cursor.close()
database.close()
```

Flight Records:
(101, 'Kingfisher', 'DEL', 'Dubai')
(102, 'Indigo', 'BLR', 'CST')
2 records fetched successfully

```
-> import pymysql
```

```
database = pymysql.connect(host='localhost', user='root', password='mysqlroot', da
tabase='AirlineDB')
Cursor = database.cursor()
#select with user input
```

```
sql = "SELECT * FROM Flight WHERE fid = %s"
fid = input("Enter Flight ID to search: ")
Cursor.execute(sql, (fid,))
rows = Cursor.fetchall()
print("\nSearch Result:")
```

```
for row in rows:
    print(row)
```

```
print(Cursor.rowcount, "record(s) fetched successfully")
```

```
Cursor.close()  
database.close()
```

Enter Flight ID to search: 102

Search Result:
(102, 'Indigo', 'BLR', 'CST')
1 record(s) fetched successfully

MySQL OUTPUT:

```
mysql> show databases;  
+-----+  
| Database |  
+-----+  
| abc      |  
| airlinedb |  
| audit_system |  
| business |  
| company  |  
| company1 |  
| company10 |  
| company11 |  
| db       |  
| db_sales |  
| exp8     |  
| hotel_db |  
| hoteldb  |  
| information_schema |  
| mysql    |  
| performance_schema |  
| practice_db |  
| sales_db |  
| salesdb  |  
| sys      |  
| voyage_ventures |  
| xyz      |  
+-----+  
22 rows in set (0.03 sec)
```

```
mysql> use airlinedb;  
Database changed
```

```
mysql> show tables;  
+-----+  
| Tables_in_airlinedb |  
+-----+  
| flight              |  
+-----+  
1 row in set (0.01 sec)
```

```
mysql> select * from flight;
```

fid	fname	source	destination
101	Emirates	PNQ	DEL
102	Indigo	BLR	CST
103	Air India	DEL	Dubai

3 rows in set (0.00 sec)

```
mysql> select * from flight;
```

fid	fname	source	destination
101	Emirates	PNQ	DEL
102	Indigo	BLR	CST


2 rows in set (0.00 sec)

```
mysql> select * from flight;
```

fid	fname	source	destination
101	Kingfisher	DEL	Dubai
102	Indigo	BLR	CST

2 rows in set (0.00 sec)

Screenshots:

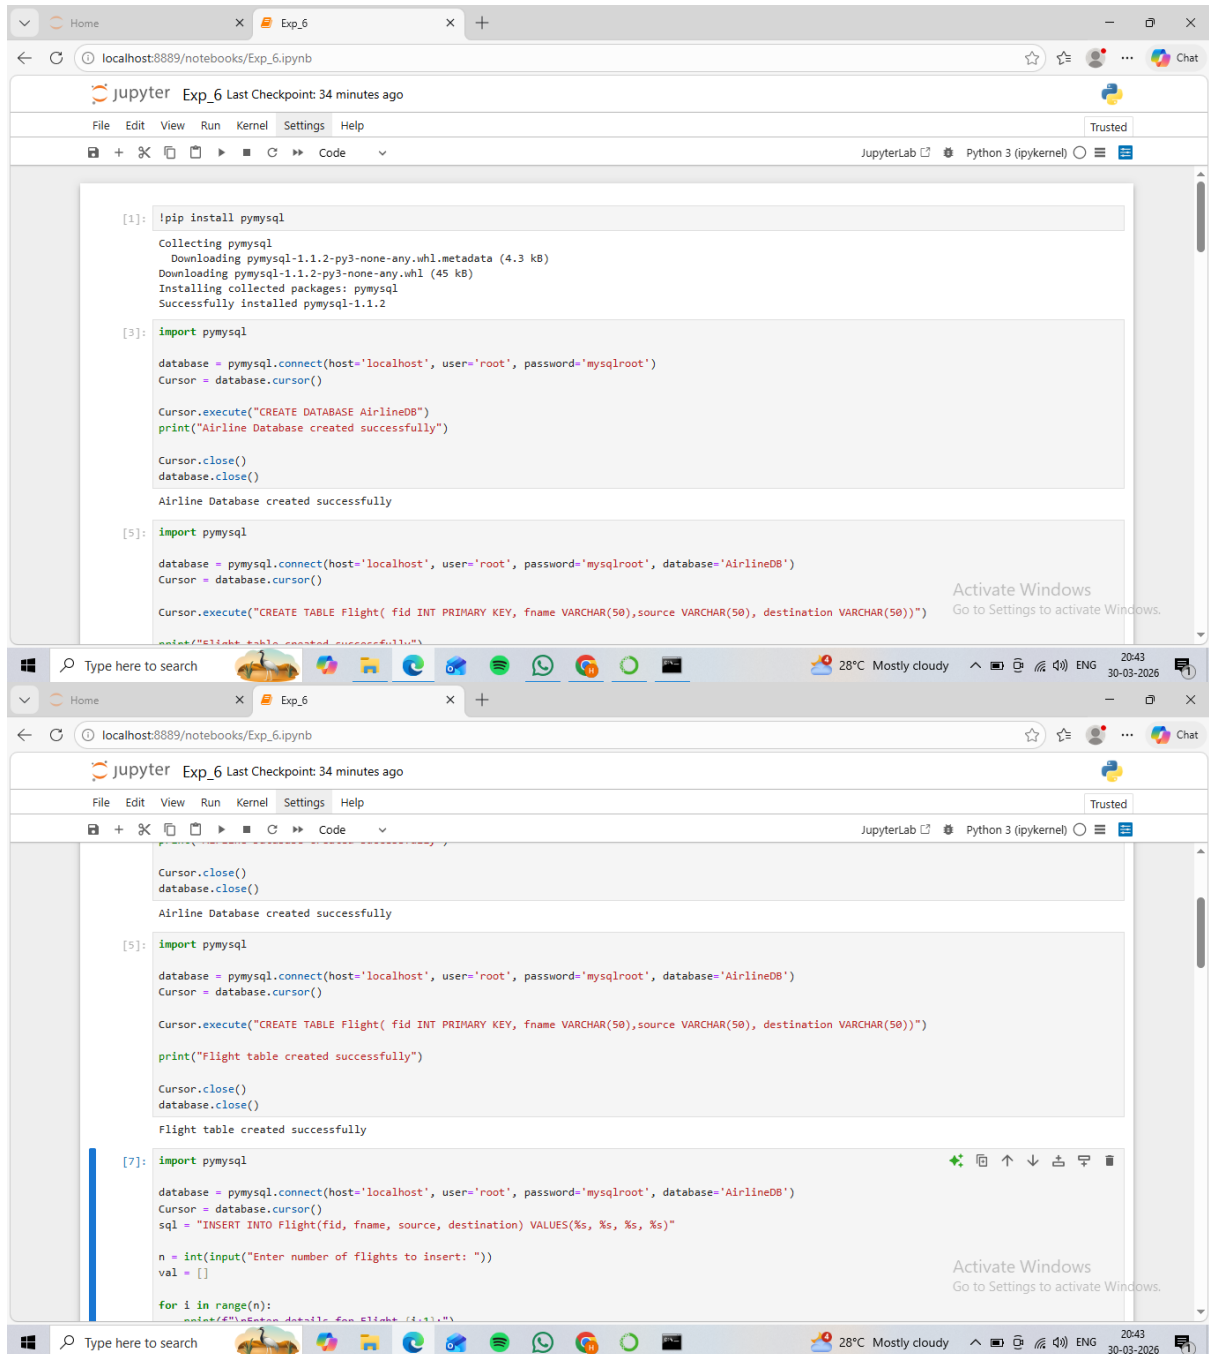

Home Exp_6

localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 34 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

Flight table created successfully

```
[7]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()
sql = "INSERT INTO Flight(fid, fname, source, destination) VALUES(%s, %s, %s, %s)"

n = int(input("Enter number of flights to insert: "))
val = []

for i in range(n):
    print(f"\nEnter details for Flight (i+1):")

    fid = input("Enter Flight ID: ")
    fname = input("Enter Flight Name: ")
    source = input("Enter Source: ")
    destination = input("Enter Destination: ")

    val.append((fid, fname, source, destination))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "values inserted successfully")

Cursor.close()
database.close()
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

28°C Mostly cloudy

20:43
30-03-2026

Home Exp_6

localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 34 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "values inserted successfully")

Cursor.close()
database.close()

Enter number of flights to insert: 3

Enter details for Flight 1:
Enter Flight ID: 101
Enter Flight Name: Emirates
Enter Source: PNQ
Enter Destination: DEL

Enter details for Flight 2:
Enter Flight ID: 102
Enter Flight Name: Indigo
Enter Source: BLR
Enter Destination: CST

Enter details for Flight 3:
Enter Flight ID: 103
Enter Flight Name: Air India
Enter Source: DEL
Enter Destination: Dubai
3 values inserted successfully

* [9]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

28°C Mostly cloudy

20:43
30-03-2026

Home Exp_6

localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 34 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
[9]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()

sql = "DELETE FROM Flight WHERE fid = %s"

n = int(input("Enter number of flights to delete: "))
val = []

for i in range(n):
    print(f"\nEnter Flight ID to delete for record {i+1}:")

    fid = input("Enter Flight ID: ")

    val.append((fid,))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "records deleted successfully")

Cursor.close()
database.close()

Enter number of flights to delete: 1

Enter Flight ID to delete for record 1:
Enter Flight ID: 103
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

28°C Mostly cloudy 20:43 30-03-2026

Home Exp_6 localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 34 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "records deleted successfully")

Cursor.close()
database.close()

Enter number of flights to delete: 1

Enter Flight ID to delete for record 1:
Enter Flight ID: 103
1 records deleted successfully

[11]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()
sql = "UPDATE Flight SET fname=%s, source=%s, destination=%s WHERE fid=%s"

n = int(input("Enter number of flights to update: "))
val = []

for i in range(n):
    print(f"\nEnter new details for Flight {i+1}:")

    fid = input("Enter Flight ID to update: ")
    fname = input("Enter New Flight Name: ")
    source = input("Enter New Source: ")
    destination = input("Enter New Destination: ")

    val.append((fname, source, destination, fid))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "records updated successfully")

Cursor.close()
database.close()

Enter number of flights to update: 1

Enter new details for Flight 1:
```

Activate Windows
Go to Settings to activate Windows.

Home Exp_6 localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 35 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
[11]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()
sql = "UPDATE Flight SET fname=%s, source=%s, destination=%s WHERE fid=%s"

n = int(input("Enter number of flights to update: "))
val = []

for i in range(n):
    print(f"\nEnter new details for Flight {i+1}:")

    fid = input("Enter Flight ID to update: ")
    fname = input("Enter New Flight Name: ")
    source = input("Enter New Source: ")
    destination = input("Enter New Destination: ")

    val.append((fname, source, destination, fid))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "records updated successfully")

Cursor.close()
database.close()

Enter number of flights to update: 1

Enter new details for Flight 1:
```

Activate Windows
Go to Settings to activate Windows.

Home Exp_6 localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 35 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
print("Enter New Details for Flight")

fid = input("Enter Flight ID to update: ")
fname = input("Enter New Flight Name: ")
source = input("Enter New Source: ")
destination = input("Enter New Destination: ")

val.append((fname, source, destination, fid))

Cursor.executemany(sql, val)
database.commit()

print(Cursor.rowcount, "records updated successfully")

Cursor.close()
database.close()

Enter number of flights to update: 1

Enter new details for Flight 1:
Enter Flight ID to update: 101
Enter New Flight Name: Kingfisher
Enter New Source: DEL
Enter New Destination: Dubai
1 records updated successfully

[13]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()
#display all records
sql = "SELECT * FROM Flight"
```

Activate Windows
Go to Settings to activate Windows.

Type here to search 28°C Mostly cloudy 20:44 30-03-2026

Home Exp_6 localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 35 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
Enter new destination: duuoi
1 records updated successfully

[13]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
Cursor = database.cursor()
#display all records
sql = "SELECT * FROM Flight"

Cursor.execute(sql)

rows = Cursor.fetchall()

print("\nFlight Records:")

for row in rows:
    print(row)

print(len(rows), "records fetched successfully")

Cursor.close()
database.close()

Flight Records:
(101, 'Kingfisher', 'DEL', 'Dubai')
(102, 'Indigo', 'BLR', 'CST')
2 records fetched successfully

[15]: import pymysql
```

Activate Windows
Go to Settings to activate Windows.

Type here to search 28°C Mostly cloudy 20:44 30-03-2026

Home Exp_6 localhost:8889/notebooks/Exp_6.ipynb

Jupyter Exp_6 Last Checkpoint: 35 minutes ago

File Edit View Run Kernel Settings Help Trusted

JupyterLab Python 3 (ipykernel)

```
[15]: import pymysql

database = pymysql.connect(host='localhost', user='root', password='mysqlroot', database='AirlineDB')
cursor = database.cursor()
#select with user input

sql = "SELECT * FROM Flight WHERE fid = %s"
fid = input("Enter Flight ID to search: ")
cursor.execute(sql, (fid,))
rows = cursor.fetchall()
print("\nSearch Result:")

for row in rows:
    print(row)
print(cursor.rowcount, "record(s) fetched successfully")

cursor.close()
database.close()

Enter Flight ID to search: 102

Search Result:
(102, 'Indigo', 'BLR', 'CST')
1 record(s) fetched successfully

[ ]:
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

Command Prompt - mysql -u root -p

```
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Users\CHIMU>mysql -u root -p
Enter password: *****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 17
Server version: 8.0.45 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+-----+
| Database |
+-----+
| abc      |
| airlinedb |
| audit_system |
| business |
| company  |
| company1 |
| company10 |
| company11 |
| db       |
| db_sales |
| exp8     |
| hotel_db |
| hoteldb  |
| information_schema |
| mysql    |
| performance_schema |
| practice_db |
| sales_db |
| salesdb  |
| sys      |
| voyage_ventures |
| xyz      |
+-----+
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

```
Command Prompt - mysql -u root -p
| xyz |
+-----+
22 rows in set (0.03 sec)

mysql> use airlinesdb;
Database changed
mysql> show tables;
+-----+
| Tables_in_airlinesdb |
+-----+
| flight |
+-----+
1 row in set (0.01 sec)

mysql> select * from airlinesdb;
ERROR 1146 (42S02): Table 'airlinesdb.airlinesdb' doesn't exist
mysql> select * from flight;
+-----+
| fid | fname | source | destination |
+-----+
| 101 | Emirates | PNQ | DEL |
| 102 | Indigo | BLR | CST |
| 103 | Air India | DEL | Dubai |
+-----+
3 rows in set (0.00 sec)

mysql> select * from flight;
+-----+
| fid | fname | source | destination |
+-----+
| 101 | Emirates | PNQ | DEL |
| 102 | Indigo | BLR | CST |
+-----+
2 rows in set (0.00 sec)

mysql> select * from flight;
+-----+
| fid | fname | source | destination |
+-----+
| 101 | Kingfisher | DEL | Dubai |
| 102 | Indigo | BLR | CST |
+-----+
2 rows in set (0.00 sec)
```

Activate Windows
Go to Settings to activate Windows.

Type here to search

28°C Mostly cloudy 20:44 30-03-2026