
Minted: 0

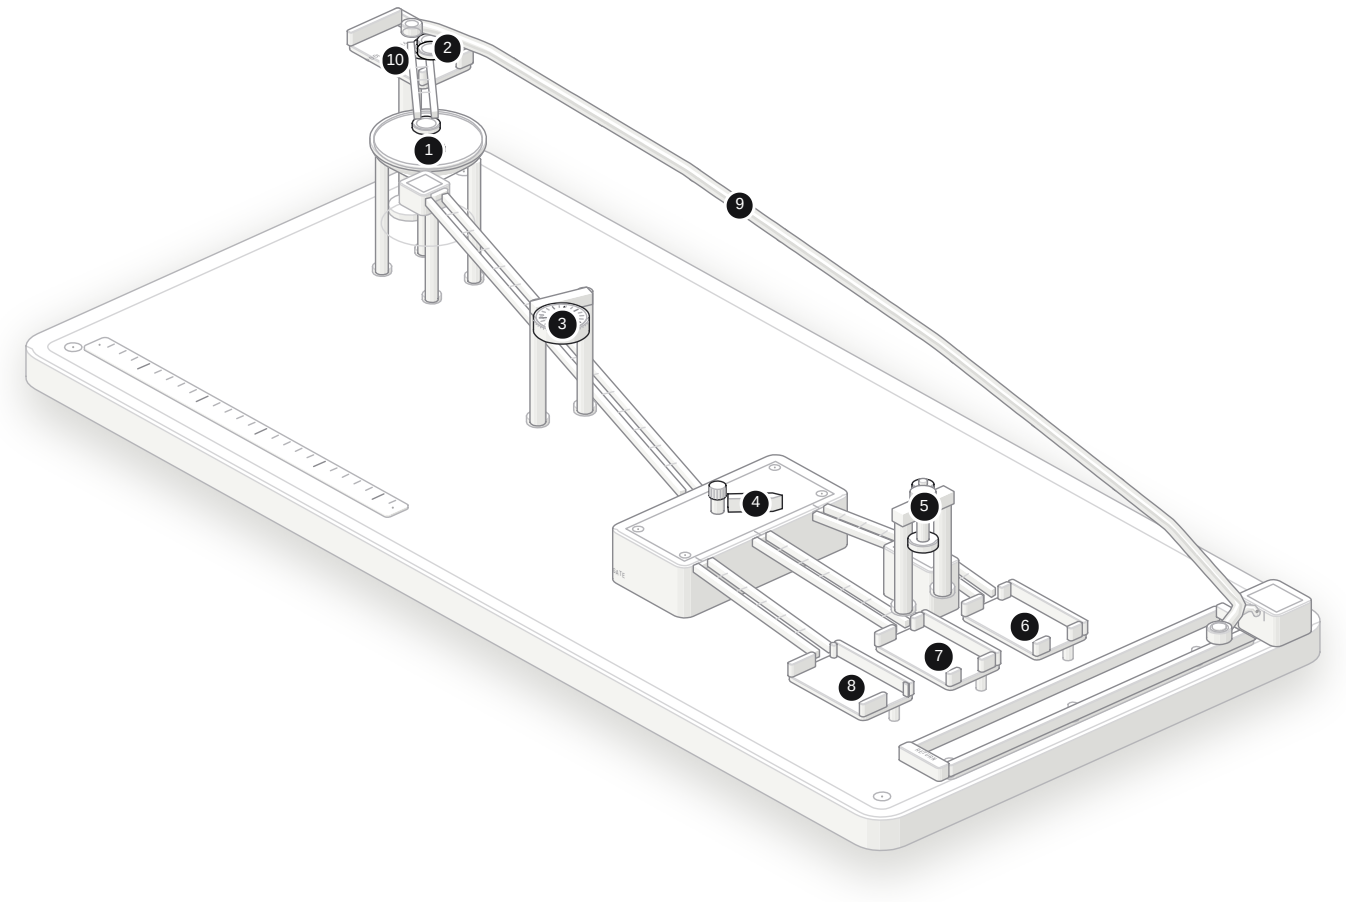

What does one request cost the garbage collector?

Every exchange runs one coin round the machine. The reading bridge is Glyph11: headers become zero-copy ByteString views over the request buffer — no strings minted. The gate is the handler tree, the press is serialization, and the return chute empties back into the pool.

0 minted
ALLOCATIONS ON THE WHOLE EXCHANGE

1024 deep
PER-THREAD STACK OF POOLED REQUESTS

0 copies
HEADERS ARE VIEWS OVER THE READ BUFFER

20 bytes
OF DIGIT BUFFER COVER ANY CONTENT-LENGTH

01 **Hopper**
Accepted connections queue here to be dealt one at a time.

02 **The coin**
One pooled Request, reused every exchange.

03 **Reading bridge**
Glyph11 weighs the headers into zero-copy views.

04 **Routing gate**
The handler tree's answer: response, null, or thrown.

05 **The press**
Status line and headers stamped out as raw UTF-8.

06 **Handler tray**
Where answered requests land before the return.

07 **404 tray**
A null answer drops the coin here.

08 **Error tray**
A thrown one is mapped to a status and lands here.

09 **Return tube**
Drained, reset and blown back to the pool.

10 **The pool**
Spare coins: 1024 Requests deep, per thread.