
IHandler

GHTTP-03
HOW IT WORKS
TWO METHODS, SOCKET TO LAMBDA

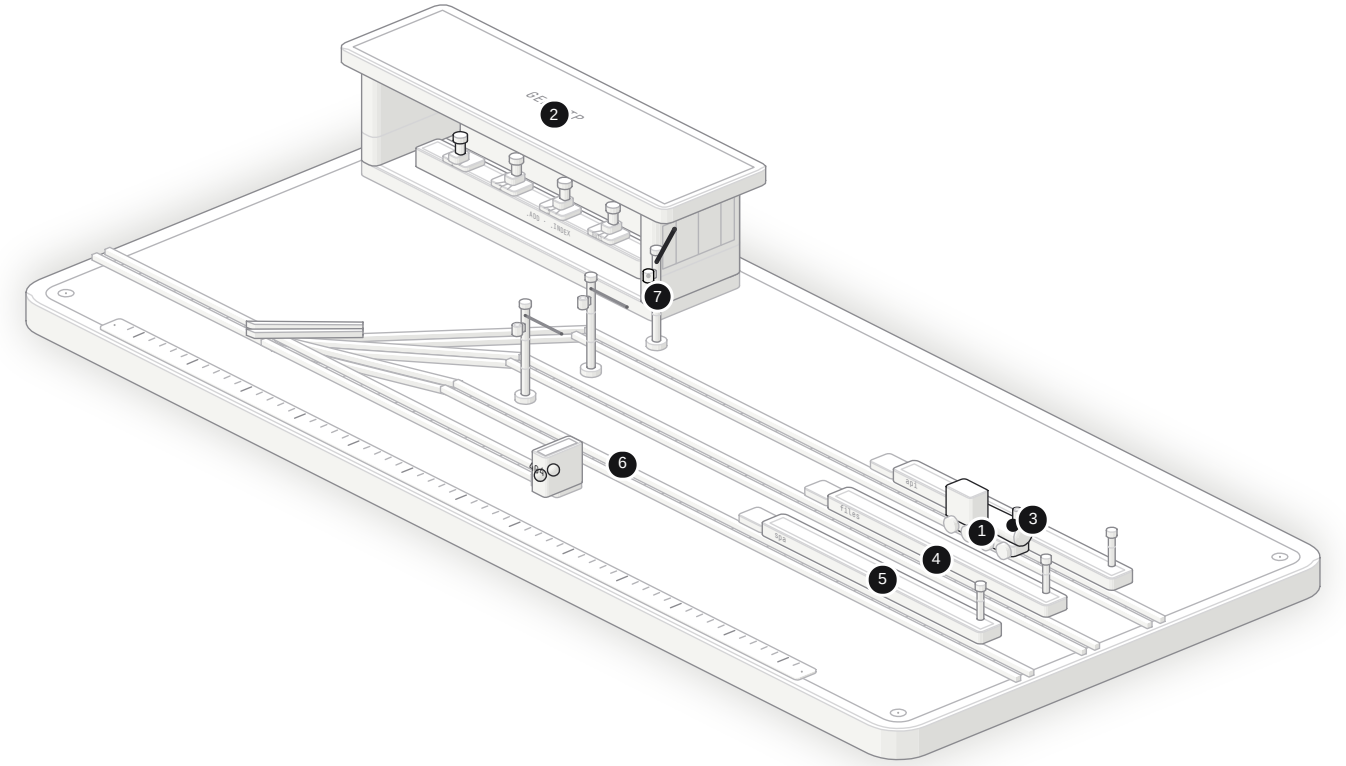

What does every part of a GenHTTP server have in common?

Every part of GenHTTP is the same two-method IHandler: PrepareAsync warms the tree once before the first connection, HandleAsync answers the request. The lever frame is the builder, the points are the segment match, and every road ends somewhere — a response, or the dead spur that becomes a 404.

2 methods
PREPAREASYNC WARMS, HANDLEASYNC ANSWERS

4 roads
THREE HANDLERS AND ONE DEAD SPUR

null → 404
WHAT AN UNCLAIMED SEGMENT RETURNS

1 interface
NO SEPARATE MIDDLEWARE, EVER

0 special cases
NOT EVEN FOR THE ROOT OF THE TREE

01 **The train**
One request, running the road the points set.

02 **The signal box**
The builder: .Add(segment, handler) hangs a platform on each branch.

03 **Platform api**
A routed segment — webservices, proxies, anything with a handler.

04 **Platform files**
Assets and trees: static files are handlers like any other.

05 **Platform spa**
A single-page app, with its fallback to index.html.

06 **The dead spur**
No handler claims it: HandleAsync returns null.

07 **Signals**
Arm dropped, lamp lit — the road that answered.