
Mapper

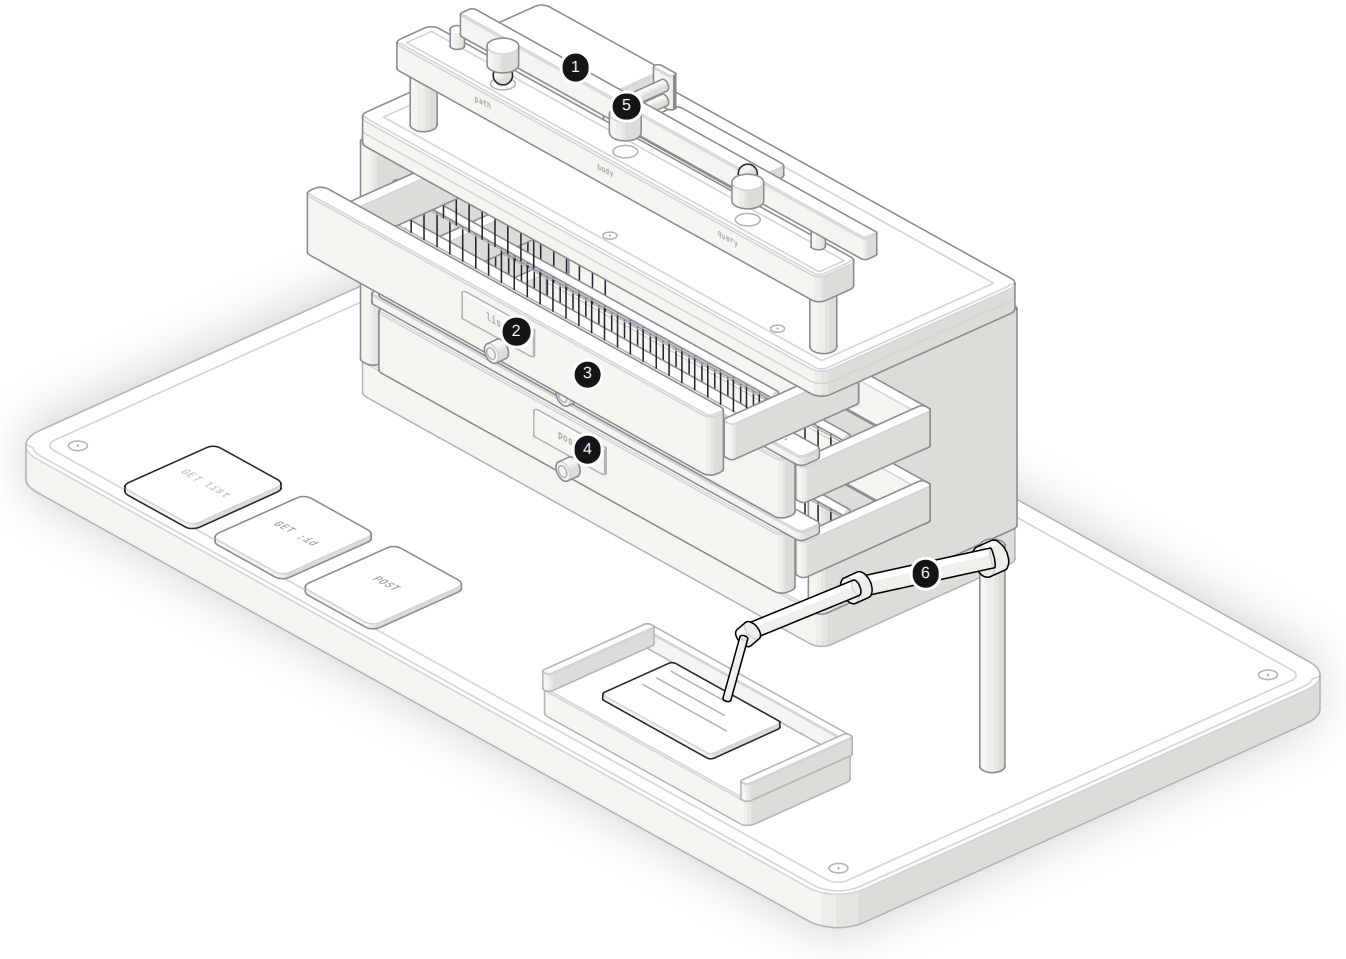

How does a plain C# method become an HTTP operation?

Every front door — ServiceResource, Controller or an Inline lambda — ends in the same machinery: TypeAnalyzer reads the attributes into a MethodCollection and the OperationRouter matches the request card to one drawer. SignatureAnalyzer then binds each parameter by fixed precedence, so a bead drops only into the slot the signature declares.

3 front doors
SERVICERESOURCE, CONTROLLER, INLINE

6 slots
FIXED BINDING PRECEDENCE: PATH TO CONTENT

15 files
A MINI-MEDIATR-PLUS-MVC, NO CODE-GEN STEP

403 intercepted
[REQUIREROLE] BLOCKS BEFORE THE METHOD

01 **The request card**
Method and path, dropped into the throat to be matched.

02 **Drawer — GET list**
One operation per method, read from the attributes.

03 **Drawer — GET :id**
Literal, :variable and regex segments all route here.

04 **Drawer — POST**
A body-carrying operation; the tray takes its answer.

05 **The beads**
Bound arguments, seated by precedence, never by guesswork.

06 **The pen arm**
The Roslyn-compiled invocation, writing the response.