
As-built

GHTTP-06
HOW IT WORKS
SURVEYED FROM THE LIVE HANDLER TREE

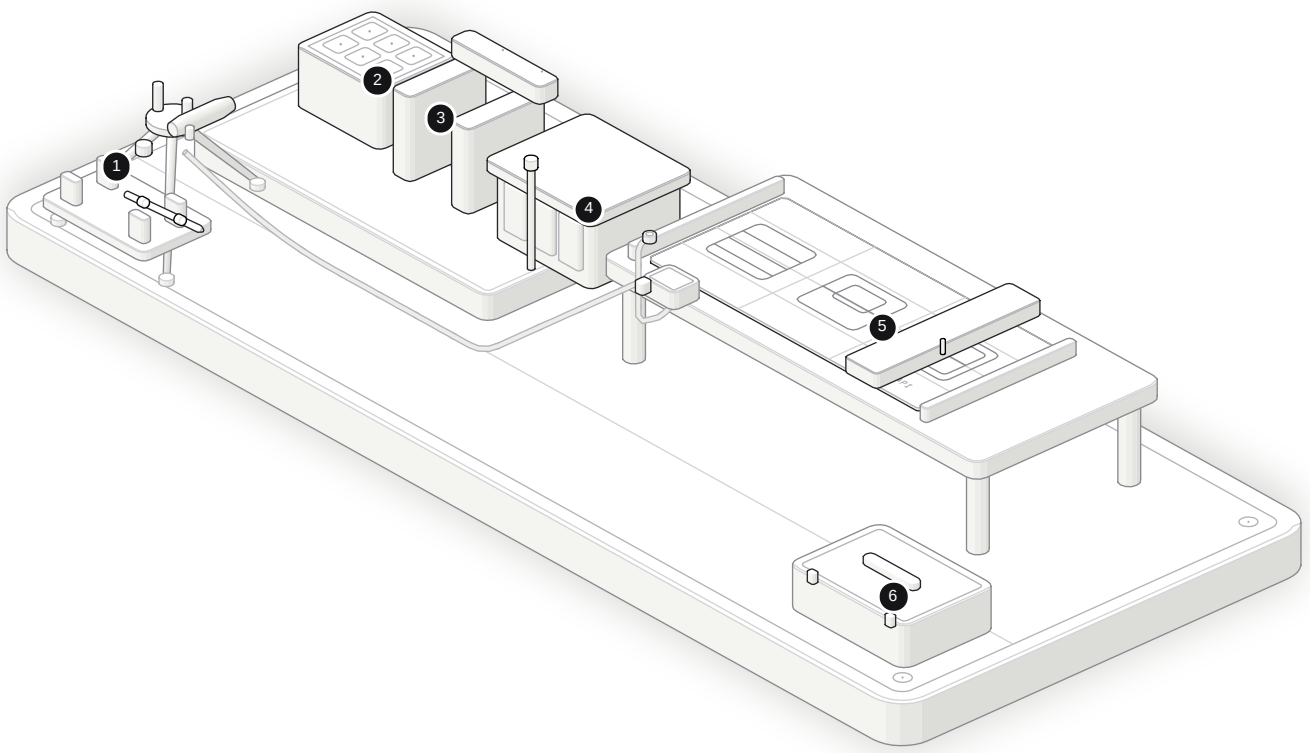

How does the OpenAPI document stay true to what the server serves?

ApiDescription crawls the live handler tree — concerns, then layout, then service methods — instead of a parallel description. The document is drawn from what actually answers, its schemas come from the same serializer options you serve with, and it is cached with a checksum and served content-negotiated as JSON or YAML.

5 explorers
CONCERN, LAYOUT, SERVICE, COLLECTION, METHOD

1 source
THE LIVE HANDLER GRAPH, NEVER A PARALLEL MODEL

2 formats
JSON OR YAML, BY CONTENT NEGOTIATION

1 line
.ADDOPENAPI() PUTS IT ON YOUR HOST

0 drift
WHAT ANSWERS IS WHAT IS DOCUMENTED

01 **The theodolite**
ApiDescription, sighted on the live tree — concerns, layout, services.

02 **Machine A**
An endpoint the survey has sighted: its drawing joins the sheet.

03 **Machine B**
The explorer chain decides, then descends, handler by handler.

04 **Machine C**
Service methods fan out to one OpenApiOperation per verb.

05 **The drafting table**
The document, drawn at full scale from the measurements.

06 **The instrument case**
The cache: the finished document, kept with a checksum.