


Transceiver

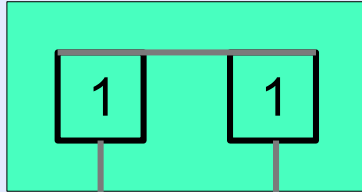


Can be used to add different types of segment to a network.

Example: RS232/RS485 transceiver

Segment 1

Segment 2

Bridge

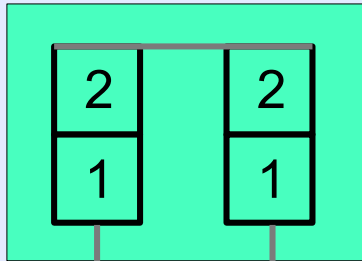

Can be used to connect 2 networks using the same protocol but different lower layers.

Example: Modbus RS485/Ethernet TCP-IP bridge

Network 1

Network 2