

Project Development - Delivery of Sprint-4

Project Domain	Cloud Application Development
Project Title	News Tracker Application
Team ID	PNT2022TMID36872
Date	19th Nov 2022

Sprint-4 Deliverables

1.Containerized the application using docker desktop and pushed the image file to dockerhub.

2.Pushed the docker image file to the ibm cloud container registry.

3.Deployed the image file from container registry to the Kubernetes.

Docker playground commands:

- docker pull sriramrmx/cad
- docker run -p 5000:5000 sriramrmx/cad

Kubernetes deployment:

- IP/Port Number: 159.122.187.10:32251
- Website address: <https://newstracker.ml/>



Figure-1: Creating images using Docker

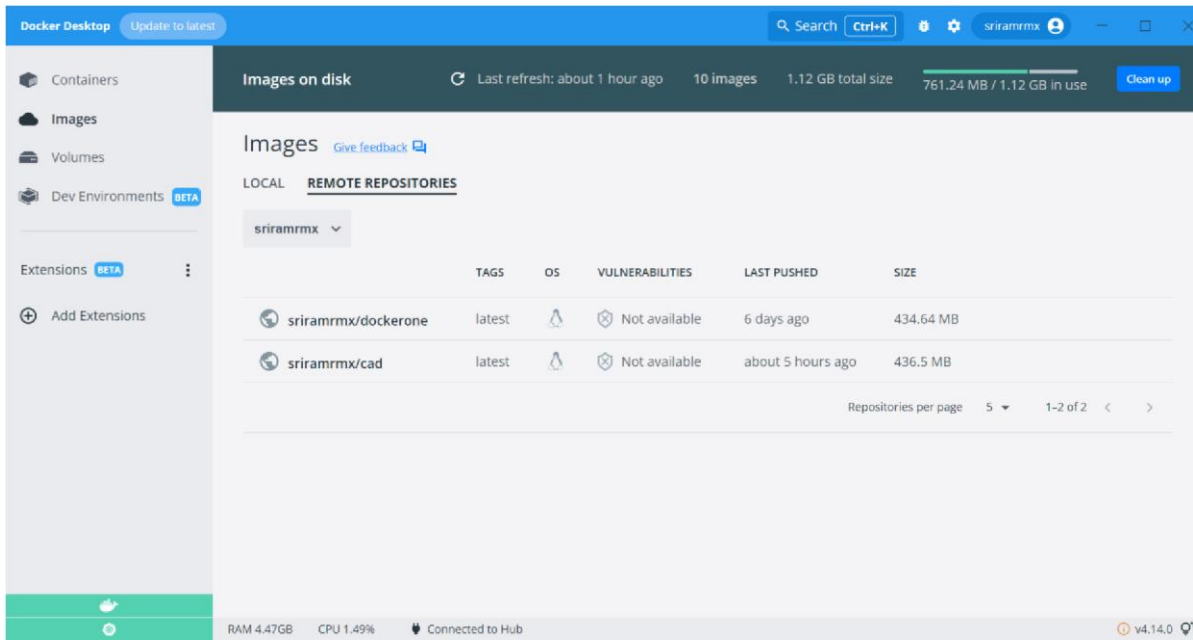
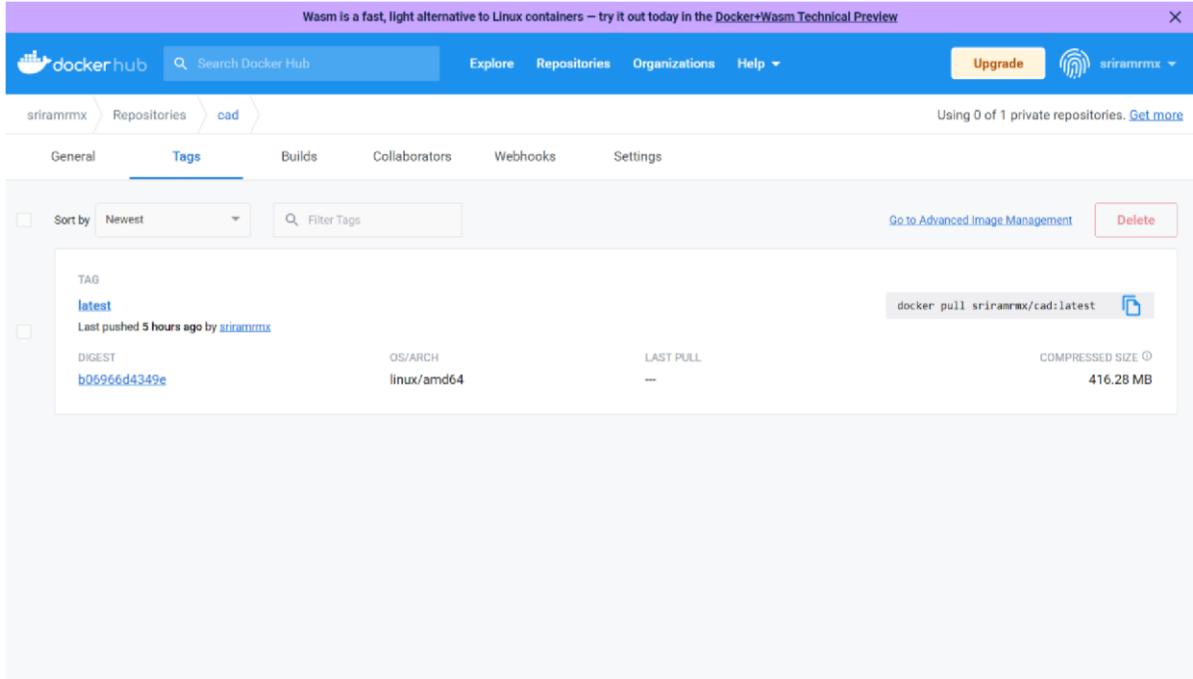




Figure-2: Uploading image file to ibm cloud container registry

IBM Cloud

Search resources and products...

Catalog

Manage

SRIRAM K's Account

Container Registry

Quick start

Namespaces 1

Repositories 1

Images 1

Trash 0

Settings



Repositories

Location

Dallas

Search

Create +

<input type="checkbox"/>	Name	Image count	Namespace	Last updated			
<input checked="" type="checkbox"/>	 cad us.icr.io/newstracker/cad	1	newstracker	5 hours ago			
<input type="checkbox"/>	Digest	Manifest type	Tags	Created	Size	Security status	
<input checked="" type="checkbox"/>	b06966d4349e	Docker	latest	5 hours ago	436 MB	 102 issues	

Items per page: 25 1-1 of 1 item

1 1 of 1 page

IBM Cloud

Search resources and products...

Catalog

Manage

SRIRAM K's Account

Container Registry

Quick start

Namespaces 1

Repositories 1

Images 1

Trash 0

Settings

Namespaces

Location

Dallas



Viewing filtered namespaces

Show all namespaces

Resource group: Filter...

Search

Create +

<input type="checkbox"/>	Name	Resource group	Repository count	Image count	Retention policy	
<input checked="" type="checkbox"/>	 newstracker	Default	1	1	Retain all images	
Repository			Image count	Last updated		
<input checked="" type="checkbox"/>	 us.icr.io/newstracker/cad		1	5 hours ago		

Items per page: 25 1-1 of 1 item

1 1 of 1 page


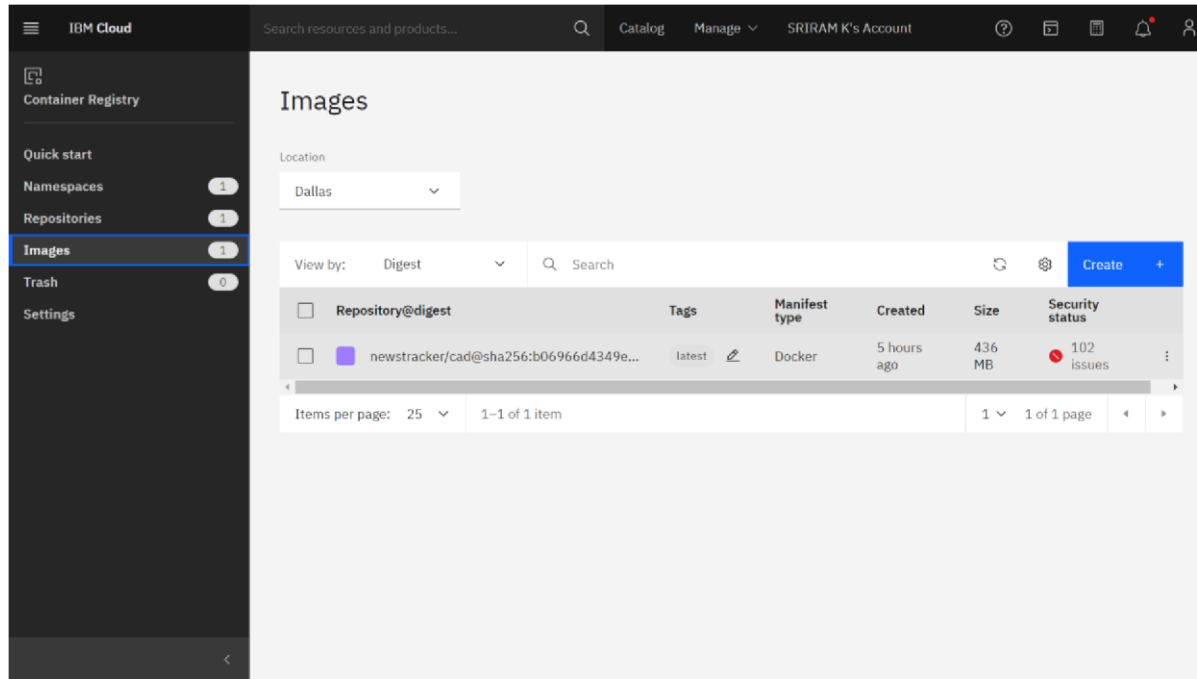


Figure-3: Deploying the image file in ibm cloud container to the ibm Kubernetes cluster

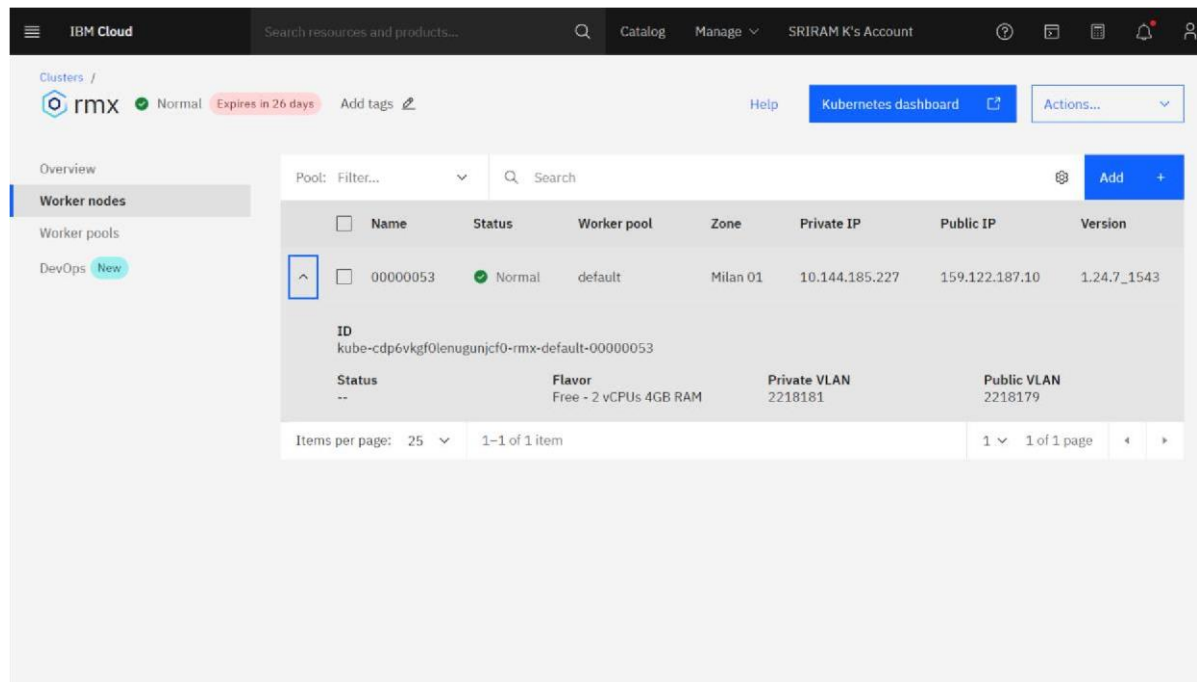

IBM Cloud

Search resources and products...

Catalog

Manage

SRIRAM K's Account

?

Clusters /

rmx

Normal

Expires in 26 days

Add tags

Help

Kubernetes dashboard

Actions...

Overview

Worker nodes

Worker pools

DevOps New

Expires in 26 days:

Be sure to back up your data, your cluster will be deleted in 26 days. To access the full capabilities of the service, try out a [standard cluster](#).

Node status

1 of 1

Normal

Details

Add-on status

0 of 0

Normal

Details

Master status

Normal

Docs

Ingress status

Healthy

Docs

Details

Cluster ID

cdp6vkgf0lenugunjcf0

Version

1.24.7_1542

Infrastructure

Classic

Zones

Milan 01

Created

11/14/2022, 10:11 PM

Resource group

Default

Image security enforcement

Enable

Node health

Worker node details

IBM Cloud

Search resources and products...

Catalog

Manage

SRIRAM K's Account

?

Clusters /

rmx

Normal

Expires in 26 days

Add tags

Help

Kubernetes dashboard

Actions...

Overview

Worker nodes

Worker pools

DevOps New

Pool: 1 x Filter...

Search

Add

<input type="checkbox"/>	Name	Status	Worker pool	Zone	Private IP	Public IP	Version
<input type="checkbox"/>	00000053	Normal	default	Milan 01	10.144.185.227	159.122.187.10	1.24.7_1543
<div>ID</div> <div>kube-cdp6vkgf0lenugunjcf0-rmx-default-00000053</div>							
<div>Status</div> <div>--</div>		<div>Flavor</div> <div>Free - 2 vCPUs 4GB RAM</div>		<div>Private VLAN</div> <div>2218181</div>		<div>Public VLAN</div> <div>2218179</div>	

Items per page: 25

1-1 of 1 item

1 of 1 page



Figure-4: Commands used in command prompt for containerizing and deploying

```
flask-node-deployment    ClusterIP   172.21.227.148   <none>      88/TCP      2d16h
kubernetes               ClusterIP   172.21.0.1       <none>      443/TCP     3d16h
newstracker              NodePort    172.21.108.222   <none>      5000:32251/TCP 17m
```

```
C:\windows\system32>kubectl describe service newstracker
```

```
Name:                newstracker
Namespace:           default
Labels:              <none>
Annotations:         <none>
Selector:            app=newstracker
Type:               NodePort
IP Family Policy:    SingleStack
IP Families:         IPv4
IP:                 172.21.108.222
IPs:                172.21.108.222
Port:               <unset> 5000/TCP
TargetPort:         5000/TCP
NodePort:           <unset> 32251/TCP
Endpoints:          172.30.159.221:5000
Session Affinity:    None
External Traffic Policy: Cluster
Events:             <none>
```

```
C:\windows\system32>
```

OK

```
C:\windows\system32>kubectl get nodes
```

```
NAME                STATUS    ROLES    AGE    VERSION
10.144.185.227      Ready    <none>   3d16h   v1.24.7+IKS
```

```
C:\windows\system32>kubectl get pods
```

```
NAME                                READY   STATUS    RESTARTS   AGE
cad-newstracker-deployment          1/1     Running   0           18m
cad-newstracker-deployment-6c9b677bdc-wd7cs  1/1     Running   0           20m
flask-node-deployment-9cdc4bf8-5v4tm  1/1     Running   0           2d16h
```

```
C:\windows\system32>kubectl get depolyment
```

```
error: the server doesn't have a resource type "depolyment"
```

```
C:\windows\system32>kubectl get services
```

```
NAME                                TYPE        CLUSTER-IP    EXTERNAL-IP    PORT(S)          AGE
cad-newstracker-deployment          ClusterIP   172.21.91.203   <none>         5000/TCP         20m
dockerone                           NodePort    172.21.131.50   <none>         88:31364/TCP     2d16h
flask-node-deployment               ClusterIP   172.21.227.148   <none>         88/TCP           2d16h
kubernetes                           ClusterIP   172.21.0.1       <none>         443/TCP          3d16h
newstracker                          NodePort    172.21.108.222   <none>         5000:32251/TCP   17m
```

```
C:\windows\system32>
```



```
C:\windows\system32>ibmcloud cr login
Logging 'docker' in to 'us.icr.io'...
Logged in to 'us.icr.io'.
```

OK

```
C:\windows\system32>kubectl get nodes
NAME                STATUS    ROLES    AGE      VERSION
10.144.185.227      Ready    <none>   3d16h    v1.24.7+IKS
```

```
C:\windows\system32>kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
cad-newstracker-deployment         1/1     Running   0           18m
cad-newstracker-deployment-6c9b677bdc-wdtcs  1/1     Running   0           20m
flask-node-deployment-9cdc4bf8-5v4tm  1/1     Running   0           2d16h
```

```
C:\windows\system32>kubectl get depolyment
error: the server doesn't have a resource type "depolyment"
```

```
C:\windows\system32>
```

```
C:\windows\system32>ibmcloud cs workers --cluster cdp6vkgf0lenugunjcf0
```

OK

ID	Zone	Version	Public IP	Private IP	Flavor	State	Stat
kube-cdp6vkgf0lenugunjcf0-rmx-default-00000053	mil01	1.24.7_1543	159.122.187.10	10.144.185.227	free	normal	Read

```
C:\windows\system32>kubectl get services
NAME                TYPE        CLUSTER-IP    EXTERNAL-IP    PORT(S)          AGE
cad-newstracker-deployment  ClusterIP   172.21.91.203 <none>         5000/TCP          23m
dockerone            NodePort    172.21.131.50 <none>         88:31364/TCP      2d16h
flask-node-deployment  ClusterIP   172.21.227.148 <none>         88/TCP            2d16h
kubernetes            ClusterIP   172.21.0.1     <none>         443/TCP           3d17h
newstracker           NodePort    172.21.108.222 <none>         5000:32251/TCP    20m
```

```
C:\windows\system32>kubectl get pods
NAME                                READY   STATUS    RESTARTS   AGE
cad-newstracker-deployment         1/1     Running   0           22m
cad-newstracker-deployment-6c9b677bdc-wdtcs  1/1     Running   0           24m
flask-node-deployment-9cdc4bf8-5v4tm  1/1     Running   0           2d16h
```

```
C:\windows\system32>
```

Source Codes

deployment.yaml:

```
apiVersion: apps/v1 kind:
Deployment metadata:  name: cad-
newstracker-deployment spec:
replicas: 1 selector:
matchLabels:
  app:
newstracker
template:
metadata:  labels:
  app:
newstracker spec:
containers:
- name: newstracker
  image:
us.icr.io/newstracker/cad
imagePullPolicy: Always ports:
- containerPort: 5000
```

service.yaml:

```
apiVersion: v1
kind: Service
metadata:
  name: cad-newstracker-deployment
spec:  ports:  - port: 5000
targetPort: 5000 selector:
  app: Newstracker
```

requirements.txt:

flask
flask_mail
newsapi-python
ibm_db

Dockerfile:

```
FROM python:3.6
WORKDIR /app
ADD . /app
COPY requirements.txt /app
RUN python3 -m pip install -r requirements.txt
RUN python3 -m pip install ibm_db
RUN python3 -m pip install newsapi-python
RUN python3 -m pip install flask_mail
RUN python3 -m pip install flask
EXPOSE 5000
CMD ["python", "app.py"]
```