Assignment – III

Name	Priyadharshan R
Team ID	PNT2022TMID14584
Roll No	7179KCTKCTKCTKCTKCTKCTKCT19BCS012
Project Name	Customer Care Registry

1.Create a Bucket in IBM object storage.

- **Created a IBM object storage bucket.**
- **Stored 5 css images**
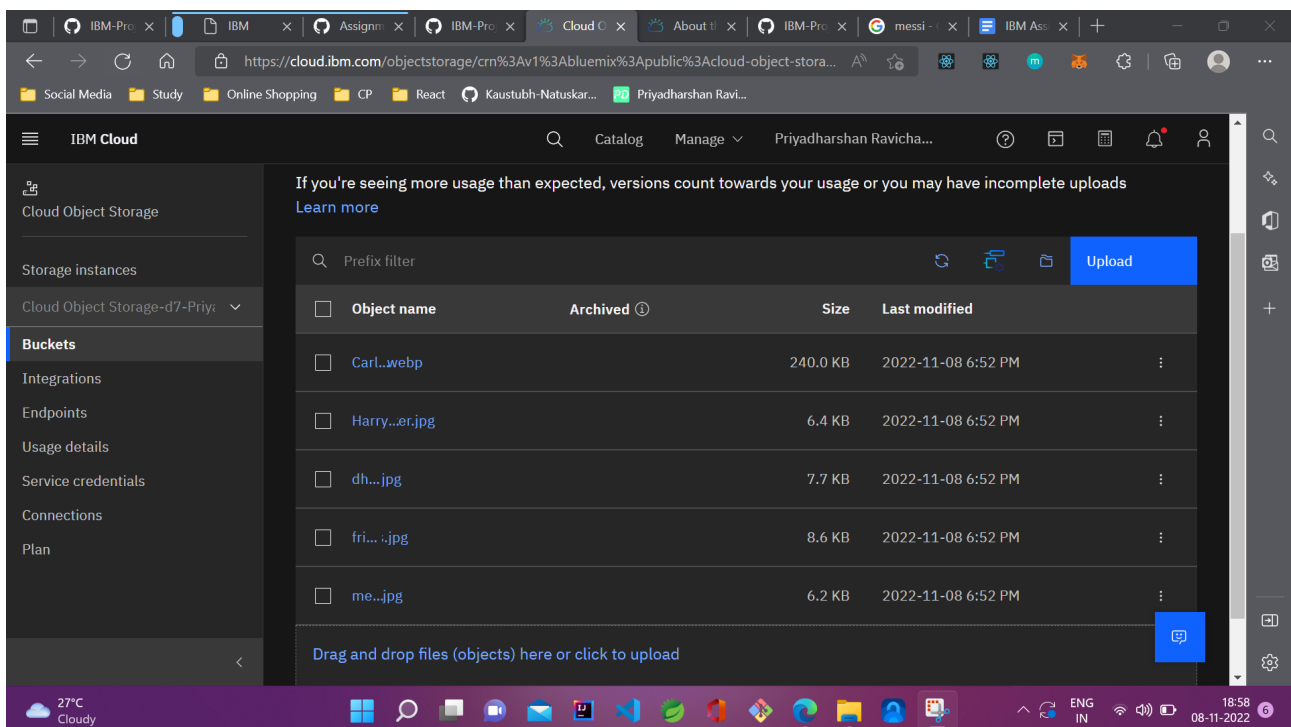
2.Upload 5 images to ibm object storage and make it public. write html code to display all the 5 images.

```
index.html

<!DOCTYPE html>

<html lang="en">

  <head>

    <meta charset="UTF-8" />

    <meta http-equiv="X-UA-Compatible" content="IE=edge" />

    <meta name="viewport" content="width=device-width, initial-scale=1.0" />

    <title>Document</title>

  </head>

  <body>

    <div>Below are 5 images from ibm cloud storage bucket.</div>

    <img

src="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/Ca
rlsen.webp"

      height="200px"

    />

    <img

src="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/Ha
rry-potter.jpg"

      height="200px"

    />

    <img

src="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/dh
oni.jpg"

      height="200px"

    />

    <img

src="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/fr
iends.jpg"

      height="200px"

    />


    <img

src="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/me
ssi.jpg"

      height="200px"

    />

  </body>
```
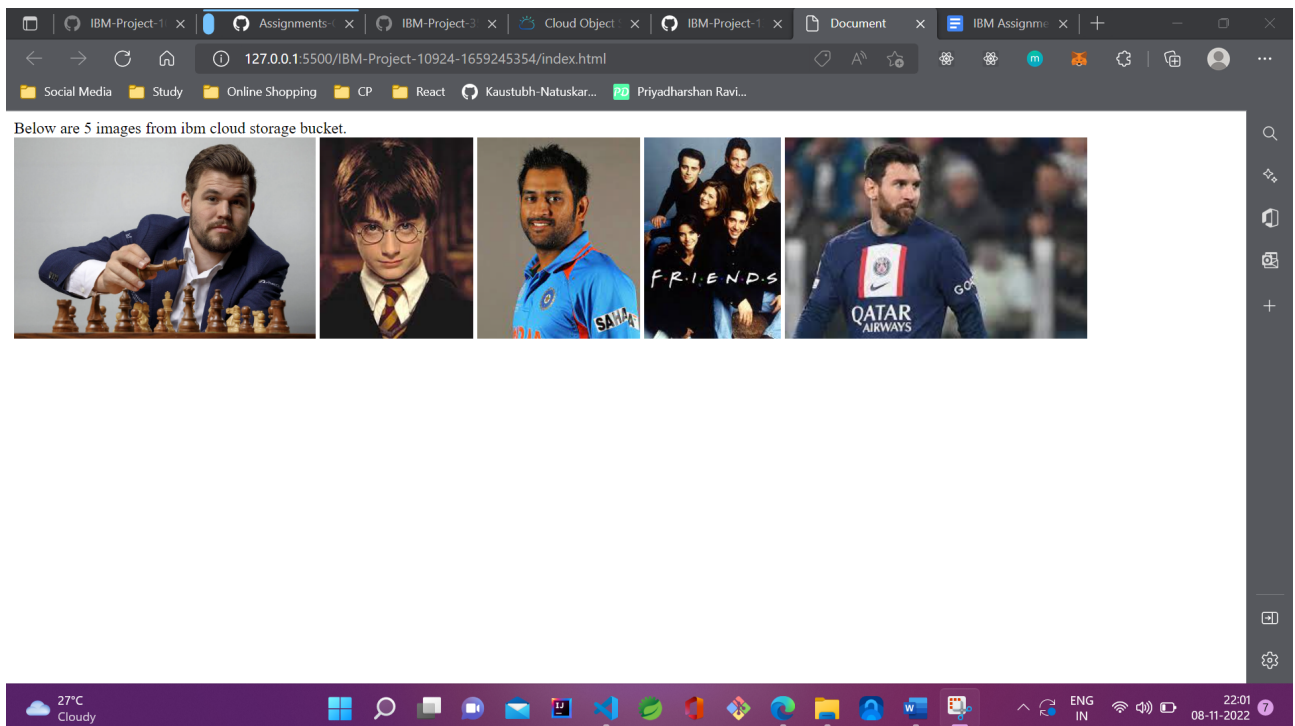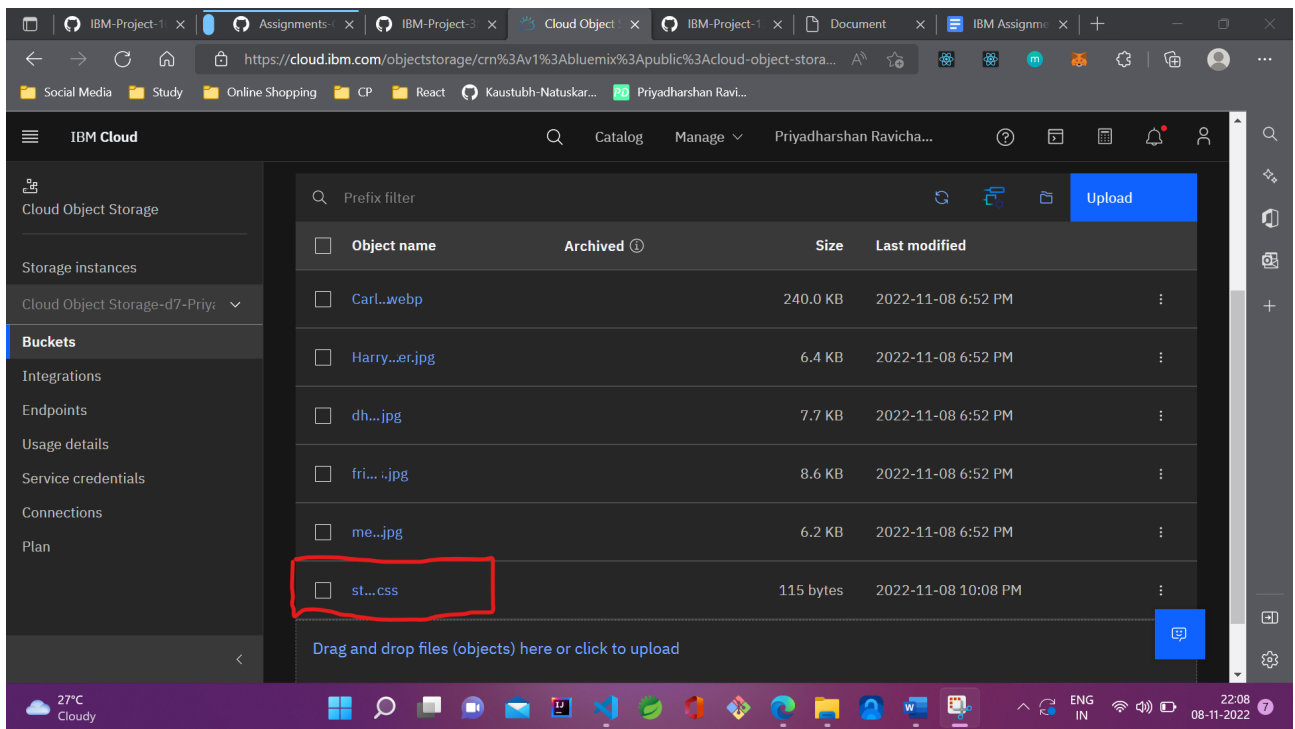
```
</html>
```


3.Upload a css page to the object storage and use the same page in your HTML code.

style.css

```css
.from-cloud-bg-box {
  background-color: red;
  padding: 5rem 10rem;
}
.from-cloud-text {
  color: white;
}
```

index.html

```html
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta http-equiv="X-UA-Compatible" content="IE=edge" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Document</title>
    <link
      rel="stylesheet"
      type="text/css"

href="https://ibm-smart-internz-pntibmmv.s3.jp-tok.cloud-object-storage.appdomain.cloud/style.css"
    />
  </head>
  <body>
    <div class="from-cloud-bg-box from-cloud-text">
      The styles applied to this box are from cloud. We've imported them in the
      head tag using link tag.
    </div>
  </body>
</html>
```
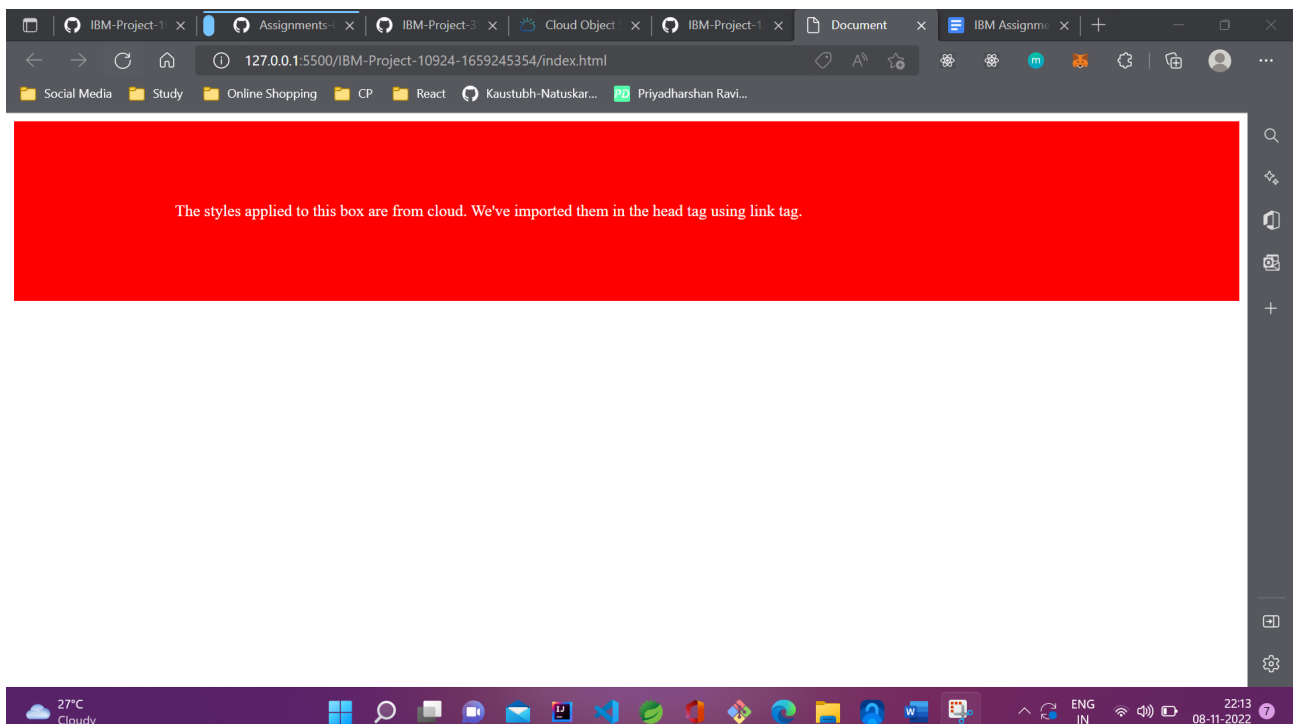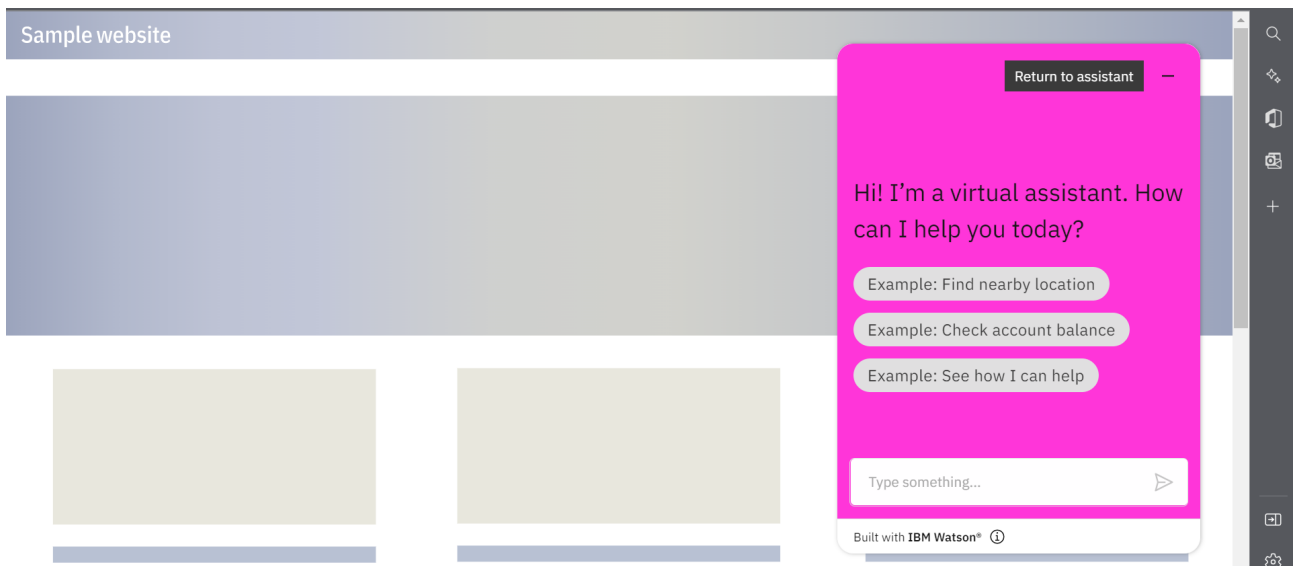
4.Design a chatbot using IBM Watson assistant for hospitals. Ex: User comes with a query to know the branches for that hospital in your city. Submit the web URL of that chat bot as an assignment.
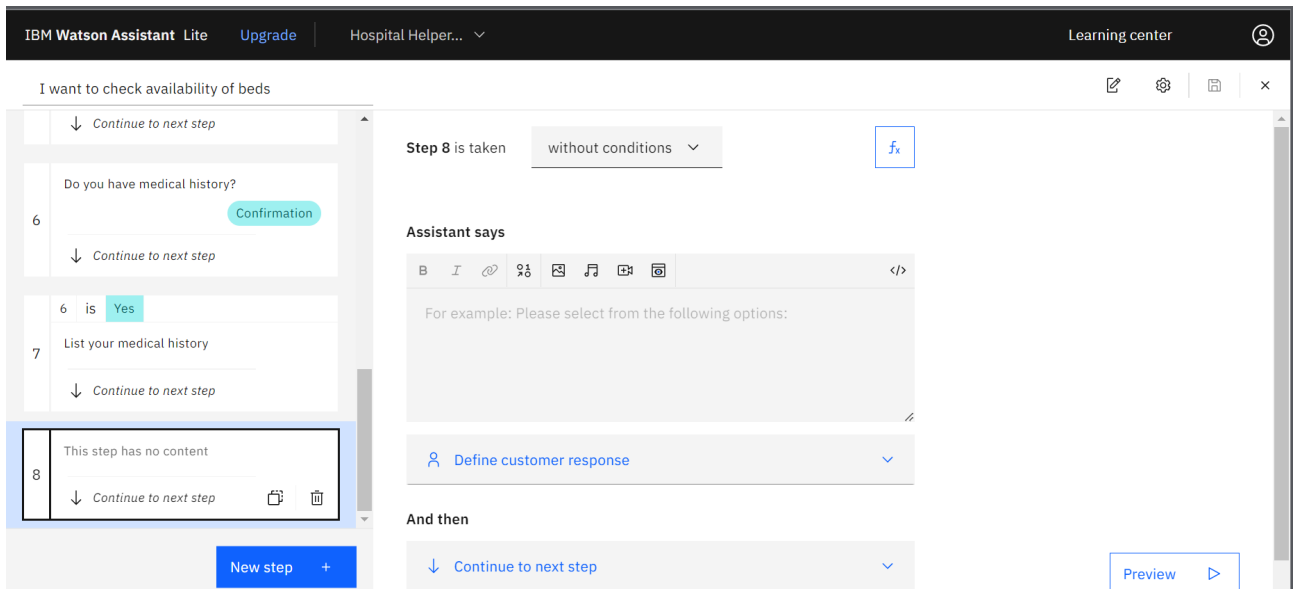

Chat bot Link:
https://web-chat.global.assistant.watson.appdomain.cloud/preview.html?backgroundImageURL=https%3A%2F%2Fau-syd.assistant.watson.cloud.ibm.com%2Fpublic%2Fimages%2Fupx-b47134eb-7b1f-4d23-a9f8-d0e6b0f0d457%3A%3A78f49bd2-3e1c-47f8-8984-369487cddb39&integrationID=70bccedd-08a4-4d1d-9c5a-69b3e2d210f3&region=au-syd&serviceInstanceID=b47134eb-7b1f-4d23-a9f8-d0e6b0f0d457

5.Create Watson assistant service with 10 steps and use 3 conditions in it. Load that script in the HTML page.

Adding 10 steps

Embedding in a website

```html
<!DOCTYPE html>

<html lang="en">

  <head>

    <meta charset="UTF-8" />

    <meta http-equiv="X-UA-Compatible" content="IE=edge" />

    <meta name="viewport" content="width=device-width, initial-scale=1.0" />

    <title>Embedding watson chat box in website</title>

  </head>

  <body>

    <h1>Embedding watson chat box in website</div>

    <script>

      window.watsonAssistantChatOptions = {

        integrationID: "70bccedd-08a4-4d1d-9c5a-69b3e2d210f3", // The ID of this
integration.

        region: "au-syd", // The region your integration is hosted in.

        serviceInstanceID: "b47134eb-7b1f-4d23-a9f8-d0e6b0f0d457", // The ID of your
service instance.

        onLoad: function (instance) {

          instance.render();

        },

      };

      setTimeout(function () {
```

```
      const t = document.createElement("script");

      t.src =

        "https://web-chat.global.assistant.watson.appdomain.cloud/versions/" +

        (window.watsonAssistantChatOptions.clientVersion || "latest") +

        "/WatsonAssistantChatEntry.js";

      document.head.appendChild(t);

    });

  </script>

</body>

</html>
```