

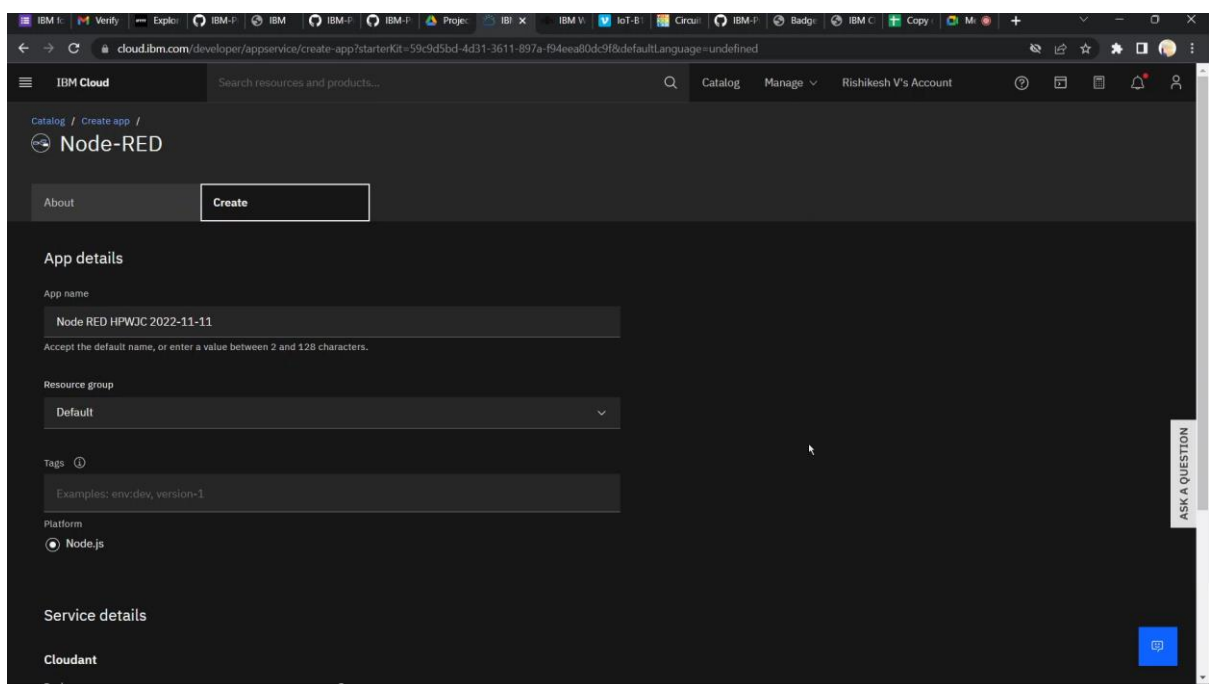
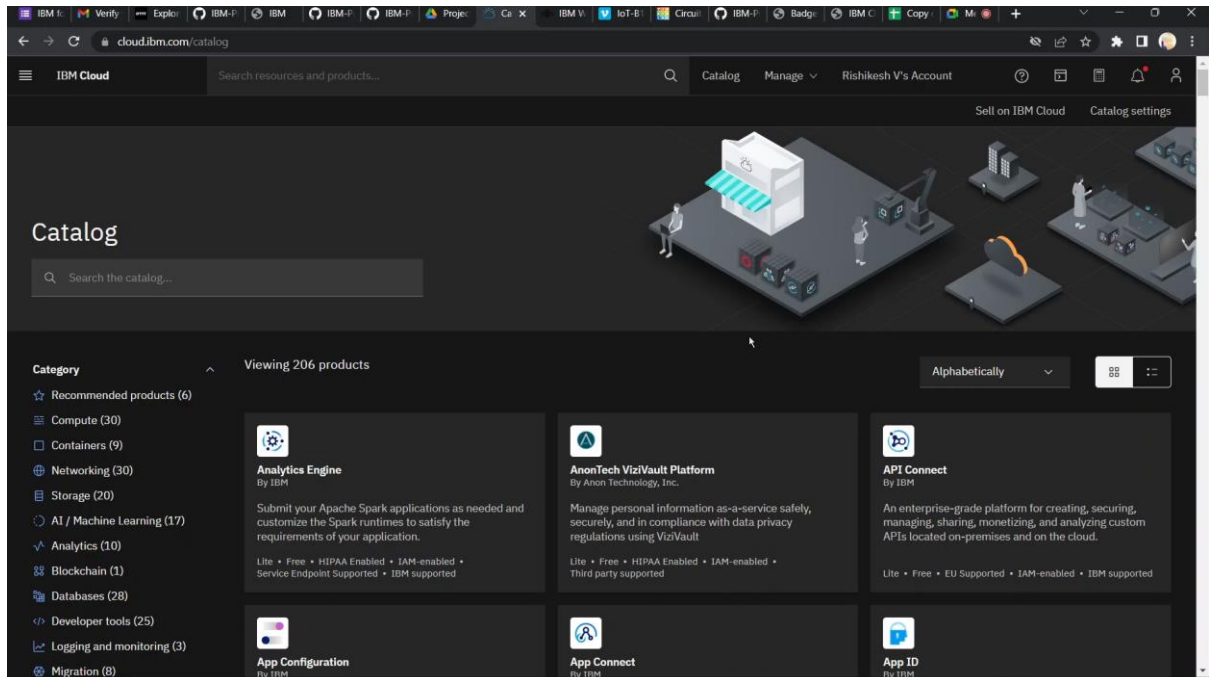


# Create Node-RED Service

Team ID	PNT2022TMID21693
Project Name	GAS LEAKAGE MONITORING AND ALERTING SYSTEM FOR INDUSTRIES

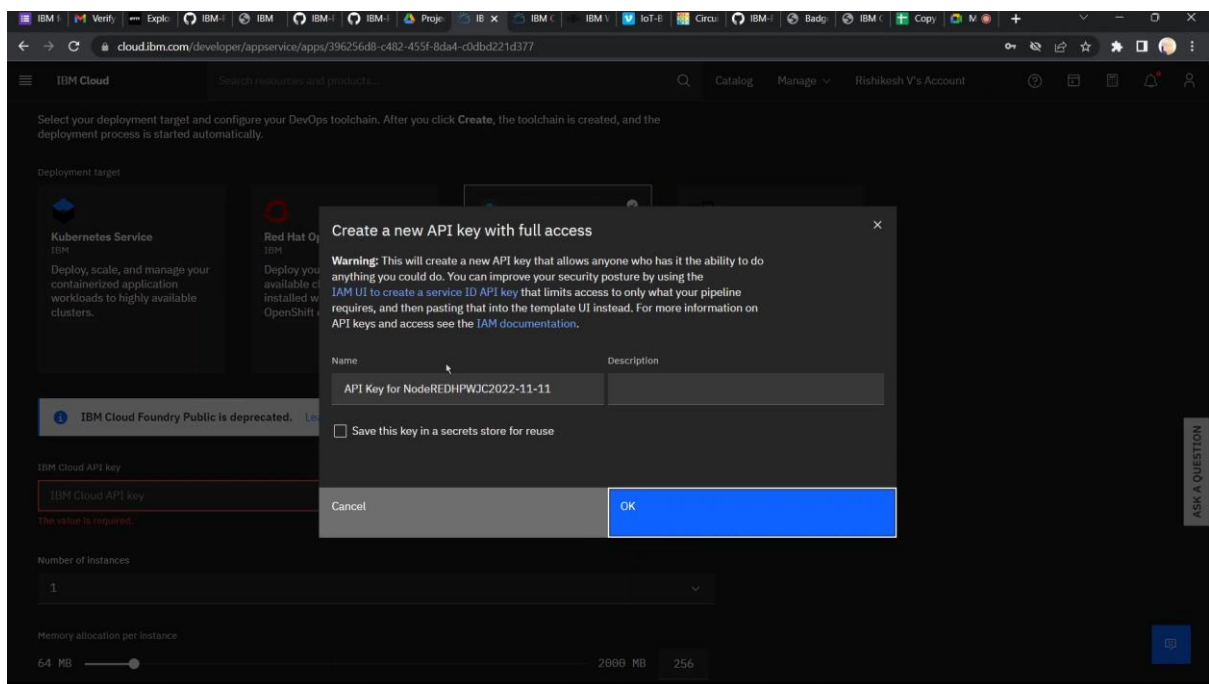

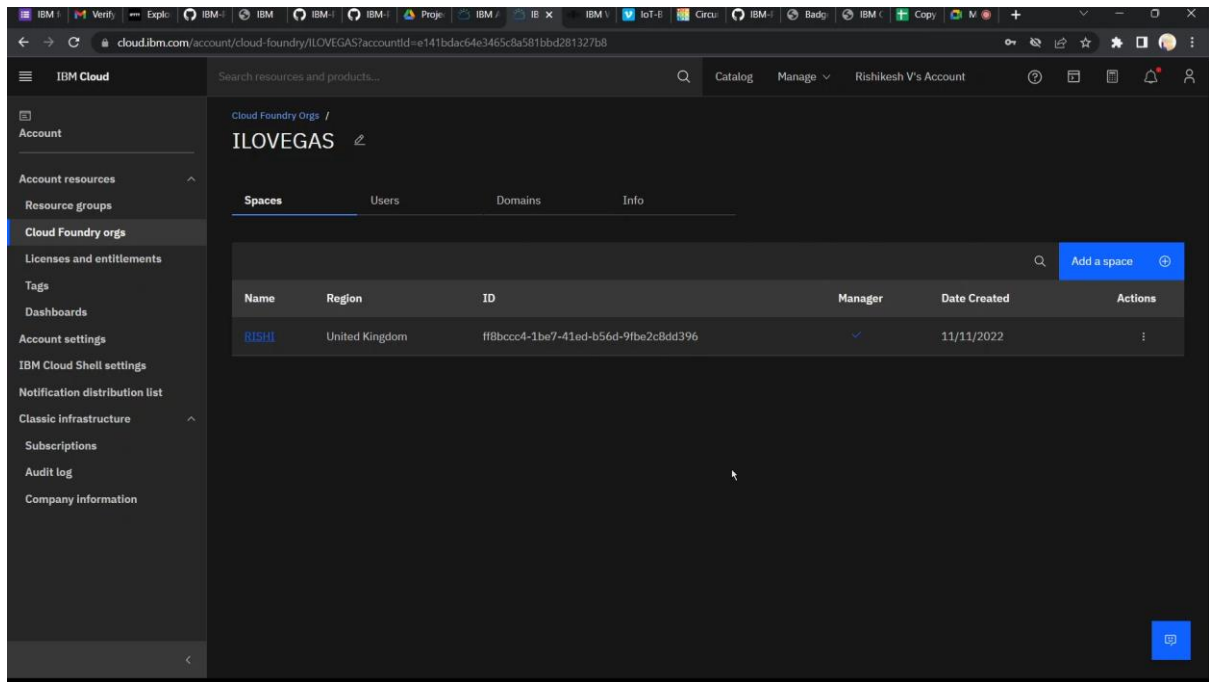

IBM Cloud

Search resources and products...

deployment.

resources that you consume.

IBM Cloud Foundry Public is deprecated. [Learn more](#)

IBM Cloud API key

Number of instances

1

Memory allocation per instance

64 MB 2000 MB 256

Region

London

Organization

ILOVEGAS

Space

RISHI

Host

node-red-hpwjc-2022-11-11

Domain

eu-gb.mybluemix.net

Cancel Next

ASK A QUESTION

IBM Cloud

Search resources and products...

Node RED HPWJC 2022-11-11 Add tags

Actions...

Details

App URL

You must deploy your app first

Source

Download code

Resource group

Default

Deployment target

You must deploy your app first

Created

11/11/2022

Services

Cloudant

Open dashboard Documentation API reference

Credentials

Connect existing services Create service

Deployment Automation

Configure Continuous Delivery

Continuous Delivery is not enabled for this app. Enable Continuous Delivery to automate builds, tests, and deployments through Delivery Pipeline, GitLab, and more.

Checking cache...

Getting started quickly

Configuring your app

To connect services and DevOps toolchains to your app:

1. Use the **Services** card to connect a service to your app. Select an existing service instance, or create a new one. [Learn more](#)
2. If you want to view the code before your app is deployed, click **Download code** to obtain the .zip file.
3. Click **Deploy your app** in the **Deployment Automation** card to select the deployment target and configure the Continuous Delivery service. The deployment begins automatically.
4. After the deployment begins, you can view the status of the deployment, modify your app, view your repo, or view the app's URL.
5. If you make any changes to your app, be sure to deploy it again.

ASK A QUESTION

IBM Cloud

Search resources and products...

Node RED HPWJC 2022-11-11 Add tags

Details

App URL You must deploy your app first

Source [Download code](#)

Resource group Default

Deployment target You must deploy your app first

Created 11/11/2022

Services

Cloudant

[Open dashboard](#) [Documentation](#) [API reference](#)

[Credentials](#)

[Connect existing services](#) [Create service](#)

Deployment Automation

Name NodeREDHPWJC2022-11-11

Location London

Tool integrations

Delivery Pipelines

Name pr-pipeline

Status No stages detected

Name ci-pipeline

Status In progress

Getting started quickly

Configuring your app

To connect services and DevOps toolchains to your app:

1. Use the **Services** card to connect a service to your app. Select an existing service instance, or create a new one. [Learn more](#)
2. If you want to view the code before your app is deployed, click **Download code** to obtain the .zip file.
3. Click **Deploy your app** in the **Deployment Automation** card to select the deployment target and configure the Continuous Delivery service. The deployment begins automatically.
4. After the deployment begins, you can view the status of the deployment, modify your app, view your repo, or view the app's URL.
5. If you make any changes to your app, be sure to deploy it again.

IBM Cloud

Search resources and products...

Toolchains / NodeREDHPWJC2022-11-11 /

ci-pipeline Dashboard [Run pipeline](#)

PipelineRuns

Definitions

Worker

Triggers

Environment properties

Other settings

Status: All Trigger: All

Run	Status
#1 simple-hosted-pipeline-e72c570a-21d2-4c5c-913c-cc6960c4edf6 Manual manual-run	Running

Items per page: 25 1 - 1 items

1 Page 1

IBM Cloud

Search resources and products...

Node RED HPWJC 2022-11-11 Add tags

Details

App URL: <https://node-red-hpwjc-2022-11-11.eu-gb.mybluemix.net>

Source: <https://eu-gb.git.cloud.ibm.com/rishikesh1113/NodeREDHPWJ...>

Resource group: Default

Deployment target: Node RED HPWJC 2022-11-11

Created: 11/11/2022

Services

Cloudant

Open dashboard Documentation API reference

Credentials

Connect existing services Create service

Deployment Automation

Name: NodeREDHPWJC2022-11-11

Location: London

Tool integrations

Delivery Pipelines

Name: pr-pipeline

Status: No stages detected

Name: ci-pipeline

Status: Success

Getting started quickly

Configuring your app

To connect services and DevOps toolchains to your app:

1. Use the **Services** card to connect a service to your app. Select an existing service instance, or create a new one. [Learn more.](#)
2. If you want to view the code before your app is deployed, click **Download code** to obtain the .zip file.
3. Click **Deploy your app** in the **Deployment Automation** card to select the deployment target and configure the Continuous Delivery service. The deployment begins automatically.
4. After the deployment begins, you can view the status of the deployment, modify your app, view your repo, or view the app's URL.
5. If you make any changes to your app, be sure to deploy it again.

Node-RED

Flow 1

inject

input

output

msg.payload

IBM IoT

Info

Flows

Flow 1

Subflows

Global Configuration Nodes

Flow 1

Flow: \*5d23594d5ab38ba9\*

Search for nodes using **ctrl-f**

