


PROJECT DEVELOPMENT PHASE

SPRINT - 1

CREATE AND ACCESS NODE-RED

DATE	29 OCTOBER 2022
TEAM ID	PNT2022TMID20466
PROJECT NAME	IOT BASED SAFETY GADGET FOR CHILD SAFETY MONITORING AND NOTIFICATION
TEAM LEADER	MONALISA M
TEAM MEMBERS	KIRUTHIKA D MADHUSRI J RAHAMATH SHIHANA S

USN 7: As a user, I can create Node-red by app deployment

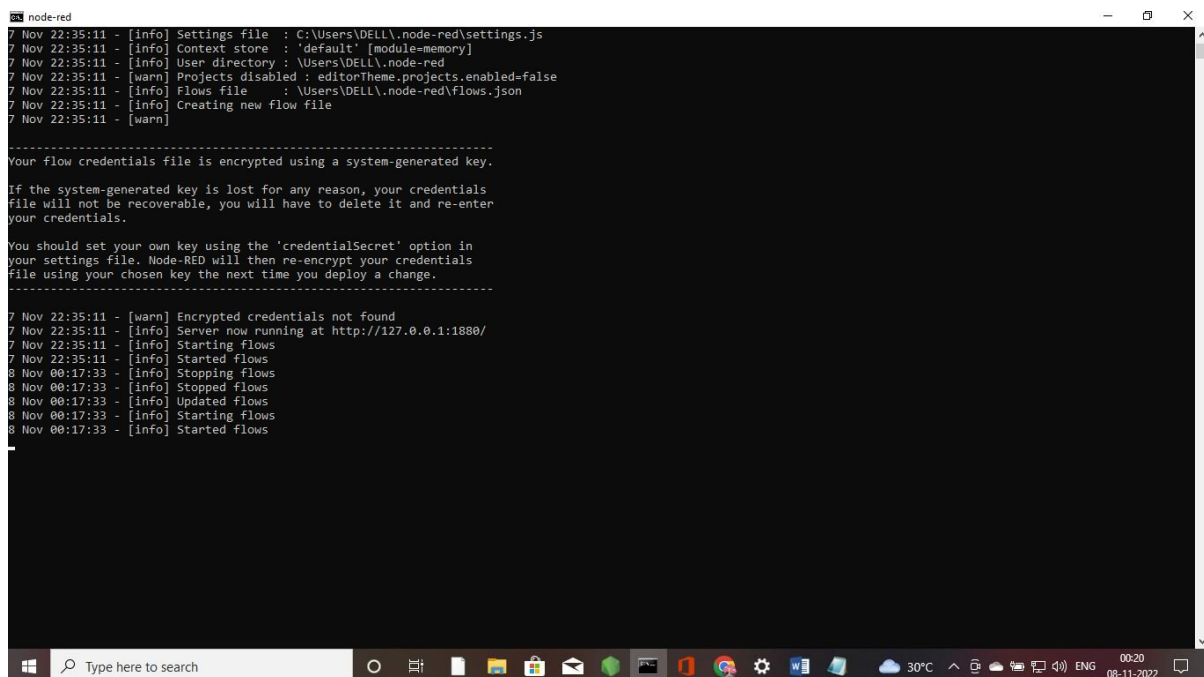


```
node-red
7 Nov 22:35:11 - [info] Settings file : C:\Users\DELL\.node-red\settings.js
7 Nov 22:35:11 - [info] Context store : 'default' [module=memory]
7 Nov 22:35:11 - [info] User directory : \Users\DELL\.node-red
7 Nov 22:35:11 - [warn] Projects disabled : editorTheme.projects.enabled=false
7 Nov 22:35:11 - [info] Flows file : \Users\DELL\.node-red\flows.json
7 Nov 22:35:11 - [info] Creating new flow file
7 Nov 22:35:11 - [warn]


-----
Your flow credentials file is encrypted using a system-generated key.
if the system-generated key is lost for any reason, your credentials
file will not be recoverable, you will have to delete it and re-enter
your credentials.

You should set your own key using the 'credentialSecret' option in
your settings file. Node-RED will then re-encrypt your credentials
file using your chosen key the next time you deploy a change.
-----
7 Nov 22:35:11 - [warn] Encrypted credentials not found
7 Nov 22:35:11 - [info] Server now running at http://127.0.0.1:1880/
7 Nov 22:35:11 - [info] Starting flows
7 Nov 22:35:11 - [info] Started flows
8 Nov 00:17:33 - [info] Stopping flows
8 Nov 00:17:33 - [info] Stopped flows
8 Nov 00:17:33 - [info] Updated flows
8 Nov 00:17:33 - [info] Starting flows
8 Nov 00:17:33 - [info] Started flows
```


USN 8: Connect IBM Watson with node red through API key

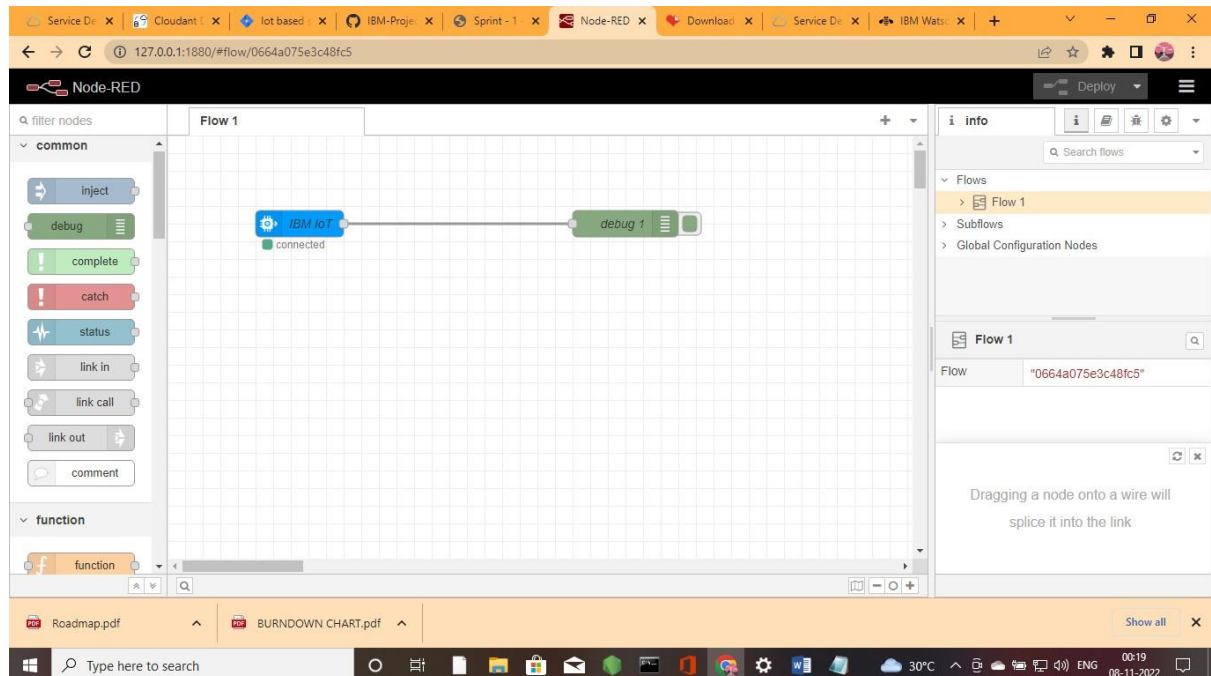


USN 9 : Design the project flow using Node-Red

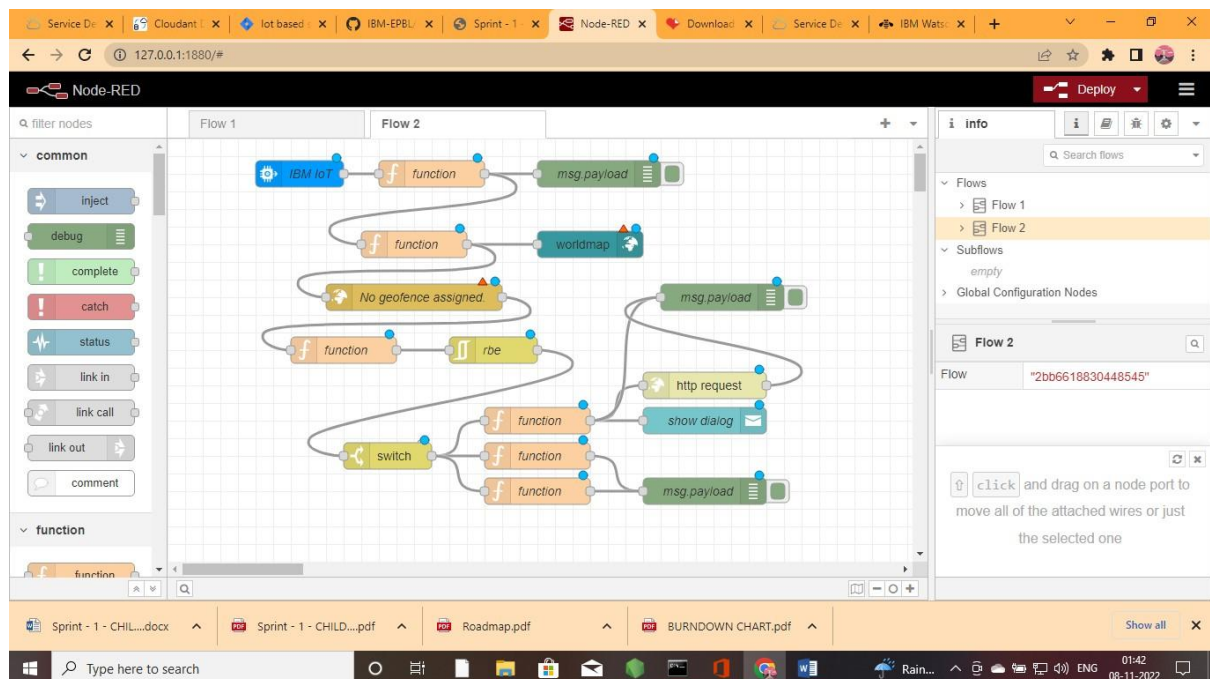


USN 10: Check for the proper connections and the output in the node red application

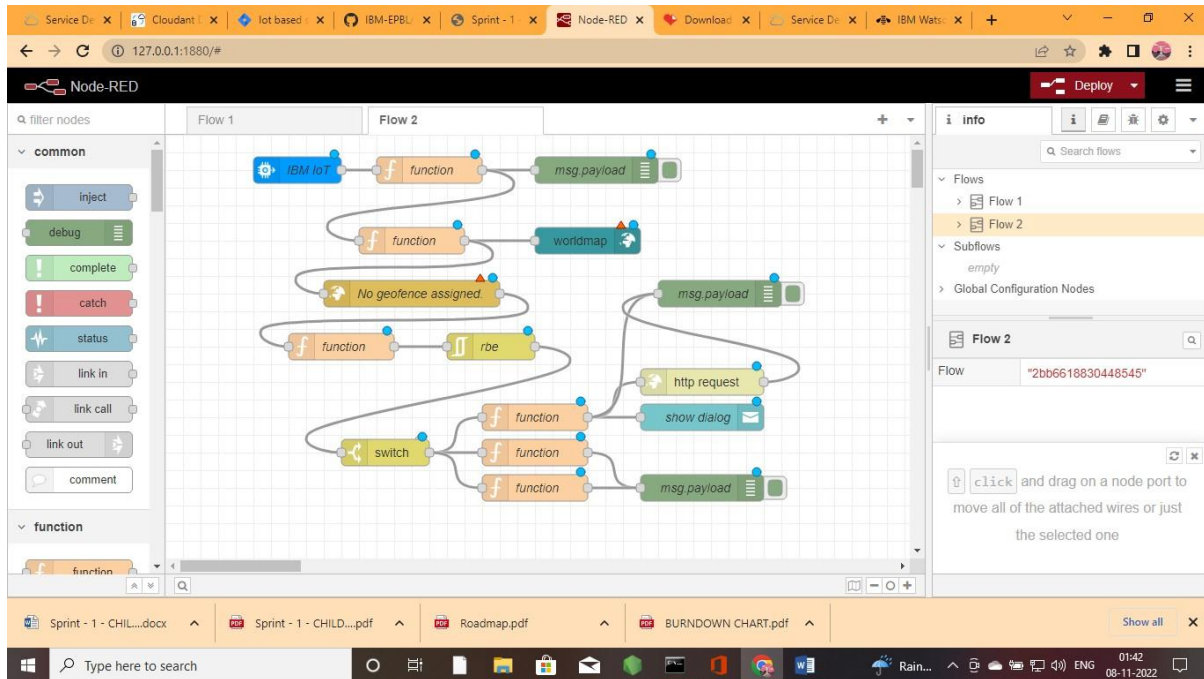

BURNDOWN CHART

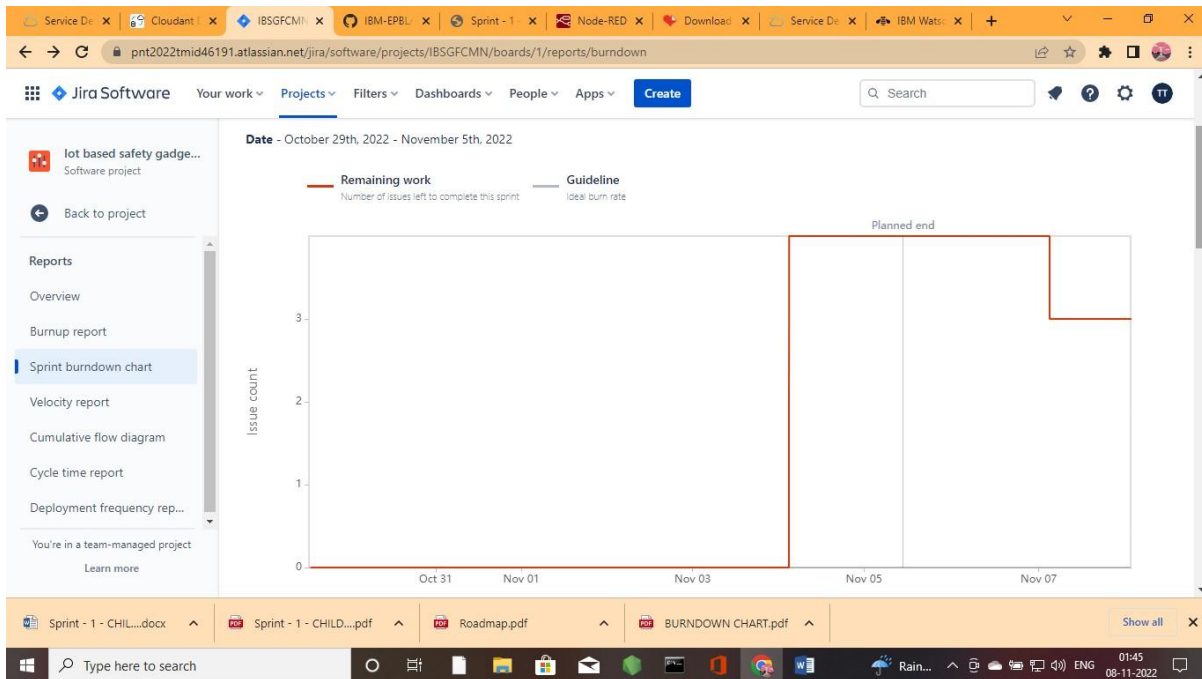

VELOCITY:

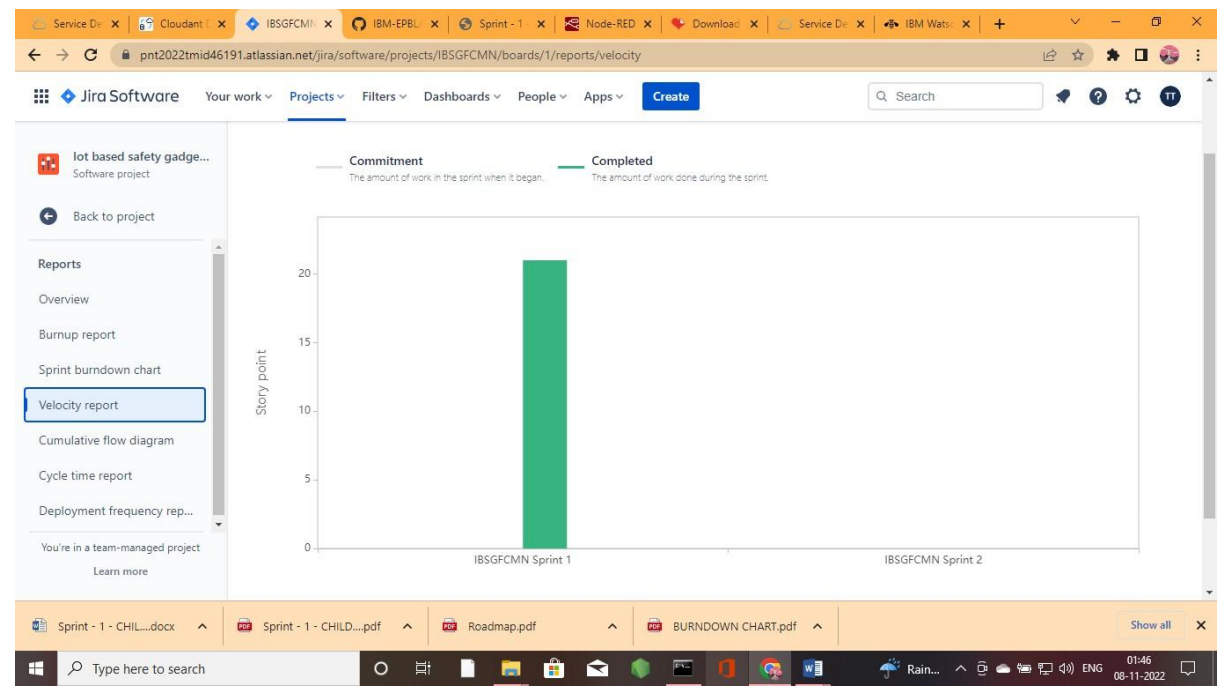

ROADMAP:

