

Assignment -4

Assignment Date	3 November 2022
Student Name	Gugan k
Student Roll Number	720719110029
Maximum Marks	2 Marks

Question 1:

Pull an image from Docker hub and run it in Docker playground.

03:57:32

CLOSE SESSION

Instances

+ ADD NEW INSTANCE

192.168.0.8
node1

cddvksm0_cddvkvm0qau000a07j5g

IP
192.168.0.8

OPEN PORT

Memory
1.24% (49.52MiB / 3.906GiB)

CPU
0.31%

SSH
ssh ip172-18-0-22-cddvksm0qau000a07j50@direct.labs.pla

DELETE

EDITOR

```
#####
# WARNING!!!!
# This is a sandbox environment. Using personal credentials
# is HIGHLY discouraged. Any consequences of doing so are
# completely the user's responsibilities.
#
# The PwD team.
#####
[node1] (local) root@192.168.0.8 ~
$ docker pull hello-world
Using default tag: latest
latest: Pulling from library/hello-world
2db29710123e: Pull complete
Digest: sha256:e18f0a77aefabe047a671ab3ec3eed05414477c951ab1a6f352a06974245fe7
Status: Downloaded newer image for hello-world:latest
docker.io/library/hello-world:latest
[node1] (local) root@192.168.0.8 ~
$ docker run hello-world
```

Activate Windows
Go to Settings to activate Windows.

03:57:05

CLOSE SESSION

Instances

+ ADD NEW INSTANCE

192.168.0.8
node1

cddvksm0_cddvkvm0qau000a07j5g

IP
192.168.0.8

OPEN PORT

Memory
1.26% (50.45MiB / 3.906GiB)

CPU
0.39%

SSH
ssh ip172-18-0-22-cddvksm0qau000a07j50@direct.labs.pla

DELETE

EDITOR

```
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
   (amd64)
3. The Docker daemon created a new container from that image which runs the
   executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it
   to your terminal.

To try something more ambitious, you can run an Ubuntu container with:
$ docker run -it ubuntu bash

Share images, automate workflows, and more with a free Docker ID:
https://hub.docker.com/

For more examples and ideas, visit:
https://docs.docker.com/get-started/

[node1] (local) root@192.168.0.8 ~
$
```

Activate Windows
Go to Settings to activate Windows.

QUESTION 2:

Create a docker file for the job portal application and deploy it in Docker desktop application.

DOCKER FILE:

```
1 FROM python:3.8-buster
2
3 WORKDIR /app
4
5 COPY requirements.txt /app/
6
7 RUN pip install -r requirements.txt
8
9 COPY . /app/
10
11 RUN cp .env.dev.sample .env
12
13 EXPOSE 8080
14
15 RUN chmod +x entrypoint.sh
16
17 CMD ["sh", "entrypoint.sh"]
```

DEPLOYMENT OF JOBPORTAL APPLICATION:

Containers

Images

Volumes

Dev Environments BETA

Extensions BETA

Add Extensions

Containers [Give feedback](#)

A container packages up code and its dependencies so the application runs quickly and reliably from one computing environment to another. [Learn more](#)

☐ Only show running containers

	NAME	IMAGE	STATUS	PORT(S)	STARTED	ACTIONS
<input type="checkbox"/>	<div>agitated_neumann</div> <div>918d20882039</div>	icr.io/helloapp/ibm:latest	Exited (137)	49160:8080		<div><div></div><div></div><div></div></div>
<input type="checkbox"/>	<div>jolly_turing</div> <div>b62c0712bdd3</div>	jobportalapplication:latest	Running	1234:8000	4 minutes ago	<div><div></div><div></div><div></div></div>

Showing 2 items


RAM 3.06GB

CPU 0.57%

Connected to Hub

v4.13.0

OUTPUT:



Job Board
Find your dream job

Home

Browse Job

Pages ▾

Blog ▾

Contact

Location ▾

Category ▾

Find Job

Login

Post A Job

Search keyword

Popular Search:

Design & Creative

Marketing

Administration

Teaching & Education

Engineering

Software & Web

Telemarketing

Popular Categories

Design & Creative

50 Available position

Marketing

50 Available position

Telemarketing

50 Available position

Software & Web

50 Available position

Administration

Teaching & Education


Engineering

Garments / Textile


QUESTION-3:

Create a IBM container registry and deploy hello-world app or jobportal app.

CONTAINER REGISTRY DEPLOYMENT:

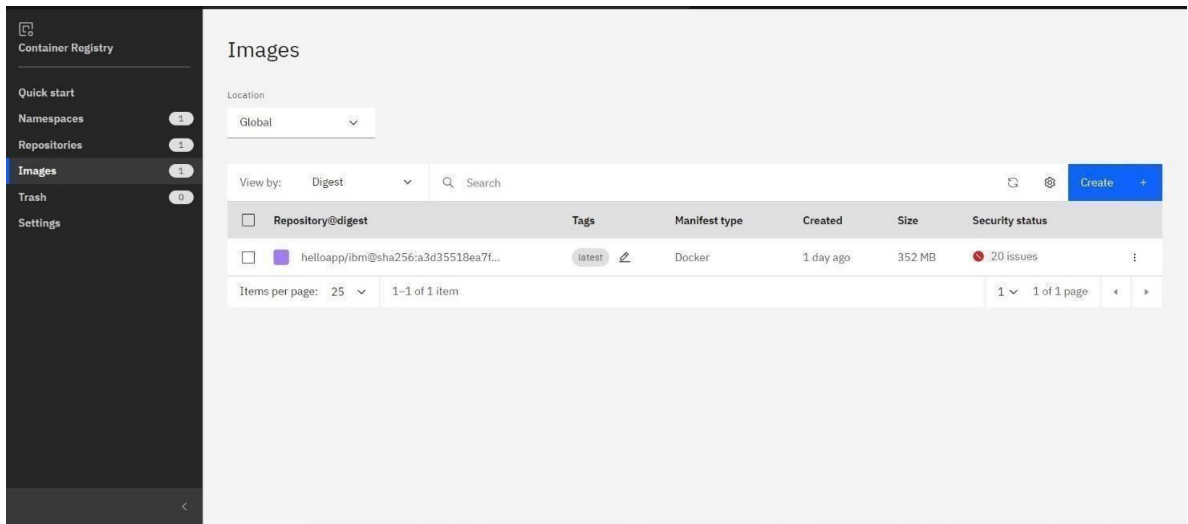


OUTPUT:



QUESTION-4:


Create a Kubernetes cluster in IBM cloud and deploy hello world image or job portal image and also expose the same app to run in node port.

CREATING KUBERNETES CLUSTER IN IBM CLOUD AND EXPOSING NODE PART:

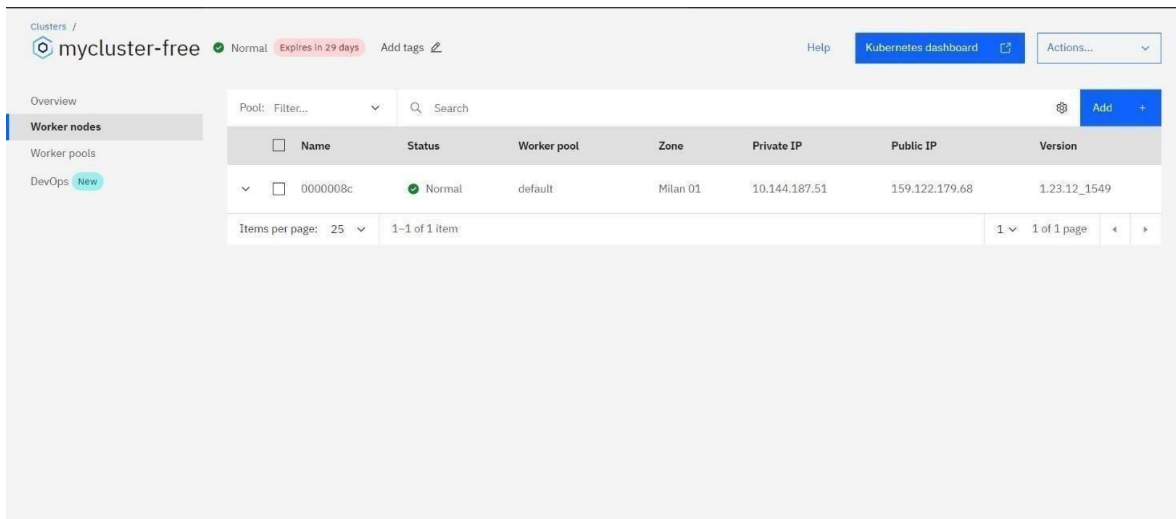

Name	Status	Worker pool	Zone	Private IP	Public IP	Version
0000008c	Normal	default	Milan 01	10.144.187.51	159.122.179.68	1.23.12_1549

Output:

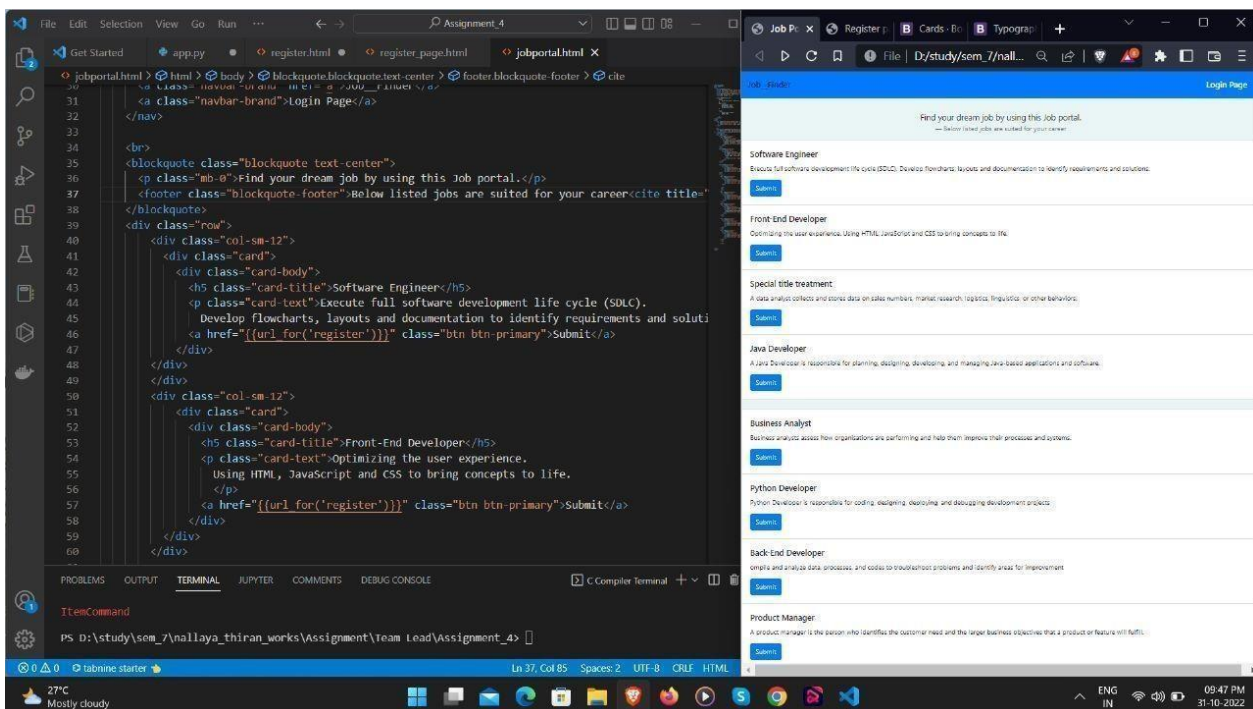

The screenshot displays a development environment with three main components:

- Code Editor:** Shows the HTML code for a job portal. The code includes a navigation bar, a main content area with job listings, and a footer. The job listings are for Software Engineer, Front-End Developer, and Back-End Developer.
- Terminal:** Shows the command prompt with the command `PS D:\study\sem_7\nallaya_thiran_works\Assignment\Team Lead\Assignment_4`.
- Browser:** Displays the rendered job portal website. The website has a blue header with a 'Login Page' link. The main content area lists job openings with details and 'Submit' buttons.