## PROJECT REPORT

### 1. INTRODUCTION

#### 1.1 PROJECT OVERVIEW

Nowadays, the proliferation of automobile industries is directly related to the number of claims in insurance companies. Those companies are facing many simultaneous claims and solving claims leakage. The project can be extended to green houses where manual supervision is far and few in between.

In Advanced Artificial Intelligence (AI), machine learning and deep learning algorithms can help to solve these kinds of problems for insurance industries

#### 1.2 PURPOSE

Auto-detection of vehicle damage using photos taken at the scene of an accident can be very useful as it can drastically reduce the cost of processing insurance claims, as well as provide greater convenience to vehicle users.

## 2. LITERATURE SURVEY

#### 2.1 EXISTING PROBLEM

In proposed system firstly, it collects the pictures of one's damaged automobile, later use these pictures to feed into our ML model that makes use of image processing to identify the details of the image, using Image processing it analyses the percentage of damage of the automobile. Next, it segregates the pictures based on 2 factors which are replace and repair.

### 2.2 REFERENCES

[1] LeCun, Y., Boser, B., Denver, J.S., Henderson, D., Howard, R.E., Hubbard, W., Jackel, L.D. Back propagation applied to handwritten zip code recognition. Neural computation, 1989, pp. 541-551.

- [2] Krizhevsky, A., Sutskever, I., Hinton, G. Imagenet classification with deep convolutional neural networks. In NIPS, 2012, pp. 1097-1105.
- [3] Zeiler, M. D., Fergus, R. Visualizing and understanding convolutional neural networks. In ECCV, 2014, pp. 818-833.
- [4] LeCun, Y., Bengio, Y., Hinton, G. Deep learning. Nature, 2015(521), pp. 436-444. [5] Simonyan, K., Zisserman, A. Very deep convolutional networks for large-scale image recognition. In ICLR, 2015, pp. 1409.1556.
- [6] Shaoqing Ren, Kaiming He, Ross Girshick, Jian Sun. Faster R-CNN: Towards real-time object detection with region proposal networks. In NIPS, 2015, pp. 91-99.
- [7] Kaiming He, Georgia Gkioxari, Piotr Dollar, Ross Girshick. Mask R-CNN. In ICCV,2017,pp. 2980-2988.
- 8]. A.Neela Madheswari, J.haripriya, G.Kiruthika, R.M.Meyammai Mahendra Engineering college, India, exterior vehicular damage detection using deep learning, department of computer science and engineering.
- [9]. Girish N, Mohammed Aquel Arshad, car damage detection using machine learning. International journal of advances research in computer and communication engineering, vol. 10, issue 8, August 2021 DOI 10.17148/IJARCCE.2021.10808.
- [10]. Phyu Mar Kyu ,car damage detection and classification, faculty of information technology king Mongkut's institute of technology ladkrabang Bangkok, Thailand 62606003@kmitl.ac.in

#### 2.3 PROBLEM STATEMENT DEFINITION

Mr. Venkataramanan is a 50 years old man. He had a own Car(Duster) and he worked at basic salary for past 30 Years, In this 30 Years he Faced a problem in Choosing Car Damage and Insurance claim.

- · Venkataramanan wants to know the better recommendation for insurance claiming.
- · He has faced huge losses for a long time.
- · This problem is usually faced by lot of Customers.

· Mr. Venkataramanan needs to know the result immediately for Insurance claim.

### 3. IDEATION & PROPOSED SOLUTION

## 3.1 EMPATHY MAP CANVAS

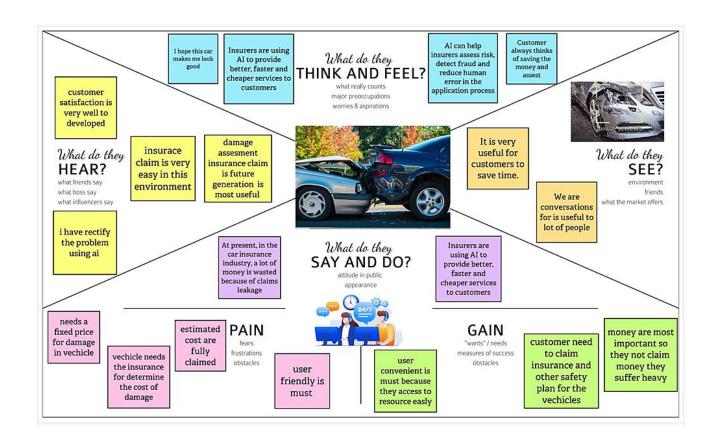


Figure 3.1.1 Empathy map

# 3.2 IDEATION & BRAINSTORMING

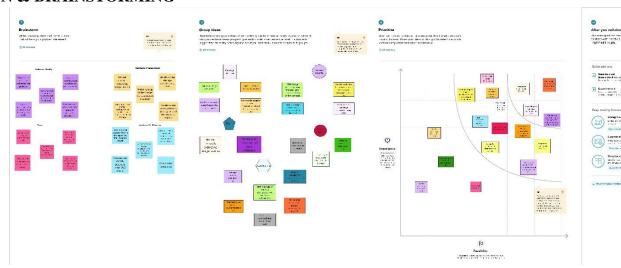


Figure 3.2.1 Brainstorm Diagram

# 3.3 PROPOSED SOLUTION


Project team shall fill the following information in proposed solution template

S.No	Parameter	Description
------	-----------	-------------

Problem Statement (Problem to be solved)	Nowadays lot of money is being wasted in the car insurance business due to leakage claims. Claims leakage Underwriting leakage is characterized as the discrepancy between the actual payment of claims made and the sum that should have been paid if all of the industry's leading practices were applied. Visual examination and testing have been used to may these results.  However, they impose delays in the processing of claims. There is no easy way of accessing and knowing about the part of the vehicle getting damaged. Often the processing of such a damaged part of the vehicle carrying the area of damaged part is cumbersome. New methods have to be proposed in order to make it faster and efficient. Processing of Insurance for the cars needs to be assessed in a quicker way so that claims can be
2 Idea / Solution description  3 Novelty / Uniqueness	Automobile Industry is one of the major industry in a Country. This proposed system is Intelligent vehicle damage assessment and cost estimator for insurance companies using computer vision in artificial intelligence. The model will predict the location of the damage as in front, side or rear, and the severity of such a damage as in minor, moderate or severe and estimate the cost of damage of both car and bike.  Deep learning method used to fixed the problem and then Working on with VGG16 pre[1]trained model by adding extra layers to increase the

4	Social Impact / Customer Satisfaction	The model developed will be used to fix the damage caused to the Vehicle quickly so that the vehicle can be modified to the old look and also for faster processing of cost of the damage to claim insurance quickly. This project can be used to save time for calculating the area and level of the damage quickly such that the insurance claim can be made efficiently.
5	Business Model (Revenue Model)	This can also be used to help car companies as well.  Can collaborate with insurance companies.  Can collaborate with car companies
6	Scalability of the Solution	AI guided Application provides 24/7 service to clear all customer queries and guide them through all the processes. In future, it can be scaled as per the requirements of the insurance or car company to include answers to queries related to the cost based on the inputs provided

#### 3.4 PROBLEM SOLUTION FIT

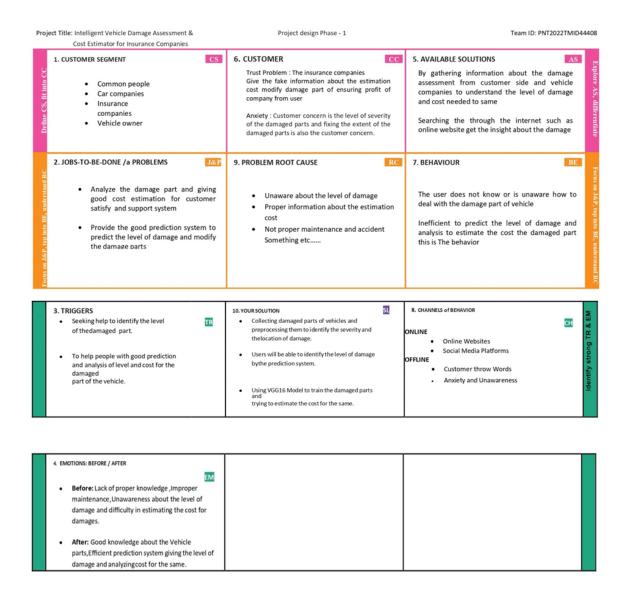

# 4. REQUIREMENT ANALYSIS

## 4.1 FUNCTIONAL REQUIREMENT

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Gmail
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	User Interface	User friendly and simple website
FR-4	Collect the datasets	Collect the data from the user side and their vehicle side information.  Collect the data from about Insurance companies plans.
FR-5	Final Results	Model should be trained with high accuracy. Results obtained from the model should be displayed to The user with easy interpretability.

# NON-FUNCTIONAL REQUIREMENTS

Following are the non-functional requirements of the proposed solution

FR No.	Non-Functional Requirement	Description	
NFR-1	Usability	Intelligent model used to assessment the damage in the vehicle and estimate the cost to be provided by the insurance company.	
NFR-2	Security	The credibility of the user and the confidentiality of user details about their vehicle must be maintained.	
NFR-3	Reliability	This scheme can achieve good accuracy in damage estimation and cost estimation, thus providing accurate and unbiased insurance coverage to the user.	
NFR-4	Performance	Real-time images are to be captured and uploaded to the website, where the proposed model performs damage assessment and gives the insurance cost accordingly.	
NFR-5	Availability	The website should be compatible with web browsers on both mobile phones and computers.	
NFR-6	Scalability	The proposed solution will be scalable in the future due to efficient and rapid analysis and accurate cost estimation	

# **5. PROJECT DESIGN**

# **5.1 DATA FLOW DIAGRAMS**

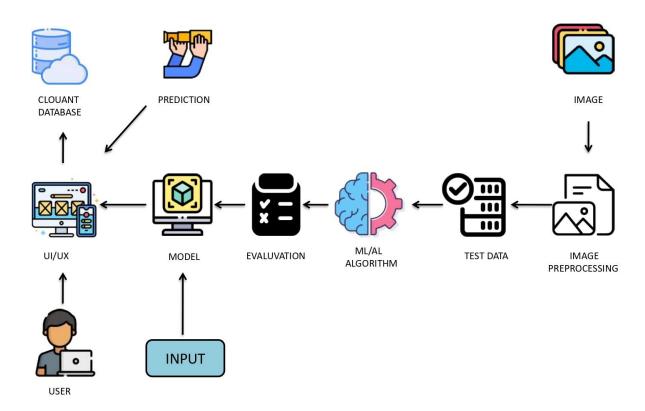


Figure 5.1.1 Data flow diagram

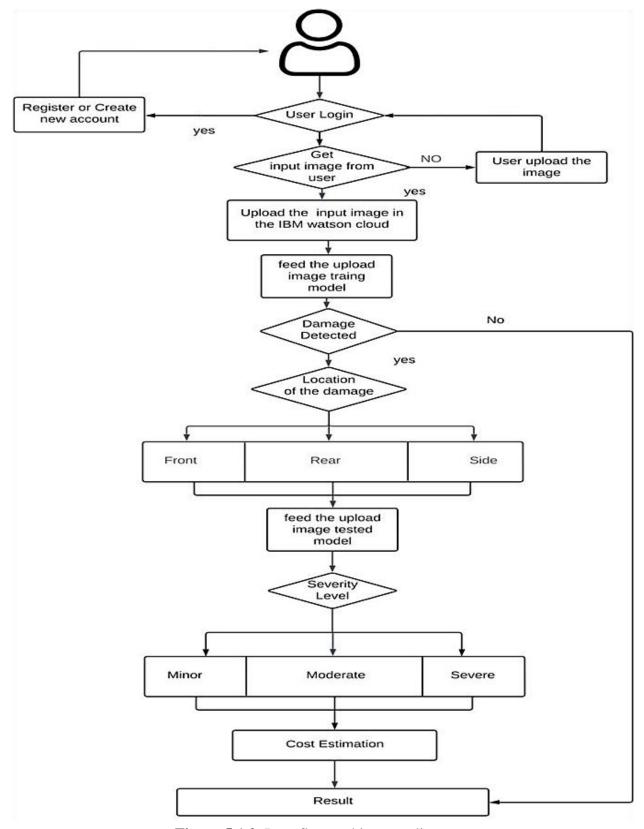


Figure 5.1.2 Data flow architecture diagram

## 5.2 SOLUTION & TECHNICAL ARCHITECTURE

# **Technical Architecture**

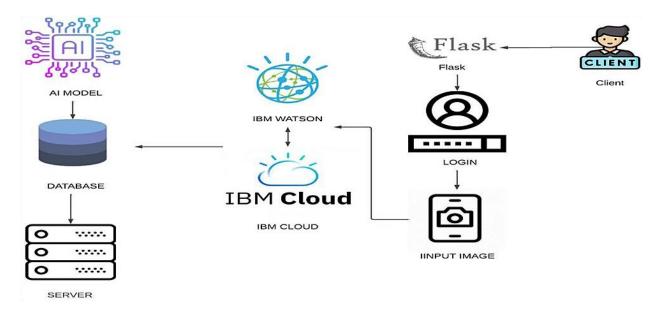


Figure 5.2.1 Technical Architecture

**Table-1: Components & Technologies** 

S.No	Component	Description	Technology
1	User Interface	The user interacts with the web application	HTML, CSS, Python
2	Application Logic-1	Gets the user input image	Python
3	Application Logic-2	Obtaining model output for damage prediction	IBM Watson , Python
4	Application Logic-3	Obtaining model output for cost estimation	IBM Watson , Python
5	Database	Data Type – Details of images and user inputs is stored	MySQL, Js, IBM DB2
6	Cloud Database	A database service in the cloud	IBM DB2, IBM Cloud ant etc.

7	File Storage	User details and user input received The images of the vehicle are stored in the cloud	IBM Block Storage or Other Storage Service or Local File system
8	Machine Learning Model	The purpose of the AI model is to estimate cost of the damaged vehicle.	The purpose of the AI model is to estimate cost of the damaged vehicle.
9	Infrastructure (Server / Cloud)	Let's use the AI model on the cloud server Using Flask on a Web Page	Local, Cloud Foundry, Kubernetes, Python Flask etc.

**Table-2: Application Characteristics** 

S.No	Characteristics	Description	Technology
1.	Open-Source Frameworks	IBM Watson Opensource frameworks are used	Open source architecture technology IBM Watson
2.	Security Implementations		Certified WatsonAssistant Encrypted file systems are encrypted. Storage systems, key management systems.
3.	Scalable Architecture	Web Server - Static and dynamic website content Existingon the website will be updated accordingly User requests and suggestions Application Server Basic Upgrade Integrating website functionality and updates The logic in the website can be done Database Server – Based on varying inputs The user supplied database will be modified connuously	IBM Watson Assistant, Python,MySQL

4.	Availability	The AI misleadingly available to users anytime	IBM WatsonCloud assistance
5.	Performance	IBM Watson- Automated processes, deepThe learning model is trained using IBMWatson StudioFor better performance and faster access.	IBM WatsonAssistant

# **5.3 USER STORIES**

Use the below template to list all the user stories for the product.

UserType	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Mobile user	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	I can access my account / dashboard by entering valid credentials	High	Sprint- 1
Customer Details	Login	USN-2	As a user, I will receive confirmation email once I have registered for the application	I can receive confirmation email& click confirm	High	Sprint1
Customer Uses	Dashboard	USN-3	As a user, I can register for the application through Facebook	I can register & access the dashboard with Facebook Login	Low	Sprint4
Customer Options	Details about insurance companies	USN-4	As a user, I can register for the application through Gmail	I can register & access the dashboard with Facebook	Medium	Sprint1

Customer usage	Login	USN-5	As a user, I can log into the application by entering email &password	I can log in and view my dashboard at my demand on any time	High	Sprint- 1
Customer needs to do	Dashboard	USN-6	As a user I must capture images of my vehicle and upload it into the web portal	I can capture the entire vehicle and upload	High	Sprint- 2
Customer (Web user)	Details about estimated cost based on damage	USN-7	As a user I must receive a detailed report of the damages present in the vehicle and the cost estimated	I can get the estimated insurance cost	High	Sprint-
Customer Care Executive	Details about Estimated cost Based on damage	USN-8	As a user, I need to get support from developers in case of queries and failure of service provided	I can have smooth user experiences and all the issues raised is sorted	Medium	Sprint- 4
Administrator	Details about Estimated cost Based on damage	USN-9	We need to satisfy the customer needs in an efficient way and make sure any sort of errors are fixed	I can finish the work without any problems	High	Sprint- 4

# 6. PROJECT PLANNING & SCHEDULING

Title	Description	Date
Literature Survey and Information Gathering	Gathering Information by referring the technical papers, research publications etc	10 October 2022
Prepare Empathy Map	To capture user pain and gains Prepare List of Problem Statement	10 October 2022
Ideation	Prioritize a top 3 ideas based on feasibility and Importance	10 October 2022

<b>Proposed Solution</b>		10 October r 2022	
	Solution include novelty, feasibility, business model, social impact and scalability of Solution		
Problem Solution Fit	Solution fit document	11 October 2022	
Solution Architecture	Solution Architecture	11 October 2022	
<b>Customer Journey</b>	To Understand UserInteractions and experiences with application	18 October 2022	
Functional Requirement	Prepare functional Requirement	18 October 2022	
Data flow Diagrams	Data flow diagram	18 October 2022	
Technology stack	Technology Architecture Diagram	18 October 2022	
Milestone & sprint delivery plan	Activity what we done &further plans	3 November 2022	
Project Development- Delivery of sprint1,2,3&4	Develop and submit the developed code by testing It	3 November 2022 – 19November 2022	

# **6.1 SPRINT PLANNING & ESTIMATION**

# **Product Backlog, Sprint Schedule, and Estimation**

Sprint	Functional	User	UserStory / Task	Story	Priority	TeamMembers
	Requirement	Story		Points		
	(Epic)	Number				

Sprint-1	Registration	USN-1	As a user ,I can resister for the applica on by entering my email,password, and confirming my password.	2	High	Sukumar Reddy
Sprint-1	Registration	USN-2	As a user, I will receive confirmation email once I haveRegistered for the Application	1	High	Sukumar Reddy
Sprint-1	Registration	USN-3	As a user ,I can register for the application Gmail.	2	Low	Sukumar Reddy
Sprint-1	Login	USN-4	As a user ,I can Login to the application by entering email &password.	1	Medium	Chetan Vivek
			As a user ,I can view all the plans and methods in			
Sprint-2	Dashboard	USN-5	the Dashboard.	1	High	Bhargav
Sprint-3	Storage	USN-1	As a user, I can Register for clammy insurance.	2	High	Chetan Vivek
Sprint-3		USN-2	As a us er, I can make a call to support line to get help with a product or service	2	High	Vivek
Sprint-4		USN-3	As a user, I can claim my insurance After getting from the administrator.		Medium	Bhargav

# **6.2 SPRINT DELIVERY SCHEDULE**

## Project Tracker, Velocity & Burndown Chart

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	3 Days	3 Nov 2022	6 Nov 2022	20	
Sprint-2	20	3 Days	6 Nov 2022	9 Nov 2022		
Sprint-3	20	3 Days	9 Nov 2022	12 Nov 2022		
Sprint-4	20	3 Days	12 Nov 2022	15 Nov 2022		


## **Velocity:**

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day)

$$AV = \frac{sprint\ duration}{velocity} = \frac{20}{10} = 2$$

### **Burn down Chart:**

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum. However, burn down charts can be applied to any project containing measurable progress over time



## 7. CODING & SOLUTIONING

### **7.1 FEATURE 1**

#### **DASHBOARD**

```
padding: 0;
.main{}
  width: 100%;
  background: linear-gradient (to\ top,\ rgba(0,0,0,0.5)50\%, rgba(0,0,0,0.5)50\%),
url("/static/images/2.jpg");
  background-position: center;
  background-size: cover;
  height: 100vh;
.navbar{
  width: 1200px;
  height: 75px;
  margin: auto;
}
.icon{
  width: 200px;
  float: left;
  height: 70px;
}
.logo{
  color: #ff7200;
  font-size: 35px;
  font-family: Arial;
  padding-left: 20px;
  float: left;
```

```
padding-top: 2px;
  margin-top: 5px
}
.menu{
  width: 700px;
  float: right;
  height: 70px;
} ul{
  float: right;
  display: flex;
  justify-content: center;
  align-items: center;
} ul li{
  list-style: none;
  margin-left: 62px;
                       margin-top: 27px;
  font-size: 14px;
} ul li a{
  text-decoration: none;
  color: #fff;
  font-family: Arial;
  font-weight: bold;
  transition: 0.4s ease-in-out;
} ul li
a:hover{
  color: #ff7200;
```

```
}
.search{
  width: 330px;
  float: left;
  margin-left: 270px;
}
.srch{
  font-family: 'Times New Roman';
  width: 200px;
  height: 40px;
  background: transparent;
  border: 1px solid #ff7200;
  margin-top: 13px;
  color: #fff;
  border-right: none;
  font-size: 16px;
  float: left;
  padding: 10px;
  border-bottom-left-radius: 5px;
  border-top-left-radius: 5px;
}
.btn{
  width: 100px;
  height: 40px;
  background: #ff7200;
```

```
border: 2px solid #ff7200;
  margin-top: 13px;
  color: #fff;
  font-size: 15px;
  border-bottom-right-radius: 5px;
  border-bottom-right-radius: 5px;
  transition: 0.2s ease;
  cursor: pointer;
}
.btn:hover{
  color: #000;
}
.btn:focus{
  outline: none;
.srch:focus{
  outline: none;
}
.content{
  width: 1200px;
  height: auto;
  margin: auto;
  color: #fff;
  position: relative;
}
```

```
.content .par{
  padding-left: 20px;
  padding-bottom: 25px;
  font-family: Arial;
  letter-spacing: 1.2px;
  line-height: 30px;
}
.content h1{
  font-family: 'Times New Roman';
  font-size: 50px;
  padding-left: 20px;
  margin-top: 9%;
  letter-spacing: 2px;
}
.content .cn{
  width: 160px;
  height: 40px;
  background: #ff7200;
  border: none;
  margin-bottom: 10px;
  margin-left: 20px;
  font-size: 18px;
  border-radius: 10px;
  cursor: pointer;
  transition: .4s ease;
```

```
.content .cn a{
  text-decoration: none;
  color: #000;
  transition: .3s ease;
}
.cn:hover{
  background-color: #fff;
}
.content span{
  color: #ff7200;
  font-size: 65px
}
.form{
  width: 300px;
  height: 340px;
  background: linear-gradient (to\ top,\ rgba(0,0,0,0.8)50\%, rgba(0,0,0,0.8)50\%);
  position: absolute;
  top: -20px;
  left: 870px;
  transform: translate(0%,-5%);
  border-radius: 10px;
  padding: 25px;
.form h2{
```

```
width: 220px;
  font-family: sans-serif;
  text-align: center;
  color: #ff7200;
  font-size: 22px;
  background-color: #fff;
  border-radius: 10px;
  margin: 2px;
  padding: 8px;
.form input{
  width: 240px;
  height: 35px;
  background: transparent;
  border-bottom: 1px solid #ff7200;
  border-top: none;
  border-right: none;
  border-left: none;
  color: #fff;
  font-size: 15px;
  letter-spacing: 1px;
  margin-top: 30px;
  font-family: sans-serif;
.form input:focus{
```

```
outline: none;
::placeholder{
  color: #fff;
  font-family: Arial;
}
.btnn{
  width: 240px;
  height: 40px;
  background: #ff7200;
  border: none;
  margin-top: 30px;
  font-size: 18px;
  border-radius: 10px;
  cursor: pointer;
  color: #fff;
  transition: 0.4s ease;
}
.btnn:hover{
  background: #fff;
  color: #ff7200;
}
.btnn a{
  text-decoration: none;
  color: #000;
```

```
font-weight: bold;
.form .link{
  font-family: Arial, Helvetica, sans-serif;
  font-size: 17px;
  padding-top: 20px;
  text-align: center;
.form .link a{
  text-decoration: none;
  color: #ff7200;
}
.liw{
  padding-top: 15px;
  padding-bottom: 10px;
  text-align: center;
}
.icons a{
  text-decoration: none;
  color: #fff;
}
.icons ion-icon{
  color: #fff;
  font-size: 30px;
  padding-left: 14px;
```

```
padding-top: 5px;
  transition: 0.3s ease;
}
.icons ion-icon:hover{
  color: #ff7200;
}
.end {
         overflow: hidden;
         background-color: rgb(63, 63, 63);
         position: auto;
         bottom: 0;
         height: 55px;
         width: 100%;
       }
</style>
</head>
<body = onload="flashMessage()">
  <script>
   function flashMessage(){
    if("{{flash_message}}" == "True"){
     alert("account created successfully")
     }
    if("{{flash_message}}" == "Fals"){
         alert("invalid credentials")
     }
```

```
if("{{flash\_message}}" == "Fal"){
     alert("Logged in successfully")
    }
   }
  </script>
  <body style: "background-image:static\images\2.jpg;">
  <div class="main">
    <div class="navbar">
      <div class="icon">
        <h6 class="logo"></h6>
      </div>
      <div class="menu">
        \langle ul \rangle
          <a href="{{ url_for('dashboard') }}">HOME</a>
          <!--<li><a href="{{ url_for('login') }}">LOGIN</a>-->
          <!--<li><a href="{{ url_for('register') }}">REGISTER</a>-->
          <a href="{{ url_for('logout') }}">LOGOUT</a>
          <a href="#section -1">ABOUT</a>
        </div>
    </div>
    <div class="content">
      <h1>Intelligent Vehicle <br><span>Damage Assessment &<br>Cost Estimator for
</span><br/>br>Insurance Companies</h1>
```

```
<br><br><br><br>>
        <button class="cn"><a href="{{ url_for('prediction')}
}}">PREDICTION</a></button>
      <!--form action="dashboard" method="POST">
        <div class="form">
          <input type="email" name="email" id="email" placeholder="Enter Your Email Id">
          <input type="password" name="password" id="password" placeholder="Enter Your
Password ">
          <button class="btnn"><a href="">Login</a></button>
          Don't have an account<br>
          <a href="#">Sign up </a> here</a>
        </div>
                   </form!-->
          </div>
        </div>
    </div>
  </div>
<br/>br><br><center>
     <div id= "section -1"> <h2 style:font-family:'Times New Roman', Times,</pre>
serif;"><center>ABOUT PROJECT</center></h2></div>
<br>><br>>
     Vehicle Damage
Detection is used to reduce claims leakage during insurance processing. Vechile Inspectin and
validation are usually done. As it takes a long time, because a person need to come and Inspect
Damage. Here we are trying to Automate the procedure . Using this Automation we can avoid time
consumption for Insurance claim procedure
<br><br><br><br><br><
<a style:"color:white;
```

```
padding: 22px;
             background-color: black;
             opacity: 85%;
             border-radius: 12px;
             margin-left: 25px;
             margin-bottom: -20px;" href="https://www.facebook.com" class="fa
fafacebook"></a>
       <a style: "color:white;
             padding: 20px;
             background-color: black;
             opacity: 85%;
             border-radius: 12px;
             margin-left: 25px;
             margin-bottom: -20px;" href="https://www.twitter.com" class="fa fa-twitter"></a>
       <a style:"color:white;
             padding: 20px;
             background-color: black;
             opacity: 85%;
             border-radius: 12px;
             margin-left: 25px;
             margin-bottom: -20px;" href="https://www.linkedin.com" class="fa
falinkedin"></a>
       <a style:"color:white;
             padding: 20px;
             background-color: black;
             opacity: 85%;
```

```
border-radius: 12px;
            margin-left: 25px;
            margin-bottom: -20px;" href="https://www.instagram.com" class="fa
fainstagram"></a>
    </center>
             </div><br><br><br>
      <div class="end">
        margin-top: 20px;
             text-align: center;">
       <br/> Copyright &#169; 2022. All Rights Reserved</b>
        <script src="https://unpkg.com/ionicons@5.4.0/dist/ionicons.js"></script>
</body>
   </html>
7.2 FEATURE 2
PREDICTION
<!DOCTYPE html>
<html lang="en">
  <head>
    <title> PREDICTION </title>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    k rel="stylesheet"
href="https://cdnjs.cloudflare.com/ajax/libs/fontawesome/4.7.0/css/font-awesome.min.css">
```

```
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script>
     <script
src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstrap.min.js"></script>
<style>
       body{
         margin: 0;
         padding: 0;
         font-family: Arial, Helvetica, sans-serif
       }
      nav{
         position:relative;
         top: 0;
          left: 0;
          width: 100%;
         height: 70px;
         padding: 10px 100px;
         box-sizing:border-box;
       }
       nav .logo{
         padding: 15px;
         height: 30px;
          float: left;
         font-size: 25px;
         font-weight: bold;
         color: #fff;
```

```
}
nav ul {
  list-style:none;
  float: right;
  margin: 0;
  padding: 0;
  display: flex;
  font-weight: 600;
}
nav ul li a{
  float: right;
  display: block;
  color: #f2f2f2;
  text-align: center;
  padding: 15px;
  text-decoration: none;
  font-size: 17px;
}
nav ul li a:hover{
  background: rgb(200, 212, 200);
  border-radius: 6px;
  color: rgb(51, 48, 47);
}
nav ul li a.active{
  background: #e2472f;
```

```
border-radius: 6px;
       }
       body {
       margin:0;
       padding:0;
       font-family: sans-serif;
       background: linear-gradient(to top,
rgba(0,0,0,0.5)50%,rgba(0,0,0,0.5)50%),url("/static/images/2.jpg");
                                                                           background-position:
center;
       background-size: cover;
        height: 100vh;
}
       .end {
         overflow: hidden;
         background-color: rgb(63, 63, 63);
         position: fixed;
         bottom: 0;
         height: 55px;
         width: 100%;
  }
 button{
             background-color:black;
             opacity: 78%;
             color: rgb(255, 255, 255);
             font-size: 20px;
```

```
border-radius: 50px;
                                                  width: 150px;"
                   }
      input{
                                                  background-color:black;
                                                  opacity: 78%;
                                                  color: white;
                                                  font-size: 15px;
                                                  width: 250px;
     </style>
         </head>
         <body style="background image=/static/images/2.jpg;">
                  <div class="wrap">
                   <nav>
                  <div class="logo">PREDICTION PAGE</div>
                   \langle ul \rangle
                           <a href="{{ url_for('dashboard') }}">Home</a>
                           <a href="{{ url_for('logout') }}">Logout </a>
                   </div>
                   <div style="margin-top: -45px;" class="container">
              <center>
                   <a href="font-family:'Franklin Gothic Medium', 'Arial Narrow', Arial, sans-serif; color: of the style="font-family:'Franklin Gothic Medium', 'Arial Narrow', Arial, sans-serif; color: of the style="font-family:'Franklin Gothic Medium', 'Arial Narrow', Arial, sans-serif; color: of the style="font-family:" of th
#ff7200;"><b>UPLOAD IMAGE TO PREDICT</b></h2><br>
```

```
<form action="{{url_for('prediction')}}" method="POST" enctype="multipart/form-data">
<div class="input">
              <input type="file" class="myFile" id="myFile" name="myFile">
              </div>
     <br><br><br>>
   <div class="button">
       <button input type="submit" >Submit</button></div>
   </form>
        <br>
  <!-- <script>
   function flashMessage(){
    if("{{ flash_message }}"=="True'){
     const im = document.createElement('img');
     im.src = "{{url_for('static', filename='imagedata/save.png')}}}";
     im.height = "200px";
     im.width = '200px';
     im.alt = 'hello world'
     }
   }
  </script> -->
 <!-- <img src="{{url_for('static', filename='imagedata/save.png')}}" alt=""
  height="200px"
  width="200px"
  /> --><br>>h2 style="font-family:Arial, Helvetica, sans-serif; color: #ff7200;" > <b> The
Estimated cost for the Damage is = {{prediction_text}}</b></h2>
      </h3>
```

//html>

# 8. TESTING

# 8.1 TEST CASES

			-	1 " 0 0		v								
	A	В	С	D	E	F	G	Н	1	J	K	L	M	N
1					Date	17-Nov-22								
2					Team ID	PNT2022TMID44408	]							
3					Project Name	Intelligent Vehicle Damage Asse								
4					Maximum Marks	4 marks								
5	Test case ID	Feature Type	Compo nent	Test Scenario	Pre-Requisite	Steps To Execute	Test Data	Expected Result		Sta tus	Commnets	TC for Automation(Y/N	BUG ID	Executed By
6	Landing Page_TC_001	Functional	Landing Page	Verify user is able to access the landing page		1.Enter URL and click go 2.Click choose File Option 3.Choose a image from local directory. 4.Click predict to view result!	https://drive.google.com /drive/folders/fg//ZhIE //MUPVAs/VY7N2Hkeb3 //E-MPhk0ueX	Predicted result popup should display.	Working as expected	Pas s				
7	Landing Page_TC_002	u	Landing Page	Verify the UI elements in Login/Signup popup		1.Sliding Banner 2.Buttons	https://drive.google.com /drive/folders/IgWZhIE //MuPVAsWV7N2Hkeb3 //E-MPhk@ueX	Application should show below UI elements: a.choose file box b.Predict button box		Pas s				
8														
9														
10														
11														
12														
13														
14														
15										$\vdash$			_	
16									_	-			-	
17										_			-	
18										$\vdash$			<u> </u>	
19														

# 8.2 USER ACCEPTANCE TESTING

# **Defect Analysis**

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved.

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Sub total
By Design	10	4	2	3	20
Duplicate	1	0	3	0	4
External	2	3	0	1	6

Fixed	11	2	4	20	37
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	5	2	1	8
Totals	0	14	13	26	77

# **Test Case Analysis**

This report shows the number of test cases passed, failed, and untested.

Section	<b>Total Cases</b>	Not Tested	Fail	Pass	
Print Engine	7	0	0	7	
Client Application	51	0	0	51	
Security	2	0	0	2	
Outsource Shipping	3	0	0	3	
Exception Reporting	9	0	0	9	
Final Report Output	4	0	0	4	
Version Control	2	0	0	2	

# 9. RESULTS

## 9.1 PERFORMANCE METRICS

User will upload a car image or images and number plate of car, and we extract car registration number in text form using Googles Tesseract OCR. The performance metrics is

	Performan detection	nces of da	amage	Performances of damage location			Performance of damage severity			
Pretrained VGG models	Precision	Recall	F1score	Precision	Recall	F1score	Precision	Recall	F1score	
VGG16	0.94	0.94	0.94	0.71	0.69	0.69	0.61	0.55	0.53	
VGG19	0.91	0.91	0.91	0.69	0.66	0.66	0.59	0.54	0.51	

## 10. ADVANTAGES & DISADVANTAGES

## **ADVANTAGES:**

- ✓ The advancement of image analysis and pattern recognition technologies, the auto insurance industry could significantly benefit.
- ✓ Our proposed system is that it was user friendly and highly efficient.
- ✓ The proposed system maintain privacy and also Working accuracy.
- ✓ It saves user time and energy.

#### **DISADVANTAGES:**

• The Major Drawback Of The Proposed Model Is That It Only Identifies The Physical Visible Damage And Not Of The Internal Or The Interior Damage.

## 11. CONCLUSION

- In this work of Damage analysis of a vehicle in general and insurance reclaim, a system has been designed using CNN and image classification which takes the input from a user as an image to test the severity of damage, which happens in a sequence of two steps.
- First being the image classification, here the input provided by the user is processed by the neural network to identify the car that is if the car is damaged or not.

## 12. FUTURE SCOPE

♦ This further research is implementing the proposed algorithm with the existing public datasets.

Also, various segmentation algorithms can be implemented to improve accuracy.

A higher quality dataset which includes pivotal parameters like location information and repair costs, the research could go a step further in predicting the cost of damage repair based on the image.

## 13. APPENDIX

#### 13.1 SOURCE CODE

```
from flask import Flask, app, request, render_template
import os import flask import re import flask_login
import base64 from PIL import Image from io import
BytesIO import datetime import cv2 import numpy as
np from tensorflow.keras.models import load_model
from cloudant.client import Cloudant from
cloudant.error import CloudantException from
cloudant.result import Result, ResultByKey model1 =
load_model('Model/level.h5') model2 =
load_model('Model/body.h5') def
detect(frame,model1,f):
  img = cv2.resize(frame,(244,244))
cv2.cvtColor(img,cv2.COLOR_BGR2RGB)
  if(np.max(img)>1):
    img=img/255.0
  img = np.array([img])
```

```
prediction = model1.predict(img)
  if(f):
    label= ['front','rear','side']
  else:
    label =['minor','moderate','severe']
  preds = label[np.argmax(prediction)]
  return preds
client = Cloudant.iam('862d725c-4fb3-4619-bfcb-083c11c6a979-
bluemix','QM5pS9ePdxMpe6Lh-
8yIvNYoZ3SXtoIdQQKnyIRYIwFb',connect=True) name = 'name' email = 'a@b.c'
password = '123' user_database = client.create_database('user_database')
user_image_database = client.create_database('user_image_database') def
image_database_updation(name,email,imagestr):
  global user_image_database
  now = datetime.datetime.now()
  json_image_document={
    'name':name,
    'email':email,
    'image':imagestr,
    'datetime':now.strftime("%m/%d/%Y, %H:%M:%S")
  }
  new_image_document = user_image_database.create_document(json_image_document)
if(new_image_document.exists()):
    print('database updated')
  else:
    print('database couldn\'t be edited')
```

```
return def
image_database_retrieval():
  global user_image_database
  image_result_retrieved = Result(user_image_database.all_docs,include_docs=True)
  image_result ={ }
  for i in image_result_retrieved:
    if(i['doc']['email'] in image_result.keys()):
       # like current date> rx date('str')
       n = datetime.datetime.strptime(i['doc']['datetime'],'% m/% d/% Y, % H:% M:% S')
       o = datetime.datetime.strptime(image_result[i['doc']['email']]['date'],'% m/% d/% Y,
%H:%M:%S'
       if(n>0):
         image_result[i['doc']['email']] =
{'name':i['doc']['name'],'image':i['doc']['image'],'date':i['doc']['datetime']}
    else:
       image_result[i['doc']['email']] =
{'name':i['doc']['name'],'image':i['doc']['image'],'date':i['doc']['datetime']}
  return(image_result) def
database_updation(name,email,password):
  global user_database
  jsonDocument = {
     'name':name,
     'email':email,
     'password':password
  newDocument = user_database.create_document(jsonDocument)
```

```
if(newDocument.exists()):
print('database updated')
  else:
     print('database couldn\'t be edited')
  return
#database_updation(name,email,password)
def database_retrieval():
  global user_database
  result_retrieved = Result(user_database.all_docs,include_docs=True)
  #print(list(result_retrieved))
  result = \{ \}
  for i in list(result_retrieved):
    result[i['doc']['email']]={'name':i['doc']['name'],'password':i['doc']['password']}
  return result
#print(database_retrieval()) app =
Flask(__name__) app.secret_key = 'apple'
login_manager = flask_login.LoginManager()
login_manager.init_app(app) users =
{'a@b.c': {'password': '123'}}
class User(flask_login.UserMixin):
  pass
@login_manager.user_loader
def user_loader(email):
data = database_retrieval()
```

```
if email not in data:
    return
  user = User()
  user.id = email
  user.name = data[email]['name']
  return user
@login_manager.request_loader def
request_loader(request):
  email = request.form.get('email')
  data = database_retrieval()
  if email not in data:
    return
  user = User()
  user.id = email
  user.name = data[email]['name']
  return user
@app.route('/') def
index():
  if(flask_login.current_user.is_authenticated):
     return render_template('dashboard.html')
                                                 else:
    return flask.redirect(flask.url_for('login'))
@app.route('/register',methods = ['GET','POST']) def
register():
  data = database_retrieval()
  if(flask.request.method == 'GET'):
```

```
return render_template('register.html')
  email = flask.request.form['email']
  if(email in data):
    return render_template('register.html',flash_message='True')
  else:
    database_updation(flask.request.form['name'],email,flask.request.form['password'])
    #users[email]={'password':flask.request.form['password']}
    user = User()
    user.id = email
    user.name = flask.request.form['name']
    flask_login.login_user(user)
    return render_template('dashboard.html',flash_message='True')
@app.route('/login',methods =['GET','POST']) def
login():
  data = database_retrieval()
  if(flask.request.method == 'GET'):
         return render_template('login.html',flash_message='False')
  email = flask.request.form['email']
  if(email in data and flask.request.form['password']==data[email]['password']):
    user = User()
    user.id = email
    flask_login.login_user(user)
    return render_template('dashboard.html',flash_message='Fal')
  #flask.flash('invalid credentials !!!')
  return render_template('login.html',flash_message="True")
```

```
#error = 'inavlid credentials')
@app.route('/dashboard',methods = ['GET','POST'])
@flask_login.login_required def
dashboard():
  if(flask.request.method == 'GET'):
    return\ render\_template('dashboard.html',flash\_message='False')
  email = flask.request.form['email']
  if(email in users and flask.request.form['password']==users[email]['password']):
    user = User()
    user.id = email
    flask_login.login_user(user)
    return render_template('dashboard.html',flash_message="Fal")
  return render_template('dashboard.html',flash_message="Fals")
@app.route('/logout')
@flask_login.login_required def
logout():
  flask_login.logout_user()
  return render_template('logout.html')
@app.route('/prediction',methods = ['GET','POST'])
@flask_login.login_required def
prediction():
  from tensorflow.keras.models import load_model
  model1 = load_model('Model/level.h5')
```

```
model2 = load_model('Model/body.h5')
if(flask.request.method=='POST'):
img = flask.request.files['myFile']
    try:
       os.remove('static\imagedata\save.png')
    except:
       pass
    imgstr = base64.b64encode(img.read()).decode('utf-8')
    image_database_updation(flask_login.current_user.name,flask_login.current_user.id,imgstr)
    data = image_database_retrieval()
    print(flask_login.current_user.id)
    #print(len(base64.b64decode(data[flask_login.current_user.id]['image'].strip())))
    image =
Image.open(BytesIO(base64.b64decode(data[flask_login.current_user.id]['image'])))
    img_retrived = np.array(image)
     "'img_retrived = np.asarray(base64.b64decode(data[flask_login.current_user.id]['image']))
    print(data[flask_login.current_user.id]['image'])
    print(img_retrived.shape)""
    #img_retrived = np.resize(img_retrived,(244,244))
    img_retrive = Image.fromarray(img_retrived)
    img_retrive.save('static\imagedata\save.png')
     "'img_retrived = np.frombuffer(
       BytesIO(
         base64.b64decode(data[flask_login.current_user.id]['image'])
         )
```

```
)""
print('##############")
result1=detect(img_retrived,model1=model2,f=True)
result2 = detect(img_retrived,model1=model1,f=False)
value="
if(result1 == 'front' and result2 == 'minor'):
  value = '3000 - 5000 INR'
elif(result1 == 'front' and result2 == 'moderate'):
  value = '6000 - 8000 INR'
elif(result1 == 'front' and result2 == 'severe'):
  value = '9000 - 11000 INR'
elif(result1 == 'rear' and result2 == 'minor'):
  value = '4000 - 6000 INR'
elif(result1 == 'rear' and result2 == 'moderate'):
  value = '7000 - 9000 INR'
elif(result1 == 'rear' and result2 == 'severe'):
  value = '11000 - 13000 INR'
elif(result1 == 'side' and result2 == 'minor'):
  value = '6000 - 8000 INR'
elif(result1 == 'side' and result2 == 'moderate'):
  value = '900 - 11000 INR'
elif(result1 == 'side' and result2 == 'severe'):
  value = '12000 - 15000 INR'
else:
  value = '16000 - 50000 INR'
```

## 13.2 GITHUB & PROJECT DEMO LINK

## Github Link:

https://github.com/IBM-EPBL/IBM-Project-137-1658213160

# 14. SCREENSHOTS

# Login page

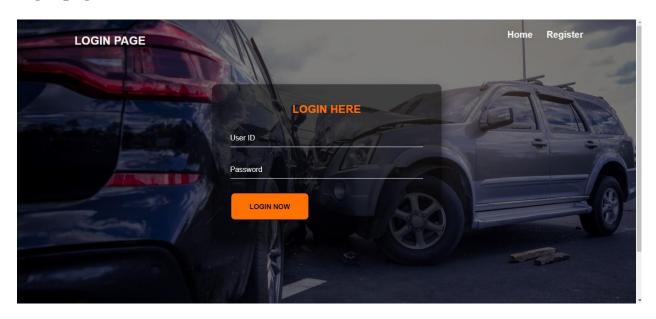


Figure 14.1 Login page

# Register page

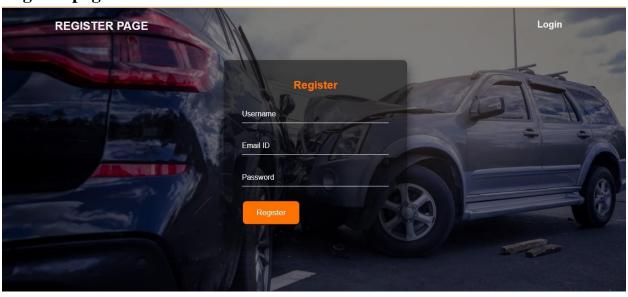


Figure 14.2 Register page

## **Dashboard**

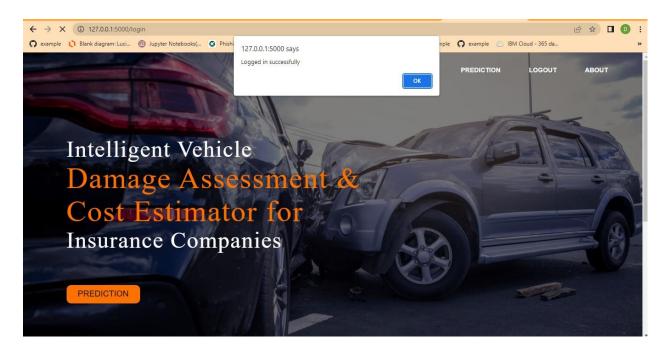


Figure 14.3 Dashboard

# About page

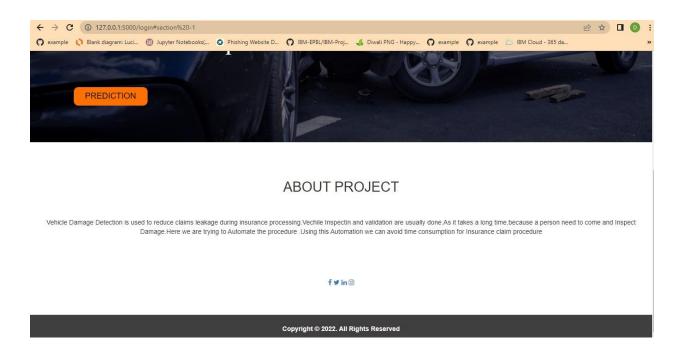


Figure 14.4 About page

# **Prediction page**

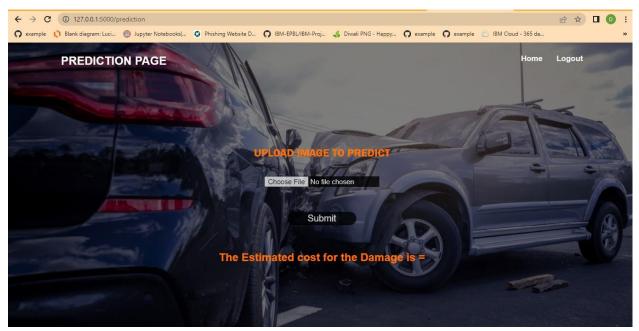


Figure 14.5 Prediction page

## **Estimated cost**

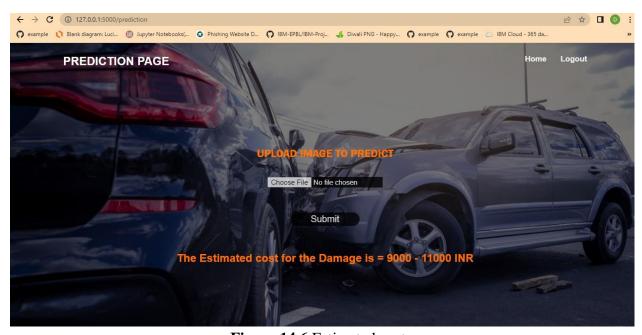


Figure 14.6 Estimated cost

# Log out page

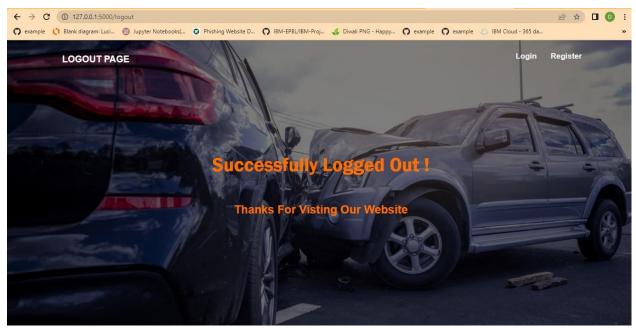


Figure 14.7 Log out page