


Create Node-RED Service

Aim:


To create a web application create a Node-RED service.

Steps followed:


- Navigated to the App creation page

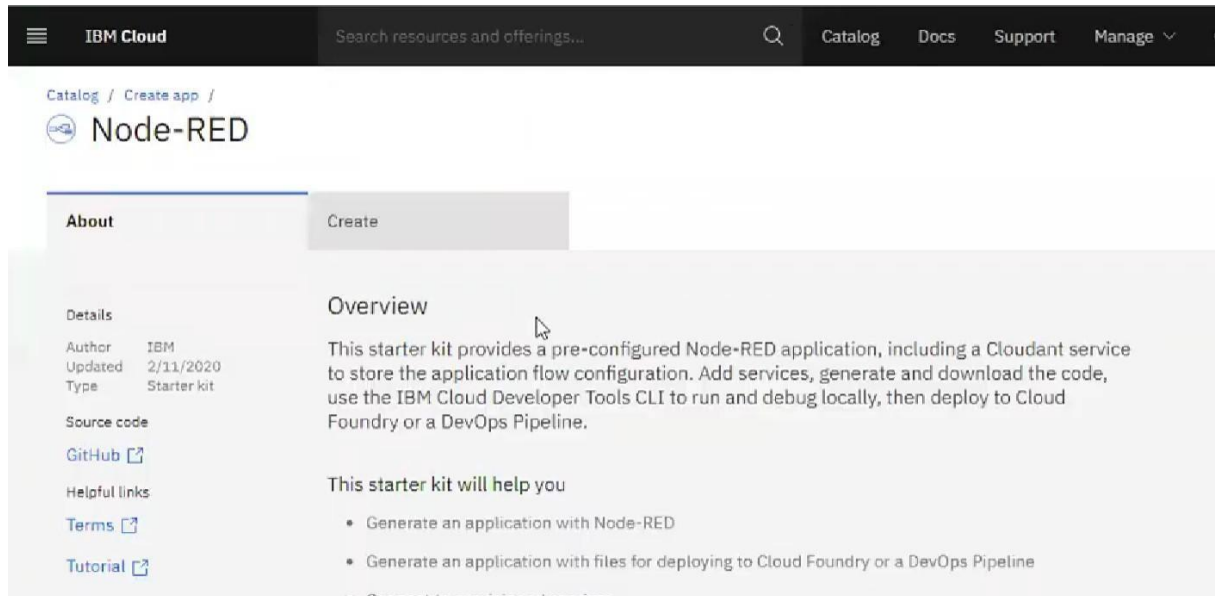


- Entered project details and clicked on create

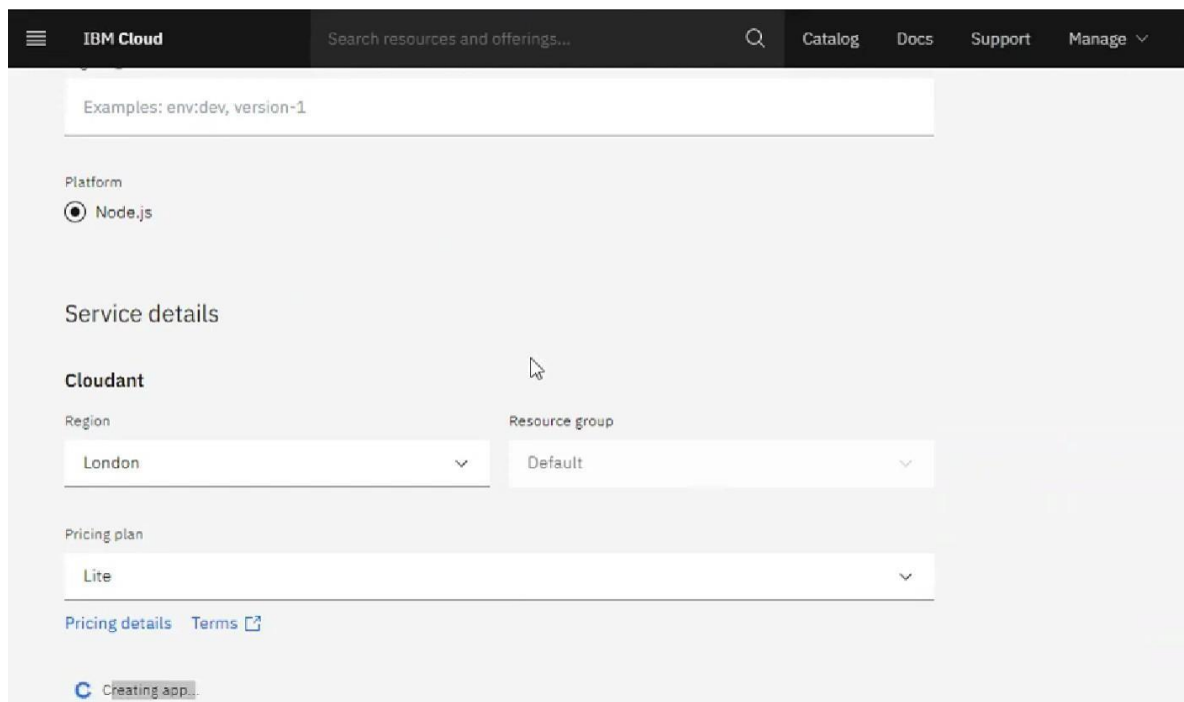

- Clicking on the “Deploy your App” Button

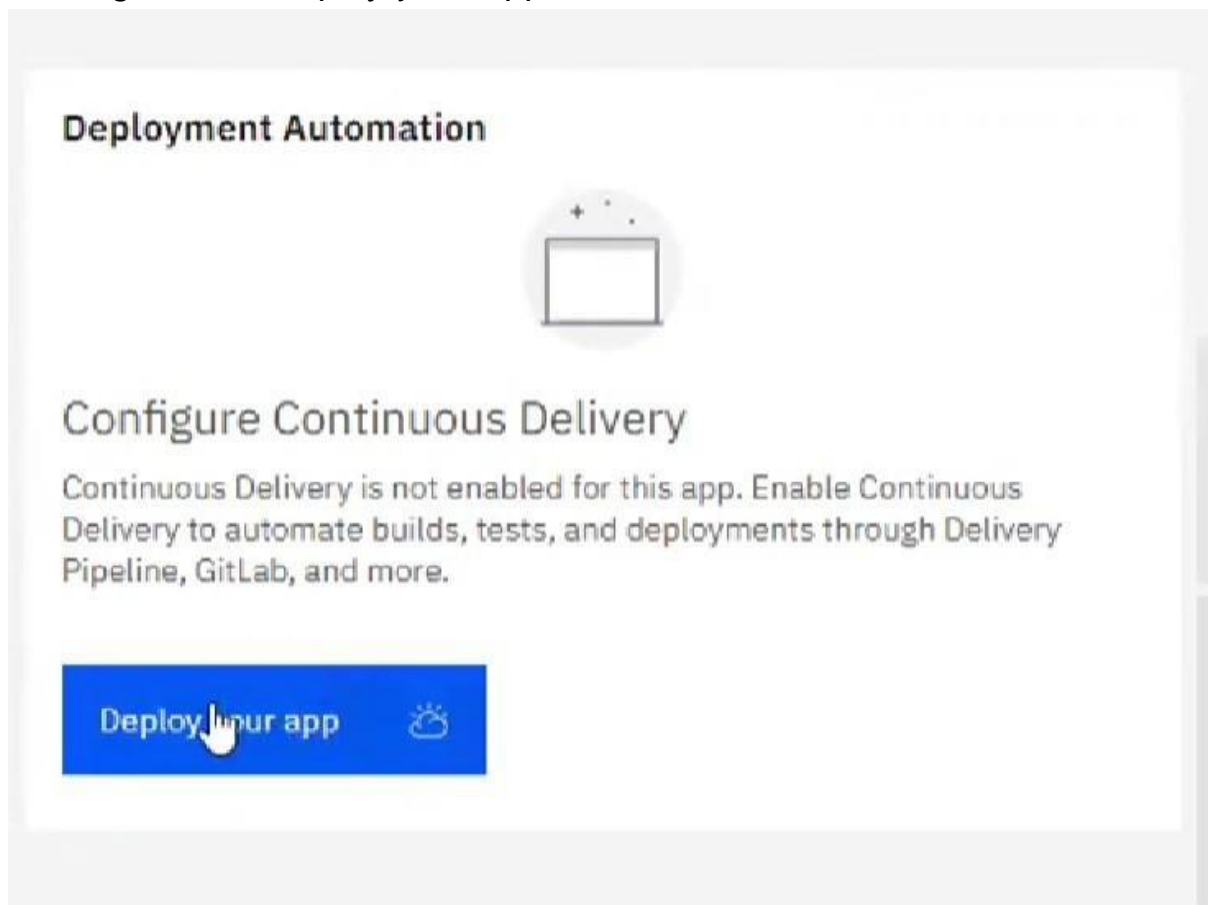

- Setting up the environment and deploying the app

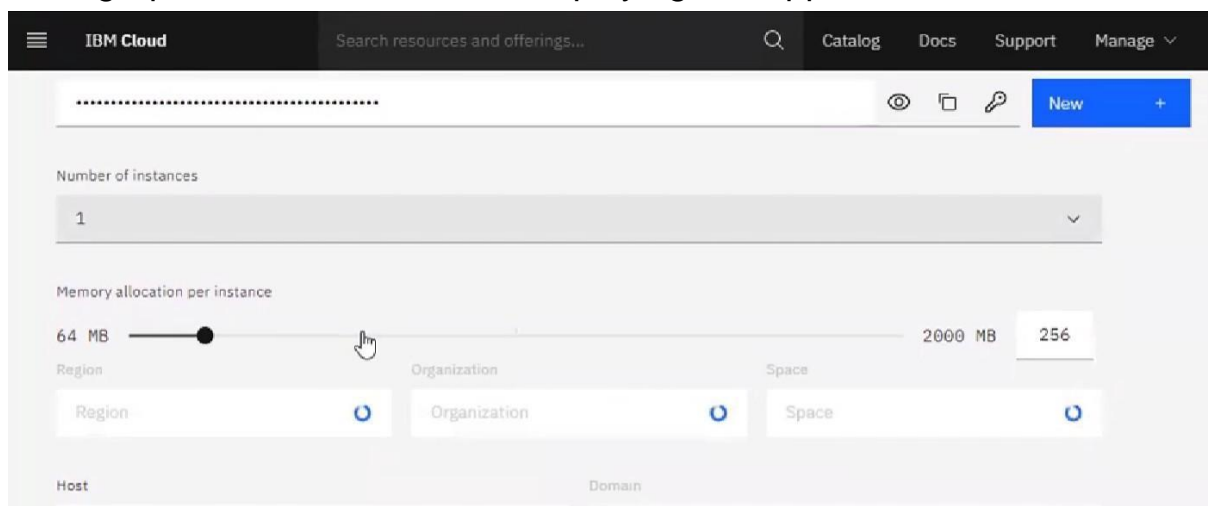


- Successfully deployed the app

Delivery Pipelines

Name	ci-pipeline ↗
Status	 Success ↗
Last input	Last commit by IBM Cloud DevOps Services (7 minutes ago) Clone from zip ↗

- Welcomed by the instance editor

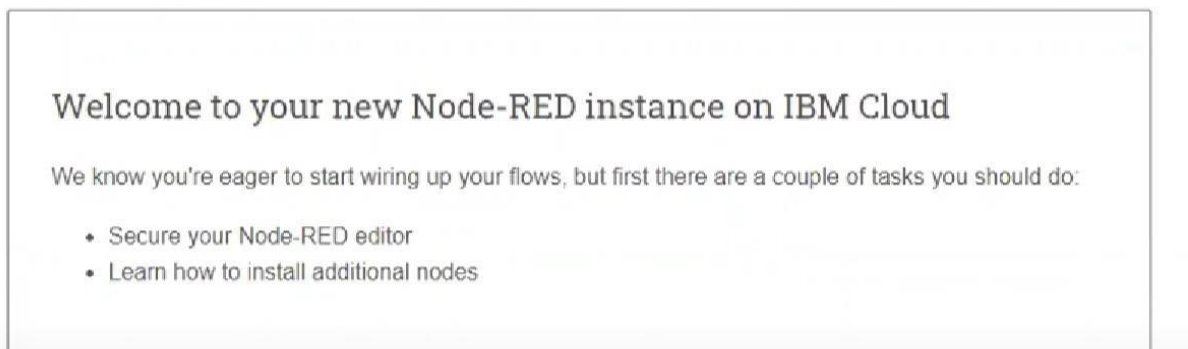

- Setting up credentials


☐ Secure your editor so only authorised users can access it

☒ *Not recommended:* Allow anyone to access the editor and make changes


Your editor will not be secured. Anyone with the URL will be able to access your flows, data and bound services.

☒ Tick this box to confirm you want your editor to be insecure

- Dragged and dropped components into the editor

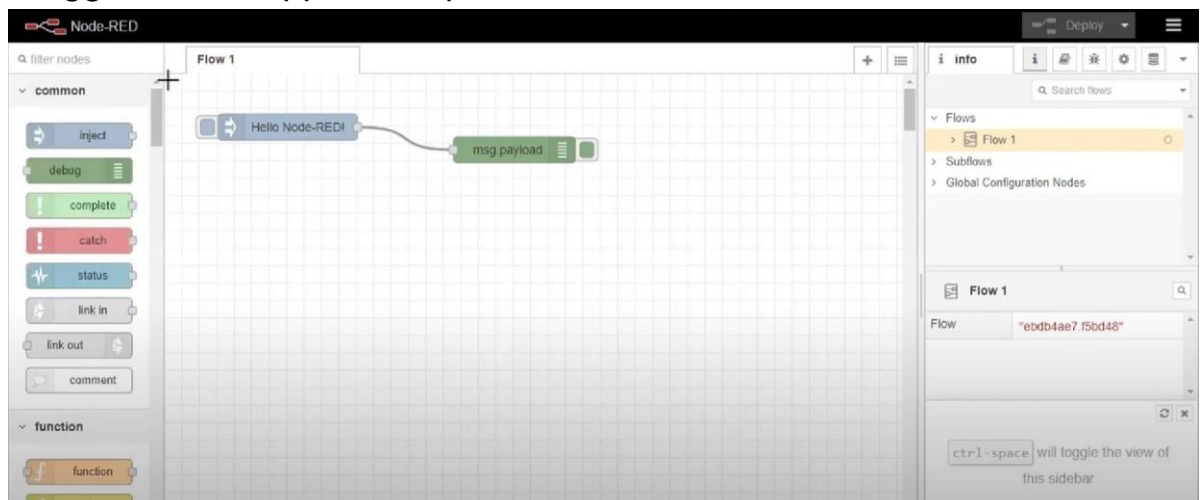

- Editing some values of the properties

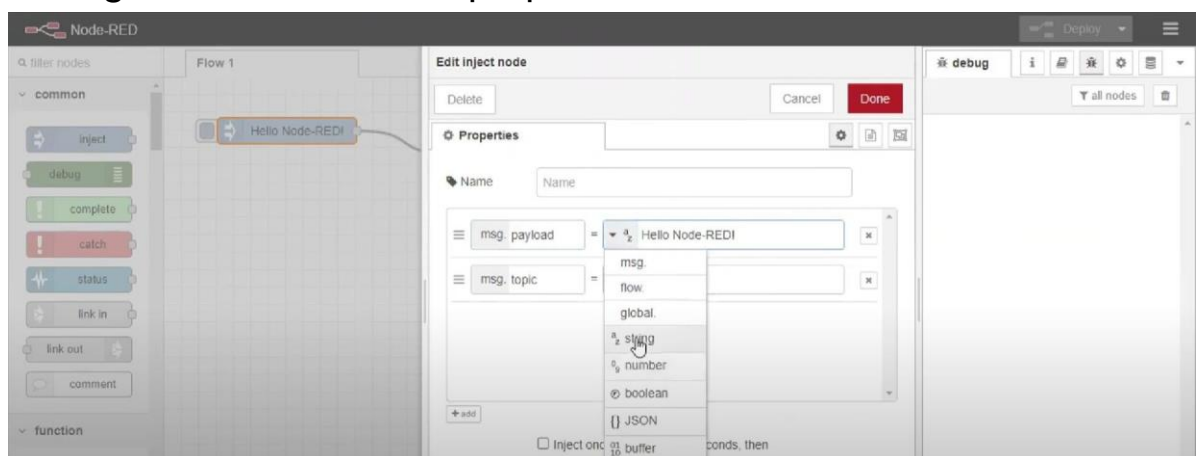

- Successfully deployed the app



Result:

Successfully created a NodeRED service on IBM Cloud