

ASSIGNMENT-2

IBM CLOUD DB2

Assignment Date	29 September 2022
Student Name	AKSHAYA.R
Student Roll Number	613019104008
Maximum Marks	2 Marks

Questions:

1. Create User table with user with email, username, roll number, password.


The screenshot displays the IBM Db2 on Cloud console interface. The top navigation bar includes tabs for 'Load Data', 'Load History', 'Tables', 'Views', 'Indexes', 'Aliases', 'MQTs', 'Sequences', and 'Application objects'. The 'Tables' tab is active, showing a search bar and a list of tables. A table named 'STUDENTS' is selected, and its definition is shown in the right-hand pane. The table definition pane displays the following columns:

Name	Data type	Nullable	Length	Scale
USERNAME	CHAR	Y	5	0
ROLL NUMBER	INTEGER	Y		0
EMAIL ID	VARCHAR	Y	32	0
PASSWORD	VARCHAR	Y	32	0

The bottom status bar shows 'Total: 1, selected: 0' and a 'View data' button. The Windows taskbar at the bottom indicates the system time as 2:34 PM on 10/19/2022.


2. Perform UPDATE,DELETE Queries with user table.

UPDATE TABLE:-

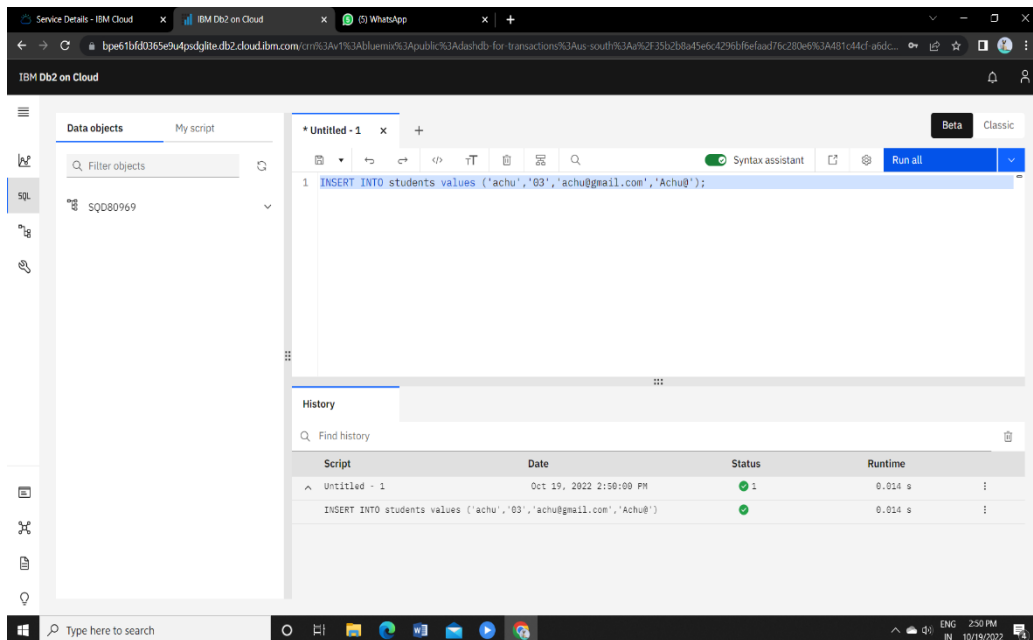

The screenshot shows the IBM Db2 on Cloud console. On the left, the 'Data objects' panel lists 'SQD80969'. The main area displays an SQL script in a text editor: `1 INSERT INTO students values ('achu','03','achu@gmail.com','Achu@');`. Below the editor, the 'History' tab shows a table of executed scripts.

Script	Date	Status	Runtime
Untitled - 1	Oct 19, 2022 2:50:00 PM	✓ 1	0.014 s
INSERT INTO students values ('achu','03','achu@gmail.com','Achu@')		✓	0.014 s

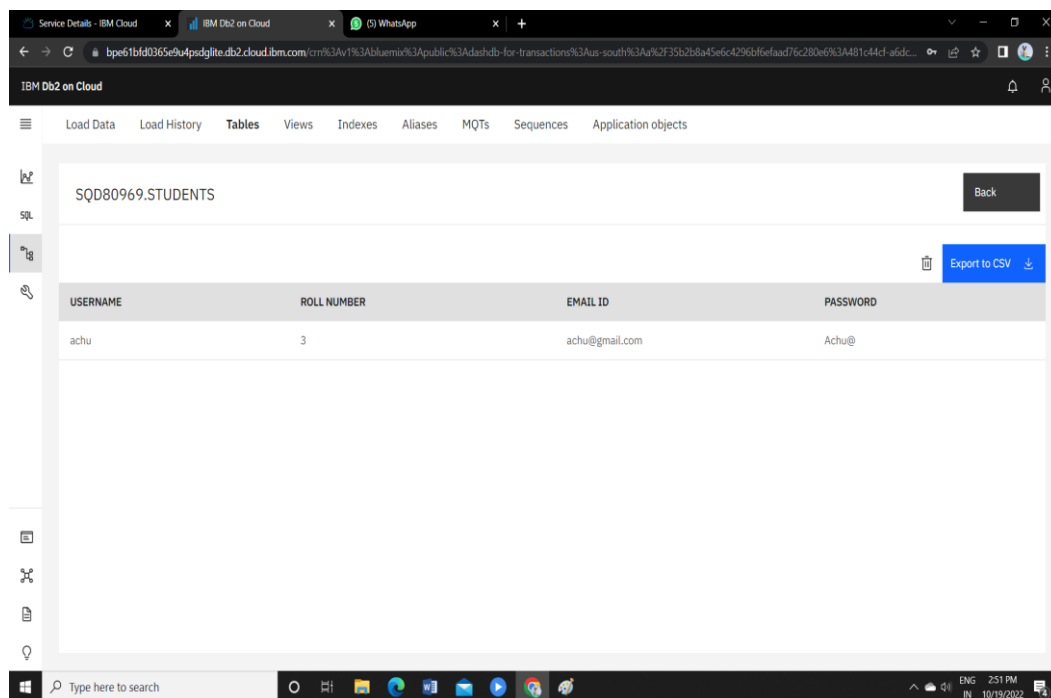

The screenshot shows the IBM Db2 on Cloud console with the 'Tables' tab selected. The table 'SQD80969.STUDENTS' is displayed. An 'Export to CSV' button is visible. The table data is as follows:

USERNAME	ROLL NUMBER	EMAIL ID	PASSWORD
achu	3	achu@gmail.com	Achu@

DELETE TABLE:-

The screenshot shows the IBM Db2 on Cloud SQL editor interface. The left sidebar displays the 'Data objects' tab with a search bar and a list of objects, including 'SQD80969'. The main editor area shows a script titled '*Untitled - 1' with the following SQL statements:

```
1 INSERT INTO students values ('achu','03','achu@gmail.com','Achu@');
2 INSERT INTO students values ('will','04','will@gmail.com','will@');
3 DELETE FROM students WHERE USERNAME = 'achu';
```

The 'History' tab at the bottom shows the execution history of the script:

Script	Date	Status	Runtime
Untitled - 1	Oct 19, 2022 2:54:44 PM	3	0.025 s
INSERT INTO students values ('achu','03','achu@gmail.com','Achu@')		✓	0.009 s
INSERT INTO students values ('will','04','will@gmail.com','will@')		✓	0.008 s
DELETE FROM students WHERE USERNAME = 'achu'		✓	0.008 s

The screenshot shows the IBM Db2 on Cloud SQL editor interface displaying the result of the SQL script execution. The left sidebar shows the 'Data objects' tab with a search bar and a list of objects, including 'SQD80969.STUDENTS'. The main editor area shows the table structure and data:

USERNAME	ROLL NUMBER	EMAIL ID	PASSWORD
will	4	will@gmail.com	will@

The 'Export to CSV' button is visible in the top right corner of the table view.

3.CONNECT PYTHON CODE TO DB2.

NOTE:- Question 4 contains Question 3 answer

4. Create a flask app with registration page, login page and welcome page. By default load the registration page once the user enters all the fields store the data in database and navigate to login page authenticate user username and password. If the user is valid show the welcome page

Answers

App.py

```
from flask import Flask, render_template, request, redirect, url_for, session
import ibm_db
import re

app = Flask(__name__)

app.secret_key = 'a'

conn = ibm_db.connect(
    "DATABASE=Db2New;HOSTNAME=19af6446-6171-4641-8aba-
    9dcff8e1b6ff.clogj3sd0tgtu0lqde00.databases.appdomain.cloud;PORT=30699;USERNAM
    E=kgb92696;PASSWORD=3IlWyGYU3bMIvwnX;SECURITY=SSL;SSLSERVERCERTIFICATE=DigiCer
    tGlobalRootCA.crt;", "", "")

@app.route("/", methods=['GET', 'POST'])
def register():
    msg = ''
    if request.method == 'POST':
        username = request.form['username']
        email = request.form['email']
        password = request.form['password']
        sql = "SELECT * FROM users WHERE username =?"
        stmt = ibm_db.prepare(conn, sql)
        ibm_db.bind_param(stmt, 1, username)
        ibm_db.execute(stmt)
        account = ibm_db.fetch_assoc(stmt)
        print(account)
        if account:
            msg = 'Account already exists !'
        elif not re.match(r'^@+@[^@]+\.[^@]+', email):
            msg = 'Invalid email address !'
        elif not re.match(r'[A-Za-z0-9]+', username):
            msg = 'name must contain only characters and numbers !'
```

```

        else:
            insert_sql = "INSERT INTO users VALUES (?, ?, ?)"
            prep_stmt = ibm_db.prepare(conn, insert_sql)
            ibm_db.bind_param(prepare_stmt, 1, username)
            ibm_db.bind_param(prepare_stmt, 2, email)
            ibm_db.bind_param(prepare_stmt, 3, password)
            ibm_db.execute(prepare_stmt)
            msg = 'You have successfully registered !'
        elif request.method == 'POST':
            msg = 'Please fill out the form !'
        return render_template('register.html', msg=msg)

@app.route('/login', methods=['GET', 'POST'])
def login():
    global userid
    msg = ''

    if request.method == 'POST':
        username = request.form['username']
        password = request.form['password']
        sql = "SELECT * FROM users WHERE username =? AND password=?"
        stmt = ibm_db.prepare(conn, sql)
        ibm_db.bind_param(stmt, 1, username)
        ibm_db.bind_param(stmt, 2, password)
        ibm_db.execute(stmt)
        account = ibm_db.fetch_assoc(stmt)
        print(account)
        if account:
            session['loggedin'] = True
            session['id'] = account['USERNAME']
            userid = account['USERNAME']
            session['username'] = account['USERNAME']
            msg = 'Logged in successfully !'

            msg = 'Logged in successfully !'
            return render_template('dashboard.html', msg=msg)
        else:
            msg = 'Incorrect username / password !'
        return render_template('login.html', msg=msg)

if __name__ == '__main__':
    app.run(host='0.0.0.0')
    # app.run(debug=True)

```

Register.html

```
<!DOCTYPE html>
```

```

<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Skill and Job recommender register</title>

  <!-- bootstrap css cdn -->
  <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css"
"
    integrity="sha384-
JcKb8q3iqJ61gNV9KGb8thSsNjpSL0n8PARn9HuZOnIxN0hoP+VmmDGMN5t9UJ0Z"
crossorigin="anonymous">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.css">
  <!-- css stylesheet -->
  <link rel="stylesheet" href="Style.css">
  <!-- font styles cdn -->
  <link rel="preconnect" href="https://fonts.gstatic.com">
  <link
href="https://fonts.googleapis.com/css2?family=Alegreya&display=swap"
rel="stylesheet">
  <link
href="https://fonts.googleapis.com/css2?family=Alegreya:wght@600&display=swap"
rel="stylesheet">
</head>

<body>
  <!-- bootstrap navbar -->
  <!-- navbar ends -->
  <!-- Login form -->
  <div class="login text-center mt-5">

    <form action="/" method="post">
      <h2 class="form-text-h2"> Register Form </h2>
      <div class="msg">{{ msg }}</div>
      <input type="text" class="form-control" name="username"
placeholder="Enter Your Username" id="username"
        required>
      <input type="email" class="form-control" name="email"
placeholder="Enter Your Email ID" id="email" required>
      <input type="password" class="form-control" name="password"
placeholder="Enter Your Password" id="password"
        required>
      <button type="submit" id="button" class="btn btn-primary">
Register </button>

```

```

        <div class="note mt-3 text-center">
            <!--Register form -->
            <p> already have an account ? please login <a
href="/login">login! </a> </p>

        </div>
    </form>

</div>

</body>

</html>

```

Login.html

```

<!DOCTYPE html>
<html lang="en">

<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Skill and Job Recommender Login</title>
    <!-- favicon -->
    <!-- <link rel="shortcut icon" href="/assets/img/favicon.ico"
type="image/x-icon"> -->
    <!-- <link rel="icon" href="/assets/img/favicon.ico" type="image/x-icon">
-->
    <link rel="icon" type="image/png" sizes="16x16" href="/assets/img/favicon-
32x32.png">
    <!-- bootstrap css cdn -->
    <link rel="stylesheet"
href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css"
"
        integrity="sha384-
JcKb8q3iqJ61gNV9KGb8thSsNjpSL0n8PARn9HuZOnIxN0hoP+VmmDGMN5t9UJ0Z"
crossorigin="anonymous">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/4.7.0/css/font-awesome.css">
    <!-- css stylesheet -->
    <link rel="stylesheet" href="style.css">
    <!-- font styles cdn -->
    <link rel="preconnect" href="https://fonts.gstatic.com">
    <link
href="https://fonts.googleapis.com/css2?family=Alegreya&display=swap"
rel="stylesheet">

```

```

    <link
href="https://fonts.googleapis.com/css2?family=Alegreya:wght@600&display=swap"
rel="stylesheet">
</head>

<body>

    <div class="login text-center mt-5">

        <form action="/login" method="post">
            <h2 class="form-text-h2"> Login Form </h2>
            <div class="msg">{{ msg }}</div>
            <div class="form-group mb-3">
                <label class="label" for="username">Username</label>
                <input type="text" class="form-control" placeholder="Username"
name="username" required>
            </div>
            <div class="form-group mb-3">
                <label class="label" for="password">Password</label>
                <input type="password" class="form-control"
placeholder="Password" name="password" required>
            </div>

            <button type="submit" id="button" class="btn btn-primary"> Login
</button>

            <div class="note mt-3 text-center">
                <!--Register form -->
                <p> Don't have an account yet? Click here to <a
href="/">register! </a> </p>
            </div>
        </form>
    </div>

</body>

</html>

```

Style.css

```

* {
    margin: 0;
    padding: 0;
}
body {
    color: #444444;
    background: linear-gradient(-45deg, #EE7752, #E73C7E, #23A6D5, #23D5AB);
    background-size: 400% 400%;
    position: relative;
    display: flex;
    flex-direction: column;

```



```
    align-items: center;
    justify-content: center;
    animation: anime 10s ease-in-out infinite;
}
@keyframes anime{
  0%{
    background-position: 0 50%;
  }
  50%{
    background-position: 100% 50%;
  }
  100%{
    background-position: 0 50%;
  }
}
```

```
form {
  display: flex;
  flex-direction: column;
  align-items: center;
  justify-content: center;
  background-color: white;
  width: 40%;
  height: 450px;
  border-radius: 50px;
  margin: 100px;
  gap: 25px;
}
```

```
h2 {
  font-size: large;
  font-weight: bolder;
}
```

```
input {
  width: 80% !important;
}
```

```
div {
  display: flex;
  align-items: center;
  justify-content: center;
  flex-direction: column;
  width: 90%;
}
```

```
.form-text-vk {
  font-size: small;
```

```
padding-bottom: 10px;
}

.form-text-h2 {
font-size: x-large;
padding-top: 10px;
}
```

OUTPUT:-

REGISTRATION PAGE:-

login!'. The browser's address bar shows 'D:/REGFORM/Register.html'."/>

LOGIN PAGE:-

register!'. The browser's address bar shows 'D:/REGFORM/Login.html'."/>

WELCOME PAGE:-

