

Sprint Delivery - 2

SmartFarmer - IoT Enabled Smart Farming Application

Team ID: PNT2022TMID30663

Date:17/11/2022

Building Project

Connecting IoT Simulator to IBM Watson IoT Platform

Open link provided in above section

Give the credentials of your device in IBM Watson IoT Platform

My credentials given to simulator are:

api:

s-xanmsr-dqrgvealm

Device type: Device1

Token: m-xyklmsr-dqkveab0i

You can see the received data in graphs by creating cards in Boards tab

➤ You will receive the simulator data in cloud

- You can see the received data in Recent Events under your device
- Data received in this format(json)

```
{
  "d": {
    "name": "abcd",
    "temperature": 17,
    "humidity": 76,
    "Moisture ": 25
  }
}
```


The screenshot displays a web application interface for managing devices. The top navigation bar includes links for 'Browse', 'Action', 'Device Types', and 'Interfaces', along with an 'Add Device' button. The main content area shows a table of devices. The first device, with ID '1234' and status 'Disconnected', is selected. Below the table, the 'Recent Events' tab is active, showing a list of events. The events are displayed in a table with columns for 'Event', 'Value', 'Format', and 'Last Received'. The events are all 'eventflow' type, with values in JSON format, and were received 'a few seconds ago'. A status message at the bottom indicates '1 Simulation running'.

Event	Value	Format	Last Received
eventflow	{"randomNumber":11,"temp":102,"hum":93}	json	a few seconds ago
eventflow	{"randomNumber":56,"temp":98,"hum":83}	json	a few seconds ago
eventflow	{"randomNumber":27,"temp":101,"hum":80}	json	a few seconds ago
eventflow	{"randomNumber":16,"temp":91,"hum":99}	json	a few seconds ago
eventflow	{"randomNumber":51,"temp":98,"hum":75}		

1 Simulation running

Configuration of Node-Red to collect IBM cloud data

The node IBM IoT App In is added to Node-Red workflow. Then the appropriate device credentials obtained earlier are entered into the node to connect and fetch device telemetry to Node-Red.

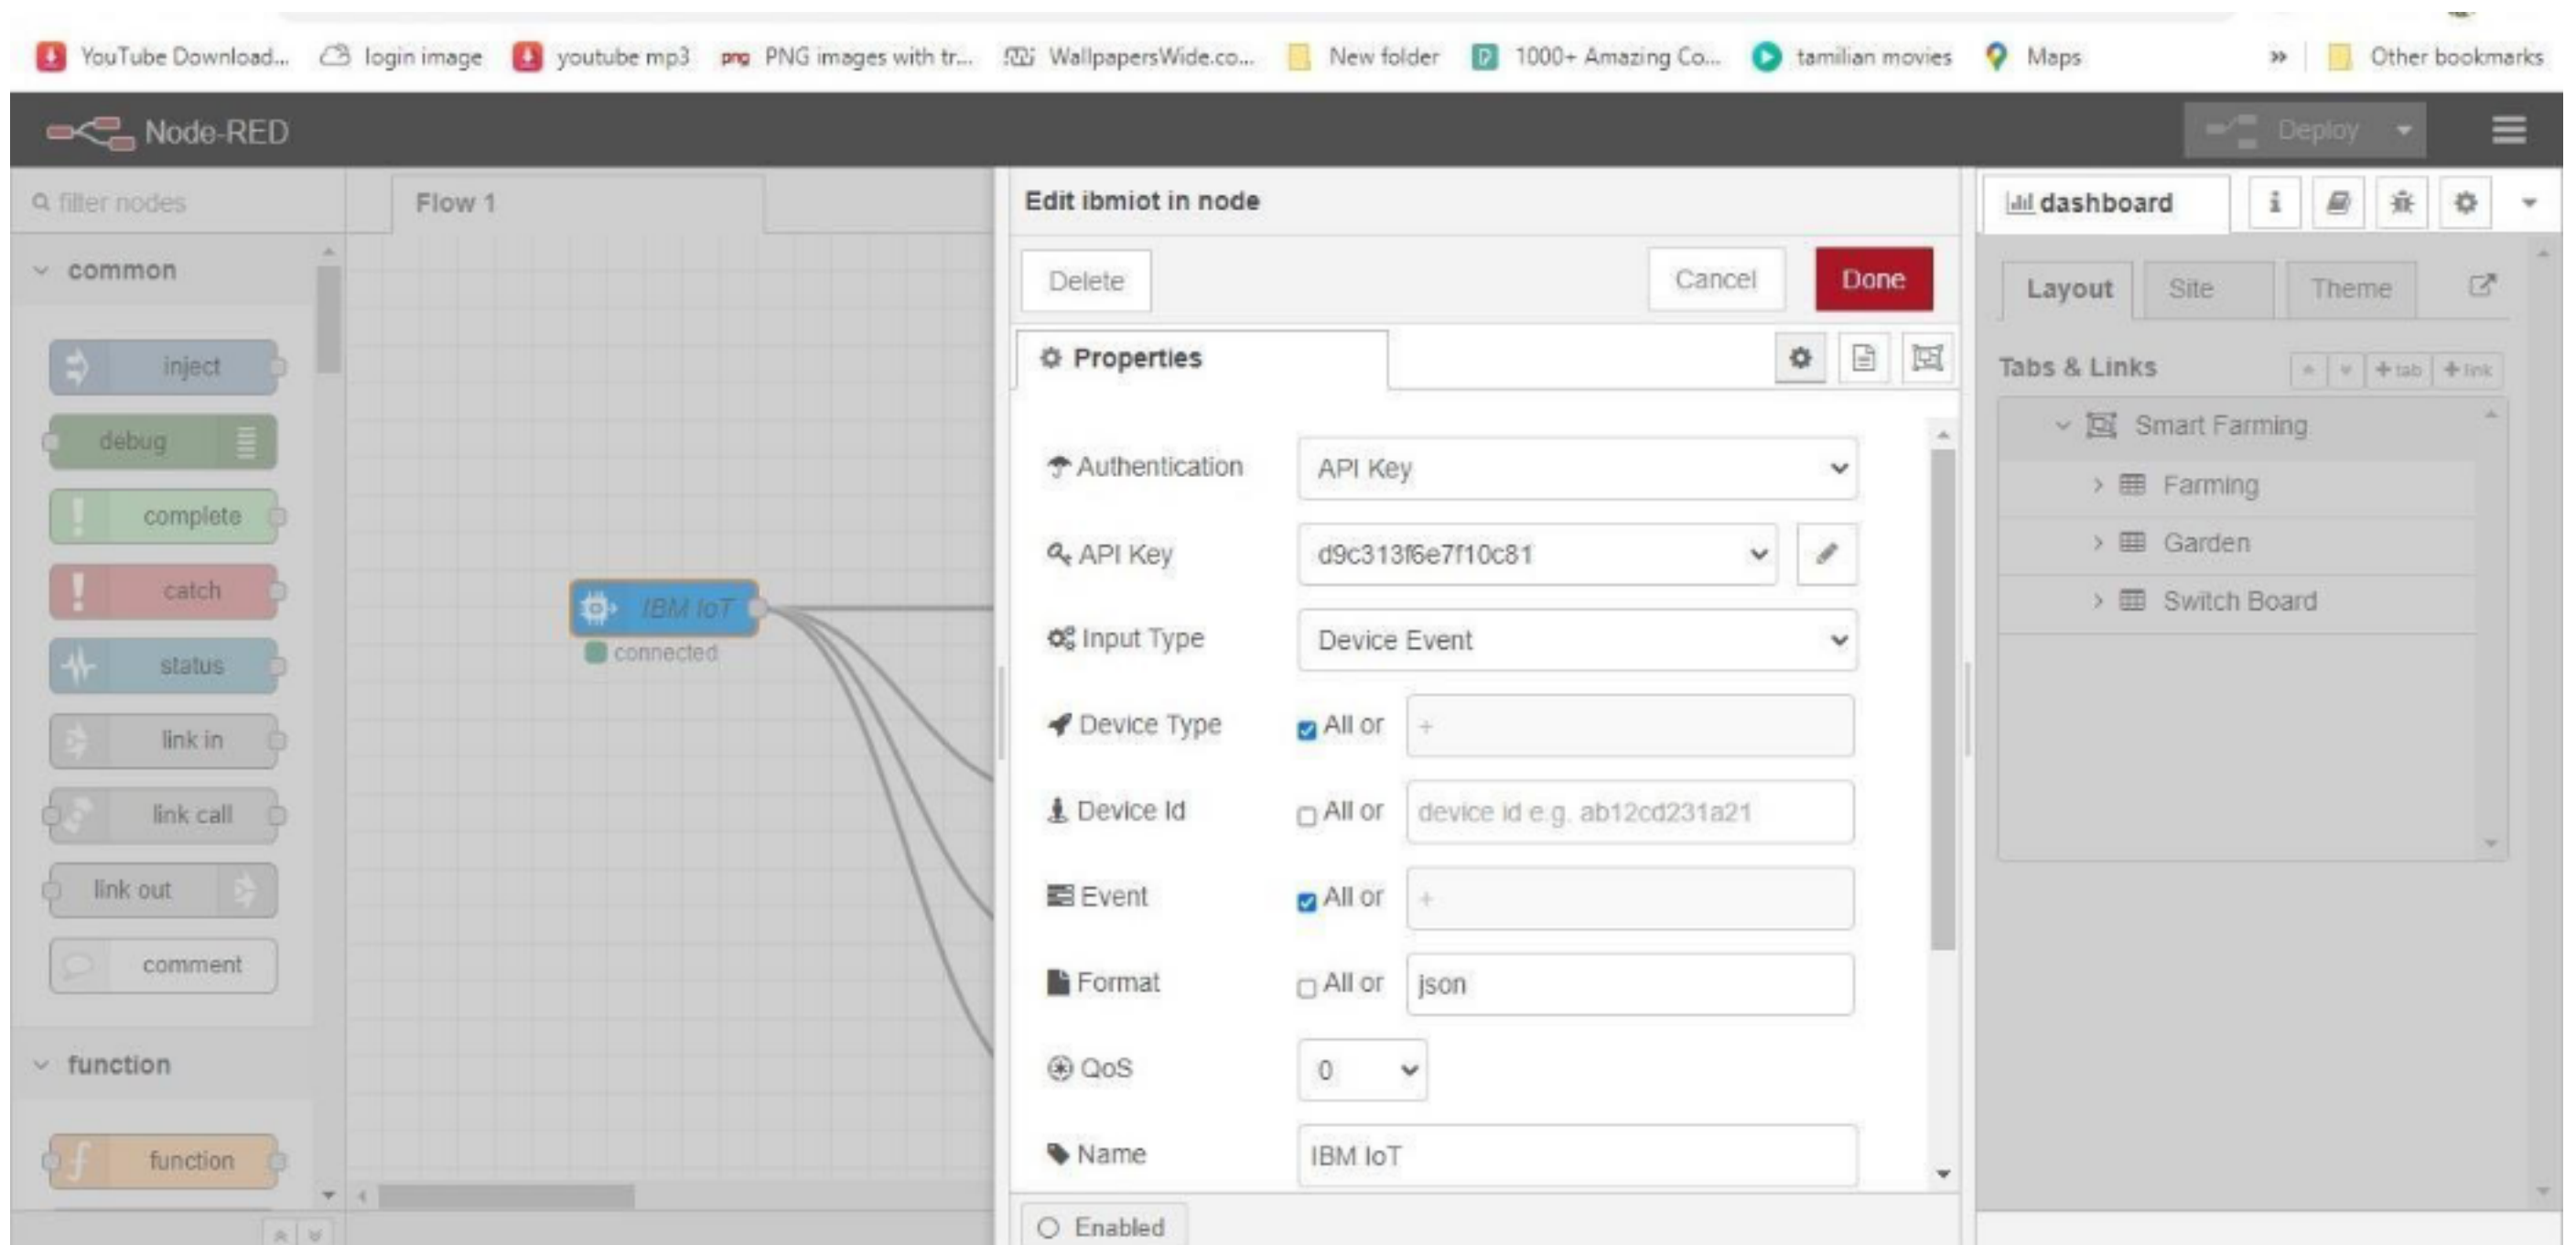

Once it is connected Node-Red receives data from the device
Display the data using debug node for verification


Connect function node and write the Java script code to get each reading separately.

The Java script code for the function node is:


```
msg.payload=msg.payload.d.temperature return
```

```
msg;
```


Finally connect Gauge nodes from dashboard to see the data in UI

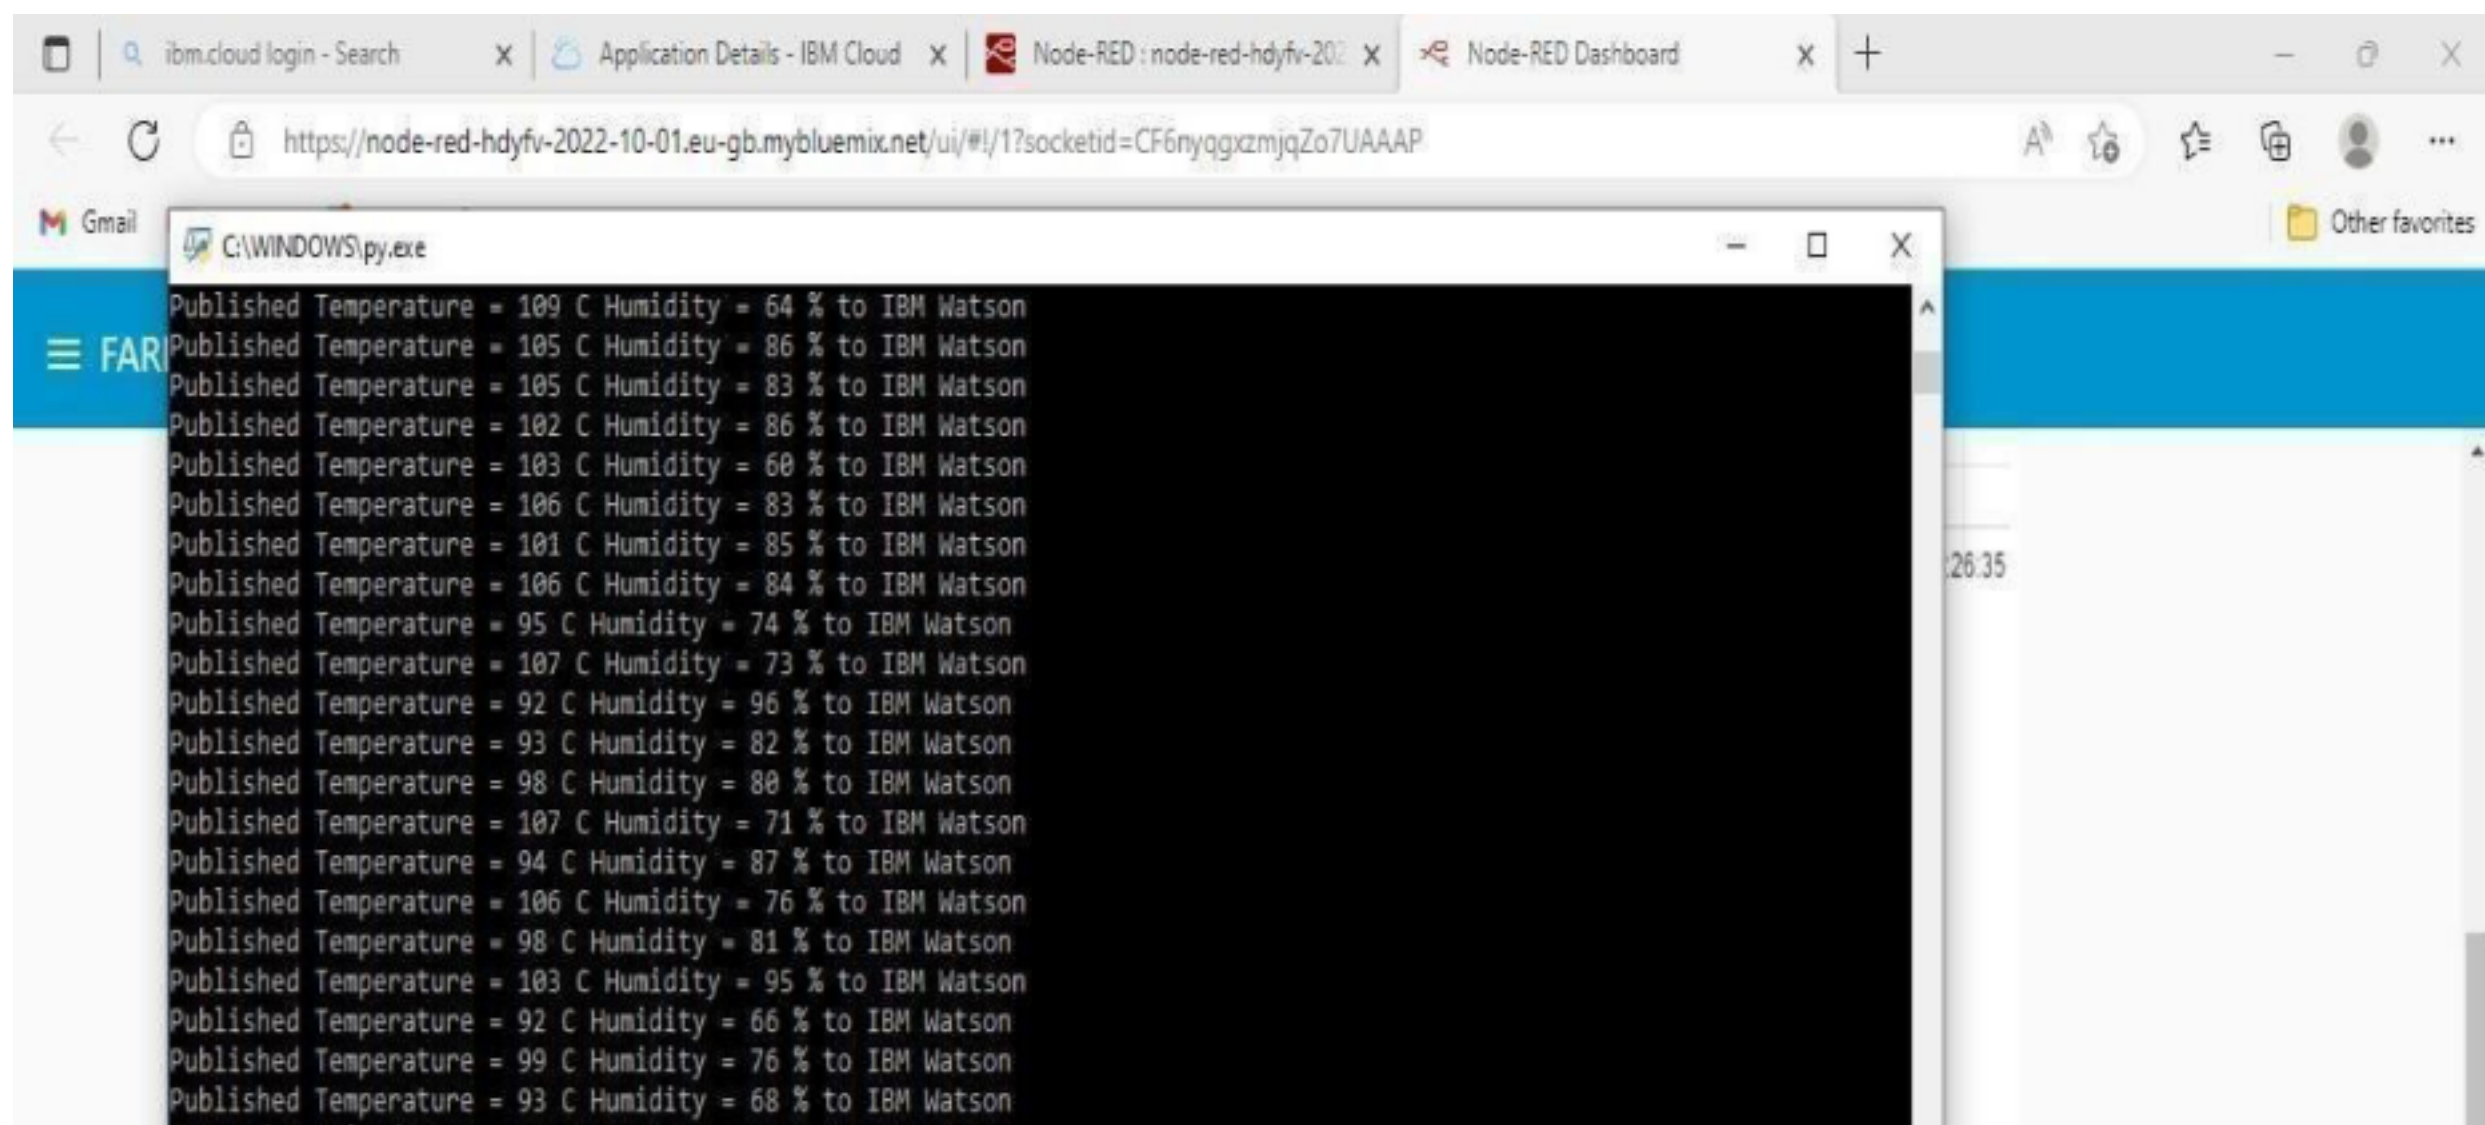

Data received from the cloud in Node-Red console

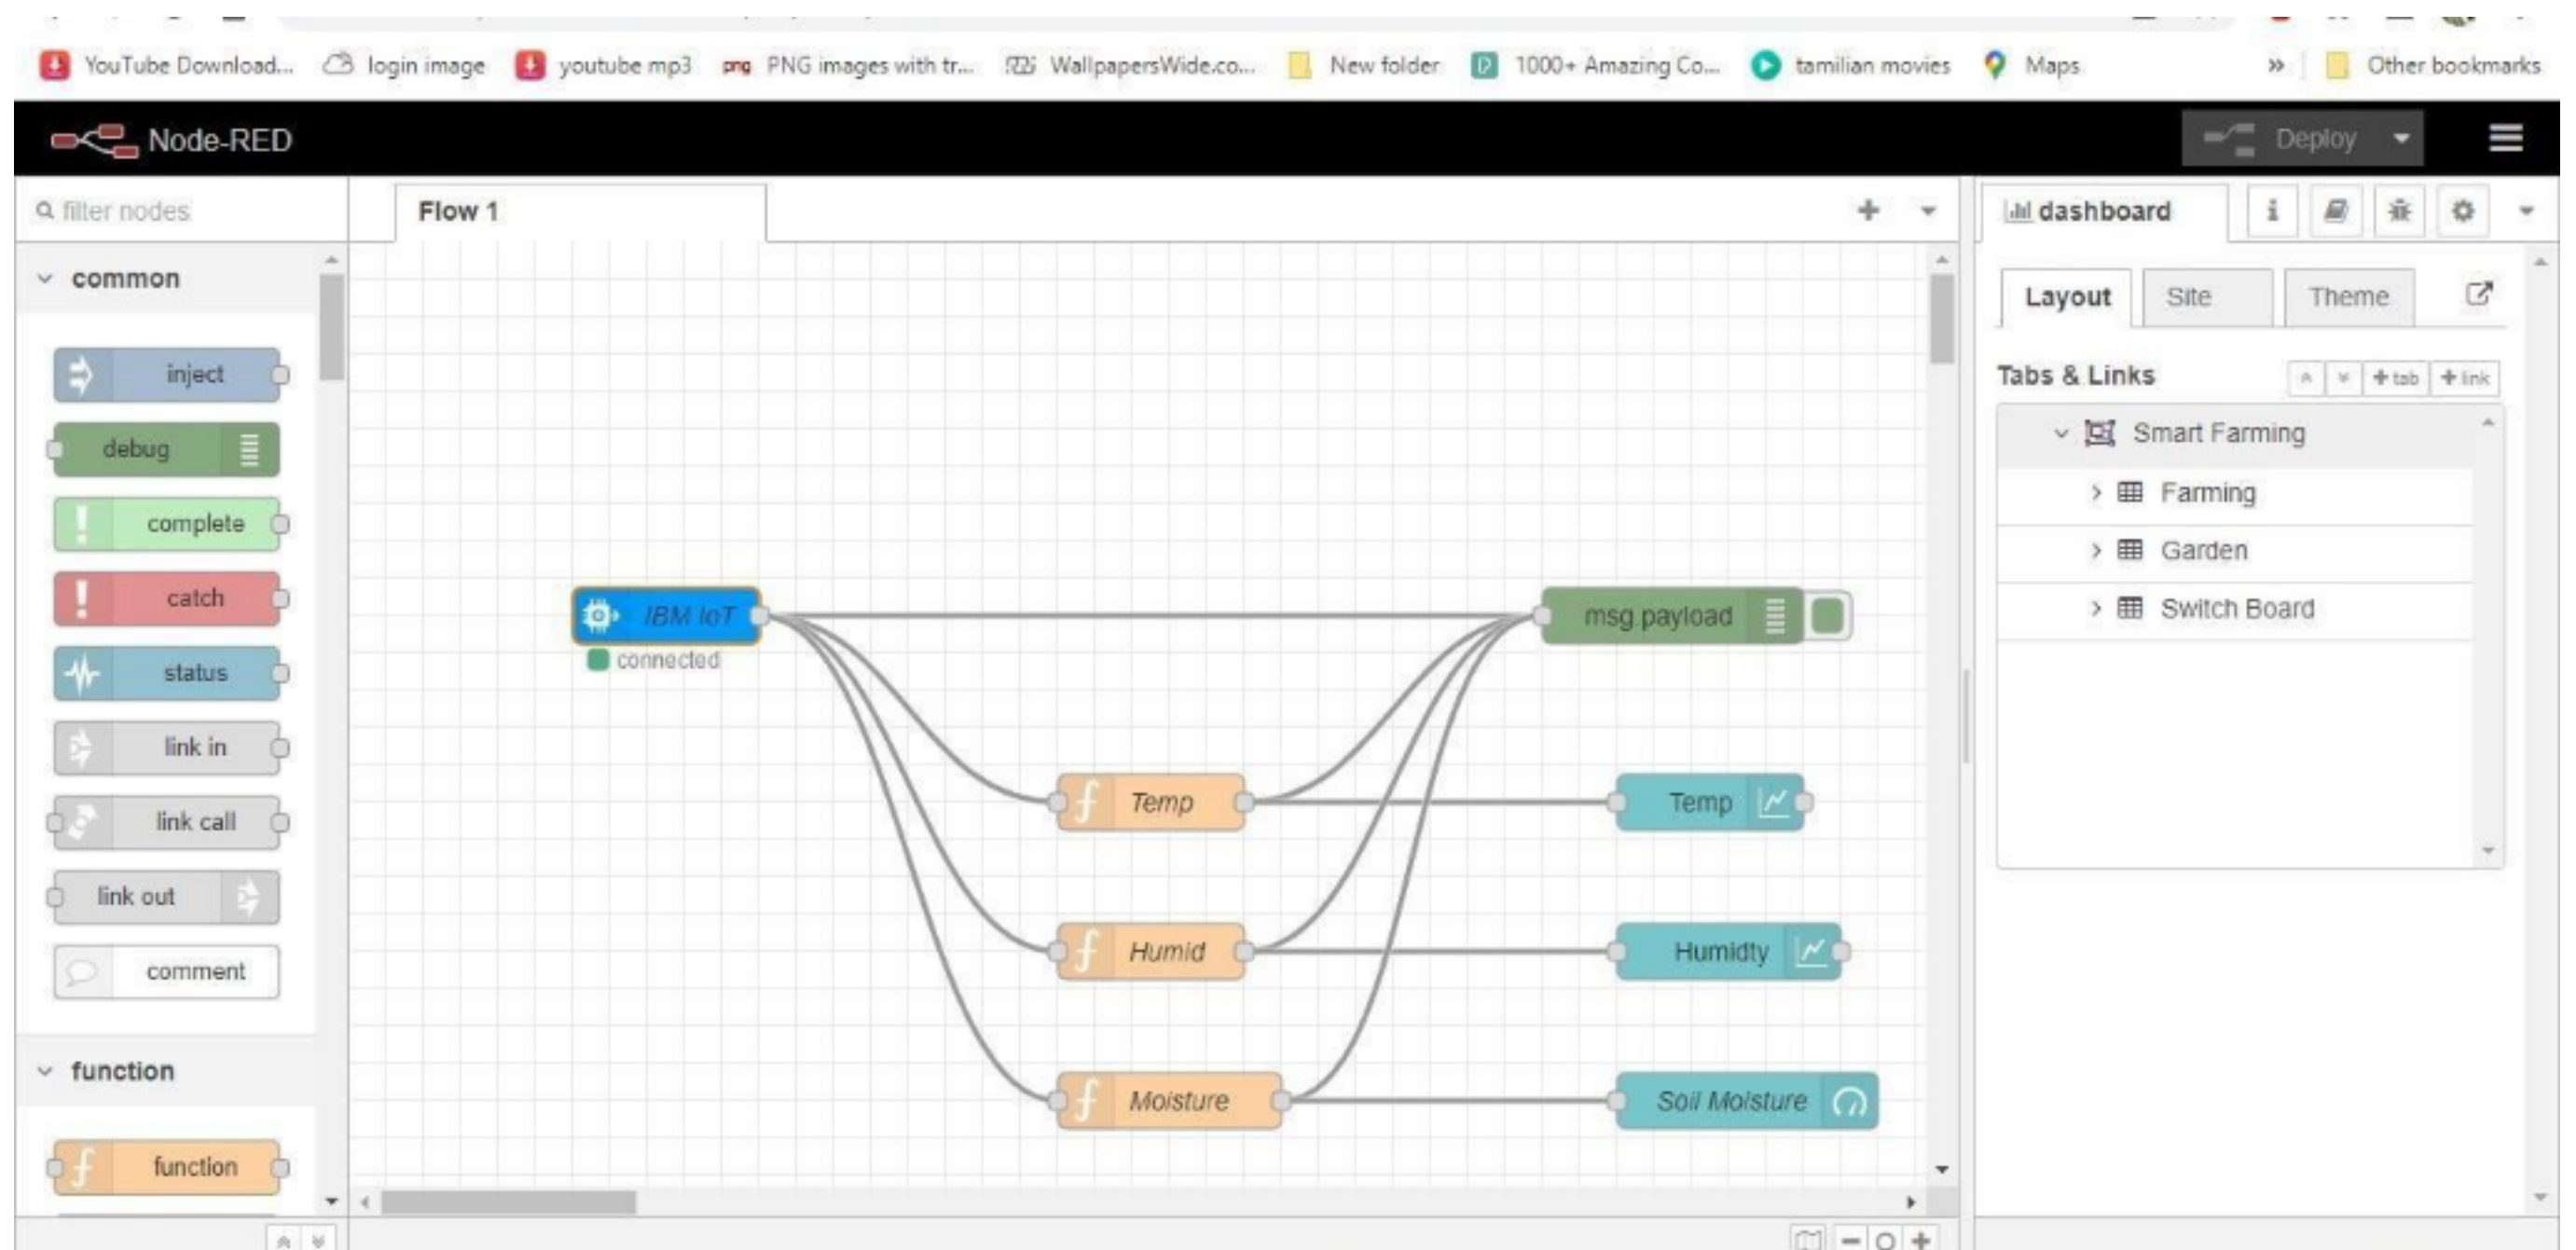

Nodes connected in following manner to get each reading separately

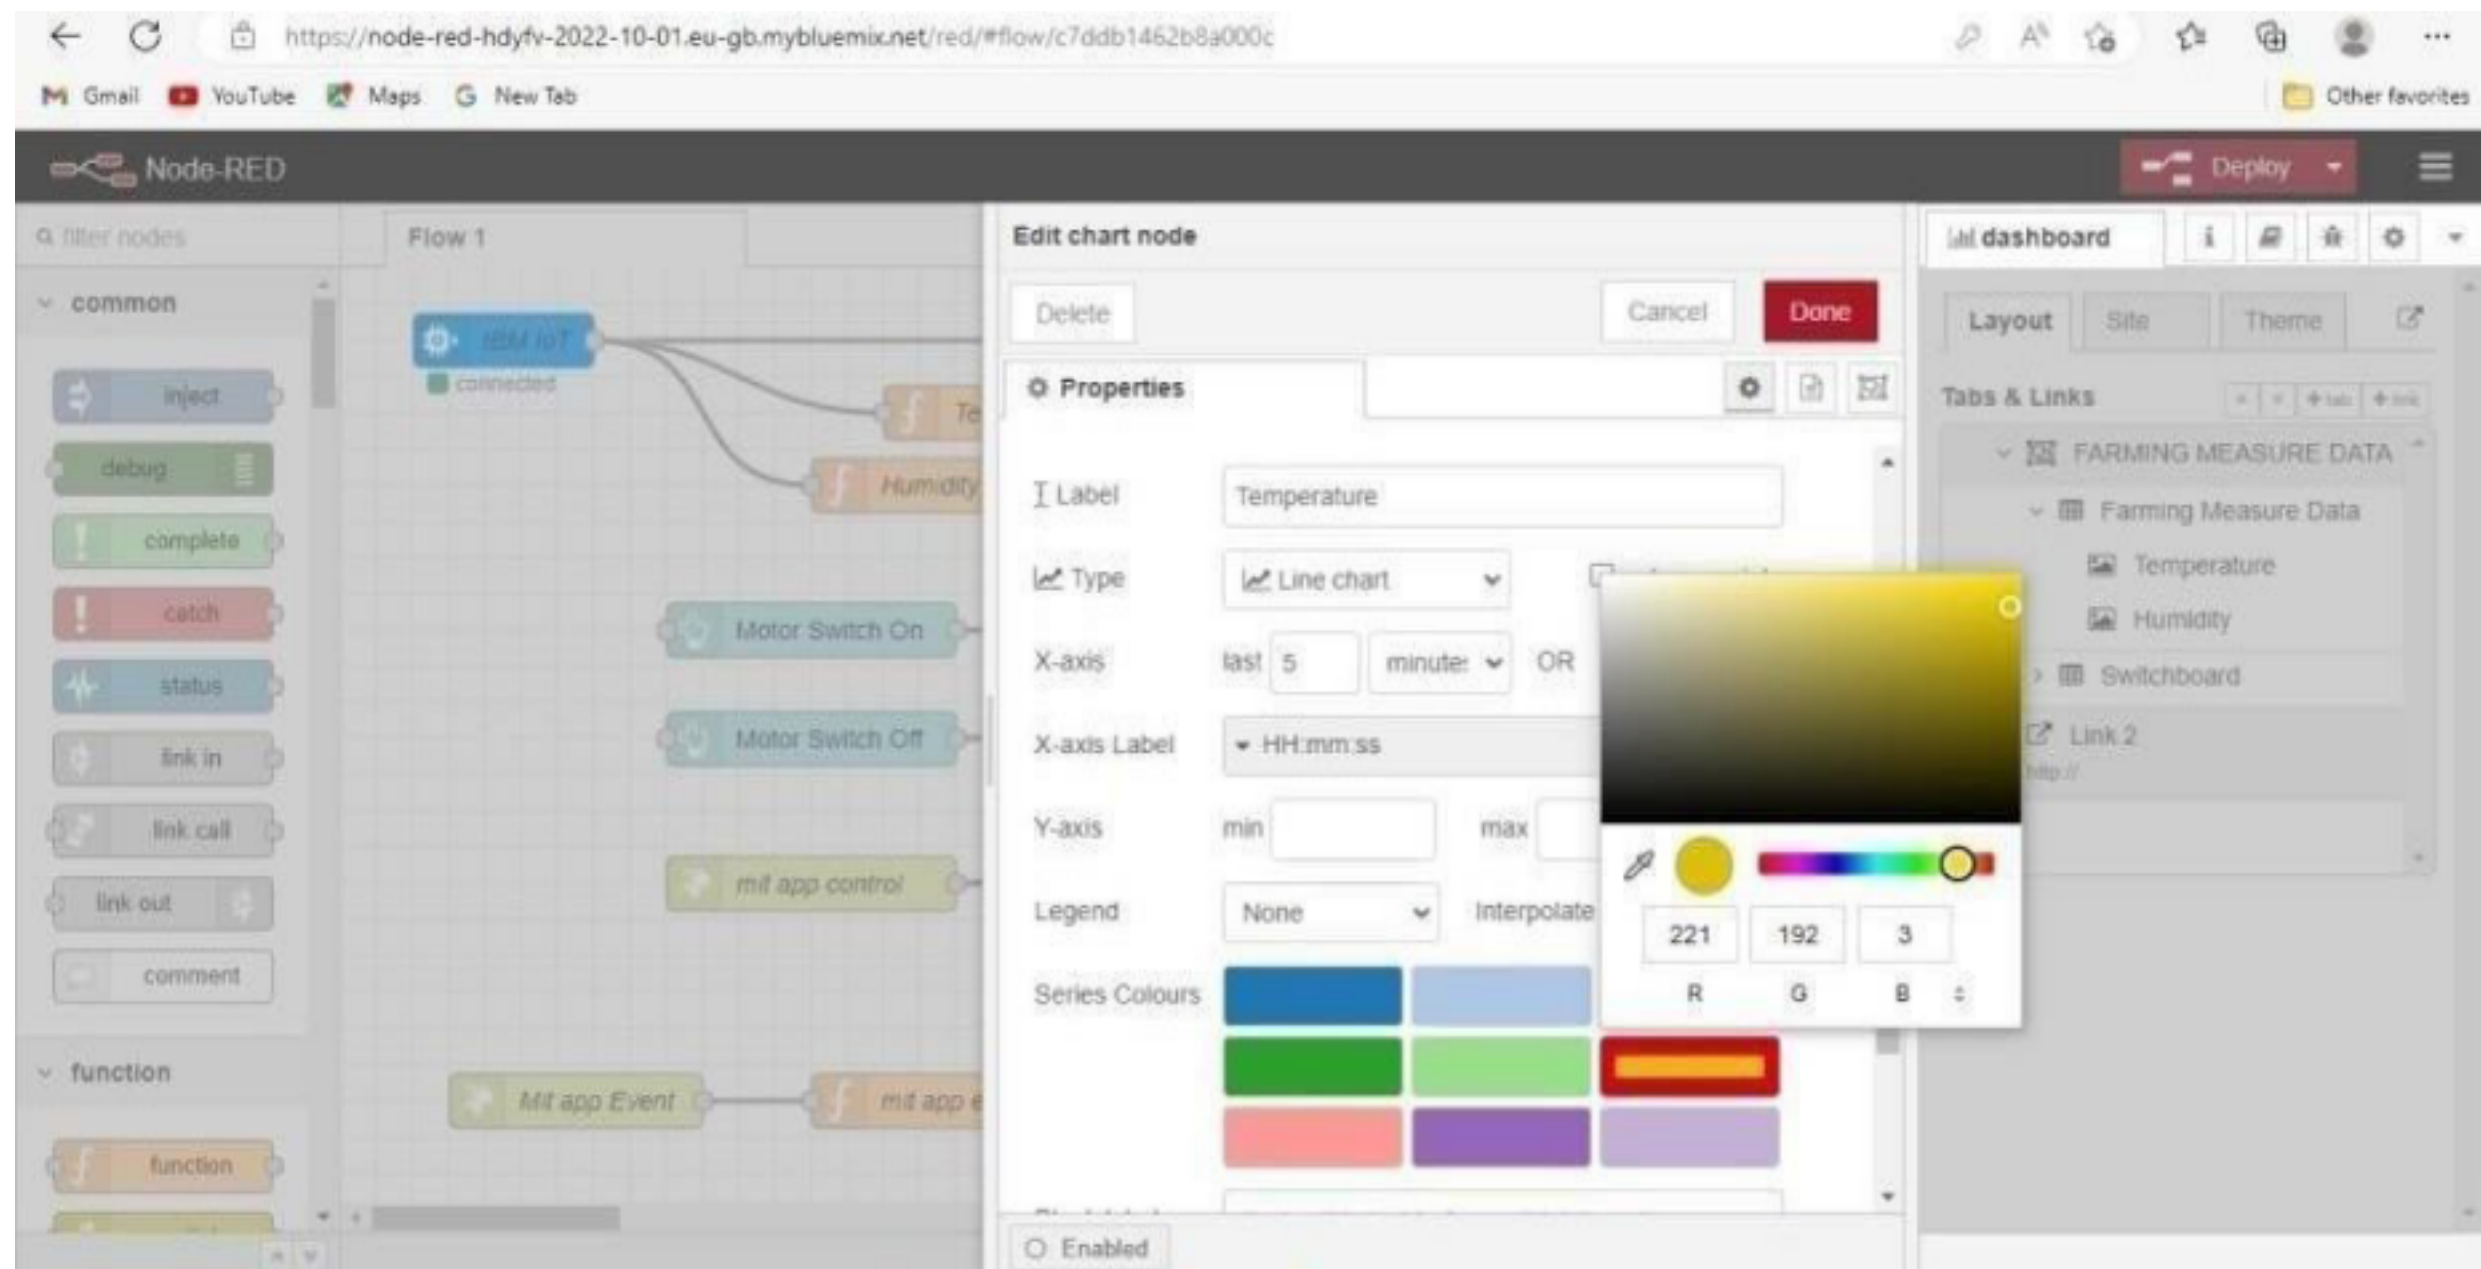

This is the Java script code I written for the function node to get Temperatureseparately.

Configuration of Node-Red to collect data from OpenWeather

The Node-Red also receive data from the OpenWeather API by HTTP GET request. An inject trigger is added to perform HTTP request for every certain interval. HTTP request node is configured with URL we saved before in section

4.4 The data we receive from OpenWeather after request is in below JSON

```
format:{"coord":{"lon":79.85,"lat":14.13},"weather":[{"id":803,"main":"Clouds","description":"brokenclouds","icon":"04n"}],"base":"stations","main":{"temp":307.59,"feels_like":305.5,"temp_min":307.59,"temp_max":307.59,"pressure":1002,"humidity":35,"sea_level":1002,"grnd_level":1000},"wind":{"speed":6.23,"deg":170}}
```

```
}  
,"clouds":{"all":68},"dt":1589991979,"sys":{"country":"IN","sunrise":158993355  
3,
```

```
"sunset":1589979720},"timezone":19800,"id":1270791,"name":"Gūdūr","cod":20 0 }
```

In order to parse the JSON string we use Java script functions and get each parameters

```
var temperature =  
msg.payload.main.temp;temperature =  
temperature-273.15;  
  
return
```

n

```
{payload : temperature.toFixed(2)};
```

In the above Java script code we take temperature parameter into a new variable and convert it from kelvin to Celsius

Then we add Gauge and text nodes to represent data visually in UI

