

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF
DIABETIC RETINOPATHY

PROJECT DOCUMENTATION

Deep Learning Fundus Image Analysis for Early Detection of Diabetic Retinopathy

Team Id:-PNT2022TMID20760

Submitted By:-

Karthick M - 412419104049

Sundarakalathi K - 412419104128

Syed Abutahir A - 412419104136

Naveen S - 412419104072

Table of Contents:-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

1. INTRODUCTION

1. Project Overview
2. Purpose

2. LITERATURE SURVEY

1. Existing problem
2. References
3. Problem Statement Definition

3. IDEATION & PROPOSED SOLUTION

1. Empathy Map Canvas
2. Ideation & Brainstorming
3. Proposed Solution
4. Problem Solution fit

4. REQUIREMENT ANALYSIS

1. Functional requirement
2. Non-Functional requirements

5. PROJECT DESIGN

1. Data Flow Diagrams
2. Solution & Technical Architecture
3. User Stories

6. PROJECT PLANNING & SCHEDULING

1. Sprint Planning & Estimation
2. Sprint Delivery Schedule
3. Reports from JIRA

7. CODING & SOLUTIONING (Explain the features added in the project along with code)

1. Feature 1
2. Feature 2
3. Database Schema (if Applicable)

8. TESTING

1. Test Cases
2. User Acceptance Testing

9. RESULTS

1. Performance Metrics

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

10. ADVANTAGES & DISADVANTAGES

11. CONCLUSION

12. FUTURE SCOPE

13. APPENDIX


Source Code

GitHub & Project Demo Link

1. INTRODUCTION :-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

The main causing of visual loss in the world is diabetic retinopathy. In the initial stages of this disease, the retinal microvasculature is affected by several abnormalities in the eye fundus such as the microaneurysms and/or dot hemorrhages, vascular hyper permeability signs, exudates, and capillary closures . Micro-aneurysm dynamics primarily increase the risk that the laser photo coagulation requires progression to the level . Diabetic retinopathy lesions are commonly accepted to be reversed and the progression of the retinopathy can only be slower during the early stages of the disease. The identification by repeated examination of patients affected of these initial lesions (mainly Micro aneurysms and small blood cells) is expected as a new possibility of improving retinopathy treatment. Floating and flashes, blurred vision, and loss of sudden vision can be common symptoms of diabetic retinopathy .

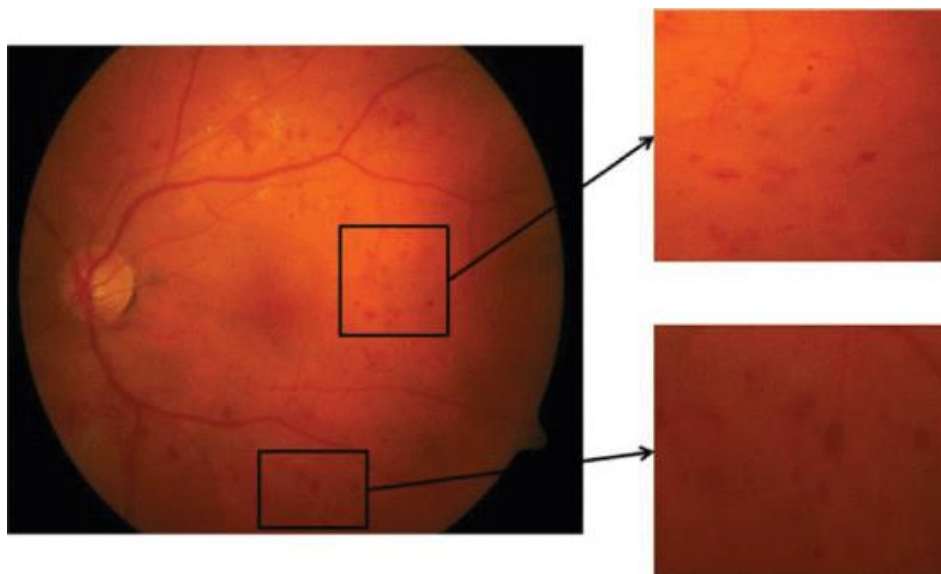

1.1 Overview :-

Project

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

Diabetic Retinopathy (DR) is a common complication of diabetes mellitus, which causes lesions on the retina that affect vision. If it is not detected early, it can lead to blindness. Unfortunately, DR is not a reversible process, and treatment only sustains vision. DR early detection and treatment can significantly reduce the risk of vision loss. The manual diagnosis process of DR retina fundus images by ophthalmologists is time, effort and cost-consuming and prone to misdiagnosis unlike computer-aided diagnosis systems.

Transfer learning has become one of the most common techniques that has achieved better performance in many areas, especially in medical image analysis and classification. We used Transfer Learning techniques like Inception V3, Resnet50, Xception V3 that are more widely used as a transfer learning method in medical image analysis and they are highly effective.

1.2 Purpose :-

The Proposed work intends to automate the detection and classification of diabetic retinopathy from retinal fundus image which is very important in ophthalmology. Most of the existing methods use handcrafted features and those are fed to the classifier for detection and classification purpose. Recently convolutional neural network (CNN) is used for this classification problem but the architecture of CNN is manually designed. In this work, a genetic algorithm based technique is proposed to automatically determine the parameters of CNN and then the network is used for classification of diabetic retinopathy. The proposed CNN model consists of a series of convolution and pooling layer used for feature extraction. Finally support vector machine (SVM) is used for classification. Hyper-parameters like number of convolution and pooling layer, number of kernel and kernel size of convolution layer are determined by using the genetic algorithm. The

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

proposed methodology is tested on publicly available Messidor dataset. The proposed method has achieved accuracy of 0.9867 and AUC of 0.9933. Experimental result shows that proposed auto-tuned CNN performs significantly better than the existing methods. Use of CNN takes away the burden of designing the image features and on the other hand genetic algorithm based methodology automates the design of CNN hyper-parameters.

2. LITERATURE SURVEY :-

ABSTRACT

EXISTING PROBLEM:-

Diabetic Retinopathy (DR) is a degenerative disease that impacts the eyes and is a consequence of Diabetes mellitus, where high blood glucose levels induce lesions on the eye retina. Diabetic Retinopathy is regarded as the leading cause of blindness for diabetic patients, especially the working-age population in developing nations. Treatment involves sustaining the patient's current grade of vision since the disease is irreversible. Early detection of Diabetic Retinopathy is crucial in order to sustain the patient's vision effectively. The main issue involved with DR detection is that the manual diagnosis process is very time, money, and effort consuming and involves an ophthalmologist's examination of eye retinal fundus images. The latter also proves to be more difficult, particularly in the early stages of the disease when disease features are less prominent in the images. Machine learning-based medical image analysis has proven competency in assessing retinal fundus images, and the utilization of deep learning algorithms has aided the early diagnosis of Diabetic Retinopathy (DR). This paper reviews and analyzes state-of-the-art deep learning methods in supervised, self-supervised, and Vision Transformer setups, proposing retinal fundus image classification and detection. For instance, referable, nonreferable, and proliferative classifications of Diabetic Retinopathy are reviewed and summarized. Moreover, the paper discusses the available retinal fundus datasets for Diabetic Retinopathy that are used for tasks such as detection, classification, and segmentation. The paper also assesses research gaps in the area of DR detection/classification and addresses various challenges that need further study and investigation.

REFERENCES:-

Survey 1 :

AUTHORS: Mohammad Z. Atwany , Abdulwahab H. Sahyoun , And Mohammad Yaqub (March 22).

TITLE: 'Deep Learning Techniques for Diabetic Retinopathy Classification: A Survey.'

METHODS: This paper reviews and analyzes state-of-the-art deep learning methods in

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

supervised, self-supervised, and Vision Transformer setups, proposing retinal fundus image classification and detection. For instance, referable, nonreferable, and proliferative classifications of Diabetic Retinopathy are reviewed and summarized. Moreover, the paper discusses the available retinal fundus datasets for Diabetic Retinopathy that are used for tasks such as detection, classification, and segmentation

Survey 2 :

AUTHORS: Mohamad Hazim Johari , Hasliza Abu Hassan , Ahmad Ihsan Mohd Yassin (July 2018).

TITLE: ‘Early Detection of Diabetic Retinopathy by Using Deep Learning Neural Network.’

METHODS: This project presents a method to detect diabetic retinopathy on the fundus images by using deep learning neural network. Convolution Neural Network (CNN) has been used in the project to ease the process of neural learning. The data set used were retrieved from MESSIDOR database and it contains 1200 pieces of fundus images. The images were filtered based on the project needed. There were 580 pieces of images types has been used after filtered and those pictures were divided into 2, which is Exudates images and Normal images. On the training and testing session, the 580 mixed of exudates and normal fundus images were divided into 2 sets which is training set and testing set. The result of the training and testing set were merged into a confusion matrix. The result for this project shows that the accuracy of the CNN for training and testing set was 99.3% and 88.3% respectively.

Survey 3 :

AUTHOR: Recep Emre Hacısoftaoglu (Dec 2019).

TITLE: ‘Deep Learning Frameworks For Diabetic Retinopathy Detection Using Smartphone-Based Retinal Imaging Systems.’

METHODS: In this thesis, we first investigate the smartphone-based portable ophthalmoscope systems available on the market and compare their Field of View and image quality to determine if they are suitable for Diabetic Retinopathy detection during a general health screening. Then, we propose automatic Diabetic Retinopathy detection algorithms for smartphone-based retinal images using deep learning frameworks, AlexNet and GoogLeNet. To test our proposed methods, we generate smartphone-based synthetic retina images by simulating the different Field of View with masking the original image around the optic disk and cropping it.

Survey 4 :

AUTHORS: Lei Lu , Ying Jiang , Ravindran Jaganathan , and Yanli Hao. (Jan 2019). **TITLE:** ‘Current Advances in Pharmacotherapy and Technology for Diabetic Retinopathy: A Systematic Review.’

METHODS: Direct injections or intra virtual antiinflammatory and anti angiogenesis agents are widely used pharmacotherapy to effectively treat DR and diabetic macular edema (DME). However, their effectiveness is short term, and the delivery system is often associated with adverse effects, such as cataract and increased intraocular pressure. Further, systemic agents and plants-based drugs have also provided promising treatment in the progression of DR. Recently,

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

advancements in pluripotent stem cells technology enable restoration of retinal functionalities after transplantation of these cells into animals with retinal degeneration. This review paper summarizes the developments in the current and potential pharmacotherapy and therapeutic technology of DR. Literature search was done on online databases, PubMed, Google Scholar, clinitrials.gov, and browsing through individual ophthalmology journals and leading pharmaceutical company websites.

2.3.PROBLEM STATEMENT DEFINITION:-

Diabetic Retinopathy (DR) is common complication of diabetes mellitus, which will cause lesions on the retina that affects vision. If it is not detected early, it can lead to blindness. Unfortunately, DR is not a reversible proves, and the given treatment will only give us a sustain vision. DR early detection and treatment can significantly reduce the risk of vision loss.

WHAT ? In contrast to computer-aided diagnosis systems, the manual / human-based diagnosis process of DR retina fundus images by doctors (ophthalmologists) is time-consuming, labor-intensive, expensive, and prone to error.

WHY ? Diabetes-related retinopathy is brought on by high blood sugar levels harming the eye's iris. which could result in a permanent loss of vision.

WHEN ? Early on, the DR has no symptoms, but later on, the vessels may start to leak a tiny amount of blood into your retina..

WHERE ? Blurred vision, Distorted vision will occur.

WHO? It is common among the Diabetic patients.

HOW ? The manual early detection of this DR is a challenging task.


OBJECTIVES :

The primary goal is to identify diabetic retinopathy by processing retinal images. Transfer learning has arose as one of the most popular techniques that has enhanced performance in many areas, notably in the analysis and classification of medical images. We used transfer learning techniques that are more frequently used in medical image analysis and have been extremely effective, including such Inception V3, Resnet50, and Xception V3.


DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF
DIABETIC RETINOPATHY

3.IDEATION PHASE & PROPOSED SOLUTION :

3.1 Empathy Map Canvas :

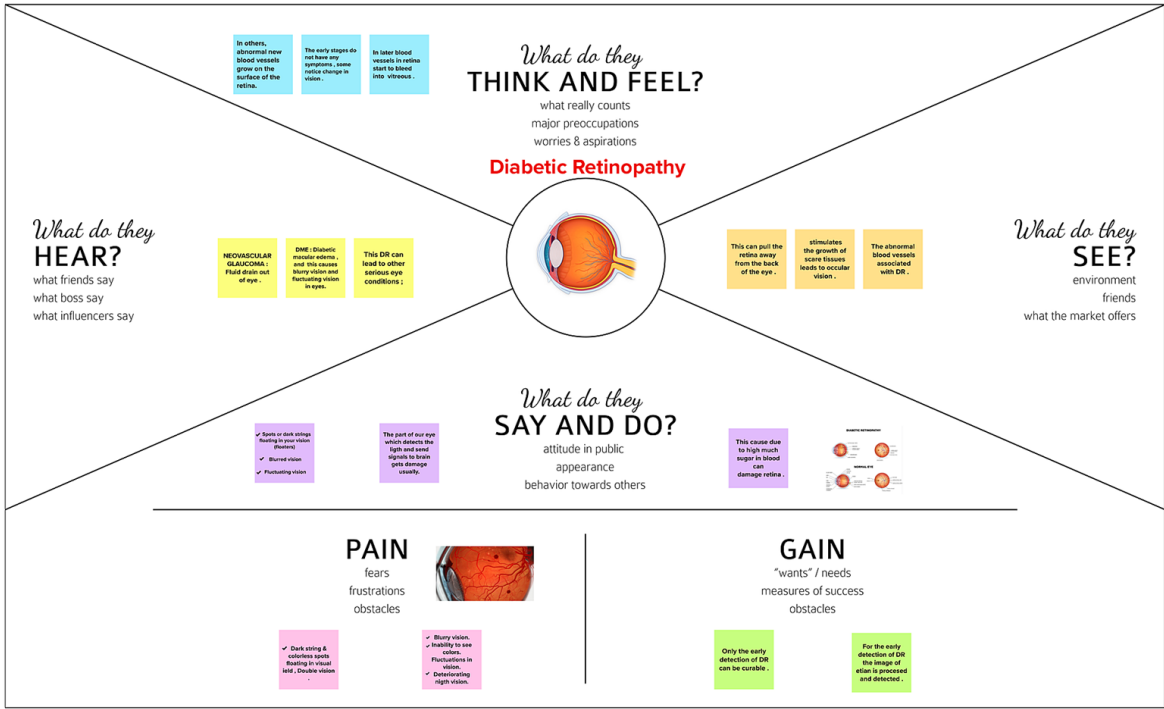

3.2 IDEATION AND BRAINSTORMING:-

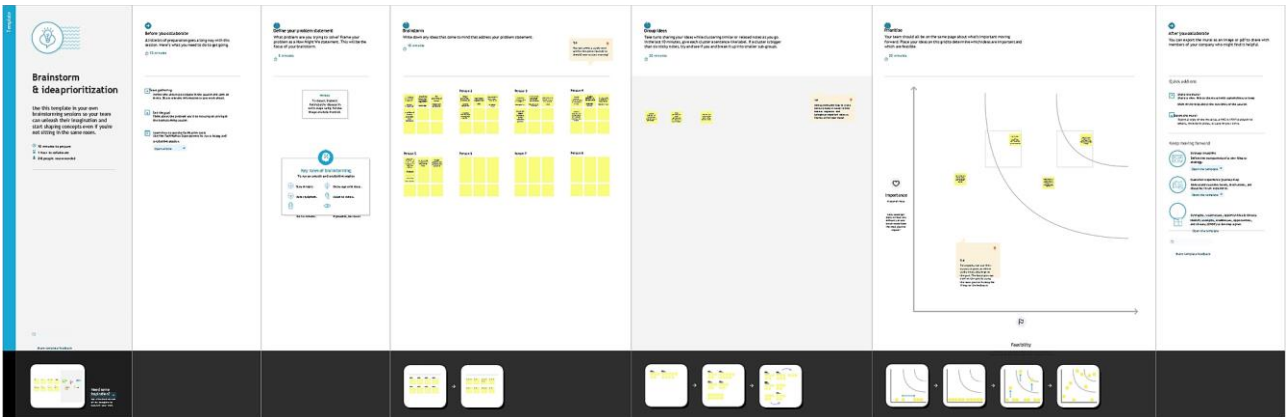

3.3 PROPOSED SOLUTION:-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| S. No. | Parameter | Description |
|--------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | Problem Statement (Problem to be solved) | <p>Analyzing a fundus image can help identify diabetic retinal disease early.</p> <ul style="list-style-type: none"> Analyze the level of DR To detect whether DR is present or not |
| 2. | Idea / Solution description | <ol style="list-style-type: none"> The goal is to identify diabetic retinopathy from the fundus image dataset as soon as possible, allowing individuals to proceed with the necessary treatments and avoid temporary or permanent vision loss. We will create a deep learning model (CNN) with high accuracy to detect DR and protect people at risk of losing their vision because there is no complete cure for this form of DR. |
| 3. | Novelty / Uniqueness | <p>On the basis of the level of DR performed during analysis, a class-based classifier will be provided. As part of the work, we'll also test out a transfer learning strategy that has the potential to be very successful and lead to improved performance.</p> |
| 4. | Social Impact / Customer Satisfaction | <p>People who lose their vision could actually benefit from this and live. Early analysis and detection of DR is crucial for minimizing social impact because it can help patients keep their vision.</p> |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| | | |
|----|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5. | Business Model (Revenue Model) | <ul style="list-style-type: none">▪ Doctors can analyze and identify DR using this model, which functions as a service model for public hospitals and a business model for private hospitals.▪ Even exporting it to other nations who require it can work as a business strategy. |
| 6. | Scalability of the Solution | There are increasingly more approaches to scale the solution so that the model is simple to combine with emerging technologies. |

3.4 PROPOSED SOLUTION FIT

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

Project Title: Deep Learning Fundus Image Analysis
For early detection of Diabetic Retinopathy.

Project Design Phase-I = Problem-Solution Fit Template
Project ID : IBM-Project-18407-1659684768

| | | | | |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Focus on J&P, tap into BE, understand RC | <div>1. CUSTOMER</div> <div>For diabetics, early detection is crucial because diabetic retinopathy is permanent. The patient's fundus image can be used to identify diabetic retinopathy and be kept in the database. This serves a greater purpose than a manual examination.</div> | <div>6. CUSTOMER</div> <div>Because diabetic retinopathy does not have any obvious symptoms, people are unaware they have the condition. Many people are unaware of diabetic retinopathy and its harmful effects.</div> | <div>5. AVAILABLE</div> <div>Proliferative diabetic retinopathy can be treated with laser therapy, and some forms of maculopathy can be stabilized with laser therapy as well. eye injections to cure your sight-threatening severe maculopathy.</div> | Focus on J&P, tap into BE, understand RC |
| | <div>2. JOBS-TO-BE-DONE / PROBLEMS</div> <div>The issue is that it is impossible to treat severe diabetic retinopathy. Furthermore, the severity of diabetic retinopathy causes serious eye conditions that might lead to blindness. Therefore, if the patient has diabetes, early identification is crucial.</div> | <div>9. PROBLEM ROOT CAUSE</div> <div>The retina, a layer of light-sensitive tissue at the rear of the inner eye, experiences alterations in its blood vessels as a result of diabetes. The blood vessels in the retina of some patients with diabetic retinopathy may enlarge and leak fluid. Others experience the aberrant growth of new blood vessels on the retinal surface.</div> | <div>7. BEHAVIOUR</div> <div>Using the pictures from the fundus, this model aids in the early diagnosis of diabetic retinopathy. The manual examination takes longer than this. Additionally, accuracy is higher compared to other methods.</div> | |
| Focus on J&P, tap into BE, understand RC | <div>3. TRIGGERS</div> <div>Patients with diabetic retinopathy experience these triggers: You may notice spots or black strings in your vision (floaters) distorted vision. unstable eyesight. Visionary voids or patches of darkness. loss of vision</div> | <div>10. YOUR SOLUTION</div> <div>Our approach uses a deep learning model with fundus images to identify diabetic retinopathy severity in patients and to make an appropriate diagnosis following an early detection.</div> | <div>8.CHANNELS OF BEHAVIOUR</div> <div>Patients with diabetes must have their eyes examined at regular intervals. Only then may retinopathy be identified early and a correct diagnosis made.</div> | Focus on J&P, tap into BE, understand RC |
| | <div>4. EMOTIONS: BEFORE / AFTER</div> <div>Before: Fear and anxiety are examples of negative emotional reactions. concerns with self-perception, guilt, rage, insecurity, and vulnerability. After: Patients feel more hopeful as a result of early discovery and diagnosis.</div> | | | |

4.REQUIREMENT ANALYSIS:-

Functional Requirements:

Following are the functional requirements of the proposed solution.

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| FR No. | Functional Requirement (Epic) | Sub Requirement (Story/ Sub-Task) |
|--------|-------------------------------|---------------------------------------------------------------------------------------------------------------|
| FR-1 | User Registration | Using a phone number to registersigning up with Gmail |
| FR-2 | User Confirmation | Reassurance via OTP mailconfirmation |
| FR-3 | Describe what the productdoes | Before you notice any changes in your vision, our projectcan identify earlyretinal changes. |
| FR-4 | Focus on user requirements | Reduce the chance of blindness and vision loss indiabetes patients who have retinal complications. |
| FR-5 | Usually defined by the user | A patient's fundusimage was obtained. |
| FR-6 | Define productfeatures | A cutting-edge technique for eye screening that allowsfor the earlydetection of diseases related to the eyes. |

Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.


| FR No. | Non-Functional Requirement | Description |
|--------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| NFR-1 | Usability | Confirming that a piece of software can successfullycarry out one or more specific tasks. |
| NFR-2 | Security | Only the system administrator may grantpermission. |
| NFR-3 | Reliability | Even though the system has the ability to roll back to its original state if a system update fails or thereare bugs in the code. |
| NFR-4 | Performance | The loadingof an image just takes two seconds. The model's performance is intended to provide patients with quick results. |
| NFR-5 | Availability | The gadget facilitates access, cost, and quality ofhealthcare. |
| NFR-6 | Scalability | Even when several users are utilising the productsimultaneously, it mustremain reliable. |

5.PROJECT DESIGN:-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

5.1 DATA FLOW DIAGRAM:-

Data Flow Diagrams:

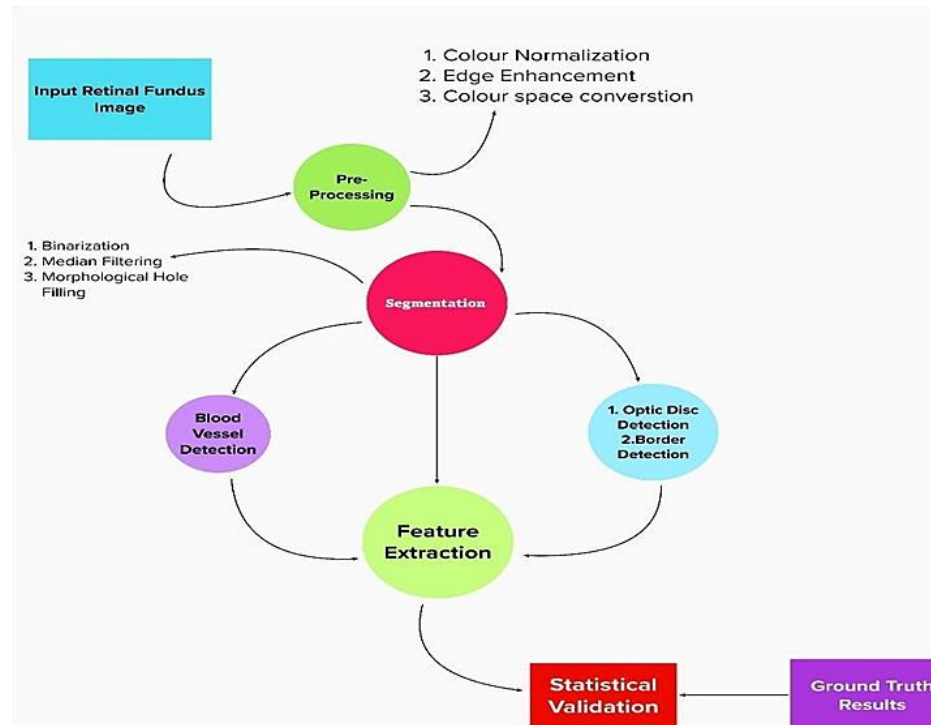

The classic visual representation of how information moves through a system is a data flow diagram (DFD). The ideal amount of the system needs can be graphically represented by a tidy and understandable DFD. It demonstrates how information enters and exits the system, what modifies the data, and where information is kept.

- Diabetic retinopathy disease is frequently detected and examined using retinal fundus. Pre-processing of raw retinal fundus images is performed using extraction of the green channel, histogram equalization, image enhancement, and resizing techniques.
- One of the main tasks in retinal image processing is the segmentation of the retinal vasculature from images of the eye fundus.
- By omitting the optic disc (OD) region of the retina, the computer-assisted automatic recognition and segmentation of blood vessels.
- Mathematical binary morphological techniques are used to identify the retinal blood vessels.

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

- The term "feature extraction from the fundus images for the diagnosis of Diabetic Retinopathy" refers to a sophisticated eye screening technique that allows for the early detection of eye-related disorders.

5.2 TECHNOLOGY ARCHITECTURE:-

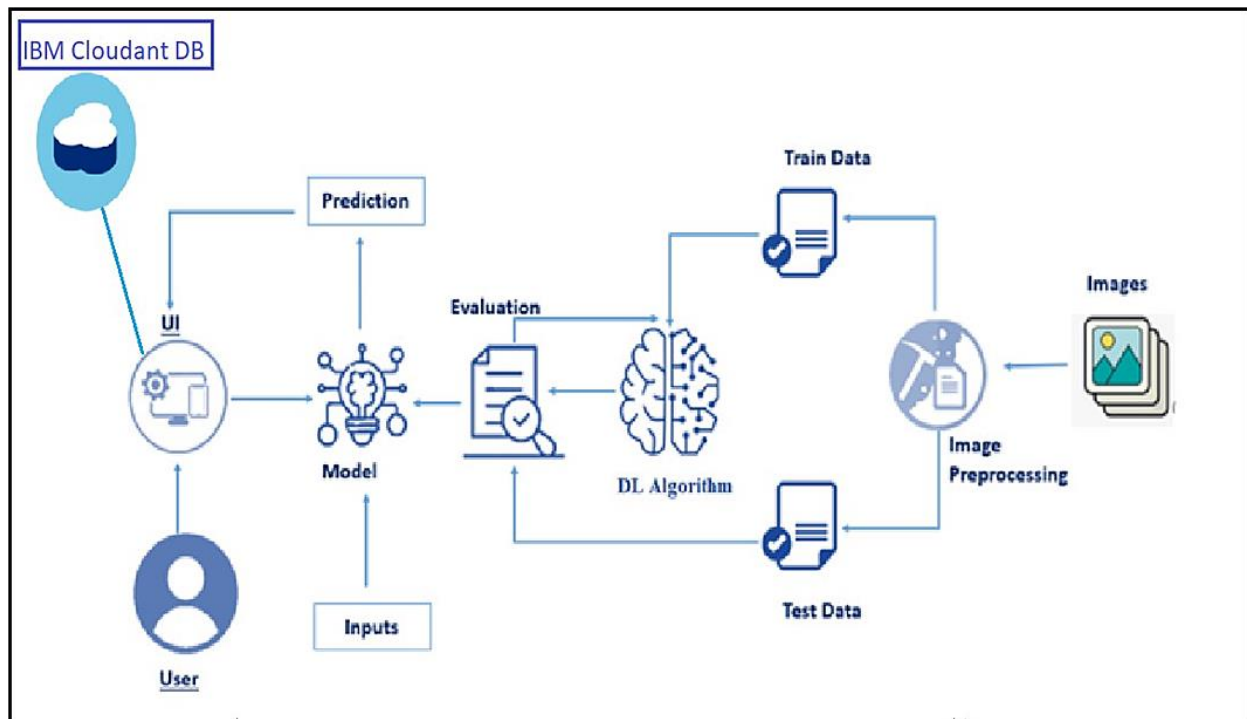


Table-1:Components& Technologies:

| | | | |
|----|---------------------|-----------------------------------|-------------------------------|
| 1. | User Interface | Web UI | HTML, CSS, JavaScript, Python |
| 2. | Application logic-1 | Image Preprocessing | Keras, Tensorflow, Numpy |
| 3. | Application logic-2 | CNN Model | Keras, Tensorflow, Numpy |
| 4. | Application logic-3 | Web UI Application | Flask |
| 5. | Database | DR Images (Jpeg, Png, Jpg, Etc..) | Uploads Folder |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| | | | |
|----|-------------------------|--------------------------------------------------|------------------------------------------------|
| 6. | File storage | File Storage Requirements (Only If Necessary) | IBM Block Storage, GoogleDrive |
| 7. | External Api | Keras | Image Processing API |
| 8. | Deep Learning Model | Inception V3 Architecture | Pre-Trained Convolution NeuralNetwork Model |
| 9. | Infrastructure (Server) | Application Deployment on Webserver | Flask-A PythonWSGI HTTP Server. |

Table-2:Application characteristics:

| S.No | Characteristics | Description | Technology |
|------|--------------------------|-----------------------------------------|--------------------------------------------|
| 1. | Open-Source Frameworks | Flask | Flask Frameworks |
| 2. | Security Implementations | CSRF Protection,Secure Flag For Cookies | Flask-WTF, Session Cookie Secure |
| 3. | Scalable Architecture | Micro-Services | Micro Web Application FrameworkBy Flask |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

5.3 USER STORIES:-

| User Type | Functional Requirement (Epic) | User Story Number | User Story / Task | Acceptance criteria | Priority | Release |
|--------------------------------|-------------------------------|-------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------|----------|
| Patient (Webuser) | Registration | USN-1 | I can register as a user on the website with either an email address or a phone number and password. | I can create my account. | High | Sprint-3 |
| | Login | USN-2 | With the provided Login credentials, I can access the website as a user. | I can log in and access my account. | High | Sprint-3 |
| | Upload image | USN-3 | I can post my data as a user in formats like pdf and doc. | I can upload my data. | Medium | Sprint-3 |
| Administration (Web developer) | Admin Login | USN-4 | I can log in to the website as the admin and analyze the user information. | I can log in and analyze the user data. | High | Sprint-3 |
| | Data collection | USN-5 | I can gather the dataset for the DR from the source as an admin. | I can collect the dataset. | Low | Sprint-1 |
| | Create model | USN-6 | I can build the model and train it using the dataset as an administrator to make predictions. | I can create and train the model. | High | Sprint-1 |
| | Test the model | USN-7 | I can evaluate the model's predictive abilities as an admin. | I can test the model. | High | Sprint-2 |
| Patient (Web user) | Diagnosis | USN-8 | I can access the application's diagnosis results as a user and continue with treatments.. | He/she can get the results and continue the treatment. | High | Sprint-2 |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

6.PROJECT PLANNING AND SCHEDULING:-

6.1 SPRINT PLANNING AND ESTIMATION:-

| Sprint | Functional Requirement (Epic) | UserStory Number | User Story/ Task | Story Points | Priority | Team Members |
|-----------|-------------------------------|------------------|------------------------------------------------------------------------------------------------------------------------------|--------------|----------|------------------------------------|
| Sprint -1 | Registration | USN-1 | As a user, I can register for the application by entering my email or phone number and password, and confirming my password. | 10 | High | Naveen S |
| Sprint -1 | Dashboard | USN-2 | As a user, I will Redirect to the dashboard after registration which shows the importance of DR. | 10 | Medium | Sundarakalathi K & Syed Abuthair A |
| Sprint -2 | Login | USN-3 | As a user, I can log into the application by entering Login credentials. | 5 | High | Naveen S |
| Sprint -2 | Upload Images | USN-4 | As a user, I should be able to upload the image of eyeRetina. | 10 | High | KarthickM |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| | | | | | | |
|----------|--------------------------|--------|-------------------------------------------------------------------------------------------------------------------------|----|--------|------------------|
| Sprint-2 | Dashboard | USN-5 | As a user, basedon my requirement I cannavigate through the dashboard. | 5 | Medium | Syed Abuthair A |
| Sprint-3 | Train the model | Task 1 | As a developer, the dataset will be uploadedand trained by developed algorithm. | 20 | High | Sundarakalathi K |
| Sprint-4 | Testing & Evaluation | Task 2 | As a developer, we tested the trained model using the provided dataset andmodel will be evaluated for accurate results. | 10 | High | Naveen S |
| Sprint-4 | Display predicted result | USN-6 | As a user, I can viewthe predicted resultinthe dashboard. | 10 | High | KarthickM |

| Sprint | Total story point | Duration | Sprint Start Date | Sprint End Date (Planned) | Story Points Completed (as on Planned End Date) | Sprint Release Date(Actual) |
|---------------|--------------------------|-----------------|--------------------------|----------------------------------|--------------------------------------------------------|------------------------------------|
| Sprint-1 | 20 | 6 Days | 24 Oct 2022 | 29 Oct 2022 | 20 | 29 Oct 2022 |
| Sprint-2 | 20 | 6 Days | 31 Oct 2022 | 05 Nov 2022 | 20 | 05 Nov 2022 |
| Sprint-3 | 20 | 6 Days | 07 Nov 2022 | 12 Nov 2022 | 20 | 12 Nov 2022 |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| | | | | | | |
|----------|----|--------|-------------|-------------|----|-------------|
| Sprint-4 | 20 | 6 Days | 14 Nov 2022 | 19 Nov 2022 | 20 | 19 Nov 2022 |
|----------|----|--------|-------------|-------------|----|-------------|

Velocity:


Imagine we have a 10-daysprint duration, and the velocityof the team is 20 (points per sprint). Let's calculate the team'saverage velocity (AV)periteration unit (storypoints per day).

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

$$AV=20/6=3.33\text{points per day.}$$

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY



6.2 Burn Down Chart & JIRA :

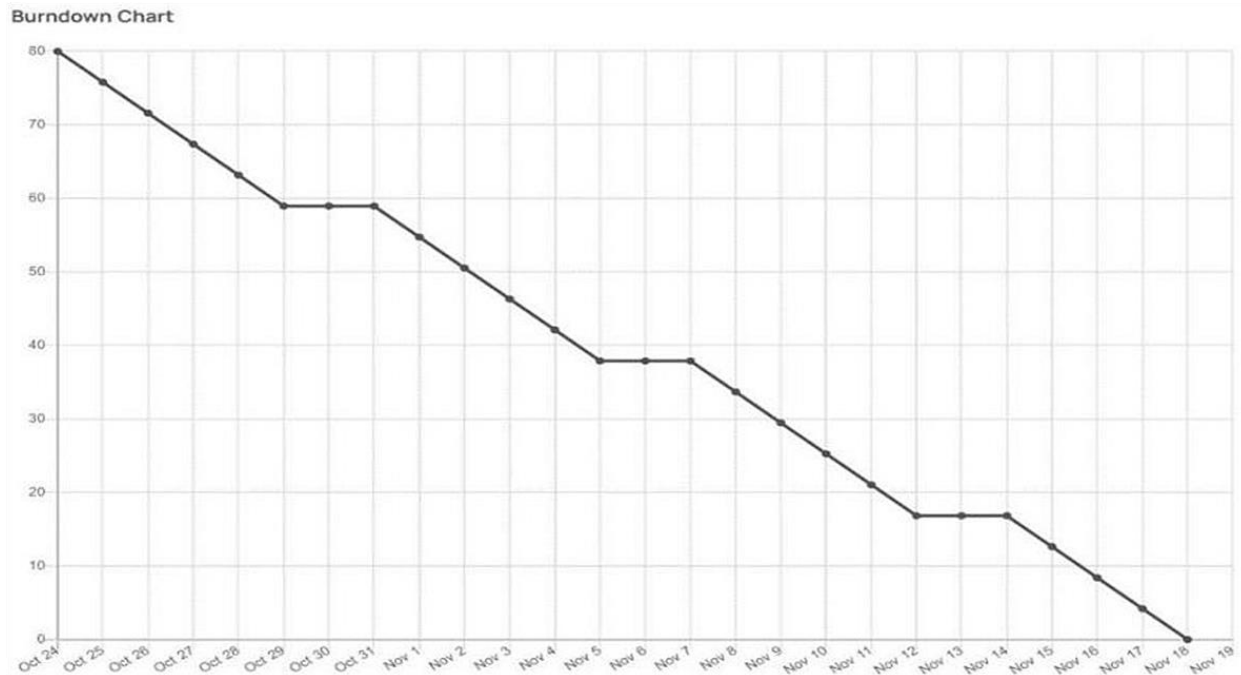

A burn down chart plots the amount of work remaining to perform against the amount of time. In agile software development approaches like Scrum, it is frequently employed. Burn down charts, however, can be used for any project that makes observable progress over time.

JIRA SCREENSHOTS:-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

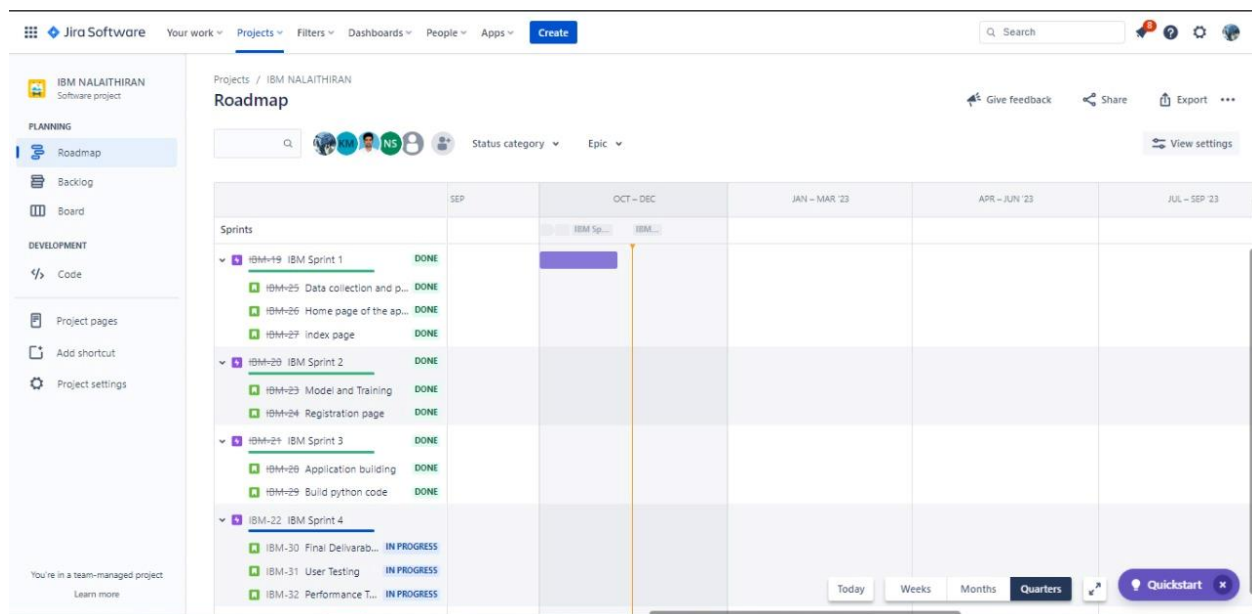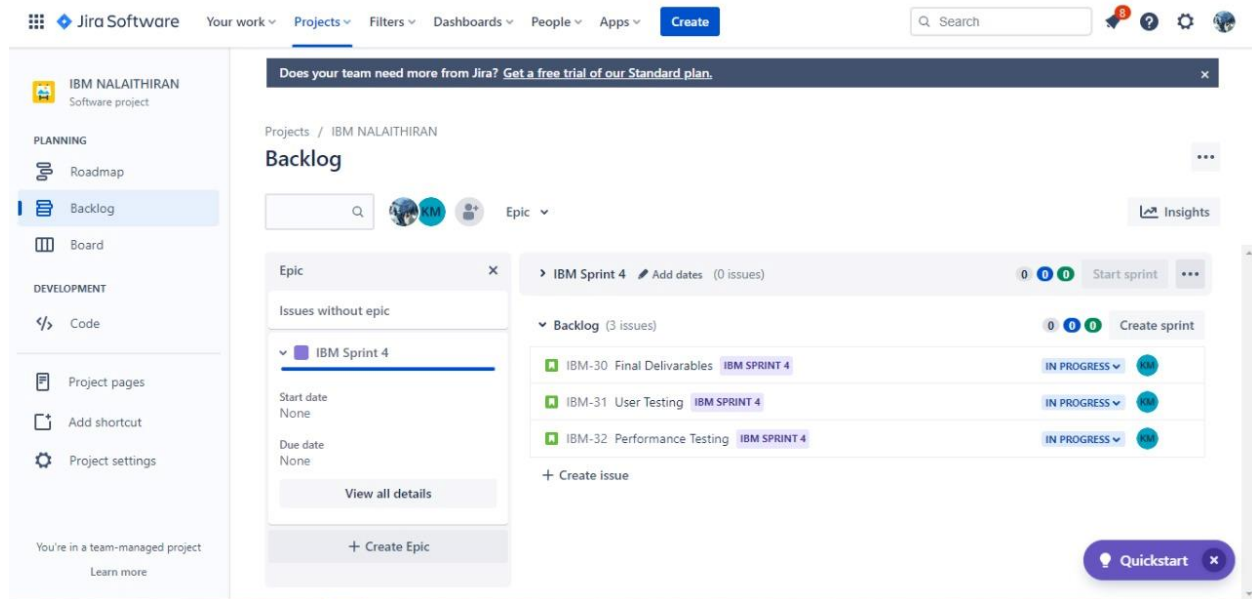

JIRA Folder is created to show the Scrum methodologies and Burn Down chart progress.

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

7.CODING AND SOLUTIONING:-

Feature 1:-

We have developed a website which authenticates users and help them upload and check the seriousness of the diabetics.

Feature 2:-

We have developed a multilayer deep convolutional nueral network that classifies the user image of a eye to which extense has the disease diabetics has been affected.The model will classify the images into 5 categories of diabetics and report them on asking for prediction. We have also developed a messaging service for recieiving message for the type of diabetics.

8.TESTING:-

8.1 TEST CASES:-

8.2 USER ACCEPTANCE TESTING:-

1. Purpose of Document:-

This document serves as a quick reference for the Deep Learning Fundus Image Analysis for Early Detection of Diabetic Retinopathy project's test coverage and open issues as of the project's release for user acceptance testing.

2. Defect Analysis:-

This shows how many bugs were fixed or closed at each severity level and how they were fixed.

| Resolution | Severity 1 | Severity 2 | Severity 3 | Severity4 | Subtotal |
|----------------|---------------|---------------|---------------|-----------|----------|
| By Design | 5 | 4 | 2 | 3 | 14 |
| Duplicate | 1 | 0 | 3 | 0 | 4 |
| External | 2 | 3 | 0 | 1 | 6 |
| Fixed | 9 | 2 | 4 | 15 | 30 |
| Not Reproduced | 0 | 0 | 1 | 0 | 1 |
| Skipped | 0 | 0 | 1 | 1 | 2 |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

| | | | | | |
|----------|----|----|----|----|----|
| Won'tFix | 0 | 5 | 2 | 1 | 8 |
| Totals | 17 | 14 | 13 | 21 | 65 |

3.Test-CaseAnalysis

This report shows the number of test cases that have passed, failed,and untested.



| Section | TotalCases | Not Tested | Fail | Pass |
|--------------------|------------|------------|------|------|
| PrintEngine | 9 | 0 | 0 | 9 |
| ClientApplication | 45 | 0 | 0 | 45 |
| Security | 2 | 0 | 0 | 2 |
| Out-sourceShipping | 3 | 0 | 0 | 3 |
| ExceptionReporting | 9 | 0 | 0 | 9 |
| FinalReportOutput | 4 | 0 | 0 | 4 |
| VersionControl | 2 | 0 | 0 | 2 |

9.RESULTS:-

9.1 Performance Metrics:-

Model Performance Testing:

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY
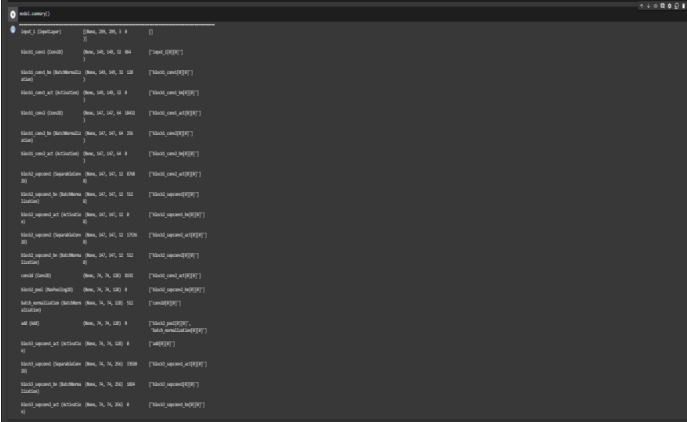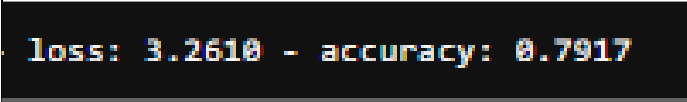
| S.NO | Parameter | Values | Screenshot |
|------|--------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 1. | Model Summary | Total params: 21,885,485 Trainable params: 1,024,005 Non-trainable params: 20,861,480 |  |
| 2. | Accuracy | Training Accuracy – 0.7917 Validation Accuracy – loss 3.2610 |  |
| 3. | Confidence Score(Only Yolo Projects) | Class Detected - Confidence Score - | -- -- -- -- |

Project team shall fill the following information in model performance testing template.

10.ADVANTAGES AND DISADVANTAGES:-

10.1 ADVANTAGES:-

There are several advantages of using deep learning for fundus image analysis for early detection of diabetic retinopathy.

First, deep learning is well-suited for image analysis tasks. This is because deep learning algorithms can automatically learn features from images, which is essential for accurate image analysis.

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

Second, deep learning is efficient at handling large amounts of data. This is important for medical image analysis, as medical images are often very large.

Third, deep learning is scalable. This means that it can be used to train models on very large datasets, which is important for medical image analysis tasks where data is often limited.

Fourth, deep learning is able to learn from data with little supervision. This is important for medical image analysis, as often there is limited labeled data available.

Finally, deep learning is robust. This means that it is less likely to overfit to the data, which is important for medical image analysis where data is often limited.

10.2 DISADVANTAGES:-

There are several disadvantages of deep learning for early detection of diabetic retinopathy. One disadvantage is that deep learning requires a large amount of data to train the models. This can be a challenge for researchers who do not have access to a large dataset. Another challenge is that deep learning models can be very complex, which can make them difficult to interpret. Finally, deep learning models can be computationally intensive, which can make them difficult to deploy in resource-limited settings.

11.CONCLUSION:-

Diabetic retinopathy (DR) is a leading cause of blindness in the United States. Early detection and treatment of DR is critical to preventing vision loss. However, DR is often asymptomatic in its early stages, making it difficult to detect.

Deep learning (DL) is a type of artificial intelligence that can be used to automatically detect patterns in data. DL has been shown to be effective for detecting DR in images of the retina.

In this study, a DL algorithm was used to automatically detect DR in fundus images. The algorithm was able to accurately detect DR in early stages, before it is symptomatic. This could potentially lead to earlier diagnosis and treatment of DR, which could help to prevent vision loss.

12.FUTURE SCOPE:-

There is a great potential for deep learning in fundus image analysis for early detection of diabetic retinopathy. However, there are a few challenges that need to be addressed. First, the current data sets are small and lack diversity. Second, the images are often low quality and need to be pre-processed before they can be used for deep learning. Third, the ground truth labels for the images are often not available. Finally, the current deep learning models are not able to generalize well to real-world data.

13.APPENDIX:-

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

app.py:-

```
import numpy as np
import os
from tensorflow.keras.models import load_model
from tensorflow.keras.preprocessing import image
from tensorflow.keras.applications.inception_v3 import preprocess_input
from flask import Flask, request, flash, render_template, redirect, url_for
from cloudant.client import Cloudant
from twilio.rest import Client
model = load_model(r"Updated-xception-diabetic-retinopathy.h5")
app = Flask(__name__)
app.secret_key="abc"
app.config['UPLOAD_FOLDER'] = "User_Images"
# Authenticate using an IAM API key

client = Cloudant.iam('08bcbaf0-260b-48e0-abdb-08db348afcf2-bluemix',
                      'yhZfUubpS3vS1vEKZSS37teD6IAUi8oLynOCQLIwnQsa', connect=True)
# Create a database using an initialized client
my_database = client.create_database('my_database')
if my_database.exists():
    print("Database '{0}' successfully created.".format('my_db'))
# default home page or route

user = ""

@app.route('/')
def index():
    return render_template('index.html', pred="Login", vis="visible")

@ app.route('/index')
def home():
    return render_template("index.html", pred="Login", vis="visible")

# registration page
@ app.route('/register',methods=["GET","POST"])
def register():
    if request.method == "POST":
        name = request.form.get("name")
        mail = request.form.get("emailid")
        mobile = request.form.get("num")
        pswd = request.form.get("pass")
        data = {
            'name': name,
            'mail': mail,
            'mobile': mobile,
            'psw': pswd
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
}
print(data)
query = {'mail': {'$eq': data['mail']}}
docs = my_database.get_query_result(query)
print(docs)
print(len(docs.all()))
if (len(docs.all()) == 0):
    url = my_database.create_document(data)
    return render_template("register.html", pred=" Registration Successful , please login using your details ")
else:
    return render_template('register.html', pred=" You are already a member , please login using your details ")
else:
    return render_template('register.html')

@app.route('/login', methods=['GET','POST'])
def login():
    if request.method == "GET":
        user = request.args.get('mail')
        passw = request.args.get('pass')
        print(user, passw)
        query = {'mail': {'$eq': user}}
        docs = my_database.get_query_result(query)
        print(docs)
        print(len(docs.all()))
        if (len(docs.all()) == 0):
            return render_template('login.html', pred="")
        else:
            if ((user == docs[0][0]['mail'] and passw == docs[0][0]['psw'])):
                flash("Logged in as " + str(user))
                return render_template('index.html', pred="Logged in as "+str(user), vis ="hidden", vis2="visible")
            else:
                return render_template('login.html', pred="The password is wrong.")
        else:
            return render_template('login.html')

@app.route('/logout')
def logout():
    return render_template('logout.html')

@app.route("/predict",methods=["GET", "POST"])
def predict():
    if request.method == "POST":
        f = request.files['file']
        # getting the current path i.e where app.py is present
        basepath = os.path.dirname(__file__)
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
#print ( " current path " , basepath )
# from anywhere in the system we can give image but we want that
filepath = os.path.join(str(basepath), 'User_Images', str(f.filename))
#print ( " upload folder is " , filepath )
f.save(filepath)
img = image.load_img(filepath, target_size=(299, 299))
x = image.img_to_array(img) # ing to array
x = np.expand_dims(x, axis=0) # used for adding one more dimension
#print ( x )
img_data = preprocess_input(x)
prediction = np.argmax(model.predict(img_data), axis=1)
index = [ ' No Diabetic Retinopathy ', ' Mild NPDR ',
          ' Moderate NPDR ', ' Severe NPDR ', ' Proliferative DR ' ]
result = str(index[prediction[0]])
print(result)
account_sid = 'AC8e0f2f5263d71c8f630a6486779cf08b'
auth_token = '30b489873afb3c47340070eabd6bfb15'

client = Client(account_sid, auth_token)

''' Change the value of 'from' with the number
received from Twilio and the value of 'to'
with the number in which you want to send message.'''
message = client.messages.create(
    from_='+16075363206',
    body='Results: ' + result,
    to='+919445979800'
)

return render_template('prediction.html', prediction=result, fname = filepath)
else:
    return render_template("prediction.html")

if __name__ == "__main__":
    app.debug = True
    app.run()
cloud.ipynb:-

from cloudant.client import Cloudant
client=Cloudant.iam('655489f8-18d0-4a44-a701-5de60570a973-
bluemix','Jc4eF6CXk72w0wGCsM_KUuXKVjsCcT4a54UKBXckK5Bv',connect=True)
my_database=client.create_database('my-database')
```

index.html:-

```
<!DOCTYPE html>
<html lang="en">
<head>
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF

DIABETIC RETINOPATHY

```
<meta charset="UTF-8" />
<meta http-equiv="X-UA-Compatible" content="IE=edge" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<!-- CSS only -->
<link
  href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/css/bootstrap.min.css"
  rel="stylesheet"
  integrity="sha384-iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZB6+fzT"
  crossorigin="anonymous"
/>
<!-- JavaScript Bundle with Popper -->
<script
  src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-u1OknCVxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTPOOmMi466C8"
  crossorigin="anonymous"
></script>
<style>
  #navbarRight {
    margin-left: auto;
    padding-right: 10px;
  }
  .navbar-brand{
    padding-left: 15px;
  }
</style>
<title>DR Predcition</title>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-light bg-dark">
    <div>
      <a class="navbar-brand" href="#" style="color:aliceblue">Diabetic Retinopathy Classification</a>
    </div>
    {{msg}}
    <div class="navbar-collapse collapse w-100 order-3 dual-collapse2" id="navbarNav">
      <ul class="navbar-nav mr-auto text-center" id="navbarRight">
        <li class="nav-item active">
          <a class="nav-link" href="index" style="color: aliceblue;">Home </a>
        </li>
        <li class="nav-item" style="visibility:{{ vis2 }}">
          <a class="nav-link" href="predict" style="color: aliceblue;">Prediction</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="login" style="color: aliceblue;">{{pred}}</a>
        </li>
        <li class="nav-item" style="visibility:{{ vis }}">
          <a class="nav-link" href="register" style="color: aliceblue;">Register</a>
        </li>
      </ul>
    </div>
  </nav>
</body>
</html>
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF

DIABETIC RETINOPATHY

```
</ul>
</div>
</nav>
<br><br>
<div class="jumbotron container">
  <h1 class="display-4">Diabetic Retinopathy</h1>
  <p class="lead">Diabetic retinopathy is a diabetes complication that affects eyes. It's caused by damage to the blood
vessels of the light-sensitive tissue at the back of the eye (retina).
  At first, diabetic retinopathy might cause no symptoms or only mild vision problems. But it can lead to blindness.
  The condition can develop in anyone who has type 1 or type 2 diabetes. The longer you have diabetes and the less
controlled your blood sugar is, the more likely you are to develop this eye complication.</p>
  <hr class="my-4">
  <div class="d-flex justify-content-center">
    
  </div>
</div>
</body>
</html>
```

login.html:-

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta http-equiv="X-UA-Compatible" content="IE=edge" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <!-- CSS only -->
    <link
      href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/css/bootstrap.min.css"
      rel="stylesheet"
      integrity="sha384-iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZB6+fzT"
      crossorigin="anonymous"
    />
    <!-- JavaScript Bundle with Popper -->
    <script
      src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
      integrity="sha384-u1OknCvxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTPOOmMi466C8"
      crossorigin="anonymous"
    ></script>
    <style>
      #navbarRight {
        margin-left: auto;
        padding-right: 10px;

      }
      .navbar-brand{
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
padding-left:15px;
}
</style>
<title>DR Predcition</title>
</head>
<form action="" method="POST">
<nav class="navbar navbar-expand-lg navbar-light bg-dark">
  <div>
    <a class="navbar-brand" href="#" style="color:aliceblue">User Login</a>
  </div>
  <div class="navbar-collapse collapse w-100 order-3 dual-collapse2" id="navbarNav">
    <ul class="navbar-nav mr-auto text-center" id="navbarRight">
      <li class="nav-item active">
        <a class="nav-link" href="index" style="color: aliceblue;">Home </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="login" style="color: aliceblue;">Login</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="register" style="color: aliceblue;">Register</a>
      </li>
    </ul>
  </div>
</nav>
<br><br>
<form class="form-inline" action="/login" method="GET">
<div class="container" style="width: 600px; height: 600px;">
  <div class="mb-3 d-flex justify-content-center"><script src="https://cdn.lordicon.com/xdjxvujz.js"></script>
    <lord-icon
      src="https://cdn.lordicon.com/elkhjhci.json"
      trigger="hover"
      style="width:200px;height:200px">
    </lord-icon></div>
    <div class="mb-3">
      <input type="email" class="form-control" id="exampleInputEmail1" name="mail" aria-describedby="emailHelp"
placeholder="Enter Registered Mail ID">
    </div>
    <div class="mb-3">
      <input type="password" class="form-control" id="exampleInputPassword1" name="pass" placeholder="Enter
Password">
    </div>
    <div class="mb-3">
      <button type="submit form-control" class="btn btn-dark btn-primary" style="width:100%;"
type="submit">Login</button>
    </div>
    {{pred}}
  </div>
```


DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
</form>
</body>
</html>
```

logout.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta http-equiv="X-UA-Compatible" content="IE=edge" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <!-- CSS only -->
  <link
    href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/css/bootstrap.min.css"
    rel="stylesheet"
    integrity="sha384-iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZB6+fzT"
    crossorigin="anonymous"
  />
  <!-- JavaScript Bundle with Popper -->
  <script
    src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
    integrity="sha384-u1OknCvxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTPOOmMi466C8"
    crossorigin="anonymous"
  ></script>
  <style>
    #navbarRight {
      margin-left: auto;
      padding-right: 10px;
    }
    .navbar-brand{
      padding-left: 15px;
    }
  </style>
  <title>DR Predcition</title>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-light bg-dark">
    <div>
      <a class="navbar-brand" href="#" style="color:aliceblue">Diabetic Retinopathy</a>
    </div>
    <div class="navbar-collapse collapse w-100 order-3 dual-collapse2" id="navbarNav">
      <ul class="navbar-nav mr-auto text-center" id="navbarRight">
        <li class="nav-item active">
          <a class="nav-link" href="index" style="color: aliceblue;">Home </a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="login" style="color: aliceblue;">Login</a>
        </li>
      </ul>
    </div>
  </nav>
</body>
</html>
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
</li>
<li class="nav-item">
  <a class="nav-link" href="register" style="color: aliceblue;">Register</a>
</li>
</ul>
</div>
</nav>
<br><br>
<div class="d-flex justify-content-center">
  <div class="row d-flex display-3 justify-content-center">
    Successfully Logged Out!
    <br><br>
    <a href="login" class="btn btn-lg btn-dark">Login for more Information</a>
  </div>
</div>
</body>
</html>
```

prediction.html:-

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8" />
  <meta http-equiv="X-UA-Compatible" content="IE=edge" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <!-- CSS only -->
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/css/bootstrap.min.css" rel="stylesheet"
    integrity="sha384-iYQeCzEYFbKjA/T2uDLTPkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZB6+fzT"
    crossorigin="anonymous" />
  <!-- JavaScript Bundle with Popper -->
  <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
    integrity="sha384-u1OknCVxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTPOOmMi466C8"
    crossorigin="anonymous"></script>
  <style>
    #navbarRight {
      margin-left: auto;
      padding-right: 10px;
    }

    .navbar-brand {
      padding-left: 15px;
    }

    .row {
      width: 90%;
    }
  </style>
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
</style>
<title>DR Predcition</title>
</head>

<body>
<nav class="navbar navbar-expand-lg navbar-light bg-dark">
  <div>
    <a class="navbar-brand" href="#" style="color:aliceblue">Diabetic Retinopathy Classification</a>
  </div>
  <div class="navbar-collapse collapse w-100 order-3 dual-collapse2" id="navbarNav">
    <ul class="navbar-nav mr-auto text-center" id="navbarRight">
      <li class="nav-item active">
        <a class="nav-link" href="index" style="color: aliceblue;">Home </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="logout" style="color: aliceblue;">Logout</a>
      </li>
    </ul>
  </div>
</nav>
<br><br>
<div class="container justify-content-center" style="width:700px">
  <form action = "/predict" method = "POST" enctype="multipart/form-data">
    <label for="formFileLg" class="form-label">Upload Image</label>
    <input class="form-control form-control-lg" name = "file" type="file" />
    <br>
    <button class="btn btn-lg btn-dark" type = "submit">Predict</button>
  </form>
  <br>
  <h1>{ { prediction } }</h1>
</div>
<br><br><br>
<div class="d-flex justify-content-center" >
  
</div>
</body>
</html>
```

register.html:-

```
<!-- <!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta http-equiv="X-UA-Compatible" content="IE=edge" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <!-- CSS only -->
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
<link
  href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/css/bootstrap.min.css"
  rel="stylesheet"
  integrity="sha384-iYQeCzEYFbKjA/T2uDLTpkwGzCiq6soy8tYaI1GyVh/UjpbCx/TYkiZhlZB6+fzT"
  crossorigin="anonymous"
/>
<!-- JavaScript Bundle with Popper -->
<script
  src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.1/dist/js/bootstrap.bundle.min.js"
  integrity="sha384-u1OknCvxWvY5kfmNBILK2hRnQC3Pr17a+RTT6rIHI7NnikvbZlHgTPOOmMi466C8"
  crossorigin="anonymous"
></script>
<style>
  #navbarRight {
    margin-left: auto;
    padding-right: 10px;

  }
  .navbar-brand{
    padding-left: 15px;
  }
</style>
<title>DR Predcition</title>
</head>
<form action="{ {url_for('register')}} " method="post" >
<nav class="navbar navbar-expand-lg navbar-light bg-dark">
  <div>
    <a class="navbar-brand" href="#" style="color:aliceblue">Registration</a>
  </div>
  <div class="navbar-collapse collapse w-100 order-3 dual-collapse2" id="navbarNav">
    <ul class="navbar-nav mr-auto text-center" id="navbarRight">
      <li class="nav-item active">
        <a class="nav-link" href="index" style="color: aliceblue;">Home </a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="login" style="color: aliceblue;">Login</a>
      </li>
      <li class="nav-item">
        <a class="nav-link" href="register" style="color: aliceblue;">Register</a>
      </li>
    </ul>
  </div>
</nav>
<br><br>
<form class="form-inline" method="POST">
<div class="container" style="width: 600px; height: 600px;">
  <div class="mb-3 d-flex justify-content-center"><script src="https://cdn.lordicon.com/xdjxvujz.js"></script>
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
<lord-icon
  src="https://cdn.lordicon.com/elkhjhci.json"
  trigger="hover"
  style="width:200px;height:200px">
</lord-icon></div>
      <div class="mb-3">
        <input type="text" class="form-control" id="exampleInputName" name = "name" aria-describedby="nameHelp"
placeholder="Enter Name">
      </div>
      <div class="mb-3">
        <input type="email" class="form-control" id="exampleInputEmail1" name="emailid" aria-describedby="emailHelp"
placeholder="Enter Mail ID">
      </div>
      <div class="mb-3">
        <input type="number" class="form-control" id="exampleInputNumber1" name="num" aria-
describedby="numberHelp" placeholder="Enter Mobile number">
      </div>
      <div class="mb-3">
        <input type="password" class="form-control" id="exampleInputPassword1" name="pass" placeholder="Enter
Password">
      </div>
      <div class="mb-3">
        <button type="submit form-control" class="btn btn-dark btn-primary" style="width:100%;">Register</button>
      </div>
      <div class="mb-3 d-flex justify-content-center">
        <a href="login" class="nav-link"> Already Registered: Login Here</a>
      </div>
    {{pred}}
  </div>
</form>
</body>
</html> -->
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

Python Notebook screenshots:-

```
In [ ]: pip install -q kaggle

In [ ]: mkdir ~/.kaggle

mkdir: cannot create directory '/root/.kaggle': File exists

In [ ]: cp kaggle.json ~/.kaggle/

In [ ]: !chmod 600 ~/.kaggle/kaggle.json

In [ ]: !kaggle datasets download -d arbethi/diabetic-retinopathy-level-detection

Downloading diabetic-retinopathy-level-detection.zip to /content
100% 9.65G/9.66G [01:17<00:00, 186MB/s]
100% 9.66G/9.66G [01:17<00:00, 133MB/s]

In [ ]: !unzip diabetic-retinopathy-level-detection.zip

Archive: diabetic-retinopathy-level-detection.zip
  inflating: inception-diabetic.h5
  inflating: preprocessed dataset/preprocessed dataset/testing/0/cfb17a7cc8d4.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/cfdbae73a8b.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/cfed7c1172ec.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/cff262ed8f4c.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/cffc50047828.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/d02b79fc3200.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/d0926ed2c8e5.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/d160ebef4117.png
  inflating: preprocessed dataset/preprocessed dataset/testing/0/d16e39b9d6f0.png
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
inflating: preprocessed dataset/preprocessed dataset/training/4/eb0175e530c.png
inflating: preprocessed dataset/preprocessed dataset/training/4/ed246ae1ed08.png
inflating: preprocessed dataset/preprocessed dataset/training/4/ed3a0fc5b546.png
inflating: preprocessed dataset/preprocessed dataset/training/4/ee1ec90b980f.png
inflating: preprocessed dataset/preprocessed dataset/training/4/ef26625121b3.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f0098e9d4ae.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f025f33b2c9b.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f03d3c4ce7fb.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f0f89314e860.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f1dc26c4bfa3.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f2d2a0c92034.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f549294e12e1.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f58d37d48e42.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f5e6226bd2e0.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f69835dc7c50.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f6f3ea0d2693.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f72adcac5638.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f850cb51fdbb.png
inflating: preprocessed dataset/preprocessed dataset/training/4/f8cf7ed8ef00.png
inflating: preprocessed dataset/preprocessed dataset/training/4/fa59221cf464.png
inflating: preprocessed dataset/preprocessed dataset/training/4/fb696a8e055a.png
inflating: preprocessed dataset/preprocessed dataset/training/4/fce93caa4758.png
inflating: preprocessed dataset/preprocessed dataset/training/4/fdd534271f3d.png
inflating: preprocessed dataset/preprocessed dataset/training/4/ff8a0b45c789.png
```

```
In [ ]: from tensorflow.keras.layers import Dense, Flatten, Input
```

```
In [ ]: from tensorflow.keras.models import Model
```

```
In [ ]: from tensorflow.keras.preprocessing import image
```

```
In [ ]: from tensorflow.keras.preprocessing.image import ImageDataGenerator, load_img
```

```
In [ ]: from glob import glob
```

```
In [ ]: import numpy as np
```

```
In [ ]: import matplotlib.pyplot as plt
```

```
In [ ]: imageSize=[299,299]
```

```
In [ ]: trainPath=r"/content/preprocessed dataset/preprocessed dataset/training"
```

```
In [ ]: testPath=r"/content/preprocessed dataset/preprocessed dataset/testing"
```

```
In [ ]: train_datagen=ImageDataGenerator(rescale=1./255, shear_range=0.2, zoom_range=0.2, horizontal_flip=True)
```

```
In [ ]: test_datagen=ImageDataGenerator(rescale=1./255)
```

```
In [ ]: training_set=train_datagen.flow_from_directory('/content/preprocessed dataset/preprocessed dataset/training', target_size=(299,299), batch_size=32,
Found 3662 images belonging to 5 classes.
```

```
In [ ]: test_set=test_datagen.flow_from_directory('/content/preprocessed dataset/preprocessed dataset/testing', target_size=(299,299), batch_size=32, class
```

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

Found 3662 images belonging to 5 classes.

```
In [ ]: test_set=test_datagen.flow_from_directory('/content/preprocessed dataset/preprocessed dataset/testing',target_size=(299,299),batch_size=32,clas
```

Found 734 images belonging to 5 classes.

```
In [ ]: xception=Xception(input_shape=imageSize+[3],weights='imagenet',include_top=False)
```

Downloading data from https://storage.googleapis.com/tensorflow/keras-applications/xception/xception_weights_tf_dim_ordering_tf_kernels_notop.h5
83683744/83683744 [=====] - 0s 0us/step

```
In [ ]: for layer in xception.layers:  
        layer.trainable=False
```

```
In [ ]: x=Flatten()(xception.output)
```

```
In [ ]: prediction=Dense(5,activation='softmax')(x)
```

```
In [ ]: model=Model(inputs=xception.input,outputs=prediction)
```

```
In [ ]: model.summary()
```

Model: "model"

| Layer (type) | Output Shape | Param # | Connected to |
|----------------------|---------------------------|---------|--------------|
| input_1 (InputLayer) | [(None, 299, 299, 3)] | 0 | [] |

Model: "model"

| Layer (type) | Output Shape | Param # | Connected to |
|---------------------------------------------|---------------------------|---------|-------------------------------|
| input_1 (InputLayer) | [(None, 299, 299, 3)] | 0 | [] |
| block1_conv1 (Conv2D) | (None, 149, 149, 32) | 864 | ['input_1[0][0]'] |
| block1_conv1_bn (BatchNormaliz ation) | (None, 149, 149, 32) | 128 | ['block1_conv1[0][0]'] |
| block1_conv1_act (Activation) | (None, 149, 149, 32) | 0 | ['block1_conv1_bn[0][0]'] |
| block1_conv2 (Conv2D) | (None, 147, 147, 64) | 18432 | ['block1_conv1_act[0][0]'] |
| block1_conv2_bn (BatchNormaliz ation) | (None, 147, 147, 64) | 256 | ['block1_conv2[0][0]'] |
| block1_conv2_act (Activation) | (None, 147, 147, 64) | 0 | ['block1_conv2_bn[0][0]'] |
| block2_sepconv1 (SeparableConv 2D) | (None, 147, 147, 12 8) | 8768 | ['block1_conv2_act[0][0]'] |
| block2_sepconv1_bn (BatchNorma lization) | (None, 147, 147, 12 8) | 512 | ['block2_sepconv1[0][0]'] |
| block2_sepconv2_act (Activatio n) | (None, 147, 147, 12 8) | 0 | ['block2_sepconv1_bn[0][0]'] |
| block2_sepconv2 (SeparableConv 2D) | (None, 147, 147, 12 8) | 17536 | ['block2_sepconv2_act[0][0]'] |

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY

```
alization)
)

block14_sepconv2_act (Activation) (None, 10, 10, 2048 0 ['block14_sepconv2_bn[0][0]'])
on)

flatten (Flatten) (None, 204800) 0 ['block14_sepconv2_act[0][0]']

dense (Dense) (None, 5) 1024005 ['flatten[0][0]']

=====
Total params: 21,885,485
Trainable params: 1,024,005
Non-trainable params: 20,861,480
```

```
In [ ]: model.compile(loss='categorical_crossentropy',optimizer='adam',metrics=['accuracy'])
```

```
In [ ]: r=model.fit_generator(training_set,validation_data=test_set,epochs=30,steps_per_epoch=len(training_set)//32,validation_steps=len(test_set)//32,
```

```
/usr/local/lib/python3.7/dist-packages/ipykernel_launcher.py:1: UserWarning: `Model.fit_generator` is deprecated and will be removed in a future version. Please use `Model.fit`, which supports generators.
"""Entry point for launching an IPython kernel.
```

```
Epoch 1/30
3/3 [=====] - 52s 15s/step - loss: 10.3196 - accuracy: 0.2396
Epoch 2/30
3/3 [=====] - 44s 13s/step - loss: 16.3913 - accuracy: 0.4896
Epoch 3/30
3/3 [=====] - 43s 13s/step - loss: 5.7194 - accuracy: 0.5521
Epoch 4/30
3/3 [=====] - 45s 13s/step - loss: 6.0489 - accuracy: 0.5104
Epoch 5/30
3/3 [=====] - 35s 9s/step - loss: 2.6817 - accuracy: 0.5897
Epoch 6/30
3/3 [=====] - 45s 14s/step - loss: 5.3608 - accuracy: 0.5833
Epoch 7/30
3/3 [=====] - 42s 13s/step - loss: 3.8375 - accuracy: 0.6250
Epoch 8/30
3/3 [=====] - 43s 13s/step - loss: 3.4297 - accuracy: 0.6771
Epoch 9/30
3/3 [=====] - 43s 13s/step - loss: 5.0327 - accuracy: 0.6979
Epoch 10/30
3/3 [=====] - 37s 14s/step - loss: 5.6452 - accuracy: 0.6026
Epoch 11/30
3/3 [=====] - 44s 14s/step - loss: 5.8190 - accuracy: 0.6562
Epoch 12/30
3/3 [=====] - 43s 13s/step - loss: 3.5427 - accuracy: 0.6979
Epoch 13/30
3/3 [=====] - 43s 13s/step - loss: 3.7831 - accuracy: 0.7083
Epoch 14/30
3/3 [=====] - 50s 16s/step - loss: 3.7079 - accuracy: 0.6250
Epoch 15/30
3/3 [=====] - 42s 13s/step - loss: 2.3158 - accuracy: 0.7292
Epoch 16/30
3/3 [=====] - 46s 13s/step - loss: 5.2872 - accuracy: 0.6979
Epoch 17/30
3/3 [=====] - 43s 13s/step - loss: 3.2610 - accuracy: 0.7917
```

```
In [ ]: model.save('Updated-Xception-diabetic-retinopathy.h5')
```

GITHUB LINK:-[IBM-EPBL/IBM-Project-18407-1659684768: Deep Learning Fundus Image Analysis for Early Detection of Diabetic Retinopathy \(github.com\)](https://github.com/IBM-EPBL/IBM-Project-18407-1659684768)

DEMO LINK:-[IBM-Project-18407-1659684768/Demo Video.mp4 at main · IBM-EPBL/IBM-Project-18407-1659684768 \(github.com\)](https://github.com/IBM-EPBL/IBM-Project-18407-1659684768)

DEEP LEARNING FUNDUS IMAGE ANALYSIS FOR EARLY DETECTION OF DIABETIC RETINOPATHY