ASSIGNMENT-4

Q


Write code and connections in wokwi for ultrasonic. When ever distance Isless than 100 cm end "alert" to ibm cloud and display in device recent events.

SOLUTION

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#define EchoPIN 4
                  // what pin we're connected to
#define TrigPIN 2
#define LED 5
//DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of dht
connected
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
//----credentials of IBM Accounts-----
#define ORG "swz5ou"//IBM ORGANITION ID
#define DEVICE TYPE "abcd"//Device type mentioned in ibm watson IOT Platform
#define DEVICE ID "12"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
//----- Customise the above values ------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform
and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command type AND
COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
float dist,dur;
String data;
//----
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client
id by passing parameter like server id, portand wificredential
void setup()// configureing the ESP32
{
 Serial.begin(115200);
 pinMode(TrigPIN, OUTPUT);
 digitalWrite(TrigPIN, LOW);
 pinMode(EchoPIN, INPUT);
 pinMode(LED,OUTPUT);
  delay(10);
```

```
Serial.println();
 wificonnect();
 mqttconnect();
}
void loop()// Recursive Function
{
 digitalWrite(TrigPIN, HIGH);
 delayMicroseconds(10);
 digitalWrite(TrigPIN, LOW);
 dur = pulseIn(EchoPIN, HIGH);
 dist= dur *0.034 / 2;
if(dist<100)</pre>
 {
   data="alert";
   digitalWrite(LED,HIGH);
 else{
   data="safe";
   digitalWrite(LED,LOW);
 }
 PublishData(dist);
 delay(1000);
 if (!client.loop()) {
   mqttconnect();
 }
}
/*....retrieving to
Cloud....*/
void PublishData(float dist) {
 mqttconnect();//function call for connecting to ibm
 /*
    creating the String in in form JSon to update the data to ibm cloud
 String payload = "{\"distance\":";
 payload += dist;
 payload += "," "\"msg\":\"";
 payload += data;
 payload += "\"}";
 Serial.print("Sending payload: ");
 Serial.println(payload);
```

```
if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it
will print publish ok in Serial monitor or else it will print publish failed
  } else {
    Serial.println("Publish failed");
  }
}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
     initManagedDevice();
     Serial.println();
}
void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");
 WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the
connection
 while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
}
```

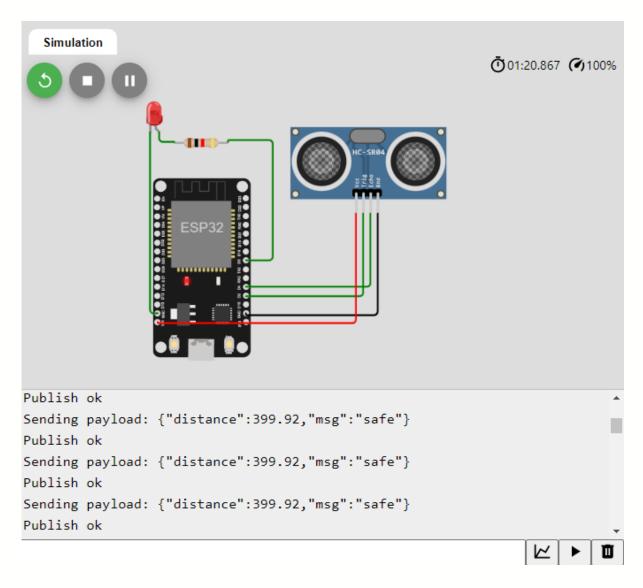

Wokwi Link: https://wokwi.com/projects/348296026455540307

IBM Cloud Device Recent Events

Identity	Device Information Recent Events 5	State Logs		×
The recent	events listed show the live stream of data that is coming a	and going from this de	vice.	
Event	Value	Format	Last Received	
Data	{"distance":399.94,"msg":"safe"}	json	a few seconds ago	_
Data	{"distance":399.92,"msg":"safe"}	json	a few seconds ago	
Data	{"distance":399.92,"msg":"safe"}	json	a few seconds ago	
Data	{"distance":399.92,"msg":"safe"}	json	a few seconds ago	
Data	{"distance":399.92,"msg":"safe"}	json	a few seconds ago	