


# IBM-Project-18767-1659689727

**PROJECT TITLE:** Personal Assistance for Seniors Who Are Self-Reliant

**TEAM ID:** PNT2022TMID42603

## Function to compare the time

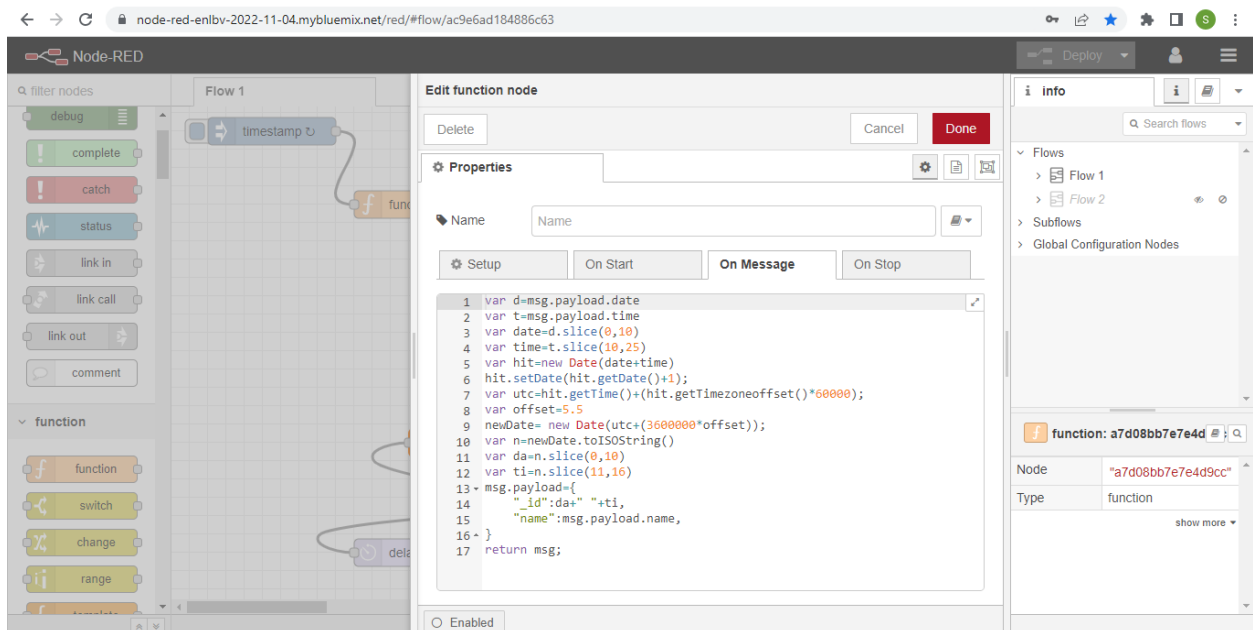

The screenshot displays the Node-RED web interface in a browser. The main workspace shows a flow with a 'timestamp' node connected to a 'function' node. The 'Edit function node' panel is open, showing the following JavaScript code:

```
1 var d=msg.payload.date
2 var t=msg.payload.time
3 var date=d.slice(0,10)
4 var time=t.slice(10,25)
5 var hit=new Date(date+time)
6 hit.setDate(hit.getDate()+1);
7 var utc=hit.getTime()+(hit.getTimezoneoffset()*60000);
8 var offset=5.5
9 newDate= new Date(utc+(3600000*offset));
10 var n=newDate.toISOString()
11 var da=n.slice(0,10)
12 var ti=n.slice(11,16)
13 msg.payload={
14   "_id":da+" "+ti,
15   "name":msg.payload.name,
16 }
17 return msg;
```

The 'Properties' section of the function node is empty. The 'Info' panel on the right shows the node's ID as 'a7d08bb7e7e4d9cc' and its type as 'function'.