PLASMA DONOR APPLICATION PROJECT REPORT

A PROJECT REPORT

Submitted by

AKASH RAM P 7376191EC109

ADHAVAN G 7376191EC106

ARULMOZHI K 7376191EC112

HARIHARASUTHAN L 7376191EC153

TEAM ID: PNT2022TMID01683

DEPARTNMENT OF INFORMATION TECHNOLOGY NANDHA COLLEGE OF TECHNOLOGY, ERODE

vaikalmedu, perundhurai - 638 052

TABLE OF CONTENTS

S. NO	TITLE
1	INTRODUCTION
1.1	Project Overview
1.2	Purpose
2	LITERATURE SURVEY
2.1	Existing problem
2.2	Problem Statement Definition
3	IDEATION & PROPOSED SOLUTION
3.1	Empathy Map Canvas
3.2	Ideation & Brainstorming
3.3	Proposed Solution
3.4	Problem Solution Fit
4	REQUIREMENT ANALYSIS
4.1	Functional requirements
4.2	Non-Functional requirements

5	PROJECT DESIGN
5.1	Data Flow Diagrams
5.2	Solution & Technical Architecture
5.3	User Stories
6	PROJECT PLANNING & SCHEDULING
6.1	Sprint Planning & Estimation
6.2	Sprint Delivery Schedule
6.3	Reports from JIRA
7	CODING & SOLUTIONING
7.1	Features
8	TESTING
8.1	Test Cases
8.2	User Acceptance Testing
9	RESULTS
9.1	Performance Metrics

- 10 CONCLUSION
- 11 FUTURE SCOPE
- 12 APPENDIX

1. INTRODUCTION

1.1 PROJECT OVERVIEW

- The person who wants to donate his/her plasma needs to register in the application.
- After that gives the basic information of donor

Like name, age, blood group, phone number and location etc.

- Patients can directly call the donor by taking his/her contact number from the application.
- The user can view the total active cases, recovered cases, vaccine canter hospital location and help line number.

1.2 PURPOSE

- To make easier for the **covid** -19 patients to get a plasma donor easily.
- They have two types of users:
 - 1. Plasma donors
 - 2. Plasma acceptor
- The user also view near by location of hospital, vaccine center, and

donor contact number.

2. <u>LITERATURE SURVEY</u>

2.1 EXISTING PROBLEM


- Location finding of donor to donate a plasma
- Searching of hospitals to find the plasma
- Searching of blood groups
- Blood center finding of acceptor

2.3 problem statement definition


- It is difficult to find a plasma donor as everybody cannot donate a Plasma so the user can benefit to the website
- Plasma donor can easily donate our plasma.
- Plasma acceptor can easily find the plasma donor.

• The patients can directly call the donor by taking his/her contact number from the application.

3. IDEATION &PROPOSED SOLUTION 3.1 EMPATHY MAP CANVAS

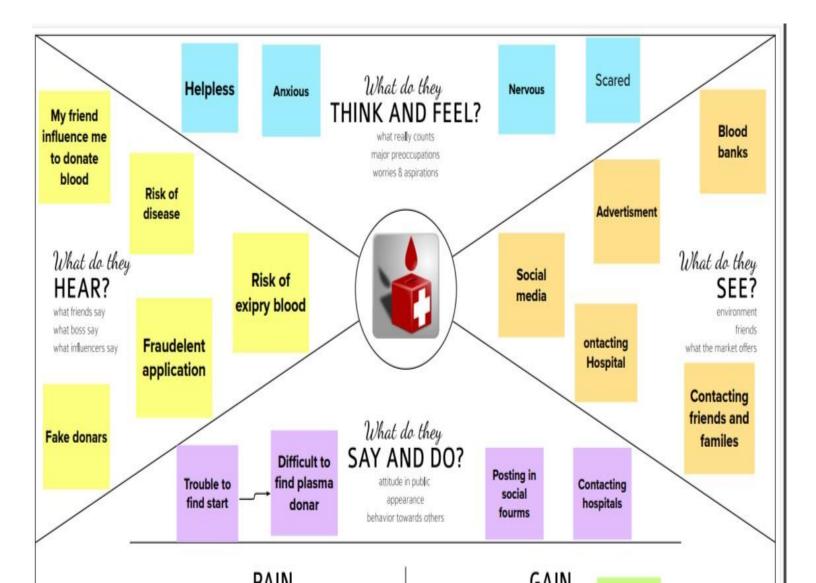

3.2BRAINSTORMING DIAGRAM

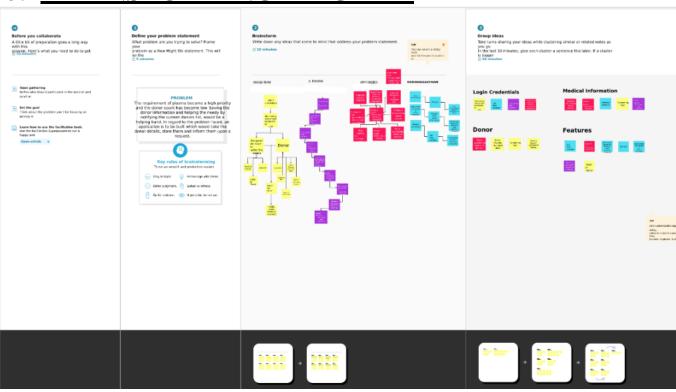

4. REQUIREMENT ANALYSIS

4.1 Functional requirements

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form (WebApp)
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	Certification	After the donor donates plasma, we will give them a certificate of appreciation and authentication.
FR-4	Statistical data	The availability of plasma is given in the page as stats, which will be helpful for the users.
FR-5	User Plasma Request	Users can request to donate plasma by filling out the request form on the page. Once the request is submitted, they will get an email
FR-6	Searching/reporting requirements	Users can use the search bar to look up information about camps and other topics.

4.2 Non-Functional requirements


Non-Functional Requirement	Description		
Usability	Must have a good looking User friendly interface.		
Security			
	It must be secured with the proper username and password.		
	The system should be made in such away that it is reliable in its operations and for securing the sensitive details.		
Reliability			
	Usability Security		

NFR-4	Performance	Users should have a proper Internet Connection.
NFR-5	Availability	
		The system including the online and offline components should be available 24/7.

Scalability				
	The application has the ability to handle			
	growing numbers of users and load			
	without compromising on performance			
	and causing disruptions to user			
	experience.			
	Scalability			

5.PROJECT DESIGN


5.1 Data Flow Diagrams

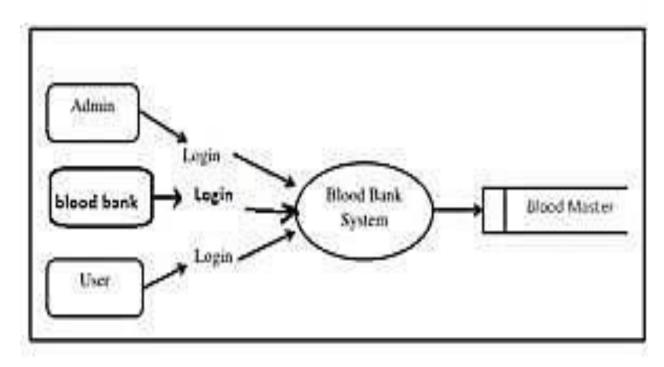

LEVEL 0




LEVEL 1

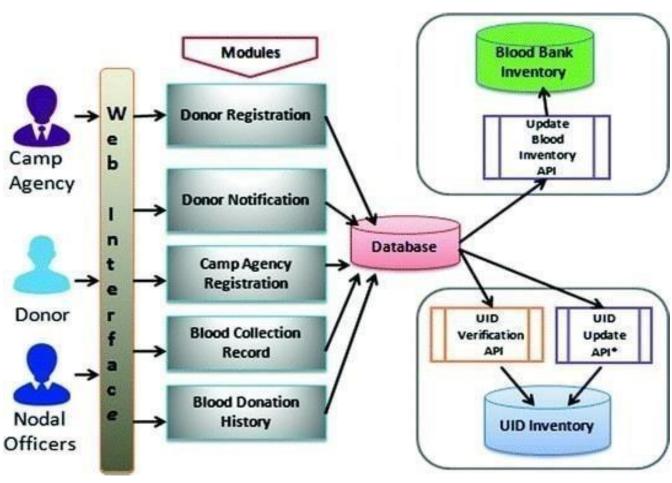

LEVEL 2

5.2 Solution & Technical Architecture

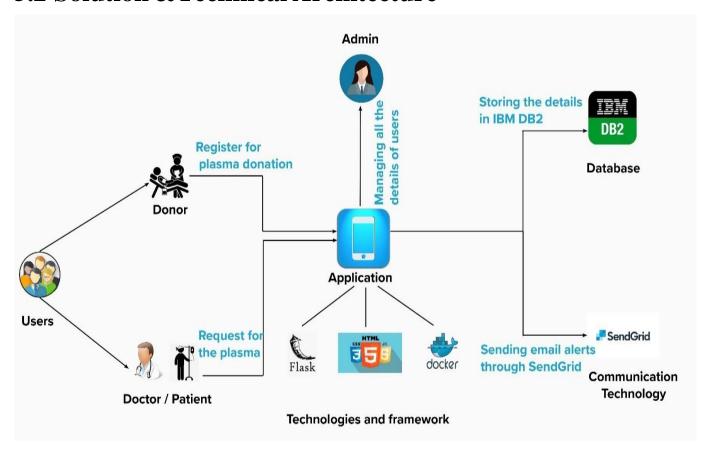

5.3 User Stories

Use the below template to list all the user stories for the product.

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria
Donor	App Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	I can access my account / dashboard
	Login	USN-2	As a user, I can log into the application by entering email & password	I can receive confirmation email & click confir

	Register For Donate	USN-3	As a user, I can log into the application and find the current bank to donate plasma and confirm my booking	I can register & access the dashboard with Facebook Login
patient/ doctor	Find the bank	USN-4	As a patient, I can directly access the application and find the plasma available bank	I can access my account / dashboard
	Request for plasma	USN-5	As a user, I can enter into the application and find the current bank and request for plasma and state the emergency	I can register & access the dashboard with Facebook Login
Administrator	Maintain the applications	USN-6	As Administrator I can log into the application by entering email & password and maintaining details for users	I can access my account / dashboard
	Connect The Bank With Users	USN-7	As Administrator, i can hold the good communication between bank and user	I can access my account / dashboard
	Maintain Database	USN-8	As Administrator i can hold the exact details of donor and patient and also bank for requesting and available of plasma	I can access my account / dashboard
Plasma Bank	Connect The Bank With Users	USN-7	As Bank, i can hold the good communication between Administrator and user	
	Maintain Database	USN-8	As Bank i can hold the exact details of donor and patient and also bank for requesting and available of plasma	I can access my account / dashboard
ВОТ	Help the user my bot message in application	USN-9	As Al bot, i can hold the good communication between bank and user also help the user	I can access my account / dashboard

6. PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning & Estimation


Sprint	Functional Requireme nt (Epic)	User Story Number	User Story / Task	Story Points	Priori ty	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	2	High	Akash Ram P
Sprint-1		USN-2	As a user, I will receive confirmation email once I have registered for the application	1	High	Hariharasuthan L
Sprint-1		USN-3	As a user, I can register for the application through Facebook	2	Low	Arulmozhi K
Sprint-1		USN-4	As a user, I can register for the application through Gmail	2	Medi um	Adhavan G
Sprint-1	Login	USN-5	As a user, I can log into the application by entering email & password	1	High	Akash Ram P
Sprint-1	Dashboard	USN-6	As a user, I can access the website in a second.	2	High	Arulmozhi K
Sprint-1	Dashboard	USN-7	As a user, If I Logged in correctly, I can view my dashboard and I can navigate to any pages which are already listed there.	2	High	Adhavan G
Sprint-2	User Profile	USN-8	As a user, I can view and update my details	2	Medi um	Hariharasuthan L


6.2 : Sprint Delivery Schedule


Total Story Points	Durati on	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
20	6 Days	24 Oct 2022	29 Oct 2022	20	29 Oct 2022
20	6 Days	31 Oct 2022	05 Nov 2022	20	05 Nov 2022

20	6 Days	07 Nov 2022	12 Nov 2022	20	12 Nov 2022
20	6 Days	14 Nov 2022	19 Nov 2022	20	19 Nov 2022

6.3: Reports From JIRA

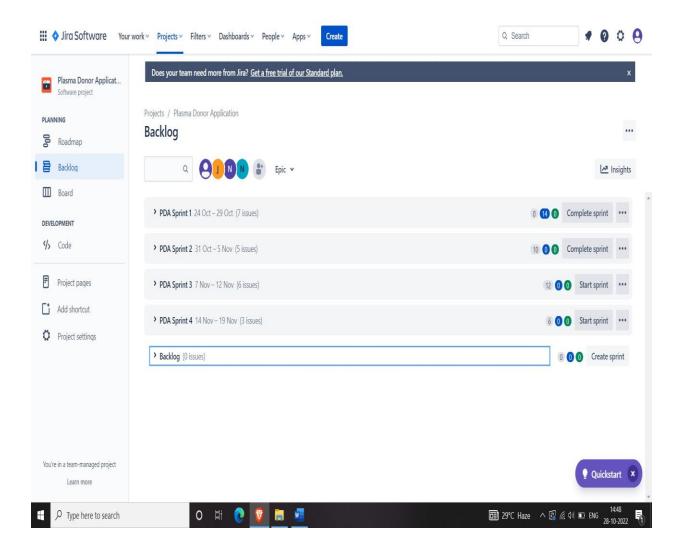

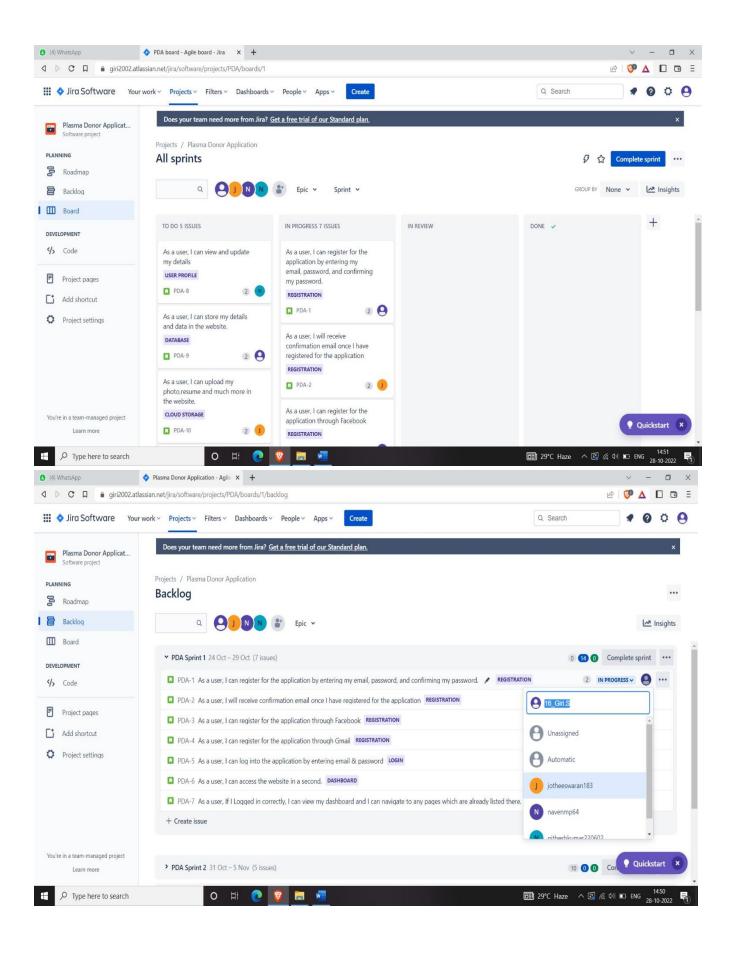

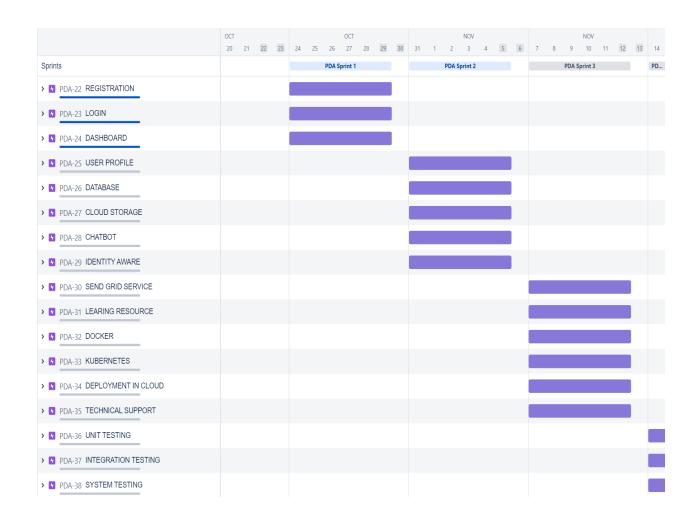

7. CODING & SOLUTIONING

login.html

<><<< HEAD
.gradient-custom-2 {
/* fallback for old browsers */
background: #fccb90;

/* Chrome 10-25, Safari 5.1-6 */

```
background: -webkit-linear-gradient(to right, #ee7724,
#d8363a, #dd3675, #b44593);
/* W3C, IE 10+/ Edge, Firefox 16+, Chrome 26+, Opera
12+, Safari 7+ */
background: linear-gradient(to right, #ee7724, #d8363a,
#dd3675, #b44593);
@media (min-width: 768px) {
.gradient-form {
height: 100vh !important;
@media (min-width: 769px) {
.gradient-custom-2 {
border-top-right-radius: .3rem;
border-bottom-right-radius: .3rem;
.gradient-custom-2 {
/* fallback for old browsers */
background: #fccb90;
```

```
/* Chrome 10-25, Safari 5.1-6 */
background: -webkit-linear-gradient(to right, #ee7724,
#d8363a, #dd3675, #b44593);
/* W3C, IE 10+/ Edge, Firefox 16+, Chrome 26+, Opera
12+, Safari 7+ */
background: linear-gradient(to right, #ee7724, #d8363a,
#dd3675, #b44593);
@media (min-width: 768px) {
.gradient-form {
height: 100vh !important;
@media (min-width: 769px) {
.gradient-custom-2 {
border-top-right-radius: .3rem;
border-bottom-right-radius: .3rem;
}
>>>>> f7575a599e8f64dd620a02c88ed095e491194af1
```

```
main.py
```

```
<<<<< HEAD
from flask import
Flask,redirect,url_for,render_template,request,make_resp
onse
import ibm_db
conn =
ibm_db.connect("DATABASE=bludb;HOSTNAME=764
264db-9824-4b7c-82df-
40d1b13897c2.bs2io90l08kqb1od8lcg.databases.appdoma
in.cloud;PORT=32536;SECURITY=SSL;SSLServerCerti
ficate=abc.crt;UID=gnq12618;PWD=0glS4tFaR2ciK8fB"
print(conn)
print("connection successful...")
app = Flask(__name__)
```

@app.route('/home')
def home():

```
return render_template("home.html")
@app.route('/login',methods=['POST','GET'])
def login():
  if request.method=='POST':
     username = request.form['username']
    password = request.form['password']
     sql = "select * from user where username=? and
password=?"
     stmt = ibm_db.prepare(conn,sql)
    ibm_db.bind_param(stmt,1,username)
    ibm_db.bind_param(stmt, 2, password)
    ibm_db.execute(stmt)
     dic = ibm_db.fetch_assoc(stmt)
    print(dic)
    if dic:
       return redirect(url_for('home'))
    else:
       return redirect(url_for('login'))
    return redirect(url_for('home'))
  elif request.method=='GET':
    return render_template('login.html')
```

```
@app.route('/signup',methods=['POST','GET'])
def signup():
  if request.method=='POST':
    username = request.form['username']
    email = request.form['email']
    password = request.form['password']
    roll_no = request.form['roll_no']
    sex = request.form['sex']
    age = request.form['age']
    address = request.form['address']
    blood_group = request.form['blood_group']
    sql = "insert into user values(?,?,?,?,?,?,?,?)"
    prep_stmt = ibm_db.prepare(conn,sql)
    ibm_db.bind_param(prep_stmt,1,username)
    ibm_db.bind_param(prep_stmt,2,email)
    ibm_db.bind_param(prep_stmt,3,password)
    ibm_db.bind_param(prep_stmt,4,roll_no)
    ibm_db.bind_param(prep_stmt,5,sex)
    ibm_db.bind_param(prep_stmt,6, age)
    ibm_db.bind_param(prep_stmt,7, "USER")
    ibm_db.bind_param(prep_stmt,8, address)
    ibm_db.bind_param(prep_stmt,9, blood_group)
    ibm_db.execute(prep_stmt)
```

```
#db post operation
    return redirect(url_for('login'))
  elif request.method=='GET':
    return render_template('signup.html')
if__name__=='__main__':
from flask import
Flask,redirect,url_for,render_template,request,make_resp
onse
import ibm_db
conn = window.watsonAssistantChatOptions = {
  integrationID: "e1e25abc-12d8-4c79-b356-
637367ad15cb", // The ID of this integration.
  region: "au-syd", // The region your integration is
hosted in.
   serviceInstanceID: "98ebe606-3242-4954-b3eb-
8389dc1ec309", // The ID of your service instance.
  onLoad: function(instance) { instance.render(); }
print(conn)
print("connection successful...")
```

```
@app.route('/home')
def home():
  return render_template("home.html")
@app.route('/login',methods=['POST','GET'])
def login():
  if request.method=='POST':
    username = request.form['username']
    password = request.form['password']
    sql = "select * from user where username=? and
password=?"
    stmt = ibm_db.prepare(conn,sql)
    ibm_db.bind_param(stmt,1,username)
    ibm_db.bind_param(stmt, 2, password)
    ibm_db.execute(stmt)
    dic = ibm_db.fetch_assoc(stmt)
    print(dic)
    if dic:
```

app = Flask(__name__)


```
return redirect(url_for('home'))
    else:
       return redirect(url_for('login'))
    return redirect(url_for('home'))
  elif request.method=='GET':
    return render_template('login.html')
@app.route('/signup',methods=['POST','GET'])
def signup():
  if request.method=='POST':
     username = request.form['username']
    email = request.form['email']
    password = request.form['password']
    roll_no = request.form['roll_no']
     sex = request.form['sex']
     age = request.form['age']
     address = request.form['address']
    blood_group = request.form['blood_group']
     sql = "insert into user values(?,?,?,?,?,?,?,?)"
    prep_stmt = ibm_db.prepare(conn,sql)
    ibm_db.bind_param(prep_stmt,1,username)
    ibm_db.bind_param(prep_stmt,2,email)
    ibm_db.bind_param(prep_stmt,3,password)
```

```
ibm_db.bind_param(prep_stmt,4,roll_no)
ibm_db.bind_param(prep_stmt,5,sex)
ibm_db.bind_param(prep_stmt,6, age)
ibm_db.bind_param(prep_stmt,7, "USER")
ibm_db.bind_param(prep_stmt,8, address)
ibm_db.bind_param(prep_stmt,9, blood_group)
ibm_db.execute(prep_stmt)
#db post operation
return redirect(url_for('login'))
elif request.method=='GET':
    return render_template('signup.html')
```

>>>>> f7575a599e8f64dd620a02c88ed095e491194af1

if___name__ == '___main___':

app.run(debug = True)

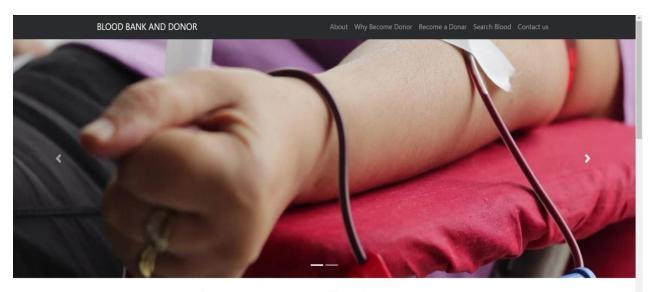

Welcome to Plasma Donor Application

The need for blood

The reason to donate is simple...it helps save lives. In fact, every two seconds of every day, someone needs blood.

Blood Tips

Donating blood removes fluids from the body. A person can help restore them by drinking water, broth, or herbal tea. The American Red


Who you could Help

Group B can donate red blood cells to B's and AB's. Group A can donate red blood cells to A's and AB's. Group O can donate red blood cells to

BLOOD BANK AND DONOR

out Why Become Donor Become a Donar Search Blood Contact us

Become a Donor

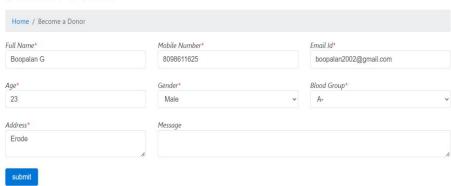

"Donate Youre BloodFor A Reason ,Let Reason To Be Life" Team Id-PNT2022TMID32253 ..THANKS FOR VISITING US...

BLOOD BANK AND	DONOR	About Why Become Donor B	ecome a Donar Search Blood (Contact us
Search Do	nor			
Home / Search Donor				
Blood Group*	Location			
A-	✓ Erode			
submit				
	Team Id-	or A Reason ,Let Reason To Be Life" .PNT2022TMID32253 (S FOR VISITING US		
BLOOD BANK AND	DONOR	About Why Become Donor B	ecome a Donar Search Blood (Contact us
About Us				
Home / About Us				
	bank.Blood banking is the process that ta			
	efore they are used in blood transfusion and testing for infectious diseases.	ns and other medical procedures.	Blood banking includes typing	the
	Team Id	For A Reason ,Let Reason To Be Life" I-PNT2022TMID32253 KS FOR VISITING US		


Why Become Donor


Home / Why Become Donor


Safe blood saves lives.


A blood donation is truly an altruistic gift that an individual can give to others in need. In only 45-60 minutes, an eligible individual can donate one unit of blood that can be separated into four individual components that could help save multiple lives.


"Donate Youre BloodFor A Reason ,Let Reason To Be Life" Team Id-PNT2022TMID32253 ..THANKS FOR VISITING US..

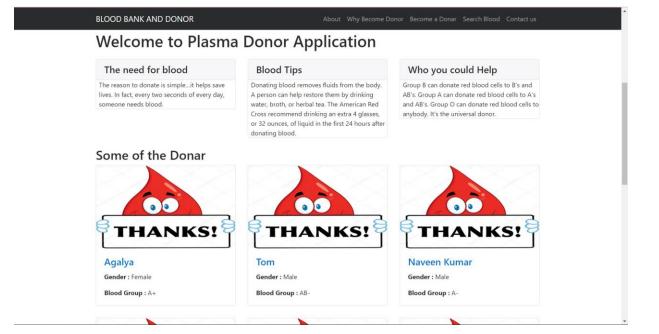

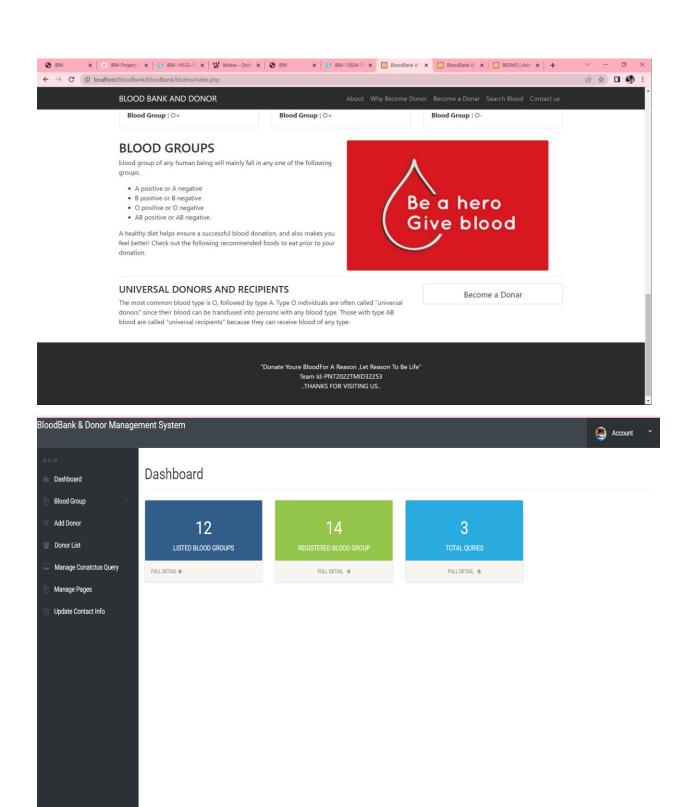

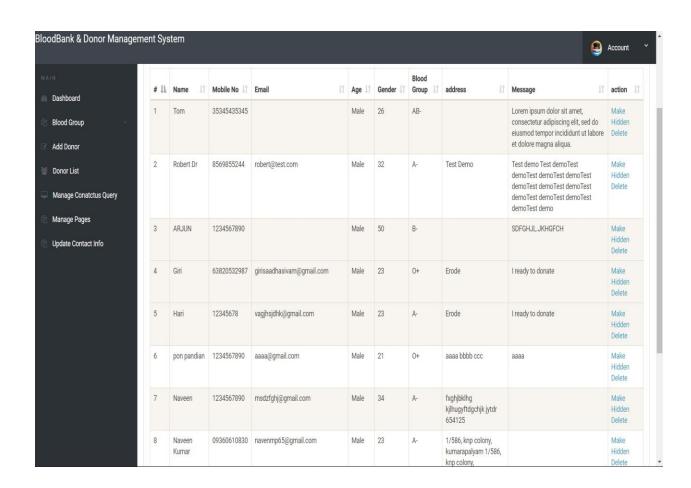

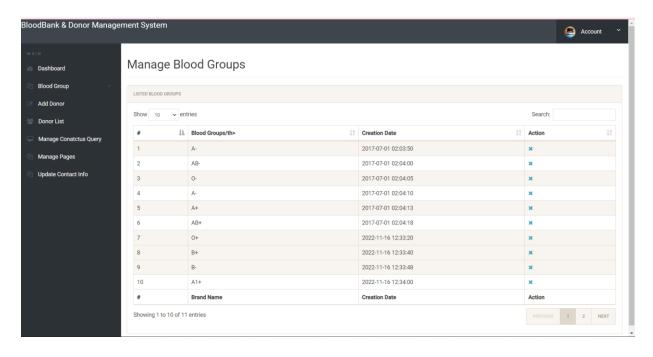

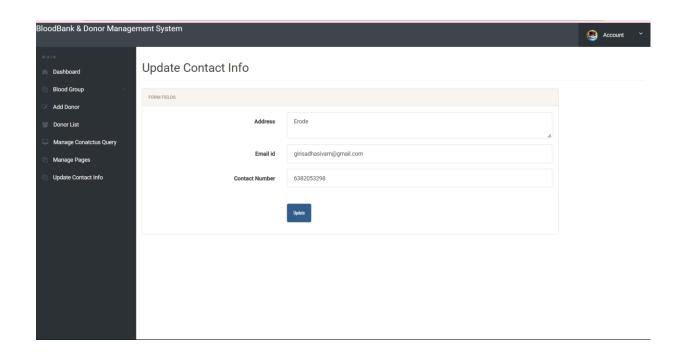

8. Testing

8.1 Performance Testing

S.No.	Parameter	Values	Screenshot
1.	Metrics	Regression Model: Logistic Regression Classification Model: • Confusion Matrix • [1 0 5] • Accuracy Score • 92.50000 • Recall Score — 98.666667 • ROC Score — 49.333333 • Classification Report: precision — 0.88 support — 80 f1-score — 0.90 recall — 0.93	** Things have upon beyond ***Control of the Control of the Contr
2.	. Tune The Model	Hyper parameter Tuning:(GridSearchCV) clf.best_score = 0.921875 Validation Method = GridSearchCV (@estinator=SVC()	In the control of the

8.2 User Acceptance Testing

1. Purpose of Document

The purpose of this document is to briefly explain the test coverage and open issues of the Exploratory Analysis Of Rainfall Data In India For Agriculture project at the time of the release to User Acceptance Testing (UAT).

2. Defect Analysis

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	10	4	2	3	20
Duplicate	1	0	3	0	4
External	2	3	0	1	6
Fixed	11	2	4	20	37
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	5	2	1	8
Totals	24	14	13	26	77

3. Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fall	Pass
Print Engine	7	0	0	7
Client Application	30	0	0	30
Security	2	0	0	2

Outsource Shipping	3	0	0	3
Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Cantrol	2	0	0	2

9. RESULTS

9.1 Performance Metrics

Software quality is a measurement of something intangible, "how good" a software product really is. Some of the aspects of so ftware quality taken are

- a. Scalability
- b. Speed
- c. Stability
- d. Reliability
- e. Security
- f. Maintainability and code quality

LOAD TEST

Scenario Name	Load Test – Plasma Donor application
Scenario Type	Load Test – Duration 1 hour
Scenario Objective	To Simulate the peak load and to monitor the performance of the Website
Steps	The online load will be maintained at steady state
Entry Criteria	The online load will be maintained at steady state
Exit Criteria	The online load will be maintained at steady state

STRESS TEST

Scenario Name	Stress Test - Plasma Donor application
Scenario Type	Stress Test
Scenario Objective	Objective is to verify that the application can handle the projected growth and to discover the breaking point
Steps	Ramp up to 150% of peak volume and continuously increase load until breaking point
Entry Criteria	All the monitors are in place Test Data is set up Peak load test completed successfully
Exit Criteria	Test completion report is agreed upon as per expectation

ENDURANCE / SOAK TEST:

Scenario Name	Soak Test - Exploratory Analysis of Rainfall Data in India for		
	Agriculture		
Scenario Type	Endurance – Duration 8 hours		
Scenario Objective	To discover memory issues and bottlenecks that might occur under		
	daily usage of the application		
Steps	Steady state is maintained for 8 hours with half of the peak load		
Entry Criteria	All the monitors are in place		
	Test Data is set up		
	Peak load test completed successfully		
Exit Criteria	Test completion report is agreed upon as per expectation		

10. ADVANTAGES:

- Have internal or external bleeding due to an injury
- Have sickle cell disease or another illness that affects the blood
- Are undergoing cancer treatment
- Are undergoing surgery, such as cardiovascular or orthopedic surgery
- Have an inherited blood disorder
- Are undergoing a transplant
- Need treatments involving plasma or other blood products

DISADVANTAGES:

Safety precautions they take include:

- screening donors for existing health conditions
- using new needles for each donation
- having professional staff on hand
- providing monitoring and refreshments to ensure a safe recovery

11. CONCLUSION

- 1. This Website gives accurate Plasma donors information it will very helpful.
- 2. It helps for whom need blood.

12. FUTURE SCOPE

- 1. The demand for plasma donor grown rapidly during the last decade and will grow even faster in coming years.
- 2. Plasma donor application of the state of the atmosphere for a given location using this website
- 3. It is a special kind of short range forecast carried out for the protection of human life

13. APPENDIX

Source Code: login.html

```
<center>
<div class="card text-left" style="width: 35rem;">
 <div class="card-body">
  <form action = "{{url_for('login')}}" method =
"POST">
<div class="form-group">
 <label for="exampleInputEmail1">Email
address</label>
 <input type="email" name ="email" class="form-</pre>
control" id="exampleInputEmail1" aria-
describedby="emailHelp" placeholder="Enter email"
required>
 <small id="emailHelp" class="form-text text-</pre>
muted">We'll never share your email with anyone
else.</small>
</div>
<div class="form-group">
 <label for="exampleInputPassword1">Password</label>
 <input type="password" name ="pass" class="form-</pre>
control" id="exampleInputPassword1"
placeholder="Password" required>
</div>
```

```
<buttoom type="submit" class="btn btn-
primary">Login</button>
</form>
 </div>
</div>
</center>
</body>
</html>
S_{\text{ignup.html}}
<Html>
<head>
<title>login</title>
<body>
<center>
<div class="card text-left" style="width: 35rem;">
 <div class="card-body">
    <div class="form-group">
   <form action = "{{url_for('addrec')}}" method =
"POST">
     <h3>Register as Donor</h3>
     <label for="name">Name</label>
```

```
<input type = "text" name = "nm" class="form-</pre>
control" required/>
      <label for="addr">Address</label>
     <textarea name = "add" class="form-control"
required></textarea>
      <label for="city">City</label>
     <input type = "text" name = "city" class="form-</pre>
control" required/>
      <label for="pin">postal code</label>
     <input type = "text" name = "pin" class="form-</pre>
control" required/>
     <label for="Bloodgroup">Blood Group</label>
     <select name="bg" class="form-control"</pre>
id="exampleFormControlSelect1">
      <option value="O+" selected>O+</option>
      <option value="O-">O-</option>
      <option value="A+">A+</option>
      <option value="A-">A-</option>
      <option value="B+">B+</option>
```

```
<option value="B-">B-</option>
      <option value="AB+">AB+</option>
      <option value="AB-">AB-</option>
     </select>
     <label for="exampleInputEmail1">Email
address</label>
     <input type = "text" name ="email" class="form-</pre>
control" required/>
     < label
for="exampleInputPassword1">Password</label>
     <input type = "password" name ="pass"</pre>
class="form-control" required/>
     <br>
     <buttoom type="submit" class="btn btn-
primary">Register</button>
   </form>
   </div>
   </div>
   </center>
   </body>
</html>
```

Requestdonor.html

```
<!doctype html>
{% extends "base.html" %}
{% block content %}{% with messages =
get_flashed_messages() % }
{ % if messages % }
  {%for mess in messages%}
 <div class="alert alert-warning alert-dismissible fade</pre>
show" role="alert">
<strong>{ {mess} }</strong>
<button type="button" class="close" data-dismiss="alert"</pre>
aria-label="Close">
 <span aria-hidden="true">&times;</span>
</button>
</div>
{ % endfor % }
{ % endif % }
{% endwith
{% if session['logged_in'] == True %}
{ % else % }
{ % endif % }
```

```
<br>
 <div class="card border-danger text-center">
   <div class="card-header">Total Blood in Blood
bank</div>
   <div class="card-body text-danger">
     <h5 class="card-title"><span class='numscroller'
data-min='1' data-max='{ {totalblood}}' data-delay='5'
data-increment='10'>{{totalblood}}</span> pints</h5>
   </div>
  </div>
<hr>>
     <div class="container">
 <div class="row">
  <div class="col"><div class="card text-white bg-</pre>
primary mb-3" style="max-width: 18rem;">
   <div class="card-header">A positive</div>
  <div class="card-body">
   <h5 class="card-title"><span class='numscroller' data-
```

```
min='1' data-max='{ {bloodtypestotal.apos}}' data-
delay='5' data-
increment='10'>{ {bloodtypestotal.apos} }</span>
pints</h5>
  </div>
 </div>
  <div class="col"><div class="card text-white bg-</pre>
secondary mb-3" style="max-width: 18rem;">
   <div class="card-header">A negative</div>
  <div class="card-body">
   <h5 class="card-title"><span class="count"><span
class='numscroller' data-min='1' data-
max='{{bloodtypestotal.aneg}}' data-delay='5' data-
increment='10'>{ {bloodtypestotal.aneg} }</span></span>
pints</h5>
  </div>
  </div>
  <div class="col"><div class="card text-white bg-</pre>
success mb-3" style="max-width: 18rem;">
   <div class="card-header">B positive</div>
  <div class="card-body">
```

```
<h5 class="card-title"><span class='numscroller' data-
min='1' data-max='{ {bloodtypestotal.bpos}}' data-
delay='5' data-
increment='10'>{{bloodtypestotal.bpos}}</span>
pints</h5>
  </div>
  </div></div>
  <div class="col"><div class="card text-white bg-</pre>
danger mb-3" style="max-width: 18rem;">
   <div class="card-header">B negative</div>
  <div class="card-body">
   <h5 class="card-title"><span class='numscroller' data-
min='1' data-max='{{bloodtypestotal.bneg}}' data-
delay='5' data-
increment='10'>{{bloodtypestotal.bneg}}</span>
pints</h5>
   </div>
  </div>
  <div class="w-100"></div>
```

```
<div class="col"><div class="card text-white bg-
warning mb-3" style="max-width: 18rem;">
   <div class="card-header">AB positive</div>
  <div class="card-body">
   <h5 class="card-title"><span class='numscroller' data-
min='1' data-max='{ {bloodtypestotal.abpos}}' data-
delay='5' data-
increment='10'>{ {bloodtypestotal.abpos} }</span>
pints</h5>
  </div>
  </div>
  <div class="col"><div class="card text-white bg-info"</pre>
mb-3" style="max-width: 18rem;">
   <div class="card-header">AB negative</div>
  <div class="card-body">
   <h5 class="card-title"><span class="count"><span
class='numscroller' data-min='1' data-
max='{{bloodtypestotal.abneg}}' data-delay='5' data-
increment='10'>{{bloodtypestotal.abneg}}</span></spa
n> pints</h5>
  </div>
```

```
</div>
  <div class="col"><div class="card bg-light mb-3"</pre>
style="max-width: 18rem;">
   <div class="card-header">O positive</div>
  <div class="card-body">
   <h5 class="card-title"><span class="count"><span
class='numscroller' data-min='1' data-
max='{{bloodtypestotal.opos}}' data-delay='5' data-
increment='10'>{{bloodtypestotal.opos}}</span>
pints</h5>
  </div>
  </div></div>
  <div class="col"><div class="card text-white bg-dark"</pre>
mb-3" style="max-width: 18rem;">
   <div class="card-header">O negtive</div>
  <div class="card-body">
   <h5 class="card-title"><span class="count"><span
class='numscroller' data-min='1' data-
max='{{bloodtypestotal.oneg}}' data-delay='5' data-
increment='10'>{{bloodtypestotal.oneg}}</span>
pints</h5> </div>
  </div>
```

```
<div class="alert alert-primary" role="alert">
 <h4>blood donatations and their details</h4>{% for row
in rows % }
      <div class="card">
       <h5 class="card-
header">{{row["donorname"]}}</h5>
       <div class="card-body">
         <h5 class="card-title">{{row["type"]}}</h5>
         {{ row["donoremail"]}}}
         {{row['donorsex']}}
         {{row['qty']}} pints
         {{row['dweight']}}kg's
         { {row['phone'] } } 
         <div class="row">
  <div class="col">
   <form action="{{url_for('editdonor',id=row['id'])}}"</pre>
method="GET">
   <input type="submit" class="btn btn-primary"</pre>
name="button" value="edit"/>
   </form>
  </div>
  <div class="col">
   <form
```

```
action="{{url_for('deletebloodentry',id=row['id'])}}"
method="GET">
  <input type="submit" name="button" class="btn btn-</pre>
danger" value="delete entry"/>
  </form>
 {% endfor %}
<hr>>
   <nav aria-label="breadcrumb">

    class="breadcrumb">

     class="breadcrumb-item active" aria-
current="page"> Registered donores:
    </01>
   <thead>
 name
  address
  city
  pin
  blood group
  email
  contact them
  delete
```

```
</thead>{% for r in users %}
       {r["name"]}}
         {r["addr"]}}
         {{ r["city"]}}
         {{r['pin']}}}
          \{ \{ r['bg'] \} \} 
         {r['email']}}
         <button type="button" class="btn btn-
primary mt-1" data-toggle="modal" data-
target="#exampleModalCenter">
  contact for blood
 </button>
 <div class="modal fade" id="exampleModalCenter"</pre>
tabindex="-1" role="dialog" aria-
labelledby="exampleModalCenterTitle" aria-
hidden="true">
  <div class="modal-dialog modal-dialog-centered"</pre>
role="document">
   <div class="modal-content">
    <div class="modal-header">
     <h5 class="modal-title"
id="exampleModalCenterTitle">contact for blood</h5>
```

```
<button type="button" class="close" data-
dismiss="modal" aria-label="Close">
       <span aria-hidden="true">&times;</span>
      </button>
     </div>
     <div class="modal-body">
      <form method="POST"
action="{{url_for('contactforblood',emailid=r['email'])}}
       <label for="name">Name</label>
       <input type = "text" name = "nm"</pre>
value="admin@bloodbank.com" class="form-control"
required/>
      <label for="addr"> confirm your Address</label>
     <input type="text" name="add" class="form-</pre>
control" value="admin's address" required></textarea>
     <buttoon type="button" class="btn btn-secondary mt-
1" data-dismiss="modal">Close</button>
      <buttoon type="submit" class="btn btn-primary mt-
1">send request</button>
    </div>
   </div>
  </div>
```

```
</div>

btn-danger">delete user</a>

</body>
</html>
```

GITHUB LINK:

https://github.com/IBM-EPBL/IBM-Project-19243-1659694749

PROJECT DEMO LINK:

https://drive.google.com/file/d/1nBT16wRA_HCPuWsCQIU1DqLXLNtX-Vvy/view?usp=sharing