#### Project Development Phase Model Performance Test

Date	18 November 2022
Team ID	PNT2022TMID37270
Project Name	Project – Web Phishing Detection
Maximum Marks	10 Marks

#### **Model Performance Testing:**

Project team shall fill the following information in model performance testing template.


S.No.	Parameter	Values	Screenshot		
1.	Metrics	Classification Model: Gradient Boosting Classification Accuray Score- 97.4%	10   10   10   10   10   10   10   10		
2.	Tune the Model	Hyperparameter Tuning - 97% Validation Method – KFOLD & Cross Validation Method	Wilsoner signal-rank test  10 100 control on two communication  The control on the control of the c		

## 1. METRICS: CLASSIFICATION REPORT:

# In [52]: #computing the classification report of the model print(metrics.classification\_report(y\_test, y\_test\_gbc))


	precision	recall	f1-score	support
-1	0.99	0.96	0.97	976
1	0.97	0.99	0.98	1235
accuracy			0.97	2211
macro avg	0.98	0.97	0.97	2211
weighted avg	0.97	0.97	0.97	2211

#### **PERFORMANCE:**



Out[83]:		ML Model	Accuracy	f1_score	Recall	Precision
	0	Gradient Boosting Classifier	0.974	0.977	0.994	0.986
	1	CatBoost Classifier	0.972	0.975	0.994	0.989
	2	Random Forest	0.969	0.972	0.992	0.991
	3	Support Vector Machine	0.964	0.968	0.980	0.965
	4	Decision Tree	0.958	0.962	0.991	0.993
	5	K-Nearest Neighbors	0.956	0.961	0.991	0.989
	6	Logistic Regression	0.934	0.941	0.943	0,927
	7	Naive Bayes Classifier	0.605	0.454	0.292	0.997
	8	XGBoost Classifier	0.548	0.548	0.993	0.984
	9	Multi-layer Perceptron	0.543	0.543	0.989	0.983

#### 2. TUNE THE MODEL - HYPERPARAMETER TUNING

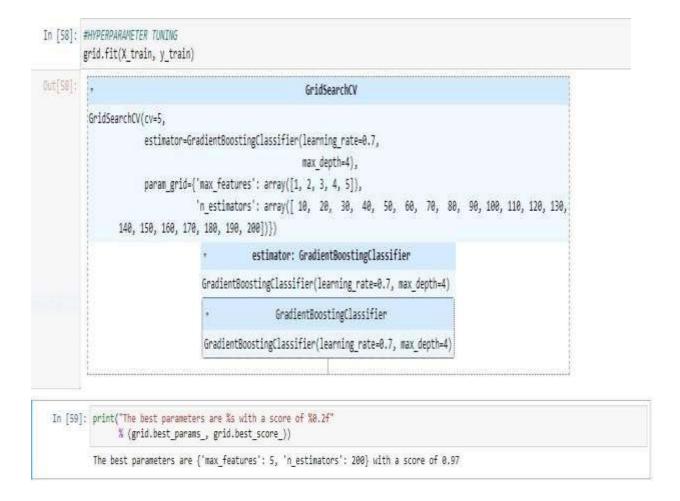

### **VALIDATION METHODS: KFOLD & Cross Folding**

#### Wilcoxon signed-rank test

```
In [78]: #KFOLD and Cross Validation Model
         from scipy.stats import wilcoxon
         from sklearn.datasets import load_iris
         from sklearn.ensemble import GradientBoostingClassifier
         from xgboost import XGBClassifier
         from sklearn.model_selection import cross_val_score, KFold
         # Load the dataset
         X = load_iris().data
         y = load_iris().target
         # Prepare models and select your CV method
         model1 = GradientBoostingClassifier(n_estimators=100)
         model2 = XGBClassifier(n_estimators=100)
         kf = KFold(n_splits=20, random_state=None)
         # Extract results for each model on the same folds
         results_model1 = cross_val_score(model1, X, y, cv=kf)
         results_model2 = cross_val_score(model2, X, y, cv=kf)
         stat, p = wilcoxon(results model1, results model2, zero method='zsplit');
         stat
Out[78]: 95.0
```

#### 5x2CV combined F test

```
In [89]: from mlxtend.evaluate import combined_ftest_5x2cv
         from sklearn.tree import DecisionTreeClassifier, ExtraTreeClassifier
          from sklearn.ensemble import GradientBoostingClassifier
         from mlxtend.data import iris_data
         # Prepare data and clfs.
         X, y = iris_data()
         clf1 = GradientBoostingClassifier()
         clf2 = DecisionTreeClassifier()
         # Calculate p-value
         f, p = combined_ftest_5x2cv(estimator1=clf1,
                                   estimator2=clf2,
                                   X=X, y=y,
                                    random_seed=1)
         print('f-value:', f)
         print('p-value:', p)
         f-value: 1.727272727272733
         p-value: 0.2840135734291782
```