

Project Development PhaseSprint II

Date	13 November 2022
Team ID	PNT2022TMID48245
Project Name	Signs with Smart Connectivity for better road safety

SPRINT TARGETS:

Sprint	Functional Requirement (Epic)	UserStory Number	UserStory / Task	StoryPoints	Priority	Team Members
Sprint-2	Safe Ride	USN-4	As a traveler , I should have a hustie free journey	20	Medium	R.Gautham Ganesh T.R.Anantha krishnan R.Tamizharasan P.Santhiya Jinthan

IBM

final_iotino copy - Wokwi Arduino

+

wokwi.com/projects/348178332935782994

Gmail

YouTube

Jenkov

WP

KPR

Insta

java

sql

Netflix

hotstar

UI/UX - Great Learn...

Smart Connected Si...

IBM

Smart Road Safety...

IBM-EPBL/IBM-Proj...

WOKWI

SAVE

SHARE

final_iotino copy

Docs

sketch.ino

diagram.json


libraries.txt

Library Manager




```
1 #include <WiFi.h>//library for wifi
2 #include <PubSubClient.h>//library for MQTT
3 #include "DHT.h"// Library for dht11
4 #define DHTPIN 5 // what pin we're connected to
5 #define DHTTYPE DHT22 // define type of sensor DHT 11
6
7 DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of dht connect
8
9 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
10
11 //-----credentials of IBM Accounts-----
12
13 #define ORG "psh4py"//IBM ORGANITION ID
14 #define DEVICE_TYPE "alert-device"//Device type mentioned in ibm watson IOT Platform
15 #define DEVICE_ID "4571"//Device ID mentioned in ibm watson IOT Platform
16 #define TOKEN "12345678" //Token
17 String data3;
18 float h, t;
19
20
21 //----- Customise the above values -----
22 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
23 char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform a
24 char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command type AND
25 char authMethod[] = "use-token-auth";// authentication method
26 char token[] = TOKEN;
27 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id
28
29
30 //-----
31 WiFiClient wificlient; // creating the instance for wificlient
32 PubSubClient client(server, 1883, callback ,wificlient); //calling the predefined client
33
34
```

Simulation

01:47.514 98%



temp:37.40
humidity:86.00
Sending payload:
{ "temp":37.40,"humidity":86.00,"North":0,"South":0,"East":0,"West":0}
Publish ok
Reconnecting client to psh4py.messaging.internetofthings.ibmcloud.com
.....

IoT Device – IoT Platform

Search

Browse

Action

Device Types

Interfaces

Add Device

Device ID	Status	Device Type	Class ID	Date Added	Descriptive Location
0001	Disconnected	edge-device-1	Device	Nov 5, 2022 8:56 PM	

Identity

Device Information

Recent Events

State


Logs

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
rnd_number	{"Lane_1":5,"Lane_2":83,"Lane_3":30,"Lane_4":...	json	a few seconds ago
rnd_number	{"Lane_1":59,"Lane_2":59,"Lane_3":94,"Lane_4":...	json	a few seconds ago
rnd_number	{"Lane_1":93,"Lane_2":88,"Lane_3":49,"Lane_4":...	json	a few seconds ago
rnd_number	{"Lane_1":2,"Lane_2":61,"Lane_3":21,"Lane_4":...	json	a few seconds ago
rnd_number	{"Lane_1":70,"Lane_2":11,"Lane_3":69,"Lane_4":...	json	a few seconds ago

1 Simulation running

Node Red

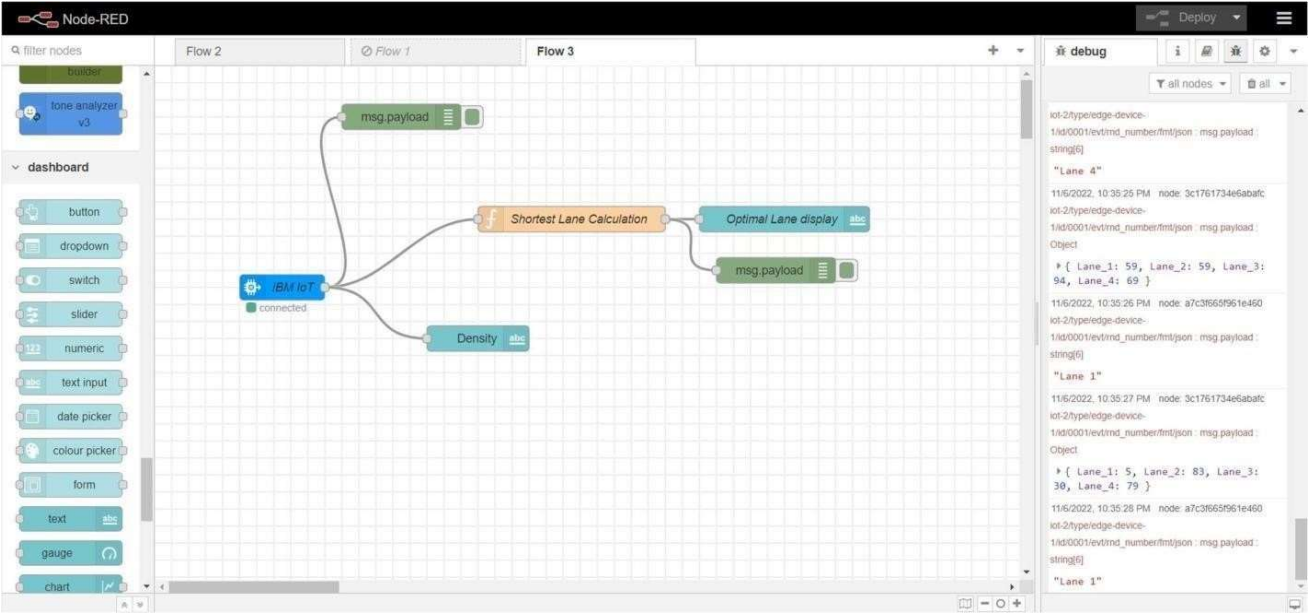

Edit function node

Delete

Cancel

Done

Properties

Name

Shortest Lane Calculation

Setup

On Start

On Message

On Stop

```
1 var l1 = msg.payload.Lane_1;
2 var l2 = msg.payload.Lane_2;
3 var l3 = msg.payload.Lane_3;
4 var l4 = msg.payload.Lane_4;
5
6 mini = Math.min(l1,l2,l3,l4);
7
8 res = "-";
9
10 switch(mini) {
11     case l1: res = "Lane 1"; break;
12     case l2: res = "Lane 2"; break;
13     case l3: res = "Lane 3"; break;
14     case l4: res = "Lane 4"; break;
15 }
16
17 msg.payload = res;
18
19 return msg;
```

Node Red Web UI

