


## DEPLOYMENT OF APP IN IBM CLOUD

Team ID	PNT2022TMID02606
Project Name	CONTAINMENT ZONE ALERTING APPLICATION
Team Members:	NAVEEN U,NAVEEN N,LOGESH G,NAVEEN KUMAR G

### CONTAINERIZE THE APP

In your project directory, create a file named "Dockerfile."  
Suggestion: Name your file exactly "Dockerfile," nothing else.

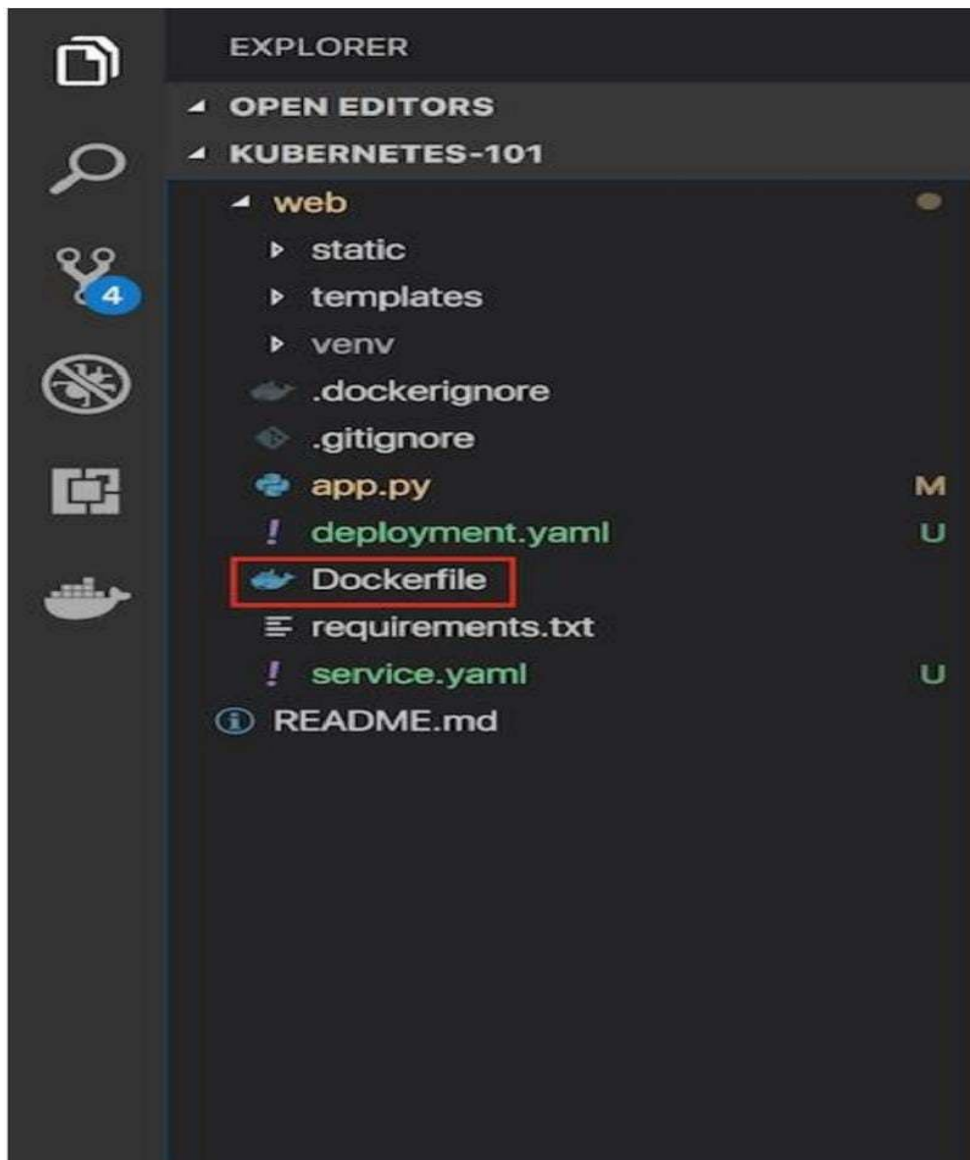

A “Dockerfile” is used to indicate to Docker a base image, the Docker settings you need, and a list of commands you would like to have executed to prepare and start your new container.

In the file, paste this code:

```
FROM python:2.7
LABEL maintainer="Kunal Malhotra, kunal.malhotra1@ibm.com"
RUN apt-get update
```

```
RUN mkdir /app
WORKDIR /app
COPY . /app
RUN pip install -r requirements.txt
EXPOSE 5000
ENTRYPOINT [ "python" ]
CMD [ "app.py" ]
```

## **Explanation and breakdown of the above Dockerfile code**

1. The first part of the code above is:

```
FROM python:2.7
```

Because this Flask application uses Python 2.7, we want an environment that supports it and already has it installed. Fortunately, DockerHub has an official image that's installed on top of Ubuntu. In one line, we will have a base Ubuntu image with Python 2.7, virtualenv, and pip. There are tons of images on DockerHub, but if you would like to start off with a fresh Ubuntu image and build on top of it, you could do that.

2. Let's look at the next part of the code:

```
LABEL maintainer="Kunal Malhotra, kunal.malhotra1@ibm.com"
RUN apt-get update
```

3. Note the maintainer and update the Ubuntu package index. The command is RUN, which is a function that runs the command after it.

`RUN mkdir /app`

`WORKDIR /app`

`COPY . /app`

4. Now it's time to add the Flask application to the image. For simplicity, copy the application under the /app directory on our Docker Image.

`WORKDIR` is essentially a `cd` in `bash`, and `COPY` copies a certain directory to the provided directory in an image. `ADD` is another command that does the same thing as `COPY`, but it also allows you to add a repository from a URL. Thus, if you want to clone your git repository instead of copying it from your local repository (for staging and production purposes), you can use that. `COPY`, however, should be used most of the time unless you have a URL.

3. Now that we have our repository copied to the image, we will install all of our dependencies, which is defined in the `requirements.txt` part of the code.

`RUN pip install --no-cache-dir -r requirements.txt`

4. We want to expose the port(5000) the Flask application runs on, so we use `EXPOSE`. `EXPOSE 5000`

7. `ENTRYPOINT` specifies the entrypoint of your application.

`ENTRYPOINT [ "python" ] CMD [ "app.py" ]`