



UNIVERSITY ADMIT ELIGIBILITY PREDICTOR

A PROJECT REPORT

Submitted by

DIVAKAR K (311019205012)

SANDEEP M N (311019205039)

SAMSON A J (311019205038)

JAYASURYA K (311019205020)

in partial fulfillment for the award of the degree of

BACHELOR OF TECHNOLOGY

IN INFORMATION TECHNOLOGY

KCG COLLEGE OF TECHNOLOGY, KARAPAKKAM

NOVEMBER 2022

CONTENTS

1. Introduction

1.1 Project Overview

1.2 Purpose

2. Literature Survey

2.1 Existing Problem

2.2 References

2.3 Problem Statement Definitions

3. Ideation & Proposed Solution

3.1 Empathy Map Canvas

3.2 Ideation & Brainstorming

3.3 Proposed Solution

3.4 Problem Solution Fit

4. Requirement Analysis

4.1 Functional Requirement

4.2 Non-Functional Requirement

5. Project Design

5.1 Data Flow Diagrams

5.2 Solution & Technical Architecture

5.3 User Stories

6. Project Planning & Scheduling

6.1 Sprint Planning & Estimation

6.2 Sprint Delivery Schedule

7. Coding & Solutioning

7.1 Feature 1

7.2 Feature 2

8. Testing

8.1 Test Cases

8.2 User Acceptance Testing

9. Results

9.1 Performance Metrics

10. Advantages & Disadvantages

11. Conclusion

12. Future Scope

13. Appendix

13.1 Source Code

13.2 GitHub

13.3 Project Demo Link

1. INTRODUCTION

The world's business sector is escalating and is constantly seeking information and experiences that are commonly beneficial to individuals. Young specialists who need to stay in their current positions are always looking for advanced degrees to help them address their skills and information. As such, the number of her sophomores applying for graduation exams has increased over the past decade. One of her main concerns is getting into fantasy her university. You can see that undergraduates are actually choosing to get their education at prestigious universities. Furthermore, when it comes to international alumni, the United States is the main trend for most of them. The most prestigious universities offer a wide range of courses accessible in any order, exceptionally accredited teaching and education programs, an international second Research scholarships for degrees are available.

According to Gauges, more than 4,444 of her 10 million international sophomores are enrolled in her 4,200+ colleges and universities, both private and public. In general, the number of undergraduates concentrated in America comes from Asian countries such as India, Pakistan, Sri Lanka, Japan and China. Select the United Kingdom, Germany, Italy, Australia, Canada as well as the United States. These countries are witnessing a rapid increase in the number of individuals seeking more advanced investigations. The basic reason why sophomores go on to master's programs in foreign graduate schools is that the number of vacancies is low and the number of people in these positions in each country is huge. This has led many professional undergraduates to pursue postgraduate studies. You can see that there are quite a few bachelor's degrees and master's degrees in computer science at US universities. The focus of this study applies to these undergraduate degrees. Many schools in the US follow comparative requirements for undergraduate accreditation. Schools consider several variables, including placement in fitness assessments and school performance ratings. English rankings are determined by exposure in English proficiency tests such as TOEFL and IELTS.

The University's Admissions Advisory Board makes decisions regarding the acceptance or rejection of specific young researchers based on the general profile of the applicant's application. Records recorded with this company are marked with informative areas. Acknowledgment is a 400-row data set containing seven different autonomic factors. ie

- Graduate Record Examination 1 (GRE) score. The score consists of 340 foci.
- English as a Foreign Language (TOEFL) test score. It consists of 120 priority areas.
- Uni.Rating. Shows the position of colleges offering bachelor's degrees among various colleges. Your score will be out of 5.
- Statement of Purpose (SOP), a record written to reveal the life, motivations and inspirations of a selected degree/college applicant. The score consists of five focal points.
- The strength of a letter of recommendation (LOR) verifies the applicant's professional experience, falsifies validity, supports certainty, and guarantees your competence. The score consists of five focal points.
- Undergraduate GPA (CGPA) from 10.
- Research experience (either 0 or 1) that could support the application, such as distributing research papers at conferences or filling out as a right-hand exam for university faculty. One ward variable can be anticipated which is possibility of affirmation, that is as per the input given will be going from 0 to 1.

1.1 PROJECT OVERVIEW


PRE-REQUISITIES

Anaconda Installation:


Anaconda is a distribution of the Python and R programming languages for scientific computing that aims to simplify package management and deployment. The distribution includes datascience packages suitable for Windows, Linux, and macOS. Developed and maintained by Anaconda. Founded in 2012 by Peter Wang and Travis Olyphant. As Anaconda, also known as Anaconda Distribution or Anaconda Individual Edition, the company's other products include his Anaconda Team Edition and Anaconda Enterprise Edition, neither of which are free.

WAY TO INSTALL ANACONDA:


STEP 1: Download and Anaconda

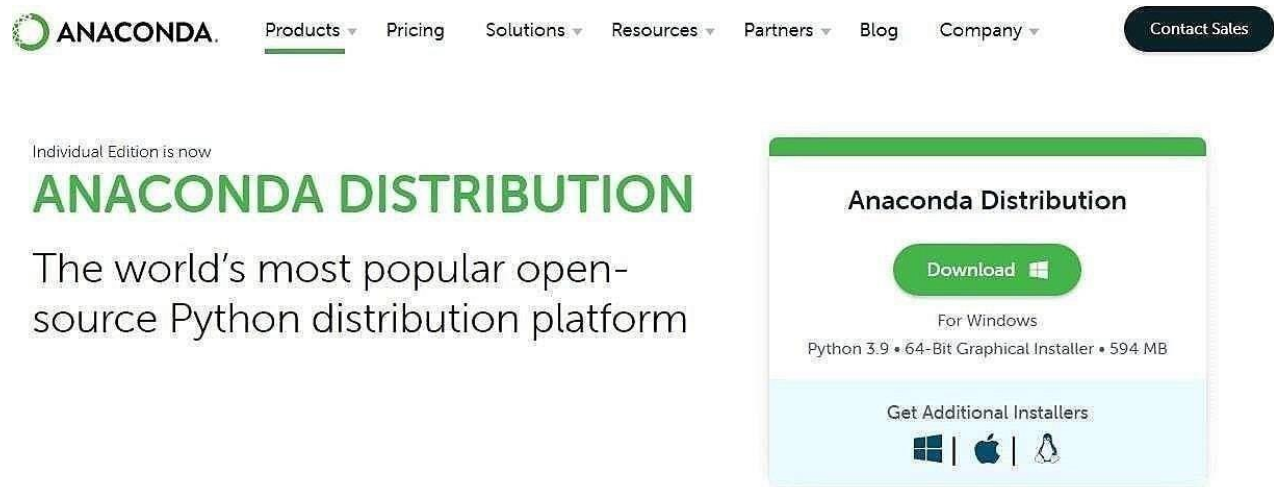


STEP 2: Install the Anaconda

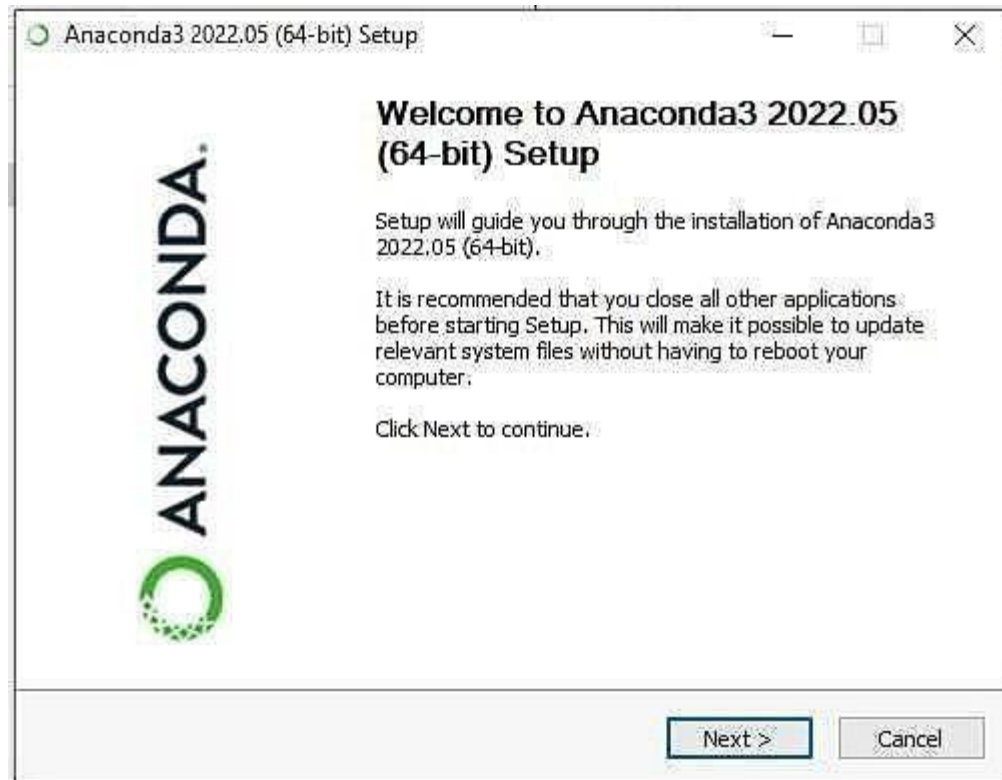


STEP 3: Click I Agree

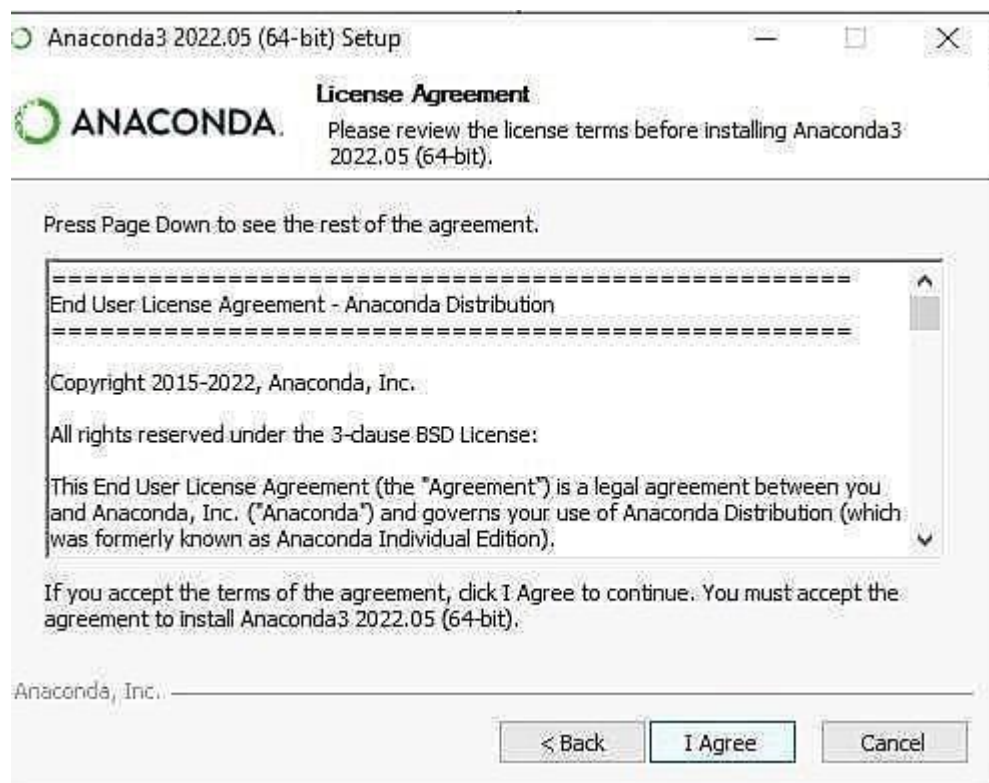


STEP 4: Choose the Installation Location

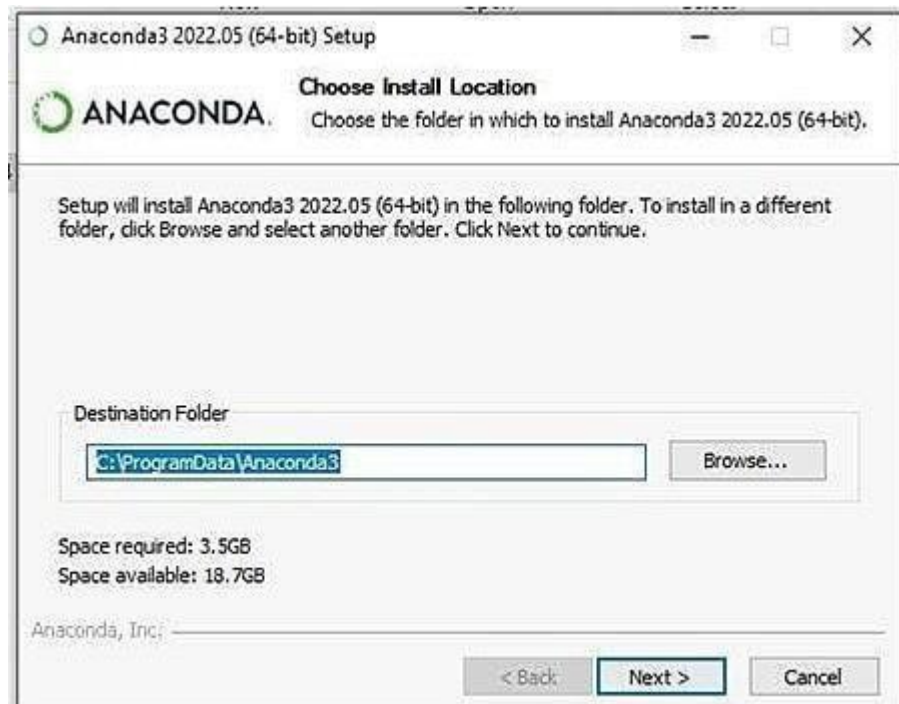

STEP 5: Installing the Requiring packages

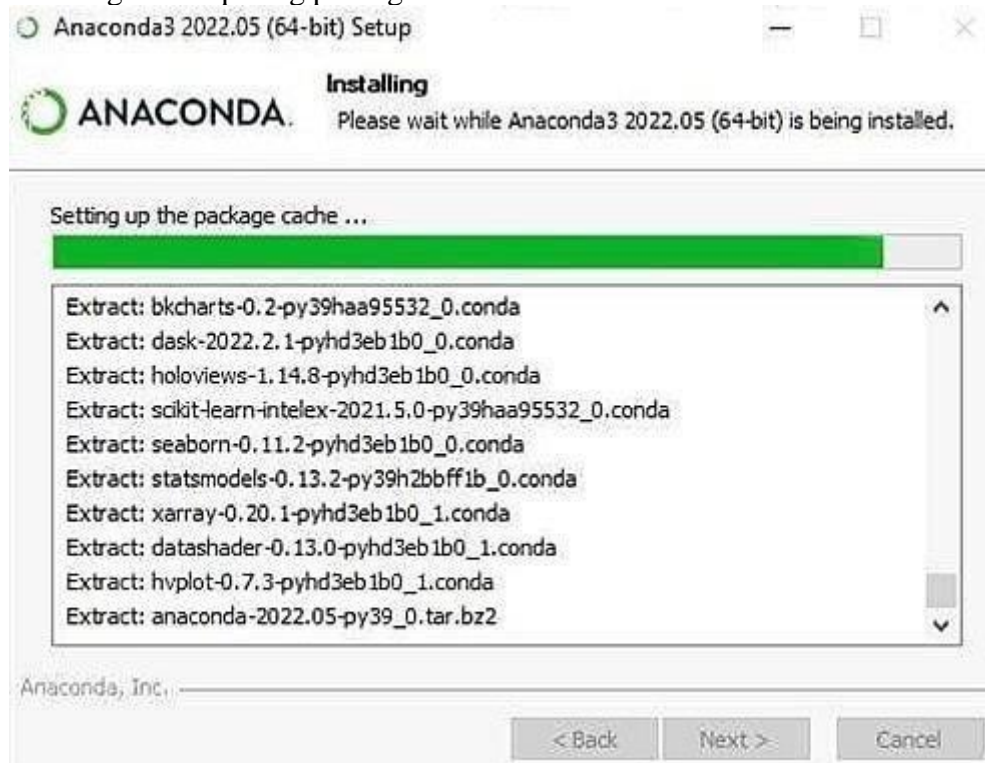

STEP 6: Setting up the base environment

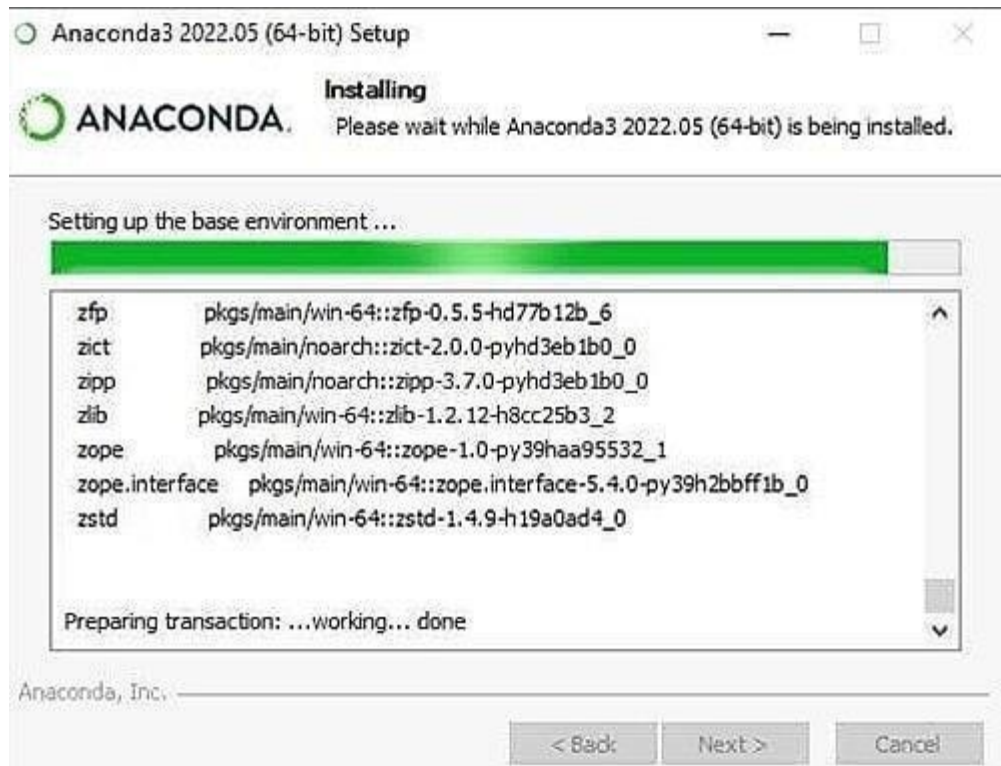


STEP 7: Successfully Installed and check the Anaconda Navigator working or not




Python packages installation:

Step 1: Open the anaconda navigator in the start menu

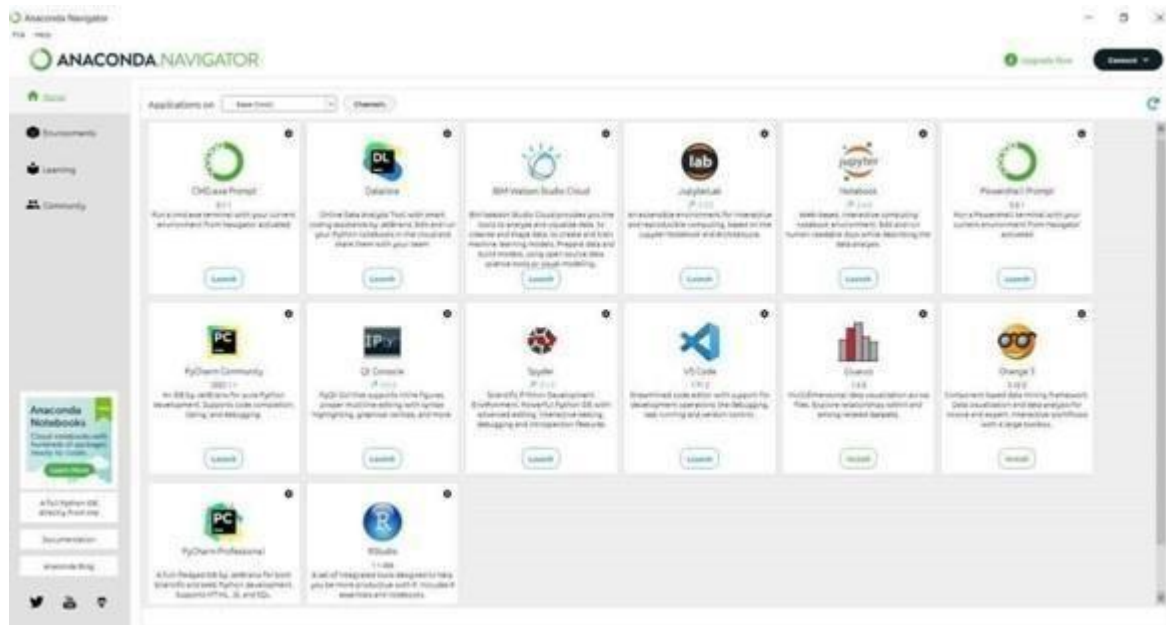

Step 2: Open the CMD.exe prompt

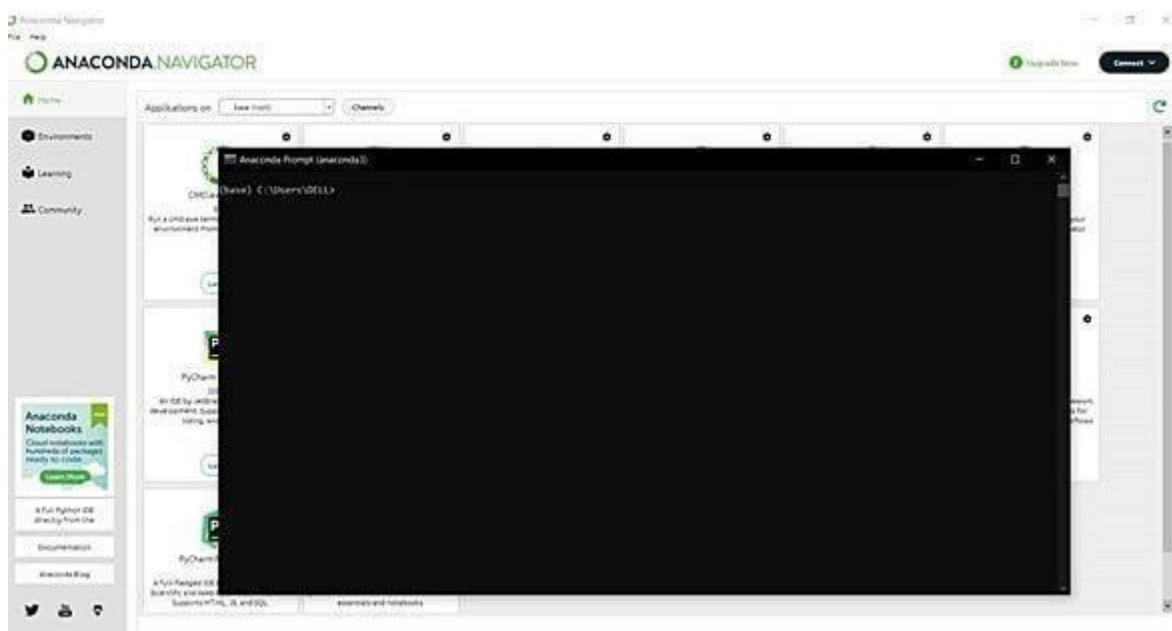


Step 3: Install the NUMPY package

To enter the numpy package enter the command in the CMD.exe

Command: **Pip install numpy**

Numpy:

This package is used to perform numerical computations. This package comes pre-installed with Anaconda. NumPy is used for manipulating arrays. NumPy stands for Numerical Python.

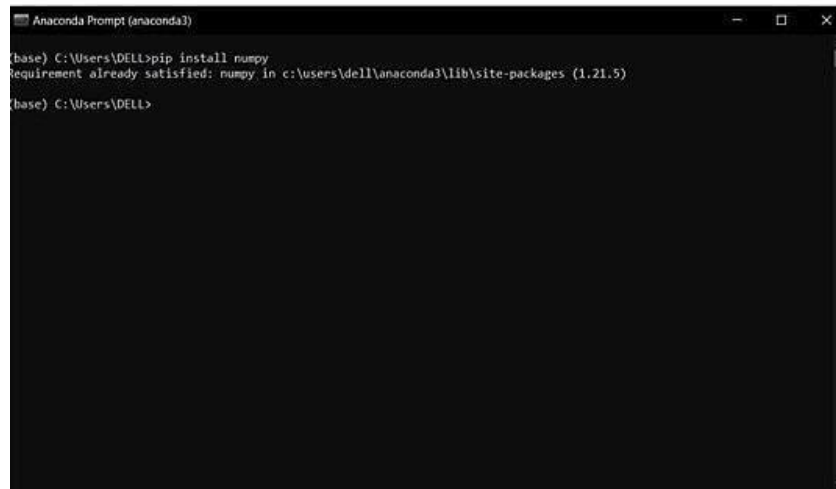A screenshot of the Anaconda Prompt window. The title bar reads 'Anaconda Prompt (anaconda3)'. The command prompt shows the command '(base) C:\Users\DELL>pip install numpy' and the output 'Requirement already satisfied: numpy in c:\users\dell\anaconda3\lib\site-packages (1.21.5)'. The prompt then shows '(base) C:\Users\DELL>'.

Step 4: Install the pandas package.

To enter the pandas package enter the command in the CMD.exe

Command: **Pip install pandas**

Pandas:

Pandas is one of the most widely used Python libraries for data science. It provides powerful and easy-to-use structure and data analysis tools. This package comes pre-installed with Anaconda. An open source library built on top of the NumPy library. A Python package that provides various data structures and operations for working with numerical data and time series. Mainly, it's common for data to be imported and analyzed much easier. Pandas is fast, providing users with high performance and productivity.

```
Anaconda Prompt (anaconda3) - pip install pandas

(base) C:\Users\DELL>pip install pandas
Requirement already satisfied: pandas in c:\users\dell\anaconda3\lib\site-packages (1.4.2)
Requirement already satisfied: python-dateutil>=2.8.1 in c:\users\dell\anaconda3\lib\site-packages (from pandas) (2.8.2)
Requirement already satisfied: numpy>=1.18.5 in c:\users\dell\anaconda3\lib\site-packages (from pandas) (1.21.5)
Requirement already satisfied: pytz>=2020.1 in c:\users\dell\anaconda3\lib\site-packages (from pandas) (2021.3)
Requirement already satisfied: six>=1.5 in c:\users\dell\anaconda3\lib\site-packages (from python-dateutil>=2.8.1->pandas) (1.16.0)
```

Step 5: Install the Matplotlib package.

To enter the Matplotlib package enter the command in the CMD.exe

Command: **Pip install Matplotlib**

Matplotlib:

Matplotlib is a comprehensive library for creating static, animated and interactive visualizations in Python. This package comes pre-installed with Anaconda. Matplotlib is a nice visualization library in Python for 2D plotting of arrays. Matplotlib is a cross-platform data visualization library based on NumPy arrays and designed to work with the wider SciPy stack. Introduced by John Hunter in 2002.

```
Anaconda Prompt (anaconda3)

(base) C:\Users\DELL>pip install matplotlib
Requirement already satisfied: matplotlib in c:\users\dell\anaconda3\lib\site-packages (3.5.1)
Requirement already satisfied: cycler>=0.10 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (0.11.0)
Requirement already satisfied: pyparsing>=2.2.1 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (3.0.4)
Requirement already satisfied: python-dateutil>=2.7 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (2.8.2)
Requirement already satisfied: numpy>=1.17 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (1.21.5)
Requirement already satisfied: pillow>=6.2.0 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (9.0.1)
Requirement already satisfied: packaging>=20.0 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (21.3)
Requirement already satisfied: fonttools>=4.22.0 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (4.25.0)
Requirement already satisfied: kiwisolver>=1.0.1 in c:\users\dell\anaconda3\lib\site-packages (from matplotlib) (1.3.2)
Requirement already satisfied: six>=1.5 in c:\users\dell\anaconda3\lib\site-packages (from python-dateutil>=2.7->matplotlib) (1.16.0)

(base) C:\Users\DELL>
```


Step 6: Install the Scikit-learn package.

To enter the Scikit-learn package enter the command in the CMD.exe

Command: **Pip install Scikit-learn**

Scikit-learn:

This is a machine learning library for the Python programming language. This package comes pre-installed with Anaconda. Scikit Learn in Python is primarily used to focus on modeling in Python. It was only focused on modeling, not loading data.

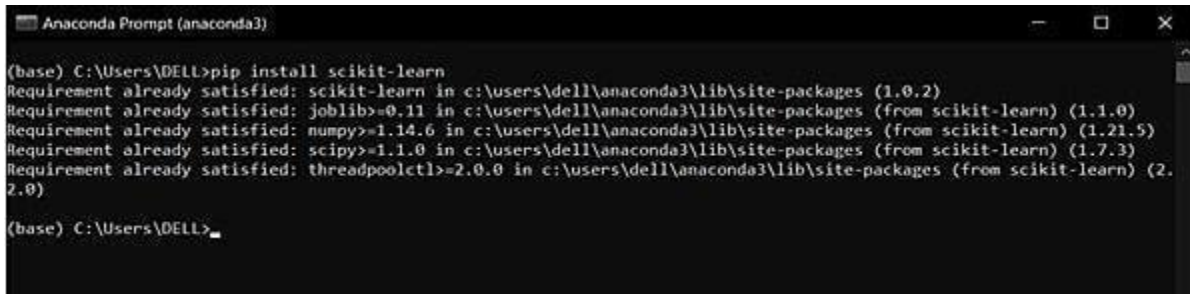A screenshot of the Anaconda Prompt (anaconda3) window. The command prompt shows the command 'pip install scikit-learn' being executed. The output indicates that the requirement is already satisfied, listing the installed version (1.0.2) and the paths for its dependencies: joblib (0.11), numpy (1.14.6), scipy (1.1.0), and threadpoolctl (2.0.0).

```
Anaconda Prompt (anaconda3)
(base) C:\Users\DELL>pip install scikit-learn
Requirement already satisfied: scikit-learn in c:\users\dell\anaconda3\lib\site-packages (1.0.2)
Requirement already satisfied: joblib>=0.11 in c:\users\dell\anaconda3\lib\site-packages (from scikit-learn) (1.1.0)
Requirement already satisfied: numpy>=1.14.6 in c:\users\dell\anaconda3\lib\site-packages (from scikit-learn) (1.21.5)
Requirement already satisfied: scipy>=1.1.0 in c:\users\dell\anaconda3\lib\site-packages (from scikit-learn) (1.7.3)
Requirement already satisfied: threadpoolctl>=2.0.0 in c:\users\dell\anaconda3\lib\site-packages (from scikit-learn) (2.2.0)
(base) C:\Users\DELL>
```

Step 7: Install the Flask package.

To enter the Flask package enter the command in the CMD.exe

Command: **Pip install Flask**

Flask:

Flask is a lightweight WSGI web application framework. Flask is a web application framework written in Python. It is developed by Armin Ronacher, who leads an international group of Python enthusiasts called Pocco. Flask is based on the WSGI toolkit tools and the Jinja2 template engine. Both are Pocco projects.

A screenshot of the Anaconda Prompt (anaconda3) window. The command prompt shows the command 'pip install flask' being executed. The output indicates that the requirement is already satisfied, listing the installed version (1.1.2) and the paths for its dependencies: click (5.1), Werkzeug (0.15), Jinja2 (2.10.1), itsdangerous (0.24), colorama, and MarkupSafe (0.23).

```
Anaconda Prompt (anaconda3)
(base) C:\Users\DELL>pip install flask
Requirement already satisfied: flask in c:\users\dell\anaconda3\lib\site-packages (1.1.2)
Requirement already satisfied: click>=5.1 in c:\users\dell\anaconda3\lib\site-packages (from flask) (8.0.4)
Requirement already satisfied: Werkzeug>=0.15 in c:\users\dell\anaconda3\lib\site-packages (from flask) (2.0.3)
Requirement already satisfied: Jinja2>=2.10.1 in c:\users\dell\anaconda3\lib\site-packages (from flask) (2.11.3)
Requirement already satisfied: itsdangerous>=0.24 in c:\users\dell\anaconda3\lib\site-packages (from flask) (2.0.1)
Requirement already satisfied: colorama in c:\users\dell\anaconda3\lib\site-packages (from click>=5.1->flask) (0.4.4)
Requirement already satisfied: MarkupSafe>=0.23 in c:\users\dell\anaconda3\lib\site-packages (from Jinja2>=2.10.1->flask) (2.0.1)
(base) C:\Users\DELL>
```

PROJECT FLOW

You will go through all the steps mentioned below to complete the project.

- User interacts with the UI (User Interface) to enter Data
- The entered data is analyzed by the model which is integrated
- Once model analyses the input the prediction is showcased on the UI

To accomplish this, we have to complete all the activities and tasks listed below


- Data Collection.
 - Collect the dataset or Create the dataset
- Data Preprocessing.
 - Import the Libraries.
 - Importing the dataset.
 - Checking for Null Values.
 - Data Visualization.
 - Taking care of Missing Data.
 - Label encoding.
 - One Hot Encoding.
 - Feature Scaling.
 - Splitting Data into Train and Test.
- Model Building
 - Training and testing the model
 - Evaluation of Model
- Application Building
 - Create an HTML file
 - Build a Python Code

PROJECT OBJECTIVES

- To understand regression and classification problems.
- To grab insights from data through visualization.
- Applying different Machine Learning algorithms to determine the probability of acceptance in a particular university.
- Evaluation metrics build a web application using the Flask framework

PROJECT STRUCTURE

Create a Project folder that contains files as shown below

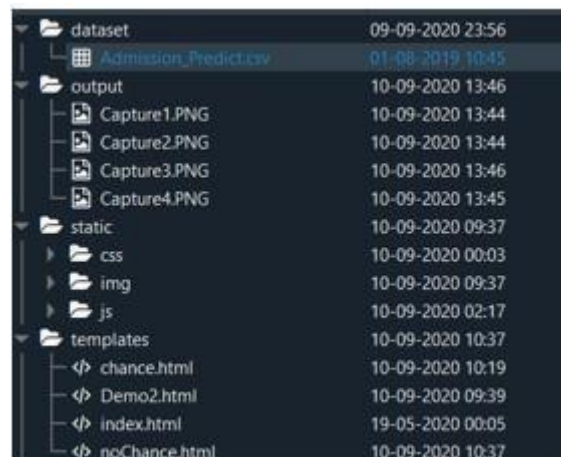





DATA COLLECTION

The path to common information varies by project type. ML projects use real-time information. Information indexes can be collected from a variety of sources such as documents, data sets, sensors, and other sources, using free information collection from the Internet. Kaggle and the UCI Machinelearning Repository are the most commonly used repositories for sorting

information for machine learning models. Kaggle is probably the most visited website used for information gathering. Collect the dataset or Create the dataset.

401 lines (401 sloc) | 12.6 KB

RawBlame



Search this file...

Serial No.	GRE Score	TOEFL Score	University Rating	SOP	LOR	CGPA	Research	Chance of Admit
1	337	118	4	4.5	4.5	9.65	1	0.92
2	324	107	4	4	4.5	8.87	1	0.76
3	316	104	3	3	3.5	8	1	0.72
4	322	110	3	3.5	2.5	8.67	1	0.8
5	314	103	2	2	3	8.21	0	0.65
6	330	115	5	4.5	3	9.34	1	0.9
7	321	109	3	3	4	8.2	1	0.75
8	308	101	2	3	4	7.9	0	0.68
9	302	102	1	2	1.5	8	0	0.5
10	323	108	3	3.5	3	8.6	0	0.45
11	325	106	3	3.5	4	8.4	1	0.52
12	327	111	4	4	4.5	9	1	0.84
13	328	112	4	4	4.5	9.1	1	0.78
14	307	109	3	4	3	8	1	0.62
15	311	104	3	3.5	2	8.2	1	0.61
16	314	105	3	3.5	2.5	8.3	0	0.54
17	317	107	3	4	3	8.7	0	0.66
18	319	106	3	4	3	8	1	0.65
19	318	110	3	4	3	8.8	0	0.63
20	303	102	3	3.5	3	8.5	0	0.62
21	312	107	3	3	2	7.9	1	0.64
22	325	114	4	3	2	8.4	0	0.7
23	328	116	5	5	5	9.5	1	0.94
24	334	119	5	5	4.5	9.7	1	0.95
25	336	119	5	4	3.5	9.8	1	0.97

DATA PRE-PROCESSING

Importing the Libraries:

It is important to import all the necessary libraries such as pandas, numpy, matplotlib.

- Numpy-

It is an open-source numerical Python library. It contains a multi-dimensional array and matrix data structures. It can be used to perform mathematical operations on arrays such as trigonometric, statistical, and algebraic routines.

- **Pandas-**

It is a fast, powerful, flexible and easy to use open-source data analysis and manipulation tool, built on top of the Python programming language.

- **Seaborn-**

Seaborn is a Python data visualization library based on matplotlib. It provides a high-level interface for drawing attractive and informative statistical graphics.

- **Matplotlib-**

Visualisation with python. It is a comprehensive library for creating static, animated, and interactive visualizations in Python

Reading the Datasets:

You might have your data in .csv files, .excel files

Let's load a .csv data file into pandas using `read_csv()` function. We will need to locate the directory of the CSV file at first

```
#read_csv is a pandas function to read csv files
data = pd.read_csv('Admission_Predict.csv')
```

If your dataset is in some other location ,Then see below command

```
Data= pd.read_csv(r"File_location/filename.csv")
```

Note: r stands for "raw" and will cause backslashes in the string to be interpreted as actual backslashes rather than special characters.

Our Dataset Admission_Predict contains following Columns

1.Serial No.

- 2.GRE Score
- 3.TOEFL Score
- 4.University Rating
- 5.SOP
- 6.LOR
- 7.CGPA
- 8.Chance of Admit

Handling Missing Values:

After loading it is important to check the complete information of data as it can indicate many of the hidden information such as null values in a column or a row

Check for the null values. if it is present then the following steps can be performed

- Imputing data using the Imputation method in sklearn.
- Filling NaNvalues with mean, median, and mode using fillna() method.

You can check the null values with the function isnull().any()

```
data.isnull().any()

GRE Score      False
TOEFL Score     False
University Rating False
SOP            False
LOR            False
CGPA           False
Research       False
Chance of Admit False
dtype: bool
```

- If the dataset contains null values then the above functions return as true. But if you look at the dataset you can observe that the dataset does not have any null values.

- You can also check the number of null values present in the columns by the using `isnull().sum()` function

As we don't have categorical data then we can skip the steps of label encoding and one-hot encoding

Data Visualization:

Data visualization is where a given dataset is presented in a graphical format. It helps the detection of patterns, trends and correlations that might go undetected in text-based data. Understanding your data and the relationship present within it is just as important as any algorithm used to train your machine learning model. Machine learning models will perform poorly on data that wasn't visualized and understood properly.

To visualize the dataset we need libraries called Matplotlib and Seaborn. The Matplotlib library is a Python 2D plotting library that allows you to generate plots, scatter plots, histograms, bar charts etc.

Splitting Dependent And Independent Columns:

We need to split our dataset into the matrix of independent variables and the vector or dependent variable. Mathematically, Vector is defined as a matrix that has just one column.

- To read the columns, we will use `iloc` of pandas (used to fix the indexes for selection) which takes two parameters — [row selection, column selection].

Let's split our dataset into independent and dependent variables.

```
x=data.iloc[:,0:7].values  
x
```

```
y=data.iloc[:,7:].values  
y
```

From the above code “:” indicates that you are considering all the rows in the dataset and “0:7” indicates that you are considering columns 0 to 7 such as year, month, and day as input values and assigning them to variable x. In the same way in the second line “:” indicates you are considering all the rows and “7:” indicates that you are considering only the last column as output value and assigning them to variable y.

Let's Check the shape of x and Y

```
x.shape
```

```
(1991, 7)
```

```
y.shape
```

```
(1991, 1)
```

- You can see in x we have 1991 rows with 7 columns and y has 1 column with the same number of rows

Splitting The Data Into Train And Test:

To train the model, first split the model into two segments: "training data" and "testing data". The classifier is trained using a 'training data set' and the performance of the classifier is tested on a non-fitting 'test data set'.

Training Set: The training Set is material for computers to learn how to process data. The AI uses computation to do the training part. The training dataset is used to learn and tune the classifier parameters.

Test set: A set of unseen data used solely to evaluate the performance of the fully displayed classifier.

When you are working on a model and you want to train it, you obviously have a dataset. But after training, we have to test the model on some test dataset. For this, you will need a dataset that is different from the training set you used earlier. But it might not always be possible to have so much data during the development phase. In such cases, the solution is to split the dataset into two sets, one for training and the other for testing.

To help us with this task, the Scikit library provides a tool, called the Model Selection library. There is a class in the library which is, 'train_test_split.' Using this we can easily split the dataset into the training and the testing datasets in various proportions.

The train-test split is a technique for evaluating the performance of a machine learning algorithm.

- Train Dataset: Used to fit the machine learning model.
- Test Dataset: Used to evaluate the fit machine learning model.

```
from sklearn.model_selection import train_test_split
X_train,X_test,y_train,y_test = train_test_split(x,y,test_size = 0.2,random_state = 10)
```

In general, you can allocate 80% of the dataset to the training set and the remaining 20% to the test set. We will create 4 sets

- x_train
- x_test
- y_train

- `y_test` .

There are a few other parameters that we need to understand before we use the class:

- `test_size`: this parameter decides the size of the data that has to be split as the test dataset. This is given as a fraction. For example, if you pass 0.5 as the value, the dataset will be split 50% as the test dataset and remaining a train dataset
- `random_state`: here you pass an integer, which will act as the seed for the random number generator during the split. Or, you can also pass an instance of the `Random_state` class, which will become the number generator. If you don't pass anything, the `Random_state` instance used by `np.random` will be used instead.

1.2 PURPOSE

This is the project for a new web-based University Admit Eligibility Predictor. Predictor is an ML based application that asks for the users to input their academic transcripts data and calculates their chances of admission into the University Tier that they selected. It also provides an analysis of the data and shows how chances of admissions can depend on various factors. This document describes the scope, objectives and goals of the system. In addition to describing the non-functional requirements, this document models the functional requirements with use cases, interaction diagrams and class models. This document is intended to direct the design and implementation of the target system in an object-oriented language.

2. LITERATURE SURVEY

2.1 Existing Problem

It's almost admission season and I've couple of friends who are in panic mode waiting for a call from the universities they've applied at.

This made me think — How can we predict whether a student will get an admit or not? What are the parameters for selection? Can it be mathematically expressed?

All of these questions started popping up. This is the main existing problem.

2.2 References

- <https://ieeexplore.ieee.org/document/9418279>

Abstract:

Students regularly have difficulty finding a fitting institution to pursue higher studies based on their profile. There are some advisory administrations and online apps that recommend universities but they ask huge consultancy fees and online apps are not accurate. So, the aim of this research is to develop a model that predict the percentage of chances into the university accurately.

References: MS Acharya, A Armaan and AS Antony, "A comparison of regression models for prediction of graduate admissions", 2019.

- <https://ieeexplore.ieee.org/document/9410717>

Abstract:

Students applying for admissions to universities find it difficult to understand whether they have good chances of getting admission in a university or not. Keeping this in focus, we have used logistic regression techniques that have gained attention in software engineering field for its ability to be used for predictions. This is a novel work on a university admissions predictor using which students can evaluate their competitiveness for getting admission at a university.

References: M. Fatima and M. Pasha, "Survey of machine learning algorithms for disease diagnostic", *Journal of Intelligent Learning Systems and Applications*, vol. 9, no. 01, pp. 1, 2017.

➤ <https://ieeexplore.ieee.org/document/6416521>

Abstract:

This paper presents a new college admission system using hybrid recommender based on data mining techniques and knowledge discovery rules, for tackling college admissions prediction problems. This is due to the huge numbers of students required to attend university colleges every year. The proposed HRSPCA system consists of two cascaded hybrid recommenders working together with the help of college predictor, for achieving high performance.

References: G. Ganapathy, and K. Arunesh, "Models for Recommender Systems in Web Usage Mining Based on User Ratings" Proceedings of the World Congress on Engineering, Vol. I WCE 2011.

➤ <https://dl.acm.org/doi/10.1145/3388818.3393716>

Abstract:

With the increase in the number of graduates who wish to pursue their education, it becomes more challenging to get admission to the students' dream university. Newly graduate students usually are not knowledgeable of the requirements and the procedures of the postgraduate admission and might spend a considerable amount of money to get advice from consultancy organizations to help them identify their admission chances.

References: E. Roberts, "using machine learning and predictive modeling to assess admission policies and standards," 2013.

➤ <https://medium.com/@jigar18011999/university-predictor-by-machine-learning-2d880e9f3a3>

Abstract:

This article describes the architecture and algorithms of the proposed system. ANN, decision trees, and logistic regression were used to find admissions for a particular student. ML models take into account various parameters such as GRE and TOEFL scores, SOP, and LOR. Finally, after evaluation, the authors state that decision trees are the most accurate among the tree algorithms used.

- <https://github.com/satwik2663/Machine-Learning-Graduate-Student-Admission-Predictor>

Abstract:

Today, there are many students who travel to USA to pursue higher education. It is necessary for the students to know what are their chances of getting an admit in the universities. Also, universities manually check and count the total number of applicants who could get an admit into university. These methods are slow and certainly not very consistent for students and universities to get an actual result. This method is also prone to human error and thus accounts for some inaccuracies. Since the frequency of students studying abroad has increased, there is a need to employ more efficient systems which handle the admission process accurately from both perspectives.

- <https://github.com/anjanatiha/University-Admission-Match-Predictor>

Abstract:

1. Analyzed university admission statistics.
2. Developed tools for matching university (in percentile) using CGPA, GRE (Verbal, Quantitative, Analytical Writing) scores.

- <https://github.com/karanwadhwa/dd-admission-predictor>

Abstract:

This system was originally developed only for Engineering College Admissions in Maharashtra, India but can essentially be adapted for other streams too. The purpose of it is to build a system to predict the users chances for getting into a certain college.

2.3 Problem Statement Definition


Problem Statement(PS)	I am (Customer)	I'm trying to	But	Because	Which makes me feel
PS-1	Student	I am looking university for long time	Still I am facing difficulties to select the university that is having good environment	University is in Chennai but I want in my Home town	Difficult to find the university.
PS-2	Student	I am Searching University on my phone	It is difficult to find and it takes long time	It is difficult to search in offline	Exhausted

3. IDEATION AND PROPOSED SOLUTION

Ideation is the process where you generate ideas and solutions through sessions such as Sketching, Prototyping, Brainstorming, Brainwriting, Worst Possible Idea, and a wealth of other ideation techniques. Ideation is also the third stage in the Design Thinking process. In this project the ideation phase consist of,

- Empathy Map
- Brainstorming
- Proposed Solution
- Problem Solution Fit

3.1 Empathy Map

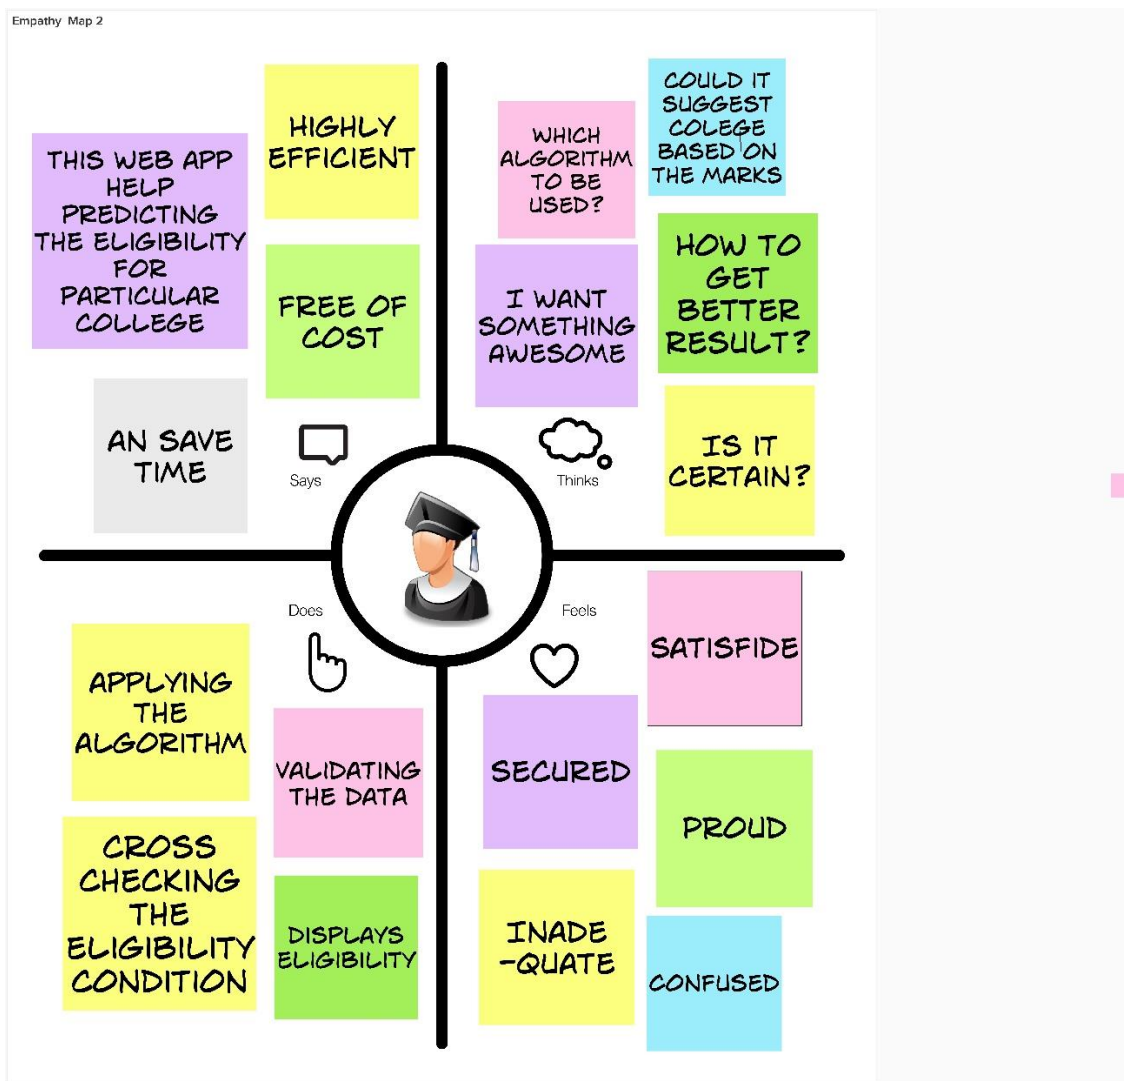

3.2 Ideation & Brainstorming

1

Define your problem statement

What problem are you trying to solve? Frame your problem as a How Might We statement. This will be the focus of your brainstorm.

⌚ 5 minutes

Problem

For anyone pursuing their it would be difficult for them to find out what college they may join, based on their HSC Scores and JEE scores. People may apply to many universities that look for candidates with a higher score set, instead of applying to universities at which they have a chance of getting into. This would be detrimental to their future. There aren't many efficient quickly.



Key rules of brainstorming

To run a smooth and productive session

- Stay in topic.
- Defer judgment.
- Go for volume.
- Encourage wild ideas.
- Listen to others.
- If possible, be visual.

2

Brainstorm

Write down any ideas that come to mind that address your problem statement.

⌚ 10 minutes

TIP
You can select a sticky note and hit the pencil (switch to sketch) icon to start drawing!


Divakar		Jaya Surya		Samson		Sandeep Rao	
Highly effective	More accurate prediction	Displays eligibility	Satisfaction of the user	The chance of occurrence of error is less	More certain at the result	Easy accessibility of data.	Avoids data redundancy and inconsistency
Flawless prediction	Suggesting other Universities	Free of cost	User friendly	Suggesting priorities	Cross checking the eligibility condition	Saves time	Does not need verification.

3

Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

⌚ 20 minutes

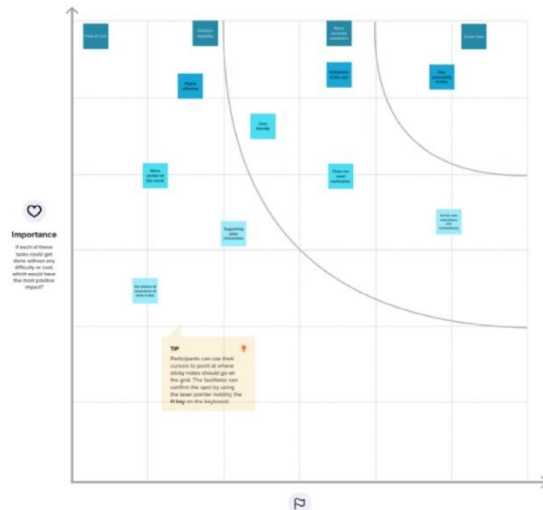


3

Group ideas

Take turns sharing your ideas while clustering similar or related notes as you go. In the last 10 minutes, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you can break it up into smaller sub-groups.

⌚ 20 minutes

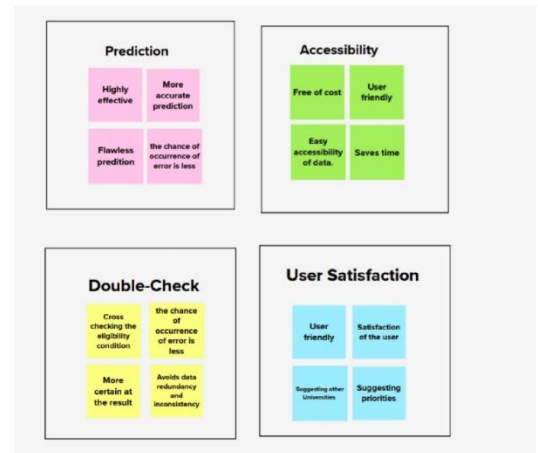

3.3 Proposed Solution

1.	Problem Statement (Problem to be solved)	Most of the people especially from the rural area are not that much aware of the standards which has been followed in various universities. At the time of completion of their higher secondary, they are having various stream willingness but not everybody is getting into the actual stream they have been wished. Same in the case of college too.
2.	Idea/ Solution description	<p>This project aims to calculate the likelihood of admission to a particular graduate school after evaluating a candidate's profile.</p> <p>The main attributes considered in decision making are:</p> <ol style="list-style-type: none">1. GRE & TOEFL Scores2. Undergraduate CGPA3. SOP & LOR4. Corporate Work Experience/Research Experience Extracurricular Activities5. Extra-curriculars <p>Determine Acceptance Rate, Logistic Regression, Multi linear, Use a variety of ML models such as regression, decision trees, and random forests, and use performance metrics such as</p>

		accuracy score, precision, and retrieval to evaluate which model has the best accuracy.
3.	Novelty / Uniqueness	In our University Admit Eligibility Predictor, student can able to get the complete insights about all the possible colleges and branches based on their cut-offs and quota. It will be like the practice session for them before attending the counselling conducted by various universities.
4.	Social Impact / Customer Satisfaction	Our project let the students to know about the possible colleges and streams based on their cut-offs and quota. So, it will be very helpful for them in their counselling processes.

5.	Business Model (Revenue Model)	We can have two models for revenue, one is the subscription model. In here user will be asked to get the subscription in order to get output from our prediction. Subscription may be monthly or weekly. Actually, this model is for admission centres. The next revenue model is pay per each prediction model, here the individual has to pay for each prediction. This model has been designed for the individual who want to get the possible colleges and streams based on their cut-offs and quota.
6.	Scalability of the Solution	We can build this prediction model with higher percentage of accuracy by considering the historical data and by having various algorithms. The algorithms include K nearest neighbor, K means, SVM (Support Vector Machine) to predict best thing among all and to predict the similarity among themselves and at last to predict the possibilities respectively..

3.4 Problem Solution Fit

Project Title: University Admit Eligibility Predictor

Project Design Phase-I - Solution Fit

Team ID: PNT2022TMID27404

Define CS, fit into	1. CUSTOMER SEGMENT(S) <small>Who is your customer? i.e. working parents of 0-5 y.o. kids</small> Students are our primary users other than students the persons or the organizations who is giving career guidance also using our predictor.	6. CUSTOMER CONSTRAINTS <small>What constraints prevent your customers from taking action or limit their choices of solutions? i.e. spending power, budget, no cash, network connection, available devices.</small> Customer constraints includes <ol style="list-style-type: none"> Poor network connectivity. System with very low processing speed. Improper data feeding. 	5. AVAILABLE SOLUTIONS <small>Which solutions are available to the customers when they face the problem aimed to get the job done? What have they tried in the past? What pros & cons do these solutions have? i.e. pen and paper is an alternative to digital note-taking</small> <ol style="list-style-type: none"> Some websites are available in the internet in order to predict the universities but they are not even 50 percent accurate. Can able to predict the college and the stream by the own manual calculation. 	Explore AS.
	2. JOBS-TO-BE-DONE / PROBLEMS <small>Which jobs-to-be-done (or problems) do you address for your customers? There could be more than one, explore different sides</small> Predicting the possible colleges and streams for the students who have been completed their higher secondary with higher percent of accuracy.	9. PROBLEM ROOT CAUSE <small>What is the real reason that this problem exists? What is the back story behind the need to do this job? i.e. customers have to do it because of the change in regulations.</small> <ol style="list-style-type: none"> Unawareness about the possible colleges and streams based on the cut-offs. Unavailability of high accurate university prediction model 	7. BEHAVIOUR <small>What does your customer do to address the problem and get the job done? i.e. directly related: find the right solar panel installer, calculate usage and benefits; indirectly associated: customers spend free time on volunteering work (i.e. Greenpeace)</small> Students who have been completed their higher secondary has to feed their academic data into our university predictor, then only they will come to know about the possible colleges and streams based on the fed data.	
Focus on J&P, tap into BE, understand	3. TRIGGERS <small>What triggers customers to act? i.e. seeing their neighbor installing solar panels, looking about a more efficient solution in the news.</small> <ol style="list-style-type: none"> Plans about their graduation and degree. Confusions in college and stream selection Low seats availability 	10. YOUR SOLUTION <small>If you are working on an existing business, write down your current solution first, fill in the curves, and check how much it fits ideally. If you are working on a new business proposition, then keep it blank until you fill in the curves and come up with a solution that fits within customer limitations, solves a problem and matches customer behaviour.</small> Developing the user-friendly prediction model with higher percentage of accuracy by considering the historical data and by having various algorithms.	8. CHANNELS of BEHAVIOUR 8.1 ONLINE <small>What kind of actions do customers take online? Extract online channels from 7 and #</small> Need to feed the data about their academic performance includes cut-offs and quota	Identify strong TR &
	3. EMOTIONS: BEFORE / AFTER <small>How do customers feel when they face a problem of a job and afterwards? i.e. lost, insecure > confident, in control-use it in your communication strategy & design</small> Before: Students are totally confused with their selection and they are so stresses too. After: Students can able to select their willing one confidently by seeing all other possibilities with full satisfaction.		8.2 OFFLINE <small>What kind of actions do customers take offline? Extract offline channels from 7 and use them for customer development.</small> Do calculate manually by having all the required academic details by comparing it with the historical data.	

4. REQUIREMENT ANALYSIS

4.1 Functional Requirements

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	User Registration	Registration through Form Registration through Gmail Registration through LinkedIN
FR-2	User Confirmation	Confirmation via Email Confirmation via OTP
FR-3	User Login	Login through username and passwordLogin through Gmail Login through LinkedIN
FR-4	Administration work	Check qualified candidate detail Make allotment
FR-5	Admission Details	Check seat availability Check college infrastructure Check fees details
FR-6	Local counsellor	Issue the final allotment order

4.2 Non-functional Requirements:

Following are the non-functional requirements of the proposed solution.

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	<ul style="list-style-type: none"> a. A logical interface is essential to make easy use of system, speeding up common tasks. b. The product could be used by two categories of


		people mainly administrator category and other users.
NFR-2	Security	<p>Some of the factors that are identified to protect the software from accidental or malicious access, use, modification, destruction, or disclosure are described below:</p> <ul style="list-style-type: none"> a. Keep specific log or history data sets. b. Utilize certain cryptographic techniques. c. Restrict the no of systems that can access the online admission system site. This could be done only by registering the systems physical addresses

		<p>before using them for online admission process.</p> <ol style="list-style-type: none"> Check data integrity for critical variables. Every user should be licensed to use the system under any of the four categories provided i.e. either verifier or advisor or local counsellor or administrator. Communication needs to be restricted when the application is validating the user or license.
NFR-3	Reliability	<ol style="list-style-type: none"> All data storage for user variables will be committed to the database at the time of entry. Data corruption is prevented by applying the possible backup procedures and techniques.
NFR-4	Performance	<ol style="list-style-type: none"> The database should be able to accommodate a minimum of 10,000 records of students. At any instant the system should support use of multiple users at a time. Availability results of the requested college should be presented to the student in max of two seconds, so retrieving of data should be reliable. As each student will be given a maximum time of 10 min, accessing from the database


		<p>should be done at relevant speed.</p>
NFR-5	Availability	<p>The system should available at all the time meaning that the user can access easily.</p> <p>Increase of the hardware and data base failure a replacement page will be show and for database back should be retrieved from data folder.</p>
NFR-6	Scalability	<p>Assesses the highest workloads under which the system will still meet the performance Deals with the measure of the system's response time under different load conditions requirements.</p> <p>Example:</p>
		<p>The system must be scalable enough to support 1,000,000 visits at the same time while maintaining optimal performance.</p>

5. PROJECT DESIGN

5.1 Data Flow Diagram

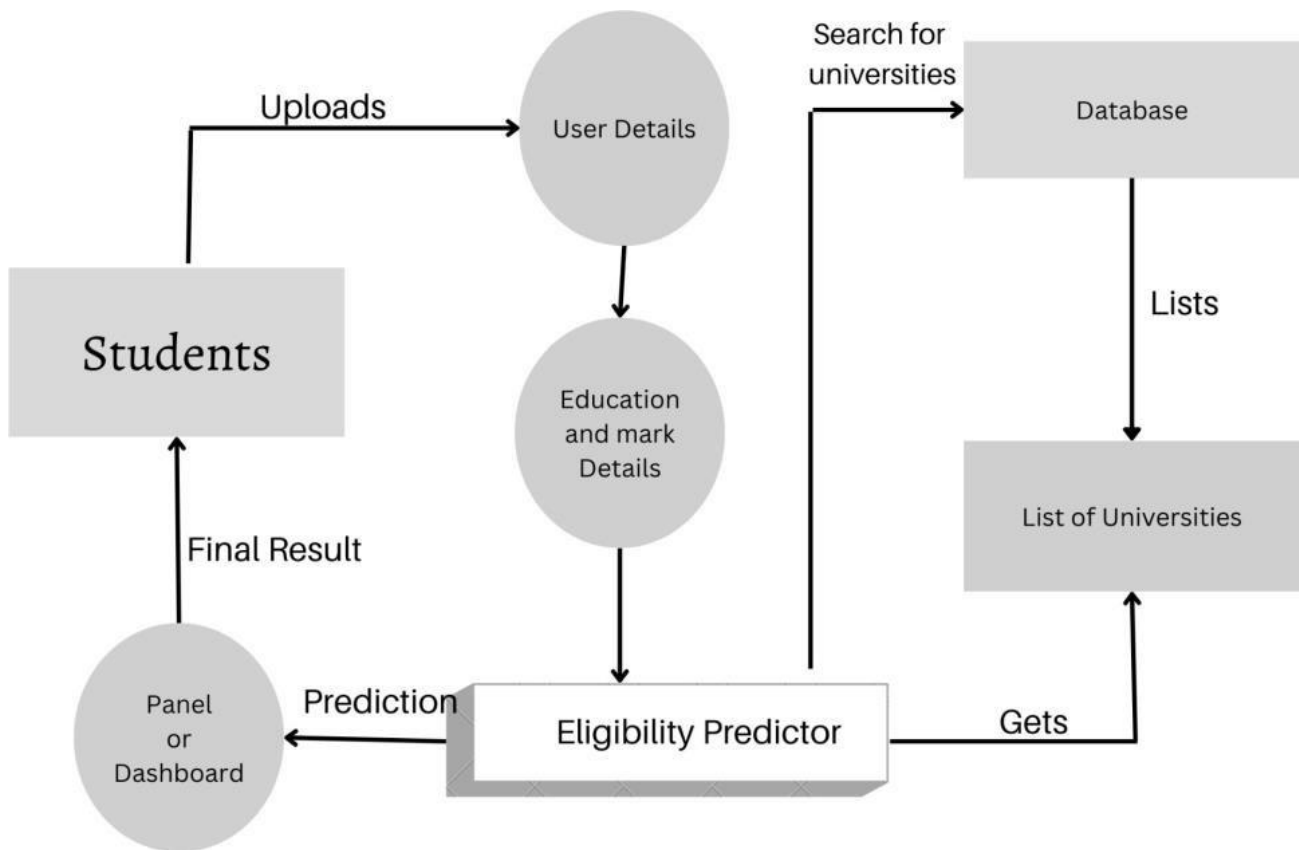

5.2 Solution & Technical Architecture

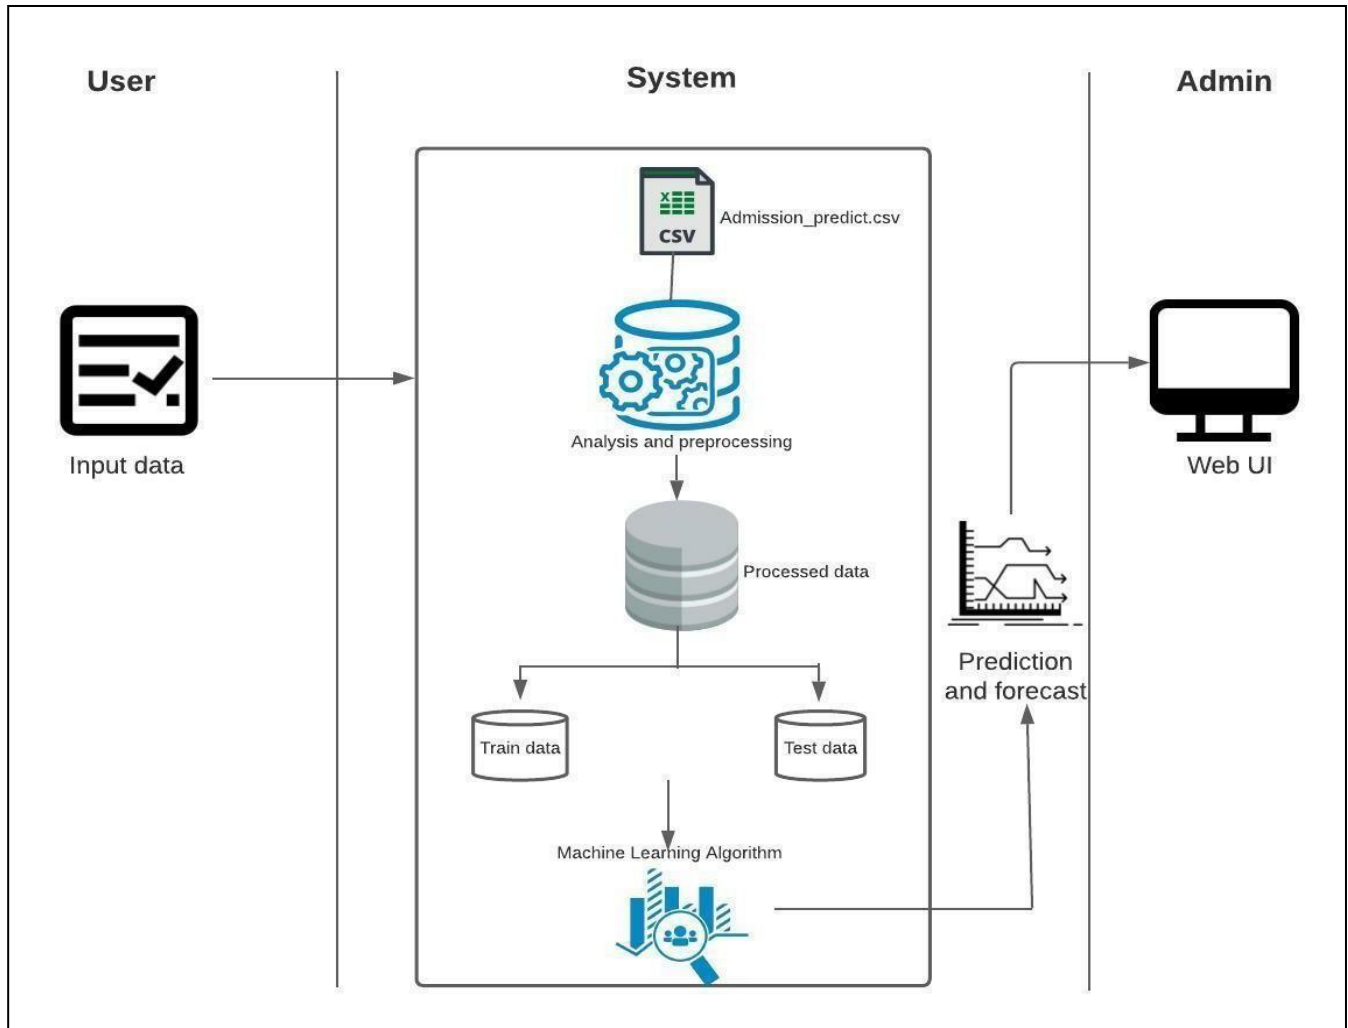


5.3 User Stories

Journey Steps	Discovery	Analysis	Prediction	Output
Actions	User discovers our website	Required details are filled as input The system analyses the given data based on the model trained	The system is trained with various Machine Learning models The accuracy of each model is compared The model providing high accuracy is considered and trained Based on the input, the output is predicted	The input is processed by the trained model and the results are obtained The results are displayed on the final screen as positive or negative
Needs and Pains	Problem to discover the website To know the possibility	Data cleaning and transformation To choose the best model To find the high accurate model	Time taken to obtain results Customer needs to find out the website that results in correct prediction	The predicted result must be in relatively with the actual possibility Must be trustworthy
Touchpoint	The user identifies the website	The user enters the required details	The user clicks on the predict button The user will be directed to the results page	The user is directed to the pages based on the obtained results A single line result predicting whether or not the user has a possibility to get admitted to that university
Customer Feeling				
Opportunities	Easy availability to predict the results	Enter the details accurately in the specified format.	Low latency	The results must be accurate False prediction leads to develop false hope

6. PROJECT PLANNING & SCHEDULING

6.1 Sprint Planning & Estimation

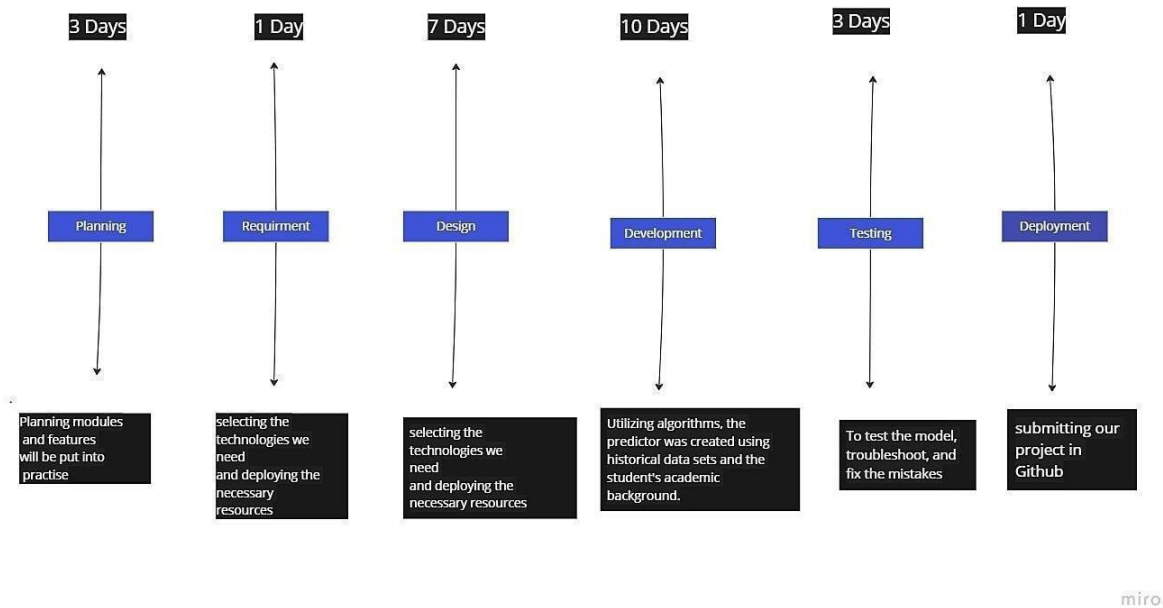

6.2 Sprint Delivery Schedule

Sprint	Functional Requirement (Epic)	User Story Number	User Story/ Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, you can register in the application by entering your emailaddress, password,	2	High	Divakar K

			and confirming thepassword			
Sprint-1		USN-2	As a user, you will receive a confirmation emailafter registering in the application	1	High	Sandeep M N
Sprint-2		USN-3	As a user, youcan register in the application via Facebook	2	Low	Samson A J
Sprint-1		USN-4	As a user, you can register in the application via Gmail	2	Medium	Jayasurya K
Sprint-1	Login	USN-5	As a user, you can login to the application by entering your emailand password	1	High	Banu Swetha R

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	5 Days	29 Oct 2022	04 Nov 2022	20	03 Nov 2022
Sprint-2	20	4 Days	04 Oct 2022	08 Nov 2022	20	07 Nov 2022
Sprint-3	20	4 Days	08 Nov 2022	11 Nov 2022	20	10 Nov 2022
Sprint-4	20	4 Days	11 Nov 2022	14 Nov 2022	20	13 Nov 2022

Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points perday)


Burndown Chart:

A burn down chart is a graphical representation of work left to do versus time. It is often used in agile software development methodologies such as Scrum. However, burn down charts canbe applied to any project containing measurable progress over time.

7. CODING & SOLUTIONING

7.1 Feature 1

The new feature will predict the chances in the admission of the university. The feature was designed in the html code connected with app.py as the backend.

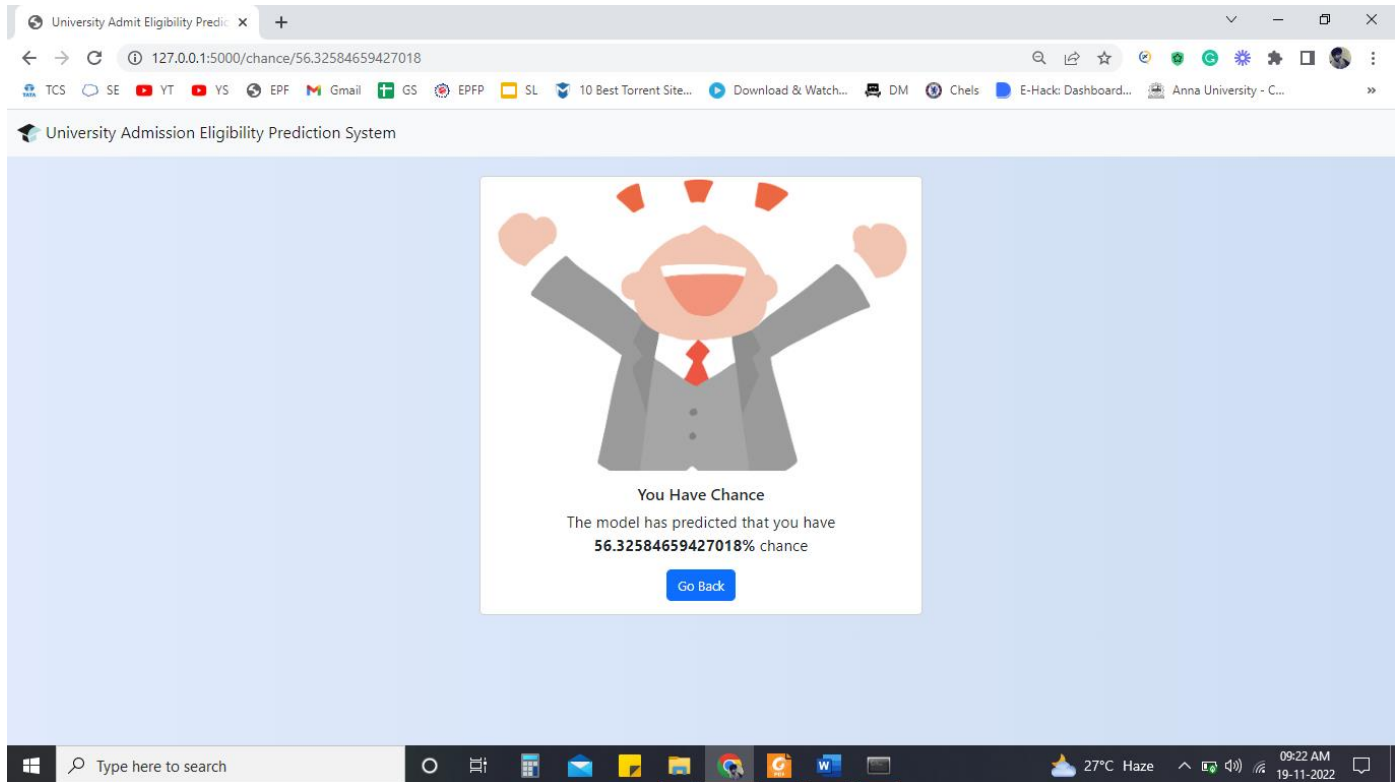

Source Code :

```
{% extends 'index.html' %}

{% block body %}

<div class="container text-center p-4">

  <div class="d-flex justify-content-center">

    <div class="card" style="width: 34rem;">

      <div class="card-body">

        <h5 class="card-title">You Have Chance</h5>
```

```
<p class="card-text">The model has predicted that you have chance</p>

<a href="/home" class="btn btn-primary">Go Back</a>

</div>

</div>


</div>

</div>

{ % endblock % }
```

7.2 Feature 2

The new feature will predict the low chances in the admission of the university. The feature was designed in the html code connected with app.py as the backend.

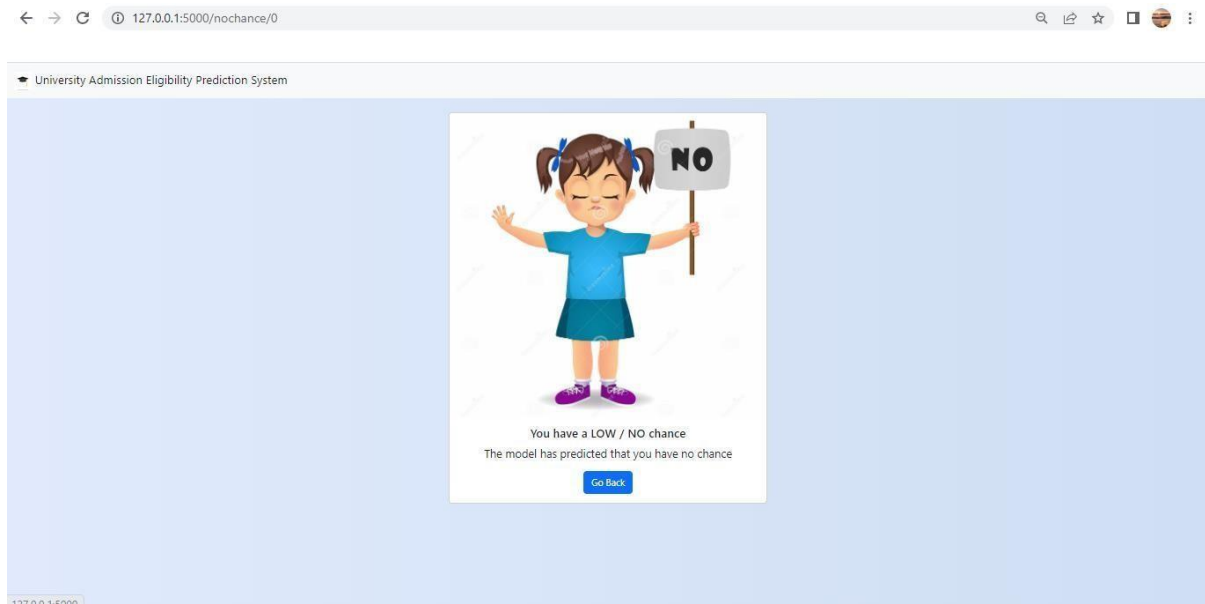

Source Code:

```
{% extends 'index.html' %}
```

```
{% block body %}
```

```
<div class="container text-center p-4">
```

```
<div class="d-flex justify-content-center">
```

```
<div class="card" style="width: 34rem;">
```

```

```

```
<div class="card-body">
```

```
<h5 class="card-title">You have a LOW / NO chance</h5>
```

```
<p class="card-text">The model has predicted that you have no chance</p>
```

```
<a href="/home" class="btn btn-primary">Go Back</a>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
{% endblock %}
```

7.3 Database Schema

The database used here in this project was Admission_Predict.csv. The sample screenshot of the database are,

481 lines (481 sloc) 12.6 KB									
RawBlame									
Q Search this file...									
1	Serial No.	GRE Score	TOEFL Score	University Rating	SOP	LOR	CGPA	Research	Chance of Admit
2	1	337	118	4	4.5	4.5	9.65	1	0.92
3	2	324	107	4	4	4.5	8.87	1	0.76
4	3	316	104	3	3	3.5	8	1	0.72
5	4	322	110	3	3.5	2.5	8.67	1	0.8
6	5	314	103	2	2	3	8.21	0	0.65
7	6	330	115	5	4.5	3	9.34	1	0.9
8	7	321	109	3	3	4	8.2	1	0.75
9	8	308	101	2	3	4	7.9	0	0.68
10	9	302	102	1	2	1.5	8	0	0.5
11	10	323	108	3	3.5	3	8.6	0	0.45
12	11	325	106	3	3.5	4	8.4	1	0.52
13	12	327	111	4	4	4.5	9	1	0.84
14	13	328	112	4	4	4.5	9.1	1	0.78
15	14	307	109	3	4	3	8	1	0.62
16	15	311	104	3	3.5	2	8.2	1	0.61
17	16	314	105	3	3.5	2.5	8.3	0	0.54
18	17	317	107	3	4	3	8.7	0	0.66
19	18	319	106	3	4	3	8	1	0.65
20	19	318	110	3	4	3	8.8	0	0.63
21	20	303	102	3	3.5	3	8.5	0	0.62
22	21	312	107	3	3	2	7.9	1	0.64
23	22	325	114	4	3	2	8.4	0	0.7
24	23	328	116	5	5	5	9.5	1	0.94
25	24	334	119	5	5	4.5	9.7	1	0.95
26	25	336	119	5	4	3.5	9.8	1	0.97

8. TESTING

8.1 Test Cases

Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Client Application	51	0	0	51
Security	2	0	0	2
Outsource Shipping	3	0	0	3
Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Control	2	0	0	2

8.2 User Acceptance Testing

- **Purpose of Document**

The purpose of this document is to briefly explain the test coverage and open issues of the University Admit Eligibility Predictor project at the time of the release to User Acceptance Testing (UAT).

- **Defect Analysis**

This report shows the number of resolved or closed bugs at each severity level, and how they were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	10	4	2	3	19
Duplicate	0	0	0	0	0
External	2	3	0	1	6
Fixed	11	2	4	20	37
Not Reproduce d	0	0	0	0	0
Skipped	0	0	1	1	2
Won't Fix	0	0	0	0	0
Totals	24	14	13	26	64

Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Client Application	51	0	0	51
Security	2	0	0	2
Outsource Shipping	3	0	0	3
Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Control	2	0	0	2

9. RESULTS

9.1 Performance Metrics

Measure the performance using Metrics

```
pd.crosstab(Y_Test,y_predict)
```

col_0	0	1	2
Sex			
0	108	29	112
1	33	223	35
2	123	52	121

```
print(classification_report(Y_Test,y_predict))
```

	precision	recall	f1-score	support
0	0.41	0.43	0.42	249
1	0.73	0.77	0.75	291
2	0.45	0.41	0.43	296
accuracy			0.54	836
macro avg	0.53	0.54	0.53	836
weighted avg	0.54	0.54	0.54	836

Measuring the performance using metrics

```
from sklearn.metrics import mean_squared_error,mean_absolute_error
from sklearn.metrics import accuracy_score
mse = mean_squared_error(pred_test,y_test)
print("The Mean squared error is: ", mse)
rmse = np.sqrt(mse)
print("The Root mean squared error is: ", rmse)
mae = mean_absolute_error(pred_test,y_test)
print("The Mean absolute error is: ", mae)
acc = lr.score(x_test,y_test)
print("The accuracy is: ", acc)
```

```
The Mean squared error is: 3.403389401193475
The Root mean squared error is: 1.8448277429596172
The Mean absolute error is: 1.3537325298790688
The accuracy is: 0.0657871258637811
```

10. ADVANTAGES & DISADVANTAGES

10.1 Advantages

- It helps student for making decision for choosing a right college.
- Here the chance of occurrence of error is less when compared with the existing system.
- It is fast, efficient and reliable.
- Avoids data redundancy and inconsistency.
- Very user-friendly.
- Easy accessibility of data.

10.2 Dis-Advantages

- Required active internet connection.
- System will provide inaccurate results if data entered incorrectly.

11. CONCLUSION

This system ,being the first we have created in Python using ML algorithms and other front end languages such as html, css, java script , has proven more difficult than originally imagined. While it may sound simple to fill out a few forms and process the information, much more is involved in the selection of applicants than this. Every time progress was made and features were added, ideas for additional features or methods to improve the usability of the system made themselves apparent. Furthermore, adding one feature meant that another required feature was now possible, and balancing completing these required features with the ideas for improvement as well as remembering everything that had to be done was a project in itself. Debugging can sometimes be a relatively straight forward process, or rather rather finding out what you must debug can be. Since so many parts of the admissions system are integrated into one another, if an error occurs on one page, it may be a display error, for example; it may be the information is not correctly read from the database; or even that the information is not correctly stored in the database initially, and all three must be checked on each occasion. This slows down the process and can be frustrating if the apparent cause of a problem is not obvious at first. Language used must be simple and easy to understand and compatibility is paramount. If this system were not designed as an entirely web based application, it would not have been possible to recreate its current state of portability. Overall, the system performs well,and while it does not include all of the features that may have been desired, it lives up to initial expectations. The majority of features that are included work flawlessly and the errors that do exist are minor or graphical.

12. FUTURE SCOPE

The future scope of this project is very broad. Few of them are:

- This can be implemented in less time for proper admission process.
- This can be accessed anytime anywhere, since it is a web application provided only an internet connection.
- The user had not need to travel a long distance for the admission and his/her time is also saved as a result of this automated system.

13. APPENDIX

13.1 Source Code

PYTHON CODE

Uploading the python code ,

IMPORT STATEMENTS

In [1]:

```
import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
%matplotlib inline
```

LOAD THE DATASET

In [2]:

```
import os, types
import pandas as pd
from botocore.client import Config
import ibm_boto3

def __iter__(self): return 0

# @hidden_cell
# The following code accesses a file in your IBM Cloud Object Storage. It includes your
# credentials.
# You might want to remove those credentials before you share the notebook.
cos_client = ibm_boto3.client(service_name='s3',
    ibm_api_key_id='T6FhPnWEPrnR91XKAfpiopbqTZ8j-gbLtjakMGexd6v0',
    ibm_auth_endpoint="https://iam.cloud.ibm.com/oidc/token",
    config=Config(signature_version='oauth'),
    endpoint_url='https://s3.private.us.cloud-object-storage.appdomain.cloud')

bucket = 'university-donotdelete-pr-1ijujvyruwxy5c'
object_key = 'Admission_Predict.csv'

body = cos_client.get_object(Bucket=bucket,Key=object_key)['Body']
# add missing __iter__ method, so pandas accepts body as file-like object
if not hasattr(body, "__iter__"): body.__iter__ = types.MethodType(__iter__, body )

data = pd.read_csv(body)
data.head()
```

Out[2]:

	Serial No.	GRE Score	TOEFL Score	University Rating	SOP	LOR	CGPA	Research	Chance of Admit
0	1	337	118	4	4.5	4.5	9.65	1	0.92
1	2	324	107	4	4.0	4.5	8.87	1	0.76

2	3	316	104	3	3.0	3.5	8.00	1	0.72
3	4	322	110	3	3.5	2.5	8.67	1	0.80
4	5	314	103	2	2.0	3.0	8.21	0	0.65

In [3]:

```
data.drop(["Serial No."], axis=1, inplace=True)
```

In [4]:

```
data.describe()
```

Out[4]:

	GRE Score	TOEFL Score	University Rating	SOP	LOR	CGPA	Research	Chance of Admit
count	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000	400.000000
mean	316.807500	107.410000	3.087500	3.400000	3.452500	8.598925	0.547500	0.724350
std	11.473646	6.069514	1.143728	1.006869	0.898478	0.596317	0.498362	0.142609
min	290.000000	92.000000	1.000000	1.000000	1.000000	6.800000	0.000000	0.340000
25%	308.000000	103.000000	2.000000	2.500000	3.000000	8.170000	0.000000	0.640000
50%	317.000000	107.000000	3.000000	3.500000	3.500000	8.610000	1.000000	0.730000
75%	325.000000	112.000000	4.000000	4.000000	4.000000	9.062500	1.000000	0.830000
max	340.000000	120.000000	5.000000	5.000000	5.000000	9.920000	1.000000	0.970000

In [5]:

```
data.info()
```

Out[5]:

```
<class 'pandas.core.frame.DataFrame'>
```

```
RangeIndex: 400 entries, 0 to 399
```

Data columns (total 8 columns):

```
# Column      Non-Null Count  Dtype
---  -
0  GRE Score    400 non-null   int64
1  TOEFL Score  400 non-null   int64
2  University Rating 400 non-null   int64
3  SOP          400 non-null   float64
4  LOR          400 non-null   float64
5  CGPA         400 non-null   float64
6  Research     400 non-null   int64
7  Chance of Admit 400 non-null   float64
dtypes: float64(4), int64(4)
memory usage: 25.1 KB
```

In [6]:

```
data.isnull().sum()
```

Out[6]:

```
GRE Score      0
TOEFL Score    0
University Rating  0
SOP            0
LOR            0
CGPA           0
Research       0
Chance of Admit  0
dtype: int64
```


VISUALIZATION

In [7]:

```
plt.scatter(data['GRE Score'],data['CGPA'])
plt.title('CGPA vs GRE Score')
plt.xlabel('GRE Score')
plt.ylabel('CGPA')
```

```
plt.show()
```


Out [7]:

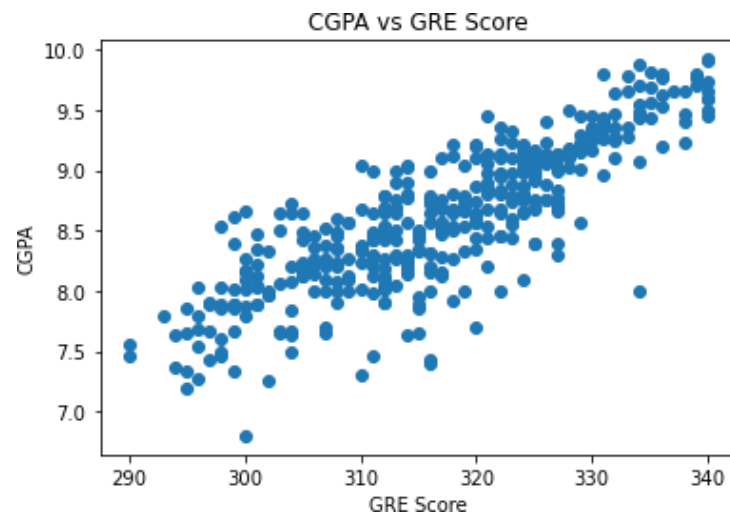

In [8]:

```
plt.scatter(data['CGPA'],data['SOP'])  
plt.title('SOP for CGPA')  
plt.xlabel('CGPA')  
plt.ylabel('SOP')  
plt.show()
```

Out [9]:

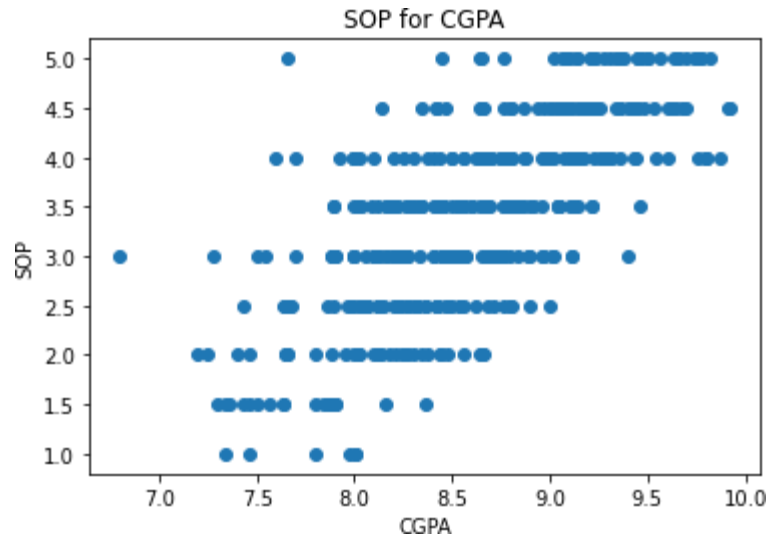

In [9]:

```
data[data.CGPA >= 8.5].plot(kind='scatter', x='GRE Score', y='TOEFL Score',color="BLUE")
```

```
plt.xlabel("GRE Score")
```


```
plt.ylabel("TOEFL SCORE")
```

```
plt.title("CGPA>=8.5")
```

```
plt.grid(True)
```

```
plt.show()
```

Out [9]:

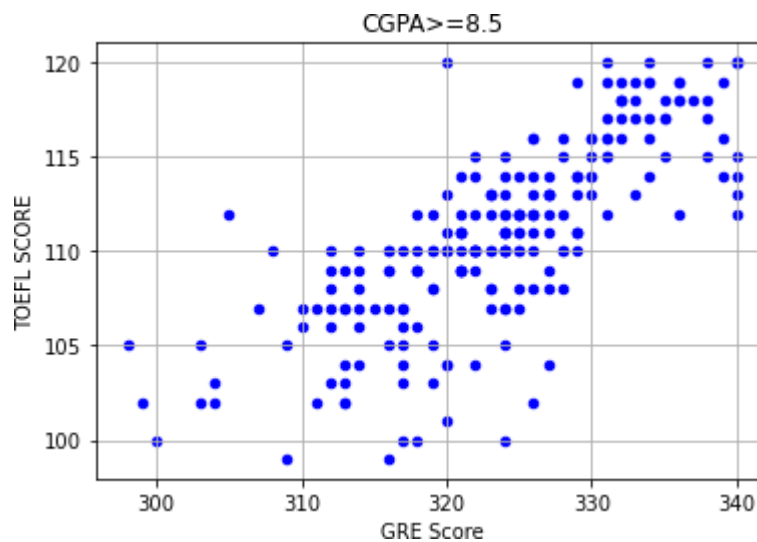

In [10]:

```
data["GRE Score"].plot(kind = 'hist',bins = 200,figsize = (6,6))
plt.title("GRE Scores")
plt.xlabel("GRE Score")
plt.ylabel("Frequency")
plt.show()
```




In[11]:

```
p = np.array([data["TOEFL Score"].min(),data["TOEFL Score"].mean(),data["TOEFL Score"].max()])
r = ["Worst","Average","Best"]
plt.bar(p,r)

plt.title("TOEFL Scores")
plt.xlabel("Level")
plt.ylabel("TOEFL Score")
```


```
plt.show()
```

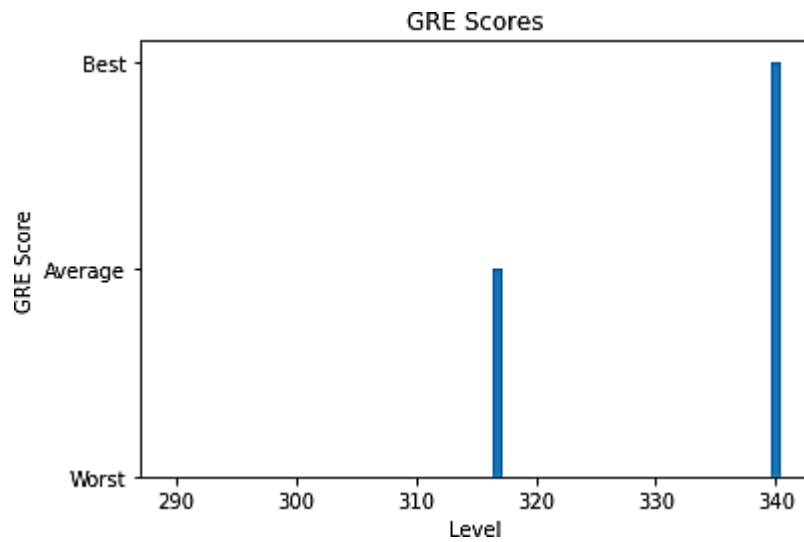

In[13]:

```
plt.figure(figsize=(10, 10))  
sns.heatmap(data.corr(), annot=True, linewidths=0.05, fmt= '.2f',cmap="magma")  
plt.show()
```

Out[13]:

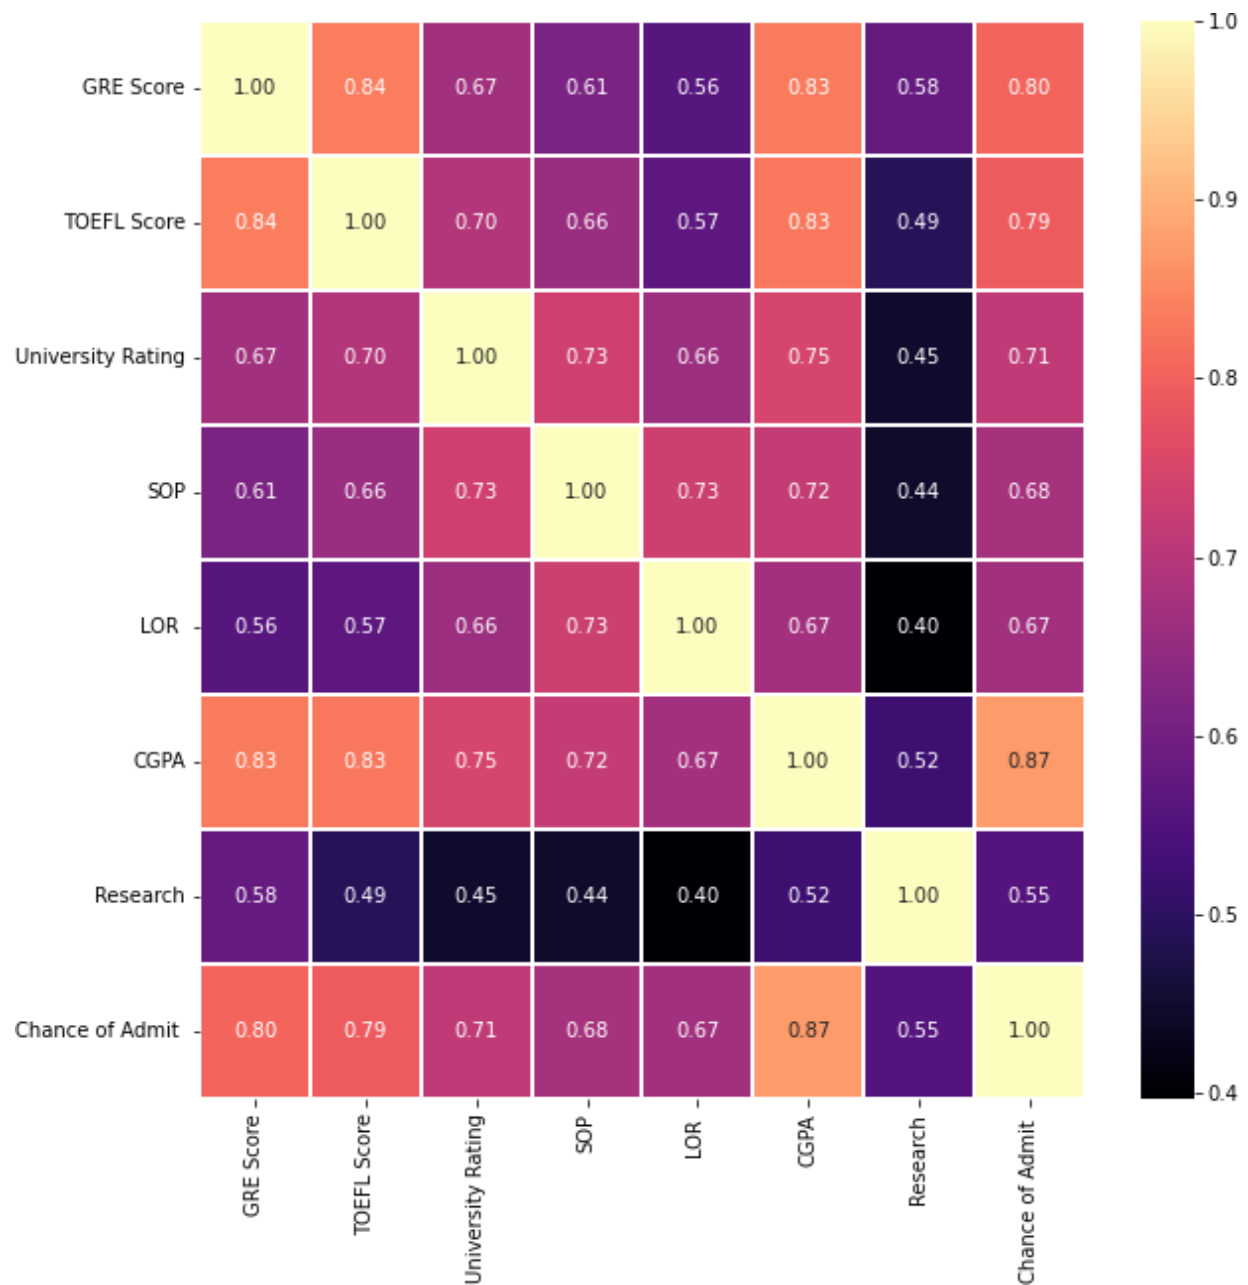


In[14]:

```
data.Research.value_counts()  
sns.countplot(x="University Rating",data=data)
```

Out[14]:

<AxesSubplot:xlabel='University Rating', ylabel='count'>

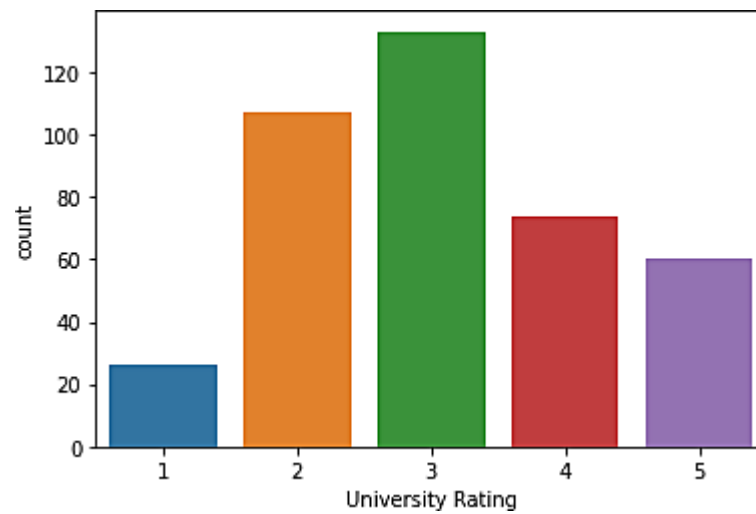


In[15]:

```
sns.barplot(x="University Rating", y="Chance of Admit ", data=data)
```

Out[15]:

<AxesSubplot:xlabel='University Rating', ylabel='Chance of Admit '>

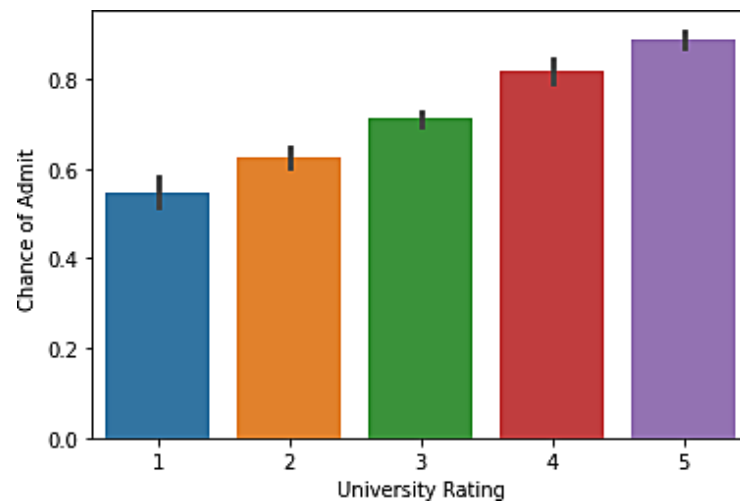

TRAINING AND TESTING SPLIT

In [16]:

```
X=data.drop(['Chance of Admit '],axis=1) #input data_set  
y=data['Chance of Admit '] #output labels
```

In [17]:

```
from sklearn.model_selection import train_test_split  
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.15)
```

MODELING AND TRAINING

In [18]:

```
from sklearn.ensemble import GradientBoostingRegressor  
rgr = GradientBoostingRegressor()  
rgr.fit(X_train,y_train)
```

Out[18]:

```
GradientBoostingRegressor()
```

In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook. On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.

In [19]:

```
rgr.score(X_test,y_test)
```

Out[19]:

```
0.7214021715194154
```

In [20]:

```
y_predict=rgr.predict(X_test)
```

In [21]:

```
from sklearn.metrics import mean_squared_error, r2_score, mean_absolute_error
```

```
import numpy as np
print('Mean Absolute Error:', mean_absolute_error(y_test, y_predict))
print('Mean Squared Error:', mean_squared_error(y_test, y_predict))
print('Root Mean Squared Error:', np.sqrt(mean_squared_error(y_test, y_predict)))
Mean Absolute Error: 0.061115035673946834
Mean Squared Error: 0.007194293635482686
Root Mean Squared Error: 0.08481918200196631
```

In [22]:

```
y_train = (y_train>0.5)
y_test = (y_test>0.5)
```

In [23]:

```
from sklearn.linear_model._logistic import LogisticRegression
lore = LogisticRegression(random_state=0, max_iter=1000)
lr = lore.fit(X_train, y_train)
```

In [24]:

```
y_pred = lr.predict(X_test)
```

In [25]:

```
from sklearn.metrics import accuracy_score, recall_score, roc_auc_score, confusion_matrix
print('Accuracy Score:', accuracy_score(y_test, y_pred))
print('Recall Score:', recall_score(y_test, y_pred))
print('ROC AUC Score:', roc_auc_score(y_test, y_pred))
print('Confussion Matrix:\n', confusion_matrix(y_test, y_pred))
```

Out [25]:

```
Accuracy Score: 0.9166666666666666
Recall Score: 1.0
ROC AUC Score: 0.7222222222222222
Confussion Matrix:
[[ 4 5]
 [ 0 51]]
```

SAVING THE MODEL

In [26]:

```
import pickle
```

In [27]:

```
pickle.dump(lr, open("university.pkl", "wb")) #logistic regression model
```

HOSTING THE MODEL

In [28]:

```
import pickle
```

In [29]:

```
lr = pickle.load(open("university.pkl", "rb")) #logistic regression model
```

In [30]:

```
pip install -U ibm-watson-machine-learning
```

Out [30]:

Requirement already satisfied: ibm-watson-machine-learning in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (1.0.255)

Collecting ibm-watson-machine-learning

Downloading ibm_watson_machine_learning-1.0.256-py3-none-any.whl (1.8 MB)

 1.8 MB 22.1 MB/s eta 0:00:01

Requirement already satisfied: packaging in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (21.3)

Requirement already satisfied: importlib-metadata in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (4.8.2)

Requirement already satisfied: urllib3 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (1.26.7)

Requirement already satisfied: lomond in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (0.3.3)

Requirement already satisfied: pandas<1.5.0,>=0.24.2 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (1.3.4)

Requirement already satisfied: ibm-cos-sdk==2.11.* in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (2.11.0)

Requirement already satisfied: requests in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (2.26.0)

Requirement already satisfied: tabulate in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (0.8.9)

Requirement already satisfied: certifi in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-watson-machine-learning) (2022.9.24)

Requirement already satisfied: ibm-cos-sdk-s3transfer==2.11.0 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-cos-sdk==2.11.*->ibm-watson-machine-learning) (2.11.0)

Requirement already satisfied: jmespath<1.0.0,>=0.7.1 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-cos-sdk==2.11.*->ibm-watson-machine-learning) (0.10.0)

Requirement already satisfied: ibm-cos-sdk-core==2.11.0 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-cos-sdk==2.11.*->ibm-watson-machine-learning) (2.11.0)

Requirement already satisfied: python-dateutil<3.0.0,>=2.1 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from ibm-cos-sdk-core==2.11.0->ibm-cos-sdk==2.11.*->ibm-watson-machine-learning) (2.8.2)

Requirement already satisfied: pytz>=2017.3 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from pandas<1.5.0,>=0.24.2->ibm-watson-machine-learning) (2021.3)

Requirement already satisfied: numpy>=1.17.3 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from pandas<1.5.0,>=0.24.2->ibm-watson-machine-learning) (1.20.3)

Requirement already satisfied: six>=1.5 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from python-dateutil<3.0.0,>=2.1->ibm-cos-sdk-core==2.11.0->ibm-cos-sdk==2.11.*->ibm-watson-machine-learning) (1.15.0)

Requirement already satisfied: charset-normalizer~=2.0.0 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from requests->ibm-watson-machine-learning) (2.0.4)

Requirement already satisfied: idna<4,>=2.5 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from requests->ibm-watson-machine-learning) (3.3)

Requirement already satisfied: zipp>=0.5 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from importlib-metadata->ibm-watson-machine-learning) (3.6.0)

Requirement already satisfied: pyparsing!=3.0.5,>=2.0.2 in /opt/conda/envs/Python-3.9/lib/python3.9/site-packages (from packaging->ibm-watson-machine-learning) (3.0.4)

Installing collected packages: ibm-watson-machine-learning

Attempting uninstall: ibm-watson-machine-learning

Found existing installation: ibm-watson-machine-learning 1.0.255

Uninstalling ibm-watson-machine-learning-1.0.255:

Successfully uninstalled ibm-watson-machine-learning-1.0.255

Successfully installed ibm-watson-machine-learning-1.0.256

Note: you may need to restart the kernel to use updated packages.

In [31]:

```
from ibm_watson_machine_learning import APIClient
import json
```

In [32]:

```
uml_credentials = {
    "url": "https://us-south.ml.cloud.ibm.com",
    "apikey": "poJ22ua6BCG9qY33B8fkgnz1bnP1f9DZqUIF9NkBM1bZ"
}
client = APIClient(uml_credentials)
```

In [33]:

```
def guid_from_space_name(client, space_name):
    space = client.spaces.get_details()
    idr = []
    for i in space['resources']:
        idr.append(i['metadata']['id'])
    return idr
```

In [34]:

```
space_uid = guid_from_space_name(client, "university")
print(space_uid[0])
4f0253e5-f162-4eec-84ba-72e01fb69ab9
```

In [35]:

```
client.set.default_space(space_uid[0])
```

Out[35]:

'SUCCESS'

In [36]:

```
client.software_specifications.list()
```

```
-----
NAME                ASSET_ID                TYPE
default_py3.6       0062b8c9-8b7d-44a0-a9b9-46c416adcbd9 base
kernel-spark3.2-scala2.12 020d69ce-7ac1-5e68-ac1a-31189867356a base
pytorch-onnx_1.3-py3.7-edt 069ea134-3346-5748-b513-49120e15d288 base
scikit-learn_0.20-py3.6 09c5a1d0-9c1e-4473-a344-eb7b665ff687 base
spark-mllib_3.0-scala_2.12 09f4cff0-90a7-5899-b9ed-1ef348aebdee base
pytorch-onnx_rt22.1-py3.9 0b848dd4-e681-5599-be41-b5f6fccc6471 base
ai-function_0.1-py3.6 0cdb0f1e-5376-4f4d-92dd-da3b69aa9bda base
shiny-r3.6          0e6e79df-875e-4f24-8ae9-62dcc2148306 base
tensorflow_2.4-py3.7-horovod 1092590a-307d-563d-9b62-4eb7d64b3f22 base
pytorch_1.1-py3.6 10ac12d6-6b30-4ccd-8392-3e922c096a92 base
tensorflow_1.15-py3.6-ddl 111e41b3-de2d-5422-a4d6-bf776828c4b7 base
runtime-22.1-py3.9 12b83a17-24d8-5082-900f-0ab31fbfd3cb base
scikit-learn_0.22-py3.6 154010fa-5b3b-4ac1-82af-4d5ee5abbc85 base
default_r3.6        1b70aec3-ab34-4b87-8aa0-a4a3c8296a36 base
pytorch-onnx_1.3-py3.6 1bc6029a-cc97-56da-b8e0-39c3880dbbe7 base
kernel-spark3.3-r3.6 1c9e5454-f216-59dd-a20e-474a5cdf5988 base
pytorch-onnx_rt22.1-py3.9-edt 1d362186-7ad5-5b59-8b6c-9d0880bde37f base
tensorflow_2.1-py3.6 1eb25b84-d6ed-5dde-b6a5-3fbdf1665666 base
spark-mllib_3.2      20047f72-0a98-58c7-9ff5-a77b012eb8f5 base
tensorflow_2.4-py3.8-horovod 217c16f6-178f-56bf-824a-b19f20564c49 base
runtime-22.1-py3.9-cuda 26215f05-08c3-5a41-a1b0-da66306ce658 base
do_py3.8             295addb5-9ef9-547e-9bf4-92ae3563e720 base
autoai-ts_3.8-py3.8 2aa0c932-798f-5ae9-abd6-15e0c2402fb5 base
tensorflow_1.15-py3.6 2b73a275-7cbf-420b-a912-eae7f436e0bc base
```

kernel-spark3.3-py3.9	2b7961e2-e3b1-5a8c-a491-482c8368839a	base
pytorch_1.2-py3.6	2c8ef57d-2687-4b7d-acce-01f94976dac1	base
spark-mllib_2.3	2e51f700-bca0-4b0d-88dc-5c6791338875	base
pytorch-onnx_1.1-py3.6-edt	32983cea-3f32-4400-8965-dde874a8d67e	base
spark-mllib_3.0-py37	36507ebe-8770-55ba-ab2a-eafe787600e9	base
spark-mllib_2.4	390d21f8-e58b-4fac-9c55-d7ceda621326	base
xgboost_0.82-py3.6	39e31acd-5f30-41dc-ae44-60233c80306e	base
pytorch-onnx_1.2-py3.6-edt	40589d0e-7019-4e28-8daa-fb03b6f4fe12	base
default_r36py38	41c247d3-45f8-5a71-b065-8580229facf0	base
autoai-ts_rt22.1-py3.9	4269d26e-07ba-5d40-8f66-2d495b0c71f7	base
autoai-obm_3.0	42b92e18-d9ab-567f-988a-4240ba1ed5f7	base
pmml-3.0_4.3	493bcb95-16f1-5bc5-bee8-81b8af80e9c7	base
spark-mllib_2.4-r_3.6	49403dff-92e9-4c87-a3d7-a42d0021c095	base
xgboost_0.90-py3.6	4ff8d6c2-1343-4c18-85e1-689c965304d3	base
pytorch-onnx_1.1-py3.6	50f95b2a-bc16-43bb-bc94-b0bed208c60b	base
autoai-ts_3.9-py3.8	52c57136-80fa-572e-8728-a5e7cbb42cde	base
spark-mllib_2.4-scala_2.11	55a70f99-7320-4be5-9fb9-9edb5a443af5	base
spark-mllib_3.0	5c1b0ca2-4977-5c2e-9439-ffd44ea8ffe9	base
autoai-obm_2.0	5c2e37fa-80b8-5e77-840f-d912469614ee	base
spss-modeler_18.1	5c3cad7e-507f-4b2a-a9a3-ab53a21dee8b	base
cuda-py3.8	5d3232bf-c86b-5df4-a2cd-7bb870a1cd4e	base
autoai-kb_3.1-py3.7	632d4b22-10aa-5180-88f0-f52dfb6444d7	base
pytorch-onnx_1.7-py3.8	634d3cdc-b562-5bf9-a2d4-ea90a478456b	base
spark-mllib_2.3-r_3.6	6586b9e3-ccd6-4f92-900f-0f8cb2bd6f0c	base
tensorflow_2.4-py3.7	65e171d7-72d1-55d9-8ebb-f813d620c9bb	base
spss-modeler_18.2	687eddc9-028a-4117-b9dd-e57b36f1efa5	base

Note: Only first 50 records were displayed. To display more use 'limit' parameter.

In [37]:

```
import sklearn
sklearn.__version__
```

Out[37]:

'1.0.2'

In [38]:

```
MODEL_NAME = 'university'  
DEPLOYMENT_NAME = 'uni'  
DEMO_MODEL = lr
```

In [39]:

```
software_spec_uid = client.software_specifications.get_id_by_name('runtime-22.1-py3.9')
```

In [40]:

```
model_props = {  
    client.repository.ModelMetaNames.NAME: MODEL_NAME,  
    client.repository.ModelMetaNames.TYPE: 'scikit-learn_1.0 ',  
    client.repository.ModelMetaNames.SOFTWARE_SPEC_UID: software_spec_uid  
}
```

In [41]:

```
model_details = client.repository.store_model(  
    model = DEMO_MODEL,  
    meta_props = model_props,  
    training_data = X_train,  
    training_target = y_train  
)  
model_details
```

Out[41]:

```
{'entity': {'hybrid_pipeline_software_specs': [],  
    'label_column': 'Chance of Admit ',  
    'schemas': {'input': [{'fields': [{'name': 'GRE Score', 'type': 'int64'},  
        {'name': 'TOEFL Score', 'type': 'int64'},  
        {'name': 'University Rating', 'type': 'int64'},  
        {'name': 'SOP', 'type': 'float64'},  
        {'name': 'LOR ', 'type': 'float64'},  
        {'name': 'CGPA', 'type': 'float64'}]}
```

```
{'name': 'Research', 'type': 'int64'}],  
'id': '1',  
'type': 'struct'}],  
'output': [],  
'software_spec': {'id': '12b83a17-24d8-5082-900f-0ab31fbfd3cb',  
'name': 'runtime-22.1-py3.9'},  
'type': 'scikit-learn_1.0'},  
'metadata': {'created_at': '2022-11-03T05:20:49.371Z',  
'id': '566cfcae-49ab-4bd3-b5df-abc981fa27b9',  
'modified_at': '2022-11-03T05:20:51.730Z',  
'name': 'university',  
'owner': 'IBMid-6630041JHH',  
'resource_key': 'a61934d2-41d0-413d-9f54-49589e7c7741',  
'space_id': '4f0253e5-f162-4eec-84ba-72e01fb69ab9'},  
'system': {'warnings': []}}
```

In [42]:

```
model_id = client.repository.get_model_id(model_details)  
model_id
```

Out[42]:

```
'566cfcae-49ab-4bd3-b5df-abc981fa27b9'
```

In [43]:

```
deployment_props = {  
    client.deployments.ConfigurationMetaNames.NAME: DEPLOYMENT_NAME,  
    client.deployments.ConfigurationMetaNames.ONLINE: {}  
}  
  
deployment = client.deployments.create(  
    artifact_uid = model_id,  
    meta_props = deployment_props  
)
```

Out [43]:

```
#####  
#####
```

Synchronous deployment creation for uid: '566cfcae-49ab-4bd3-b5df-abc981fa27b9' started

```
#####  
#####
```

initializing

Note: online_url is deprecated and will be removed in a future release. Use serving_urls instead.

ready

```
-----  
Successfully finished deployment creation, deployment_uid='28aea4f7-0bec-4310-82bf-  
06e502d2cd4d'  
-----
```

HTML CODES

Uploading Html codes

Chance.html

```
{% extends 'index.html' %}
```

```
{% block body %}
```

```
<div class="container text-center p-4">
```

```
    <div class="d-flex justify-content-center">
```

```
        <div class="card" style="width: 34rem;">
```

```


<div class="card-body">

    <h5 class="card-title">You Have Chance</h5>

    <p class="card-text">The model has predicted that you have chance</p>

    <a href="/home" class="btn btn-primary">Go Back</a>

</div>

</div>

</div>

</div>

{% endblock % }
```

Demo2.html

```
{% extends 'index.html' % }

{% block body % }

<div class="p-4">

    <div class="row mb-3">

        <div class="col-4">

            <h2 class="text-responsive-h">

                Enter your details and get probability of your admission

            </h2>

            <p class="text-responsive">
```

Students are often worried about their chances of admission to University. The aim of this project is to help students in shortlisting universities with their profiles. The predicted output gives them a fair idea about their admission chances in a particular university. This

analysis should also help students who are currently preparing or will be preparing to get a better idea.

```
</p>
<div class="d-flex justify-content-right">
  
</div>
</div>
<div class="col-8">
  <div class="card p-2 ms-2 my-2">
    <div class="card-body">
      <h5 class="card-title pb-4">
        Enter the details
      </h5>
      <form action="/" method="post" id="theForm">
        <div class="row mb-3">
          <label for="gre" class="col-lg-2 col-form-label">GRE Score:</label>
          <div class="col-lg-10">
            <input type="number" class="form-control" id="gre" name="gre"
min="250" max="340" required>
          </div>
        </div>
        <div class="row mb-3">
          <label for="tofel" class="col-lg-2 col-form-label">TOFEL Score:</label>
          <div class="col-lg-10">
            <input type="number" class="form-control" id="tofel" name="tofel"
min="50" max="120" required>
          </div>
        </div>
      </form>
    </div>
  </div>
</div>
```

```

        <label for="university_rating" class="col-lg-2 col-form-label">University
Rating:</label>
        <div class="col-lg-10">
            <input type="number" class="form-control" id="university_rating"
step="0.01" name="university_rating" min="1" max="5" required>
        </div>
    </div>
    <div class="row mb-3">
        <label for="sop" class="col-lg-2 col-form-label">SOP:</label>
        <div class="col-lg-10">
            <input type="number" class="form-control" id="sop" name="sop"
step="0.01" min="1" max="5" required>
        </div>
    </div>
    <div class="row mb-3">
        <label for="lor" class="col-lg-2 col-form-label">LOR:</label>
        <div class="col-lg-10">
            <input type="number" class="form-control" id="lor" name="lor"
step="0.01" min="1" max="5" required>
        </div>
    </div>
    <div class="row mb-3">
        <label for="cgpa" class="col-lg-2 col-form-label">CGPA:</label>
        <div class="col-lg-10">
            <input type="number" class="form-control" id="cgpa" name="cgpa"
step="0.01" min="5" max="10" required>
        </div>
    </div>
    <fieldset class="row mb-3">
        <legend class="col-form-label col-sm-2 pt-0">Research:</legend>
    </fieldset>

```

```

<div class="col-sm-10">
    <div class="form-check">
        <input class="form-check-input" type="radio" name="yes_no_radio"
id="gridRadios1" value="1">
        <label class="form-check-label" for="yes_no_radio">
            Yes
        </label>
    </div>
    <div class="form-check">
        <input class="form-check-input" type="radio" name="yes_no_radio"
id="gridRadios2" value="0" checked>
        <label class="form-check-label" for="yes_no_radio">
            No
        </label>
    </div>
</div>
</fieldset>
<div class="row lg-3">
    <div class="col-lg-2 mb-2 me-3">
        <button
            type="submit"
            class="btn
            btn-primary"
id="button">Predict</button>
    </div>
    <div class="col-lg-2" id="spinner">
        <div class="spinner-border text-primary m-1" role="status">
            <span class="visually-hidden">Loading...</span>
        </div>
        <div class="spinner-grow text-primary m-1" role="status">
            <span class="visually-hidden">Loading...</span>
        </div>
    </div>

```

```
        </div>
    </form>
</div>
</div>
</div>
</div>
</div>
{ % endblock % }
```

Index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <meta name="viewport" content="width=device-width, initial-scale=1, maximum-scale=1,
user-scalable=no">
    <link      rel="stylesheet"      type="text/css"      rel="noopener"      target="_blank"
href="../static/css/styles.css">
    <link      href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/css/bootstrap.min.css"
rel="stylesheet"                                integrity="sha384-
Zenh87qX5JnK2Jl0vWa8Ck2rdkQ2Bzep5IDxbcnCeuOxjzrPF/et3URy9Bv1WTRi"
crossorigin="anonymous">
    <script type="text/javascript" src="../static/js/script.js" async></script>
    <title>University Admit Eligibility Predictor</title>
</head>
```

```

<body>

  <nav class="navbar navbar-expand-lg bg-light">

    <div class="container-fluid">

      <a class="navbar-brand text-responsive-h" href="/">

          University Admission Eligibility Prediction System

        </a>

      </div>

    </nav>

    { % block body % }

    <h1> Index Page </h1>

    { % endblock % }

    <script      src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-
OERcA2EqjJCMA+/3y+gxIOqMEjwtxJY7qPCqsdltbNJuaOe923+mo//f6V8Qbsw3"
crossorigin="anonymous"></script>

  </body>

</html>

```

Nochance.html

```

{ % extends 'index.html' % }

{ % block body % }

<div class="container text-center p-4">

  <div class="d-flex justify-content-center">

    <div class="card" style="width: 34rem;">

```

```
<div class="card-body">

  <h5 class="card-title">You have a LOW / NO chance</h5>

  <p class="card-text">The model has predicted that you have no chance</p>

  <a href="/home" class="btn btn-primary">Go Back</a>

</div>

</div>

</div>

</div>

{ % endblock % }
```

Script.js

```
const button = document.getElementById('button');
const theForm = document.getElementById('theForm');
const loading = document.getElementById('spinner');
```

```
const disableButton = () => {
  console.log('Submitting form...');
  button.disabled = true;
  button.className = "btn btn-outline-primary";
  button.innerHTML = "Predicting..."
  loading.style.display = "block"
};
```

```
const enableButton = () => {
  console.log('Loading window...');
  button.disabled = false;
```

```
button.className = "btn btn-primary"

button.innerHTML = "Predict"

loading.style.display = "none"
}
```

```
theForm.onsubmit = disableButton;

window.onload = enableButton;
```

Styles.css

```
* {
    margin: 0;
    padding: 0;
    border: 0;
}

body {
    font: 62.5%/1.5 "Lucida Grande", "Lucida Sans", Tahoma, Verdana, sans-serif;
    background: #e0eafc;
    background: -webkit-linear-gradient(to right, #e0eafc, #cfdef3);
    background: linear-gradient(to right, #e0eafc, #cfdef3);
    color: #000000;
    text-align:center;
}

h1 {
    font-size: 2.2em;
}
```

```
h2 {  
    font-size: 2.0em;  
}
```

```
h4 {  
    font-size: 1.6em;  
}
```

```
p {  
    font-size: 1.2em;  
}
```

```
input.text  
{  
    padding: 3px;  
    border: 1px solid #999999;  
}
```

```
img {  
    max-width: auto;  
    height: auto;  
}
```

```
.text-responsive {  
    font-size: calc(50% + 0.6vw + 0.6vh);  
}
```



```
.text-responsive-h {  
  font-size: calc(80% + 0.6vw + 0.6vh);  
}
```

Footer

REQUIRED IMAGES IN THE HTML CODES :







PYTHON CODE

App.py

```
from flask import Flask, render_template, redirect, url_for, request
import requests

app = Flask(__name__)

@app.route("/", methods = ['POST', 'GET'])
def index():
    if request.method == 'POST':
        arr = []
        for i in request.form:
            val = request.form[i]
            if val == "":
                return redirect(url_for("demo2"))
            arr.append(float(val))

# deepcode ignore HardcodedNonCryptoSecret: <please specify a reason of ignoring this>
API_KEY = "poJ22ua6BCG9qY33B8fkgnz1bnP1f9DZqUIF9NkBM1bZ"
token_response = requests.post('https://iam.cloud.ibm.com/identity/token', data={
    "apikey": API_KEY,
    "grant_type": 'urn:ibm:params:oauth:grant-type:apikey'
})
mltoken = token_response.json()["access_token"]
header = {'Content-Type': 'application/json', 'Authorization': 'Bearer ' + mltoken}
```

```
payload_scoring = {  
    "input_data": [{ "fields":[ 'GRE Score',  
                            'TOEFL Score',  
                            'University Rating',  
                            'SOP',  
                            'LOR ',  
                            'CGPA',  
                            'Research'],  
                    "values": [arr]  
                }]  
}
```

```
response_scoring = requests.post(  
    'https://us-south.ml.cloud.ibm.com/ml/v4/deployments/28aea4f7-0bec-4310-82bf-  
06e502d2cd4d/predictions?version=2022-11-03',  
    json=payload_scoring,  
    headers=header  
)  
.json()
```

```
result = response_scoring['predictions'][0]['values']
```

```
if result[0][0] > 0.5:
```

```
    return redirect(url_for('chance', percent=result[0][0]*100))
```

```
else:
```

```
    return redirect(url_for('no_chance', percent=result[0][0]*100))
```

```
else:
```

```
    return redirect(url_for("demo2"))
```

```
@app.route("/home")

def demo2():

    return render_template("demo2.html")


@app.route("/chance/<percent>")
def chance(percent):

    return render_template("chance.html", content=[percent])


@app.route("/nochance/<percent>")
def no_chance(percent):

    return render_template("noChance.html", content=[percent])


@app.route('/<path:path>')
def catch_all():

    return redirect(url_for("demo2"))


if __name__ == "__main__":

    app.run()
```


OUTPUT IMAGES:

← → ↻ 127.0.0.1:5000/home 🔍 📄 ☆ 🏠 👤 ⋮

University Admission Eligibility Prediction System

Enter your details and get probability of your admission

Students are often worried about their chances of admission to University. The aim of this project is to help students in shortlisting universities with their profiles. The predicted output gives them a fair idea about their admission chances in a particular university. This analysis should also help students who are currently preparing or will be preparing to get a better idea.



Enter the details

GRE Score:

TOFEL Score:

University Rating:

SOP:

LOR:

CGPA:

Research: ☐ Yes ☒ No


Predict

← → ✕ 127.0.0.1:5000/home 🔍 📄 ☆ 🏠 👤 ⋮

University Admission Eligibility Prediction System

Enter your details and get probability of your admission

Students are often worried about their chances of admission to University. The aim of this project is to help students in shortlisting universities with their profiles. The predicted output gives them a fair idea about their admission chances in a particular university. This analysis should also help students who are currently preparing or will be preparing to get a better idea.



Enter the details

GRE Score:

TOFEL Score:


University Rating:

SOP:

LOR:


CGPA:

Research: ☐ Yes ☒ No

Predicting... 

127.0.0.1:5000

University Admit Eligibility Prediction System




You Have Chance
The model has predicted that you have
56.32584659427018% chance

[Go Back](#)

127.0.0.1:5000/chance/56.32584659427018

Windows taskbar: Type here to search, 27°C Haze, 09:22 AM 19-11-2022

University Admission Eligibility Prediction System



You have a LOW / NO chance
The model has predicted that you have no chance


[Go Back](#)

127.0.0.1:5000/nochance/0

13.2 GITHUB LINK:

<https://github.com/IBM-EPBL/IBM-Project-20398-1659718544>

13.3 DEMO LINK:

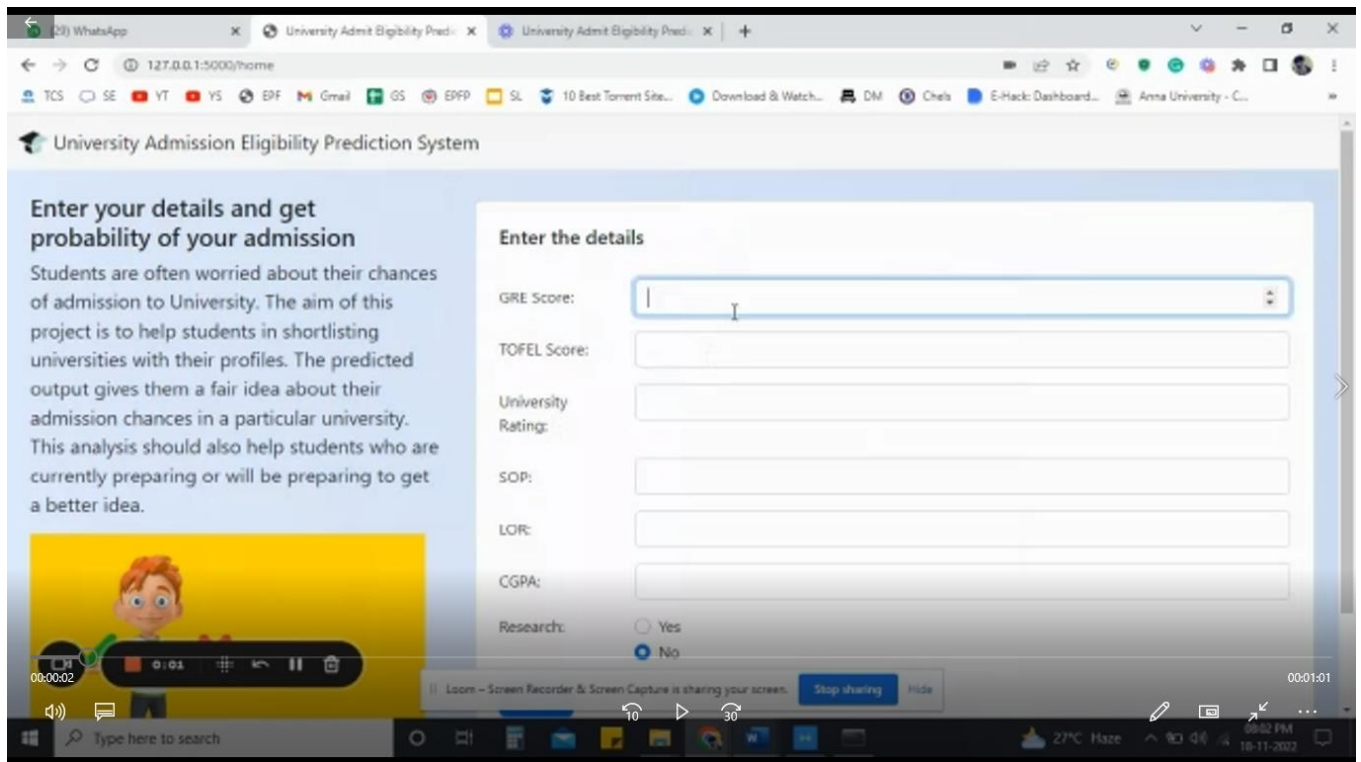

https://drive.google.com/file/d/1S8_zMLvoxxGrxIDR2fsvfG4RMSAvRgbJ/view?usp=sharing

