ASSIGNMENT 4

NAME	KALYANASUNDARI V
REGISTER NUMBER	113119UG04042
TEAM ID	PNT2022TMID22430
DATE	25 October 2022
MAXIMUM MARKS	4 Marks

QUESTION: Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

CODE:


```
#include <WiFi.h>
#include
<PubSubClient.h>
void callback(char*subscribetopic,byte*payload,unsignedintpayloadLength);
//----credentials of IBM Accounts-----
#define ORG "Ashfaq1824"//IBM ORGANITION ID
#define DEVICE TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[]=ORG".messaging.internetofthings.ibmcloud.com";
char publishTopic[]="iot-2/evt/Data/fmt/json";
char subscribetopic[]="iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient);
const int trigPin = 5;
const int echoPin = 18;
```

```
#define SOUND SPEED
0.034 long duration;
float distance;
void setup()
{
Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
void loop()
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin,HIGH);
distance = duration *SOUND SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if(!client.loop()) {
mqttconnect();
} }
delay(1000);
```


```
void PublishData(floatdist)
mqttconnect();
String payload="{\"Distance\":";
payload += dist;
payload += ", \ ''ALERT!! \ ''' \ ''Distance \ less \ than \ 100cms \ '''';
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c str()))
{ Serial.println("Publish ok");
else
Serial.println("Publish failed");
void mqttconnect()
if(!client.connected())
Serial.print("Reconnecting client to");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token))
{ Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
} }
void wificonnect()
{
```

```
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL CONNECTED)
{ delay(500); Serial.print(".");
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice()
{ if (client.subscribe(subscribetopic))
{
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
}
else
Serial.println("subscribe to cmd FAILED");
} }
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++)
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
Serial.println("data: "+ data3);
data3="";
}
```

SCHEMATIC/CIRCUIT DIAGRAM

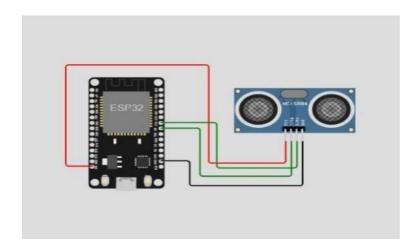

IBM CLOUD OUTPUT:

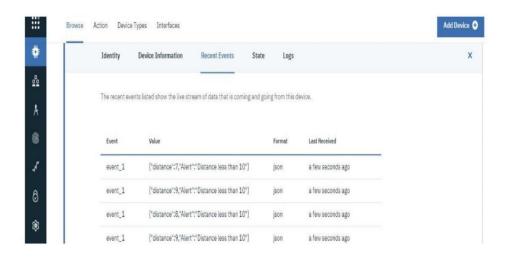

WOKWI LINK: https://wokwi.com/projects/346419220039336530