


Containerize your Flask application

DATE	18-11-2022
PROJECT NAME	SKILL/JOB RECOMMENDER
TEAM ID	PNT2022TMID30065
TEAM MEMBERS	Bhuvaneshwaran A Bharanidhar S Harish J Kowsikprasaath E P

- In your project directory, create a file named "**Docker file**." Suggestion: Name your file exactly "**Docker file**," nothing else.

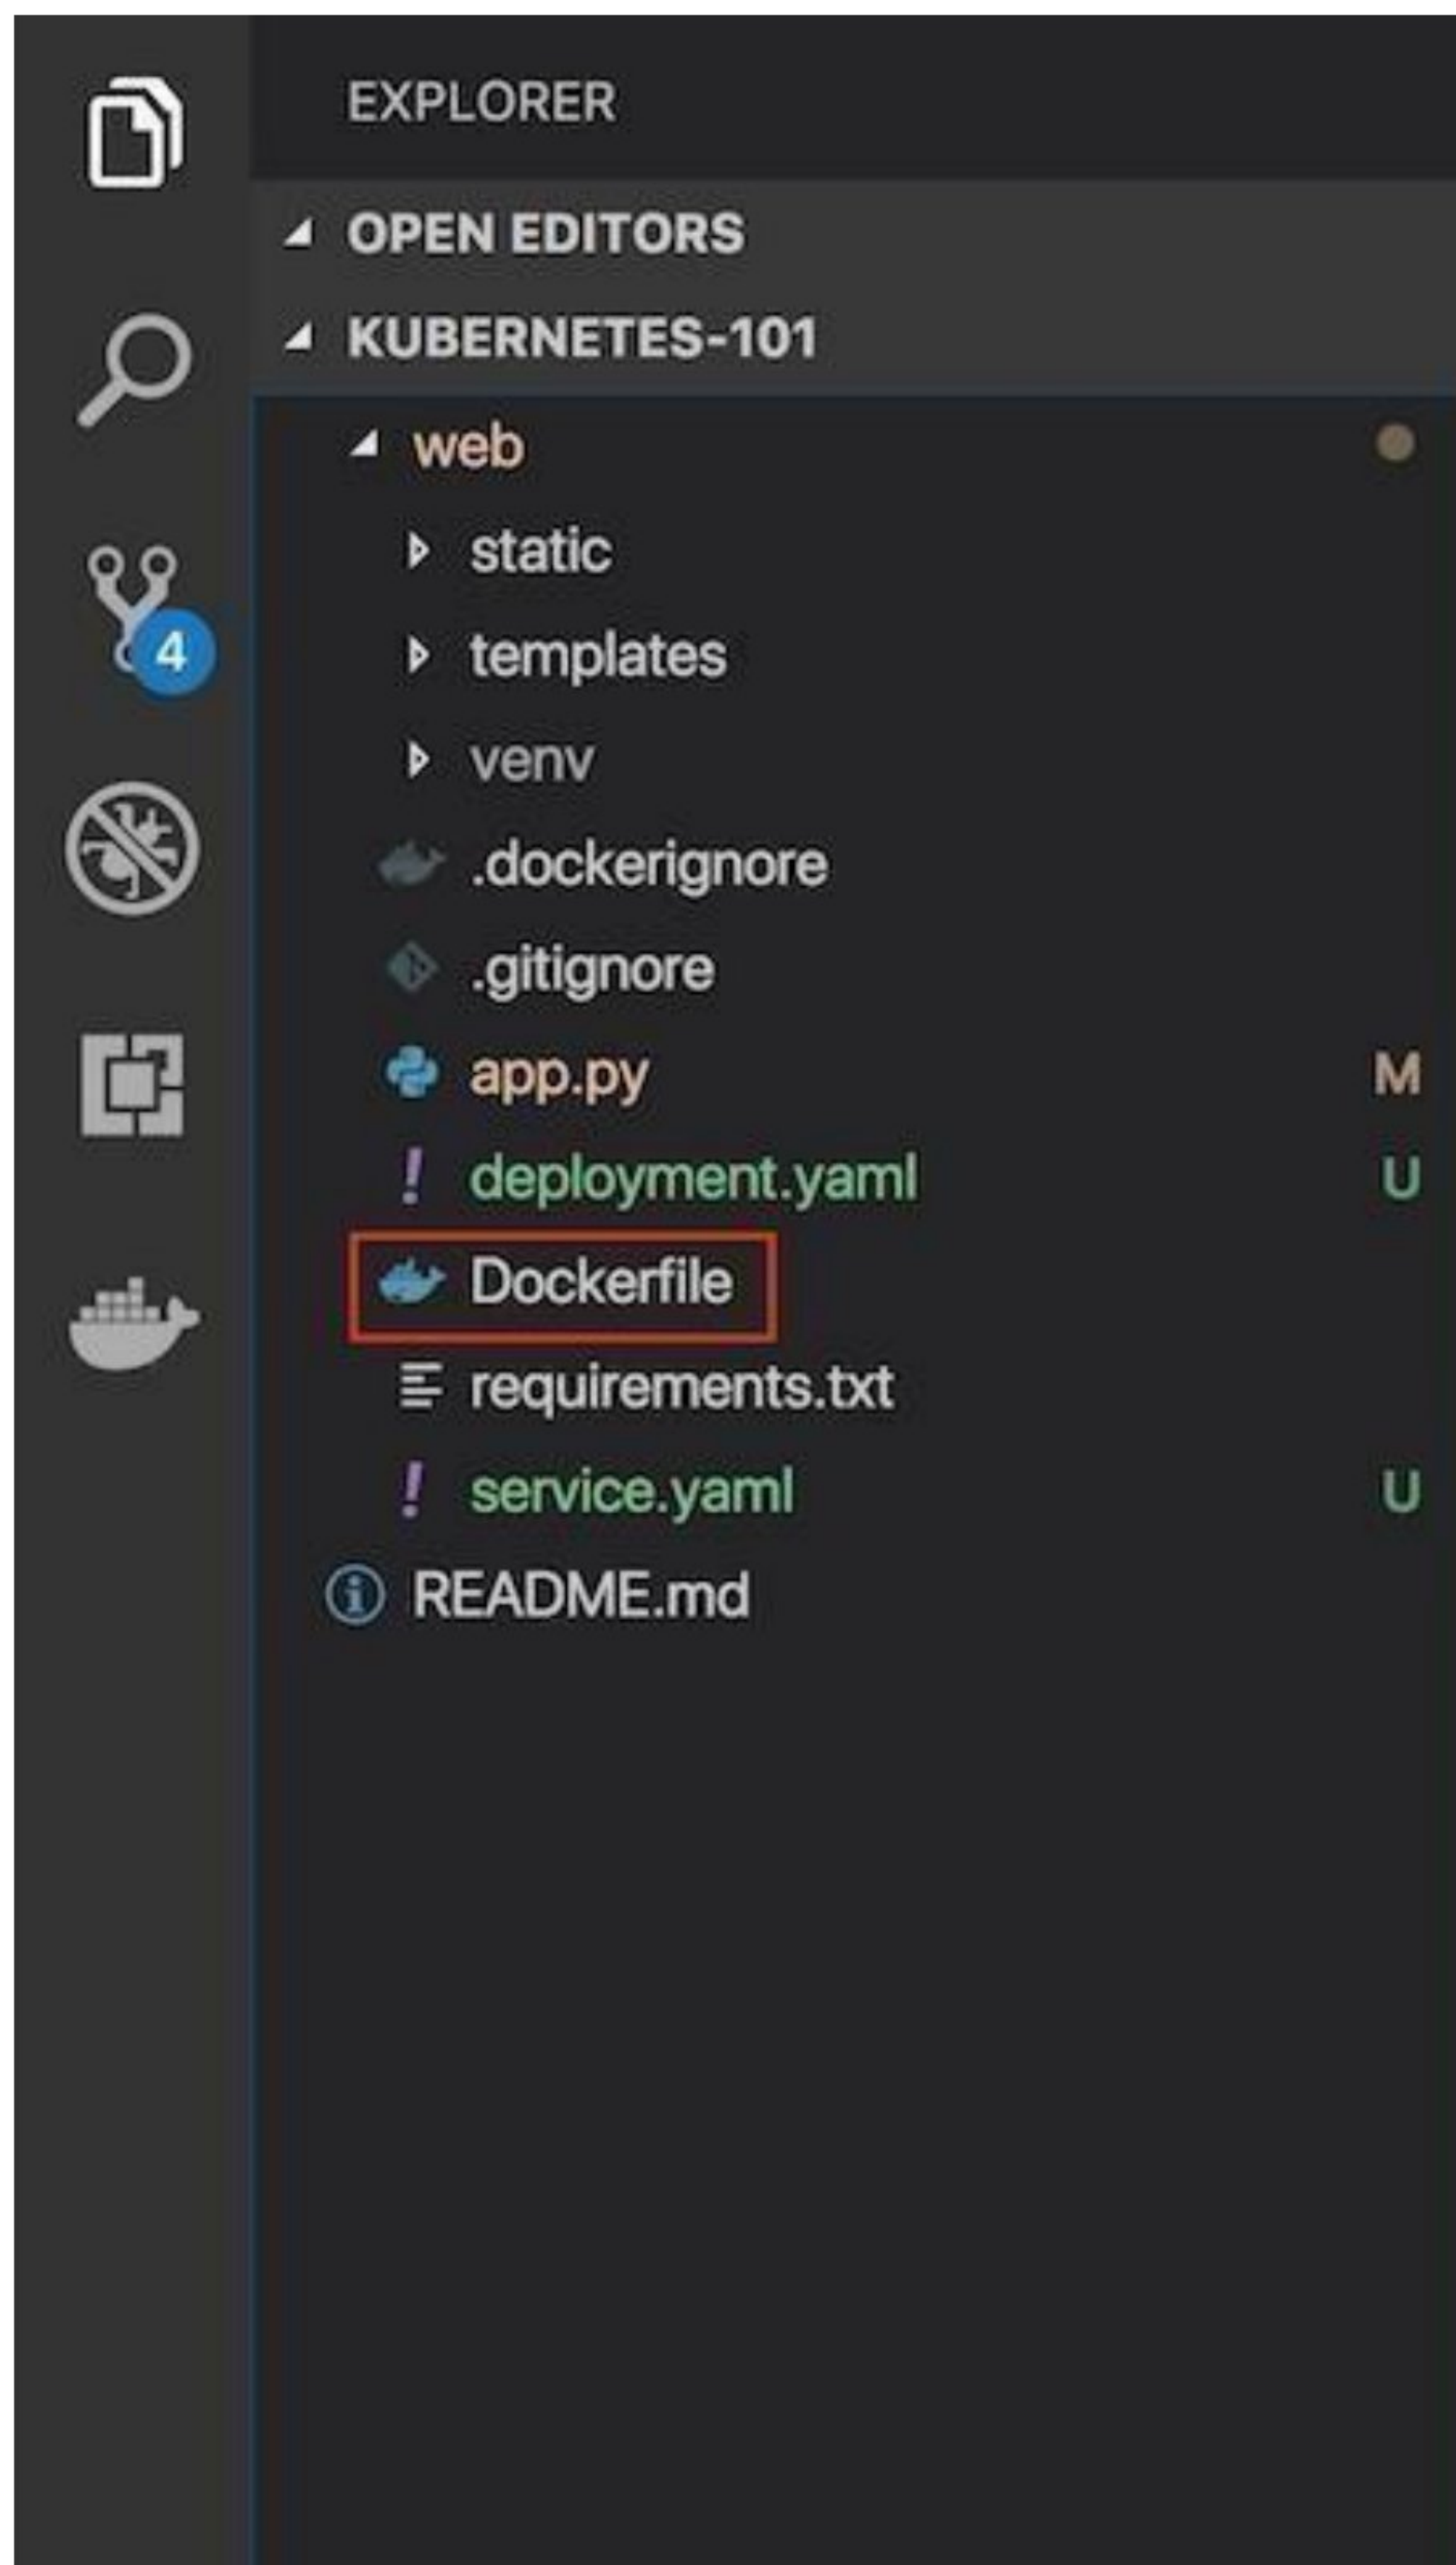

A "Docker File" is used to indicate to Docker a base image, the Docker settings you need, and a list of

Containerize your Flask application

commands you would like to have executed to prepare and start your new container.

- In the file, paste this code:
- `FROM python:2.7`
- `LABEL maintainer="Kunal Malhotra, kunal.malhotra1@ibm.com"`

- `RUN apt-get update`
- `RUN mkdir /app WORKDIR /app COPY ./app`
- `RUN pip install -r requirements.txt`
- `EXPOSE 5000`
- `ENTRYPOINT ["python"]`
- `CMD ["app.py"]`

Show more

Explanation and breakdown of the above Docker file code

1. The first part of the code above is:
2. `FROM python:2.7`

Show more

Because this Flask application uses Python 2.7, we want an environment that supports it and already has it installed. Fortunately, Docker Hub has an official image that's installed on top of Ubuntu. In one line, we will have a base Ubuntu image with Python 2.7, virtual env, and pip. There are tons of images on Docker Hub, but if you would like to start off with a fresh Ubuntu image and build on top of it, you could do that.

3. Let's look at the next part of the code:
4. `LABEL maintainer="Kunal Malhotra, kunal.malhotra1@ibm.com"`
5. `RUN apt-get update`

Show more

6. Note the maintainer and update the Ubuntu package index. The command is `RUN`, which is a function that runs the command after it.
7. `RUN mkdir /app`
8. `WORKDIR /app`
9. `COPY . /app`

Show more

10. Now it's time to add the Flask application to the image. For simplicity, copy the application under the `/app` directory on our Docker Image.

`WORKDIR` is essentially a `cd` in bash, and `COPY` copies a certain directory to the provided directory in an image. `ADD` is another command that does the same thing as `COPY`, but it also allows you to add a repository from a URL. Thus, if you want to clone your git repository instead of copying it from your local repository (for staging and production purposes), you can use that. `COPY`, however, should be used most of the time unless you have a URL.

11. Now that we have our repository copied to the image, we will install all of our dependencies, which is defined in the `requirements.txt` part of the code.

12. `RUN pip install --no-cache-dir -r requirements.txt`

Show more

13. We want to expose the port(5000) the Flask application runs on, so we use `EXPOSE`.

Containerize your Flask application

14. EXPOSE 5000

Show more

15. ENTRYPOINT specifies the entry point of your application.

16.ENTRYPOINT ["python"]

17.CMD ["app.py"]

Show more

Build an image from the Docker File

Open the terminal and type this command to build an image from your Docker file: `docker build -t <image name>:<tag> .`(note the period to indicate we're in our apps top level directory). For example: `docker build -t app:latest .`

```
kunals-mbp:web kunalmalhotra$ docker build -t app:latest .
Sending build context to Docker daemon 348.2kB
Step 1/8 : FROM python:2.7
--> 6c76e39e7cfe
Step 2/8 : LABEL maintainer="Kunal Malhotra, kunal.malhotra1@ibm.com"
--> Using cache
--> d8b57d41591c
Step 3/8 : RUN apt-get update
--> Using cache
--> 6262a134e40e
Step 4/8 : COPY . /app
--> f07f7377099f
Step 5/8 : WORKDIR /app
Removing intermediate container f9010b99d2fe
--> 0bcc6af20e3d
Step 6/8 : RUN pip install -r requirements.txt
--> Running in 8153040b00b7
Collecting click==6.7 (from -r requirements.txt (line 1))
  Downloading https://files.pythonhosted.org/packages/34/c1/8806f99713ddb993c5366c362b2f908f18269f8d792aff1abfd700775a77/click-6.7-py2.py3-none-any.whl (71kB)
Collecting Flask==1.0.2 (from -r requirements.txt (line 2))
  Downloading https://files.pythonhosted.org/packages/7f/e7/08578774ed4536d3242b14dacb4696386634607af824ea997202cd0edb4b/Flask-1.0.2-py2.py3-none-any.whl (91kB)
Collecting itsdangerous==0.24 (from -r requirements.txt (line 3))
  Downloading https://files.pythonhosted.org/packages/dc/b4/a60bcdba945c00f6d608d8975131ab3f25b22f2bcfe1dab221165194b2d4/itsdangerous-0.24.tar.gz (46kB)
Collecting Jinja2==2.10 (from -r requirements.txt (line 4))
  Downloading https://files.pythonhosted.org/packages/7f/ff/ae64bacdfc95f27a016a7bed8e8686763ba4d277a78ca76f32659220a731/Jinja2-2.10-py2.py3-none-any.whl (126kB)
Collecting MarkupSafe==1.0 (from -r requirements.txt (line 5))
  Downloading https://files.pythonhosted.org/packages/4d/de/32d741db316d8fdb7680822dd37001ef7a448255de9699ab4bfcdbf4172b/MarkupSafe-1.0.tar.gz
Collecting Werkzeug==0.14.1 (from -r requirements.txt (line 6))
  Downloading https://files.pythonhosted.org/packages/20/c4/12e3e56473e52375aa29c4764e70d1b8f3efa6682bef8d0aae04fe335243/Werkzeug-0.14.1-py2.py3-none-any.whl (322kB)
Building wheels for collected packages: itsdangerous, MarkupSafe
Running setup.py bdist_wheel for itsdangerous: started
Running setup.py bdist_wheel for itsdangerous: finished with status 'done'
Stored in directory: /root/.cache/pip/wheels/2c/4a/61/5599631c1554768c6290b08c02c72d7317910374ca602ffe5
Running setup.py bdist_wheel for MarkupSafe: started
Running setup.py bdist_wheel for MarkupSafe: finished with status 'done'
Stored in directory: /root/.cache/pip/wheels/33/56/20/ebe49a5c612fffe1c5a632146b16596f9e64676768661e4e46
Successfully built itsdangerous MarkupSafe
Installing collected packages: click, itsdangerous, MarkupSafe, Jinja2, Werkzeug, Flask
Successfully installed Flask-1.0.2 Jinja2-2.10 MarkupSafe-1.0 Werkzeug-0.14.1 click-6.7 itsdangerous-0.24
Removing intermediate container 8153040b00b7
--> 66d2636b97bc
Step 7/8 : ENTRYPOINT [ "python" ]
--> Running in bdc1c83815e1
Removing intermediate container bdc1c83815e1
--> 73cefc38a1c
Step 8/8 : CMD [ "app.py" ]
--> Running in a784d430dd6f
Removing intermediate container a784d430dd6f
--> d8b6b83763a5
Successfully built d8b6b83763a5
Successfully tagged app:latest
kunals-mbp:web kunalmalhotra$
```

Run your container locally and test

After you build your image successfully, type: `docker run -d -p 5000:5000 app`

This command will create a container that contains all the application code and dependencies from the image and runs it locally.

```
kunals-mbp:web kunalmalhotra$ docker run -d -p 5000:5000 app
3c2bbf86f758e9a606006eb52a2ef389ea8400eb88263137ca5543c0c616247
kunals-mbp:web kunalmalhotra$ docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED             STATUS              PORTS              NAMES
3c2bbf86f758        app                "python app.py"     Less than a second ago    Up 5 seconds       0.0.0.0:5000->5000/tcp    compassionate_keladysh
kunals-mbp:web kunalmalhotra$
```


Containerize your Flask application

