Assignment -2 Data Visualization and Pre-processing

Assignment submission	27 September 2022
Student Name	Sivakami R
Student Roll Number	951919CS093
Maximum Marks	2 Marks

1. Download the dataset: Dataset


2. Load the dataset.

import pandas as pd
df=pd.read_csv('Churn_Modelling.csv')


- 3. Perform Below Visualizations
- Univariate Analysis


import matplotlib.pyplot as plt


%matplotlib inline plt.scatter(df.CreditScore,df.EstimatedSalary) plt.title('CreditScore vs. EstimatedSalary') plt.xlabel('CreditScore') plt.ylabel('EstimatedSalary') plt.show()

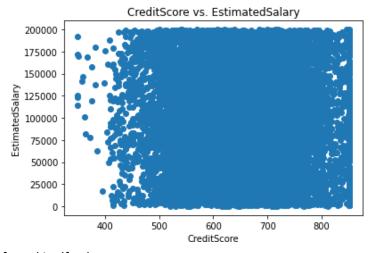



for col in df.columns:
 if(df.dtypes[col]=='int64' or df.dtypes[col]=='float64'):
 sns.boxplot(x=df[col]).set(xlabel=col)
 plt.show()










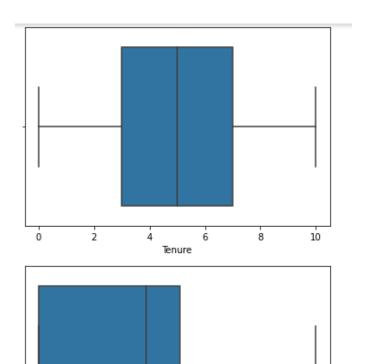

Balance

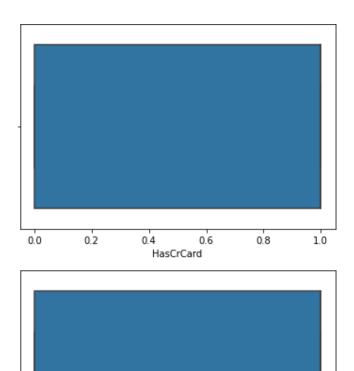


0.4 0.6 IsActiveMember


0.8

1.0

0.2


0.0






• Bi - Variate Analysis

import seaborn as sns
sns.FacetGrid(df,hue='Exited',height=5).map(plt.scatter,"Balance","CreditScore").add_legend()
plt.show()



• Multi - Variate Analysis

sns.pairplot(df, hue='Exited', height=2)

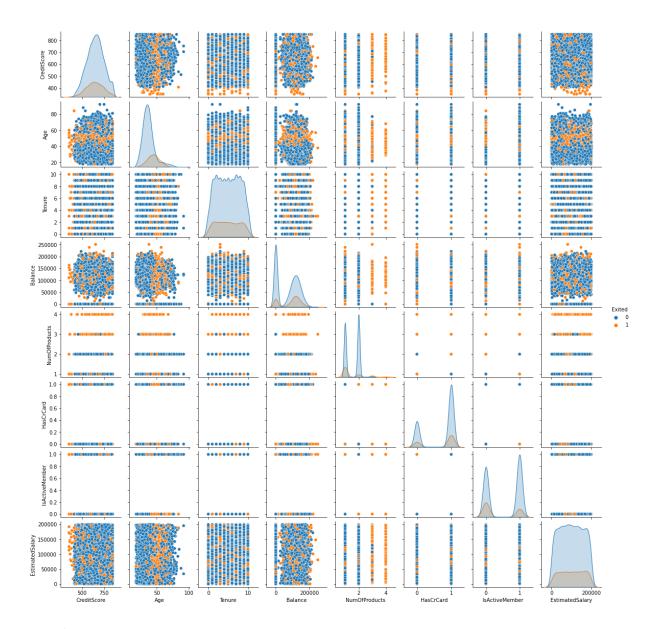

4. Perform descriptive statistics on the dataset.

df.describe()

	CreditScore	Geography	Gender	Age	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	EstimatedSalary	Exited
count	10000.00000	10000.000000	10000.000000	10000.000000	10000.000000	10000.000000	9940.000000	10000.00000	10000.000000	10000.000000	10000.000000
mean	650.52400	0.746300	0.545700	38.921800	5.012800	76485.889288	1.515292	0.70550	0.515100	100090.239881	0.203700
std	96.66498	0.827529	0.497932	10.487806	2.892174	62397.405202	0.550743	0.45584	0.499797	57510.492818	0.402769
min	365.00000	0.000000	0.000000	18.000000	0.000000	0.000000	1.000000	0.00000	0.000000	11.580000	0.000000
25%	584.00000	0.000000	0.000000	32.000000	3.000000	0.000000	1.000000	0.00000	0.000000	51002.110000	0.000000
50%	652.00000	0.000000	1.000000	37.000000	5.000000	97198.540000	1.000000	1.00000	1.000000	100193.915000	0.000000
75%	718.00000	1.000000	1.000000	44.000000	7.000000	127644.240000	2.000000	1.00000	1.000000	149388.247500	0.000000
max	850.00000	2.000000	1.000000	92.000000	10.000000	250898.090000	3.000000	1.00000	1.000000	199992.480000	1.000000

5. Handle the Missing values.

df.isnull().sum()

CreditScore 0 Geography 0

Gender	0
Age	0
Tenure	0
Balance	0
NumOfProducts	0
HasCrCard	0
IsActiveMember	0
EstimatedSalary	0
Exited	0
dtype: int64	

#there is no missing values

6. Find the outliers and replace the outliers

import numpy as np #Outliers are found using the univariate

CreditsMedian = df.loc[df['CreditScore']<400, 'CreditScore'].median()
ProdMedian = df.loc[df['NumOfProducts']>=3.5,'NumOfProducts'].median()

df.loc[df.CreditScore < 400, 'CreditScore'] = np.nan
df.fillna(CreditsMedian,inplace=True)
df.loc[df.NumOfProducts > 3, 'NumOfProducts'] = np.nan
df.fillna(ProdMedian,inplace=True)

df

	CreditScore	Geography	Gender	Age	Tenure	Balance	NumOfProducts	HasCrCard	IsActiveMember	${\sf EstimatedSalary}$	Exited
0	619.0	0	0	42	2	0.00	1.0	1	1	101348.88	1
1	608.0	2	0	41	1	83807.86	1.0	0	1	112542.58	0
2	502.0	0	0	42	8	159660.80	3.0	1	0	113931.57	1
3	699.0	0	0	39	1	0.00	2.0	0	0	93826.63	0
4	850.0	2	0	43	2	125510.82	1.0	1	1	79084.10	0
9995	771.0	0	1	39	5	0.00	2.0	1	0	96270.64	0
9996	516.0	0	1	35	10	57369.61	1.0	1	1	101699.77	0
9997	709.0	0	0	36	7	0.00	1.0	0	1	42085.58	1
9998	772.0	1	1	42	3	75075.31	2.0	1	0	92888.52	1
9999	792.0	0	0	28	4	130142.79	1.0	1	0	38190.78	0

7. Check for Categorical columns and perform encoding.

df.drop(['RowNumber','CustomerId','Surname'],axis=1,inplace=True)

df.info()

10000 rows × 11 columns

#we have 2 categorial information

<class 'pandas.core.frame.DataFrame'>

RangeIndex: 10000 entries, 0 to 9999 Data columns (total 11 columns):

#	Column	Non-Nu	ıll Count	Dtype			
0	CreditScore	10000	non-null	int64			
1	Geography	10000	non-null	object			
2	Gender	10000	non-null	object			
3	Age	10000	non-null	int64			
4	Tenure	10000	non-null	int64			
5	Balance	10000	non-null	float64			
6	NumOfProducts	10000	non-null	int64			
7	HasCrCard	10000	non-null	int64			
8	IsActiveMember	10000	non-null	int64			
9	EstimatedSalary	10000	non-null	float64			
10	Exited	10000	non-null	int64			
dtypes: float64(2), int64(7), object(2)							

memory usage: 859.5+ KB

from sklearn.preprocessing import LabelEncoder,MinMaxScaler labelencoder = LabelEncoder() df['Geography']= labelencoder.fit_transform(df['Geography']) df['Gender'] = labelencoder.fit_transform(df['Gender'])

8. Split the data into dependent and independent variables.

```
x= df.iloc[:, :-1]
y= df.iloc[:,-1:]
```

9. Scale the independent variables

from sklearn.preprocessing import MinMaxScaler nm =MinMaxScaler() X = nm.fit_transform(x)

10. Split the data into training and testing

from sklearn.model_selection import train_test_split x_train,x_test,y_train,y_test=train_test_split(X,y,test_size=0.2,random_state=0)