

# SENDGRID INTEGRATION WITH PYTHON

Date	14 Nov 2022
Team ID	PNT2022TMID02598
Project Name	NUTRITION ASSISTANT APPLICATION

## STEP 1:

Requirements:

**Python 2.6, 2.7, 3.4 or 3.5.**

## STEP 2:

Creating an API key


## STEP 3:

INSTALL

PACKAGE: > pip install sendgrid

## STEP 4:

SEND EMAIL

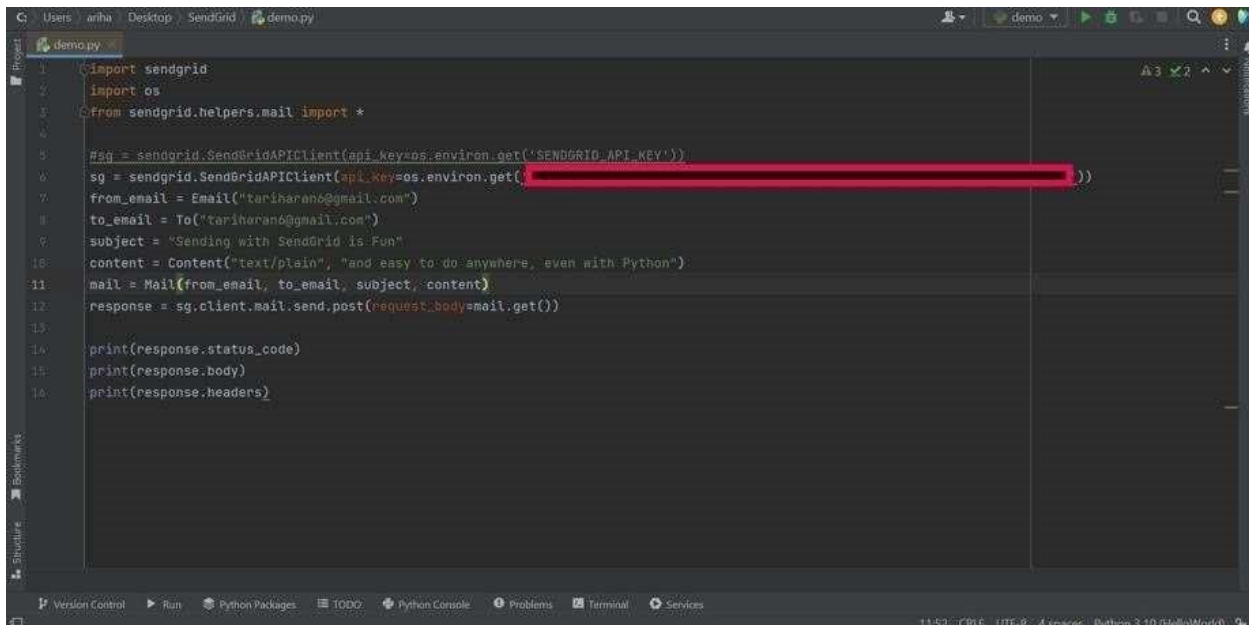

```
1 import sendgrid
2 import os
3 from sendgrid.helpers.mail import *
4
5 #sg = sendgrid.SendGridAPIClient(api_key=os.environ.get('SENDGRID_API_KEY'))
6 sg = sendgrid.SendGridAPIClient(api_key=os.environ.get('SENDGRID_API_KEY'))
7 from_email = Email("tariharan@gmail.com")
8 to_email = To("tariharan@gmail.com")
9 subject = "Sending with SendGrid is Fun"
10 content = Content("text/plain", "and easy to do anywhere, even with Python")
11 mail = Mail(from_email, to_email, subject, content)
12 response = sg.client.mail.send.post(request_body=mail.get())
13
14 print(response.status_code)
15 print(response.body)
16 print(response.headers)
```

## SENDGRID PYTHON CODE :

```

1  """HTTP Client library"""
2  import json
3  import logging
4  from .exceptions import handle_error
5
6      try:
7          # Python 3
8          import urllib.request as urllib
9          from urllib.parse import urlencode
10         from urllib.error import HTTPError
11         except ImportError:
12             # Python 2
1
1 import os
2 from sendgrid import SendGridAPIClient
3 from sendgrid.helpers.mail import Mail
4
5     message = Mail(
6         from_email='from_email@example.com',
7         to_emails='to@example.com',
8         subject='Sending with Twilio SendGrid is Fun',
9         html_content='<strong>and easy to do anywhere, even with
10         Python</strong>')
11
12     try:
13         sg = SendGridAPIClient(os.environ.get('SENDGRID_API_KEY'))
14         response = sg.send(message)
15         print(response.status_code)
16         print(response.body) 15 print(response.headers) 16 except Exception as
17         e:
18             print(e.message)

```

## HTTP CLIENT PROGRAM:

```
import urllib2 as urllib

14     from urllib2 import HTTPError
15     from urllib import urlencode
16
17 _logger = logging.getLogger( name )
18
19
20     class Response(object):
21         """Holds the response from an API call.""" 22
22
23         def init (self, response):
24             """
25             :param response: The return value from a
26             open call
27             on a urllib.build_opener()
28             :type response: urllib response object
29             """
30             self._status_code = response.getcode()
31             self._body = response.read()
32             self._headers = response.info()
33
34     @property
```

```
34     def status_code(self):
35         """
36         :return: integer, status code of API call
37         """
38         return self._status_code
39
40     @property
41     def body(self):
42         """
43         :return: response from the API
44         """
45         return self._body
46
47 @property
```

```
48     def headers(self):
49         """
50         :return: dict of response headers
51         """
52         return self._headers
53
54     @property
55     def to_dict(self):
56         """
57         :return: dict of response from the API
58         """
59         if self.body:
60             return json.loads(self.body.decode('utf-8'))
61         else:
62             return None
63
64
65 class Client(object):
66     """Quickly and easily access any REST or REST-like API.""" 67
68     # These are the supported HTTP verbs
```

```

69 methods = {'delete', 'get', 'patch', 'post', 'put'} 70
71 def init (self,
72 host,
73 request_headers=None,
74 version=None,
75 url_path=None,
76 append_slash=False, 77 timeout=None):
78     """
79     :param host: Base URL for the api. (e.g.
80     https://api.sendgrid.com)
81     :type host: string
82     :param request_headers: A dictionary of the headers you want

```

applied on all calls

```

83         :type request_headers: dictionary
84         :param version: The version number of the
85         API.
86         Subclass _build_versioned_url for custom
87         behavior.
88         Or just pass the version as part of the URL
89         (e.g. client._("/v3"))
90         :type version: integer
91         :param url_path: A list of the url path
92         segments
93         :type url_path: list of strings
94         """
95         self.host = host

```

```
93         self.request_headers = request_headers or {}  
94         self._version = version  
95         # _url_path keeps track of the dynamically  
        built url  
96         self._url_path = url_path or []
```

```
97             # APPEND SLASH set
98             self.append_slash = append_slash
99             self.timeout = timeout
100 101 def _build_versioned_url(self, url):
```

```
102         """Subclass this function for your own needs.
103         Or just pass the version as part of the URL
104         (e.g. client._('/v3'))
105         :param url: URI portion of the full URL being requested
106         :type url: string
107         :return: string
108         """
109         return '{}{}/v{}{}'.format(self.host, str(self._version),
                                     url)
```



```
110
111     def _build_url(self, query_params):
112         """Build the final URL to be passed to urllib
113
114         :param query_params: A dictionary of all the query
```


---

parameters



```
115         :type query_params: dictionary
116         :return: string
117         """
118         url = ''
119         count = 0
120         while count < len(self._url_path):
121             url += '{}/{}'.format(self._url_path[count])
122             count += 1
123
124         # add slash
125         if self.append_slash:
126             url += '/'
127
128         if query_params:
129             url_values = urlencode(sorted(query_params.items()), True)
130             url = '{}?{}'.format(url, url_values)
131
132         if self._version:
133             url = self._build_versioned_url(url)
134         else:
135             url = '{}{}'.format(self.host, url)
136         return url
137
138     def _update_headers(self, request_headers):
139         """Update the headers for the request
140
141         :param request_headers: headers to set for the API call
```

```
142         :type request_headers: dictionary
143         :return: dictionary
144         """
145         self.request_headers.update(request_headers)
146     def _build_client(self, name=None):
147
```



```

148         """Make a new Client object
149
150         :param name: Name of the url segment
151         :type name: string
152         :return: A Client object
153         """
154         url_path = self.url_path + [name] if name else
            self._url_path
155         return Client(host=self.host,
156                       version=self._version,
157                       request_headers=self.request_headers,
158                       url_path=url_path,
159                       append_slash=self.append_slash,
160                       timeout=self.timeout)
161
162         def make_request(self, opener, request,
163                           timeout=None):
164             """Make the API call and return the response. is
165             This separated into testing.
166             it's own function, so we can mock it easily for
167
168             :param opener:

```

```
167         :type opener:
168
169         :param request: url payload to request
170
171         :type request: urllib.Request object
172
173         :param timeout: timeout value or None
174
175         :type timeout: float
176
177         :return: urllib response
178
179         """
180
181         timeout = timeout or self.timeout
182
183         try:
184             return opener.open(request, timeout=timeout)
185
186         except HTTPError as err:
187             exc = handle_error(err)
188
189             exc.cause = None
190
191         _logger.debug('{method} Response: {status}
```








```
212         :return: string, version
213         """
214         self._version = args[0]
215
216         return self._build_client()
217         return get_version
218
219         # We have reached the end of the method chain, make the
220         API call
221         if name in self.methods:
222             method = name.upper()
223
224             def http_request(
225                 request_body=None,
226                 query_params=None,
227                 request_headers=None,
228                 timeout=None,
229                 **_):
230
231                 """Make the API call
232
233                 :param timeout: HTTP request timeout. Will be
234                 propagated to
235                 urllib client
236
237                 :type timeout: float
```



```
232         :param request_headers: HTTP headers. Will be
merged into
233         current client object state
234         :type request_headers: dict
235         :param query_params: HTTP query parameters
236         :type query_params: dict
237         :param request_body: HTTP request body
238         :type request_body: string or json-serializable
object
239         :param kwargs:
240         :return: Response object
241         """
242         if request_headers:
```



```
243         self._update_headers(request_headers)
244
245         if request_body is None:
246             data = None
247         else:
248             # Don't serialize to a JSON formatted str
249             # if we don't have a JSON Content-Type
250             if 'Content-Type' in self.request_headers and \
251                 self.request_headers['Content-Type'] != \
252                 'application/json':
253                 data = request_body.encode('utf-8')
254             else:
255                 self.request_headers.setdefault(
256                     'Content-Type', 'application/json')
257                 data =
258                 json.dumps(request_body).encode('utf-8')
259
260         opener = urllib.build_opener()
261         request = urllib.Request(
262             self._build_url(query_params),
263             headers=self.request_headers,
264             data=data,
265         )
266         request.get_method = lambda: method
267
268         _logger.debug('[method] Request: {url}'.format(
269             method=method,
270             url=request.get_full_url()))
271         if request.data:
272             _logger.debug('PAYLOAD: {data}'.format(
273                 data=request.data))
274         _logger.debug('HEADERS: {headers}'.format(
275             headers=request.headers))
```

```

        response = Response(
            self.make_request(opener, request,
                timeout=timeout)
278         )
279
280         logger.debug('{method} Response: {status}
            {body}'.format(
281             method=method,
282             status=response.status_code,
283             body=response.body))
284
285         return response
286
287     return http_request 288
    else:
289         # Add a segment to the URL
290         return self._(name)
291
292     def getstate (self):
293         return self. dict
294
295     def setstate (self, state):

```