

## Sprint-1


Date	7 November 2022
Team ID	PNT2022TMID36769
Project Name	Smart waste management system for metropolitan cities

### Display the temperature values:

Submitted by:A.Bindo,K.B.Kiran babu,P.Pandi judhisti,k.logesh

Student Roll number:2102191060106010,210219106023,210219106302,210219106024

Wokwi link: <https://wokwi.com/projects/348465676245008979>

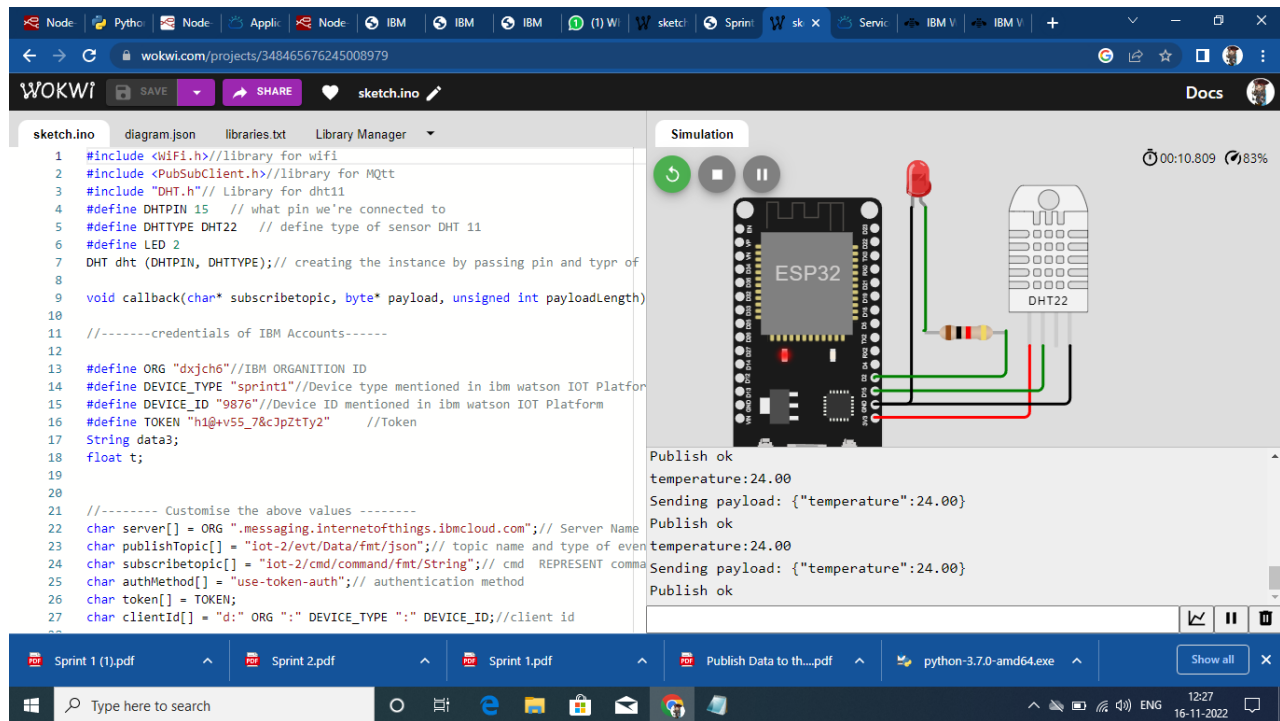

### Program:

```
#include <WiFi.h> //library for wifi

#include <PubSubClient.h> //library for MQTT

#include "DHT.h" // Library for dht11
```

```

#define DHTPIN 15    // what pin we're connected to

#define DHTTYPE DHT22    // define type of sensor DHT 11

#define LED 2

DHT dht (DHTPIN, DHTTYPE); // creating the instance by passing pin and typ
of dht connected

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "zbgr67"//IBM ORGANITION ID

#define DEVICE_TYPE "fershidevicetype"//Device type mentioned in ibm watson
IOT Platform

#define DEVICE_ID "fershideviceid"//Device ID mentioned in ibm watson IOT
Platform

#define TOKEN "fershiageona"    //Token
String data3; float t;

//----- Customise the above values -----

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server
Name

char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send

char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING char authMethod[] = "use-
token-auth";// authentication method char token[] = TOKEN; char clientId[]
= "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id

```

```

//-----

WiFiClient wifiClient; // creating the instance for wificlient

PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential void setup()// configureing the ESP32

{

    Serial.begin(115200);

    dht.begin();

    pinMode(LED,OUTPUT);

    delay(10);    Serial.println();

    wificonnect();    mqttconnect();

} void loop()// Recursive
Function

{

    t = dht.readTemperature();

    Serial.print("temperature:");

    Serial.println(t);

    PublishData(t);    delay(1000);

    if (!client.loop()) {
mqttconnect();

    }

}

```

```

/*.....retrieving to
Cloud.....*/

void PublishData(float temp) {
mqttconnect();//function call for connecting to ibm

/*      creating the String in in form JSon to update the data to ibm
cloud    */

String payload = "{\"temperature\":\"";    payload
+= temp;    payload += "}";

Serial.print("Sending payload: ");

Serial.println(payload);        if

(client.publish(publishTopic, (char*) payload.c_str()))

{

    Serial.println("Publish ok");// if it sucessfully upload data on the
cloud then it will print publish ok in Serial monitor or else it will print
publish failed

} else {

    Serial.println("Publish failed");

}

} void mqttconnect() {    if

(!client.connected()) {

    Serial.print("Reconnecting client to ");

Serial.println(server);        while

```

```

(!!!client.connect(clientId, authMethod, token)) {

Serial.print(".");          delay(500);

        }          initManagedDevice();
Serial.println();

} } void wificonnect() //function defination for wificonnect
{

    Serial.println();

    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to
    establish the connection    while (WiFi.status() != WL_CONNECTED) {
    delay(500);

        Serial.print(".");

    }

    Serial.println("");

    Serial.println("WiFi connected");

    Serial.println("IP address: ");
Serial.println(WiFi.localIP());

} void initManagedDevice() {    if
(client.subscribe(subscribetopic)) {

Serial.println((subscribetopic));

        Serial.println("subscribe to cmd OK");

    } else {

        Serial.println("subscribe to cmd FAILED");

    }
}

```

```
}
```

```
void callback(char* subscribetopic, byte* payload, unsigned int  
payloadLength)
```

```
{
```

```
    Serial.print("callback invoked for topic: ");  
Serial.println(subscribetopic);    for (int i = 0;  
i < payloadLength; i++) {  
//Serial.print((char)payload[i]);    data3 +=  
(char)payload[i];  
  
    }  
  
    Serial.println("data: "+ data3);    if(data3=="lighton")  
  
    {  
  
Serial.println(data3); digitalWrite(LED,HIGH);  
  
    }    else  
  
    {  
  
Serial.println(data3); digitalWrite(LED,LOW);  
  
    } data3="";  
  
}
```

## Displaying DHT22 sensor values:

The screenshot displays the IBM Watson IoT Platform dashboard. The top navigation bar includes tabs for 'Browse', 'Action', 'Device Types', and 'Interfaces'. A sidebar on the left contains icons for various IoT functions. The main content area shows a list of devices. The first device, ID 12345, is 'Disconnected'. The second device, ID 9876, is 'Connected' and is selected, showing its details in a modal window.

**Device Details for ID 9876:**

- Identity:** 9876
- Device Information:** sprint1
- State:** Connected
- Recent Events:** 16 Nov 2022 12:19
- Logs:** bindomax30@gmail.com

The 'Recent Events' tab is active, displaying a table of live data:

Event	Value	Format	Last Received
Data	{\"temperature\":24}	json	a few seconds ago
Data	{\"temperature\":24}	json	a few seconds ago
Data	{\"temperature\":24}	json	a few seconds ago
Data	{\"temperature\":24}	json	a few seconds ago

At the bottom of the modal, it indicates 'Items per page: 50' and '1-2 of 2 items'. The bottom of the screen shows a Windows taskbar with several open applications, including PDF files and a Python script.



