# SMART FASHION RECOMMENDER APPLICATION

## A PROJECT REPORT

Submitted by

Vaseem Ahamed A (727619BCS073)

Daniel Raja Rathinam S (727619BCS085)

Pradeesh P (727619BCS101)

Hariharan S (727619BCS105)

In partial fulfillment for the award of degree of Bachelor of Engineering (B.E) in Electronics

Communication and Engineerring

Dr.Mahalingam College of Engineering and Technology
ANNA UNIVERSITY NOVEMBER 2022

## **ACKNOWLEDGEMENT**

We would like to express our special thanks of gratitude to our Faculty Mentor and Industry Mentor for their support and guidance in completing ourproject on the Smart Fashion Recommender Application.

We would like to extend our gratitude to the IBM for Nalaiya Thiran project for providing us with all the facility that was required.

It was a great learning experience. We would like to take this opportunity to express our gratitude.

**TEAM MEMBERS:** 

DATE:

Vaseem Ahamed A (727619BCS073)
Daniel Raja Rathinam S(727619BCS085)
Pradeesh P (727619BCS101)
Hariharan S (727619BCS105)

17/11/2022

## **TITLE**

- 1. ABSTRACT
- 2. INTRODUCTION
- 3. HISTORY AND OVERVIEW
- 4. RECOMMENDATION SYSTEM
- 5. LITERATURE REVIEW
- 6. METHODOLOGY
  - LEARNING PHASE
  - RECOMMENDATION PHASE
     CHANNELS OF SCHOLARLY DISSEMINATION RELATED
     TOFASHION RECOMMENDATION SYSTEM
- 7. PROJECT PHASE
  - PHASE 1
  - PHASE 2

PROJECT DEVELOPMENT PHASE

**LOGIN PAGE** 

HOME PAGE

**CHAT BOT** 

- b. FEEDBACK
- 8. DISCUSSION
- 9. CONCLUSION
- 10. FUTURE SCOPE

## **ABSTRACT**

In recent years, the huge amount of information and users of the internet service, it is hard to know quickly and accurately what the user wants. This phenomenon leads to an extremely low utilization of information, also known as the information overload problem. Traditionally, keywords are used to retrieve images, but such methods require alot of annotations on the image data, which will lead to serious problems such as inconsistent, inaccurate, and incomplete descriptions, and a huge amount of work. To solvethis problem, Content Based Information Retrieval (CBIR) has gradually become a researchhotspot. CBIR retrieves picture objects based entirely on the content. The content of an image needs to be represented by features that represent its uniqueness. Basically, any picture object can be represented by its specifc shapes, colours, and textures. Thesevisual characteristics of the image are used as input conditions for the query system, and a result the system will recommended nearest images and data set. This research designs and implements two-stage deep learning-based model that recommends a clothing fashion style. This model can use deep learning approach to extract various atributes from images with clothes to learn the user's clothing style and preferences. These atributes are provided to the correspondence model to retrieve the contiquous related images for recommendaton. Based on data-driven, this thesis uses convolutonal neural network as a visual extractor of image objects. This experimental model shows and achieves beter results than the ones of the previous schemes.

Recommendation systems are the techniques that are used to predict the rating one individual will give to an item or social entity. The items can includebooks, movies, restaurants and things on which individuals have different preferences. These preferences are being predicted using two approaches frst content-based approach which involves characteristics of an item and second collaborative fltering approaches which considers user's past behaviour to evaluate its choices. This thesis proposes a fashion recommendation system which will recommend clothing images supported the style sort of the provided clothing images. In this work, we focus on the images of upper body as well as

the lower body clothing and with human model in the images. We have created our own datasets through web scrapping of different ecommerce websites. In this paper we have come up with an idea to build a content-based recommendation system using ResNet-50 convolutional neural network.

**Keywords**: Cloth Recommendation, Convolutional Neural Network, Similarity Measure.

## Introduction

During the last years, online shopping has been growing. In 2013, the total turnover for ecommerce in Europe expanded with 17% in contrast to the 12 months before and huge organizations can have hundreds and hundreds of products or even more from which we can select on websites. Both the customer and the business enterprise desire the client to easily discover applicable products or items both throughout search and when they are searching, and this is where recommender systems come into the picture. The greater part (62%) of US buyers with Web access presently shop on-line, to some degree, at least a month, and 1% say they do not buy from internet, as indicated by a current report by Walker Sands. From all the clients looking for items on the web, 63% of them buy garments (Burke, 2002), these being, quite possibly, the most purchased items. Theinformaton uncover that women are more likely to buy on-line, with 71% of ladies doing this, contrasted with 52% of men. Studies on clothing are in a growing development in general as a result of the tremendous market related to dress. In China, the serviceable market crushed 20 billion US dollars in 2016. Picture recovery can be depicted as the errand of looking out for pics in a picture data set. This is present not an astute thought, in light of everything. It has been explored on account of the way that the 1970s joined informational collection associations with PC vision, looking into the issue as indicated through two uncommon perspectives, the frst being text-based and the second one being visual-based. From the outset, the developments have been made only through information annotations that have been saved in a database to work the retrieval step, however, when the dimension of the image collections started to amplify the effort required to label them used to be as soon as unsustainable, to solve this issue, during the 1990s, content-based photograph retrieval was proposed. Starting now many

searched for lines have seemed the use of one or the diferent isolated or combining them. Recommendation systems make Recommendations based on the information they are provided with and in the manner in which they are programmed. Going into details, most of the evaluation applied is independent coming up with a brand-new recommendation algorithm, system, or model. However, different researchers use already existing work as researchers use an already existing current piece of work to come up with a new diagram or to truly improve the current one. The present analysis model focuses on the use of a current algorithmic program and, consequently, the use of a new research concept comes up with a recommender system. Existing researchand fashions have given us some inspirations of how to design fashion recommendation systems. Nevertheless, they also involve some common drawbacks. Therefore, in this study, our aim to suggest a new method to assist personal choice making through supplying images and get suggestions based on provided contents.

#### The contribution of the research are follows:

- To design and implement a web-based clothing fashion style recommender system based on deep learning;
- A scheme for improving a person's clothing style by removing thefeatures he/she doesn't like.
- These attributes served to a similar model to retrieve similar images as Recommendations.
- Combined with more common content-based recommendationsystems, our model can help to extend robustness and performance.

# Literature survey

### **Myntra-Matching Clothes Recommendation:**

On selecting a particular item to buy, Myntra automatically suggests a full set of clothes that are matching to the selected item. For example, on selecting aparticular t-shirt, the system automatically generates a combination of watches, shoes, pants, etc. that are matching to the selected t-shirt. This system does not take into consideration private qualities of customers like skin color and existing clothes. It will only suggest clothes that already exist in its database.

#### **Your Closet:**

This is a mobile application that organizes the closet. The user interface is shown in. The application asks customer to input their clothes. It then matches each cloth with other clothes. For example, if there are 4 shirts and 4 pants, the application matches each shirt with each pant and thus provides 16 possibilities. The application does not make matches of clothes depending upon patterns, color and texture of clothes. It also does not have a recommendation system.

## **Your Closet App Magic Closet:**

This system aims to retrieve clothes from online stores that are matching to the input clothes. These clothes must be ft to a particular occasion. In this system, the user takes a photo of them specifying if they want to use the top or bottom clothes along with the occasion they want to use it for. The systemwill search for clothing that matches the user query and satisfes the criterion of wearing aesthetically and wearing properly.

### Which Clothes to wear confidently?:

The basic problem the system addresses is: From the two given images corresponding to a pair of clothes, we have to determine if the pair of clothes matches or not. While there may be several aesthetics espoused by dierent individuals, it takes a simplistic approach in this problem. An example ofshirts and ties is used. Various machine learning methods are used to classify if the clothes are matching or not such as Ridge Regression, Standard Neural Network and Siamese Neural Network.

# Personalized Clothing Recommendation Based on Knowledge Graph:

This system attempts to exploit the knowledge graph for providing clothing recommendations to the user keeping the user context in mind. The recommendation is done by calculating the similarity in the clothing ontology similar to users collection. Skin and Clothes matching seeded by Color SystemSelection: The main aim of the system is to suggest clothes to user based on skin color. The paper frst fnds out which color scheme is best suited to represent skin colors and then tries to fnd a way to recommend if clothes and skin color match. An automated system to determine the highest levels of color suitability between skin and clothing was made.

## **Discerning Advisor:**


The system tries to recommend clothes based on skin olor of the customer. Using a neural network, frst the skin color is detected. Fuzzy logic is used to map a skin color to the skin color of a fashion model, and clothes suitedto that model are recommended. Garment Detectives: The garment detection isto detect the presence of clothes in images and somewhat locate their extents, where the localization can be defined from coarse (image) level to fne (pixel) level. A unifed system is proposed for detecting and recognizing clothes in customer photos.

## **Identifying Corners of Clothes by Image Processing:**

This system aims to find the edges of the clothes for clothes manipulation. This system achieves this by finding pixels that represent the clothes. This system first accepts user image and then performs several imageprocessing operations to improve the efciency of edge detection. It then uses certain criterion to decide whether a pixel represents an image or not.


### **Real-time Clothing Recognition from Surveillance Videos:**

It is an analysis system of contents of video which is capable of tagging various clothes of different persons is created. First, face detection and tracking is performed and each frame is aligned. The system then proceeds to clothing segmentation using a variant of region growing method. Through this, clothes are detected. The system then proceeds to clothing recognition and indicates the type of clothing – skirt, t-shirt, etc.

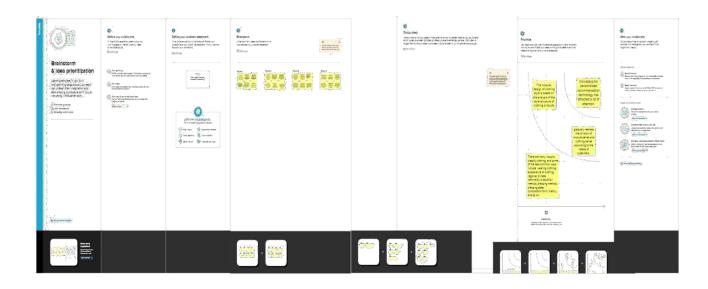

# Proposed system architecture

The system architecture defines the hardware, software and network environment of the structure. The system will be web-based meaning that the usersneed to run the URL in order to run the system. The system will run both horizontally and vertically. The architecture used in the system is shown horizontallywhere the Model View Controller is explained as represented in Figure 1. The high-level part of the system is looked at using the vertical way.

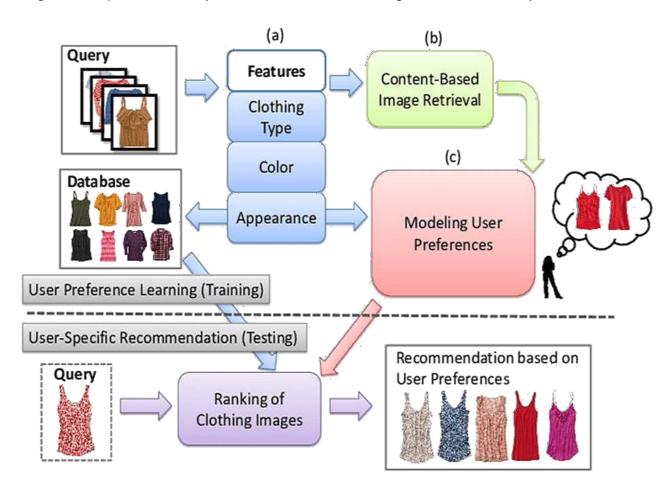

## Figure 1. **System architecture**.


The system comprises of the Client tire, which is the front end or View mode, middle tire which is the system controller and the backend tire which is the model. The client side is where the users/customers log in in the system, browse for the system interface, provide input query image to the system, and get recommendation according to the input query.

The middle true is responsible for communication between the front end and the back end. Itreceives user requests and sends them to the back end and in turn accepts responses from the back end and sends them to the user. The internet works to provide access to the site with a strong security check, provided by both firewall and password protection policy.

Any unauthorized access is detected and prevented by the firewall.

#### a. The vertical classification system model

The recommendation system works with the data set to track user input datafeatures and extracted features from data set upon which new predictions and recommendations are made. The recommendation browses the dataset for user data and available dataset features. Receives Recommendations User Web Server Sends response to user Database Stores User input data Stores dataset features.

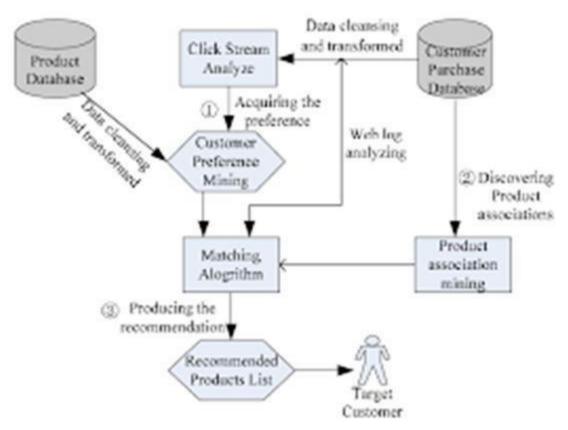

Data Recommender Makes Recommendations Recommender Algorithm Determines the Similarity between cloths Figure 2. Vertcal architecture of the system. It uses the algorithm to go over the input user data and determine similarities betweenusers input data and stored dataset features. Finally, it makes Recommendations. By looking at Figure 1 and Figure 2, we realize that the recommender system does not interact directly with the users at any point. When the repository stores data, the recommender filters the data it needs from the repository using the algorithm. When asignal is sent to the algorithm about what data are needed for filtering, the algorithm

computes the similarity. The similarity results are then transferred to the recommender system which in turn sends Recommendations to the webserverand finally to the respective user.

#### b. Dataset and classification

In this project, we worked with the Deep Fashion dataset, which is gathered from researchers from the Chinese Hong Kong University. It has over one million diverse trend pics and wealthy annotations with additional dataabout landmarks, categories, pairs etc. The dataset consists of 5 distinct typesof predicting subsets that are tailor-made towards their tasks.


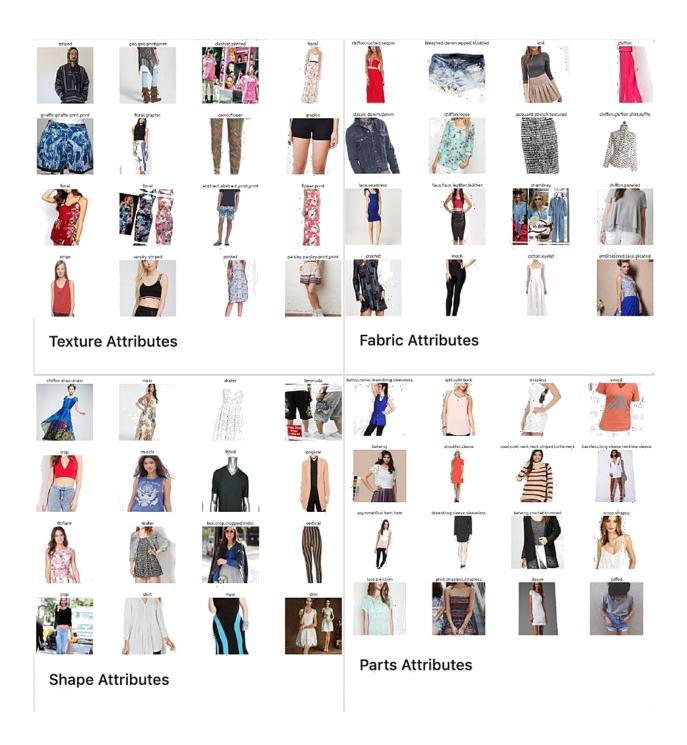


Figure 3. Fashion dataset One subset, known as Attribute Prediction, can be used for apparel category and attribute prediction. From almost 290,000 photos of 50 apparel categories and 1,000 apparel attributes, we randomly picked 18k images from different categories and then we classified them for training and testing. The distribution of labels is presented in Figure

#### c. Design of deep learning module

There are many classification algorithms or classifiers in use today. The most notably and the most implemented classifiers and feature extractor are implemented to solve a problem of cloth / fashion recommendation Design process. (1) are weight vectors, are fully connected output layers that actually perform classification and are the CNN without the last layer. They are used as a feature extractors.

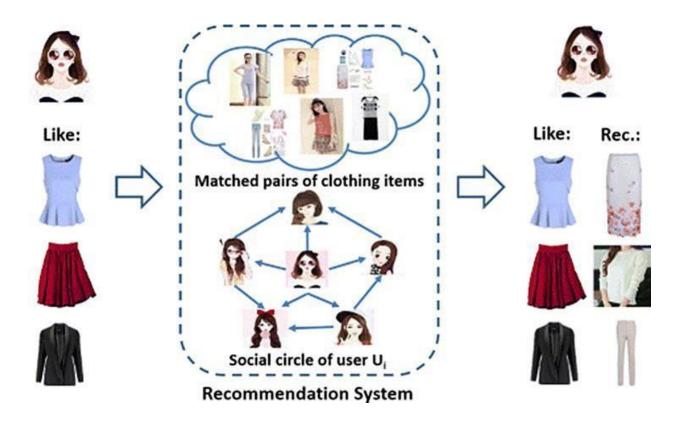

The core network of our model as shown in Figure 4. who presented a convolutional neural network in the paper "Very Deep Convolutional Networksfor Large-Scale Image Recognition", at the University of Oxford.". Then modelis checked for top-5 accuracy on ImageNet.

# **Results and Evaluation**


This section focuses on evaluating our system and deciding the stage whichit is able to fulfil the purpose for which it was created the performance of the systemis analyzed in detail through several tests, from small scale to large scale. Firstly, the unit tests are done at the lower stages and then we proceed to the whole test system. In the training implementation module, we are performing the movement throughout the area, freeze the base layers of the organization i.e., the VGG16 layers, and train the model on the dataset for 5 epochs. This trains the external layers to figure out how to characterize the pictures. We then unfreeze the lower layers and train the model for 5-7 epochs until the approval exactness settles. We keep the best achievable loads (best on approval exactness) and use it for the suggestion model. The training implementation code is presented below.

Step 1: Training the whole network for 5 epochs frst
Step 2: Checkpoint\_callback=modelcheckpoint(',
/model/vgg\_weights\_best\_patern.hdf5'.Step.3: Monitor='val\_acc',
verbose=0 save\_best\_only=true, save\_weights\_only=false,
mode=auto', period=1)
Step 4: Tf\_model.ft\_generator( Train\_generator,
Samples\_per\_epoch=nb\_train\_sample,Nb\_epoch=10, Validaton
data=validaton\_generator, Nb\_val\_samples=nb\_validaton\_samples,
Verbose=1, Inital\_epoch=5, Callbacks=[checkpoint\_callback]
Step 5: end

## 1. Visual recommendation module implementation

To get proposals, we wished to construct a vault of pictures. This archive would be a unique application. If the suggestion was cultivated for shopping, the storehousewould have contained pictures from online retail locations like Amazon, eBay, Pinterest, Instagram, etc. A subset of pattern datasets was used to test our proposed approach. At that point, the information had already been cleared of unimportant photos. Then, the photos were passed by means of the organization and design vector pictures have been created from each photo. For the getting the suggestion, we first needed to build the

individual style profle. This is brought out by taking one or more noteworthy pictures of the client's ideal atre things as they were entered and by making their style vector. These vectors are then blended to shape the framework of the individual style profle. The Figure 5 shown Patern recommendation with similarity score.

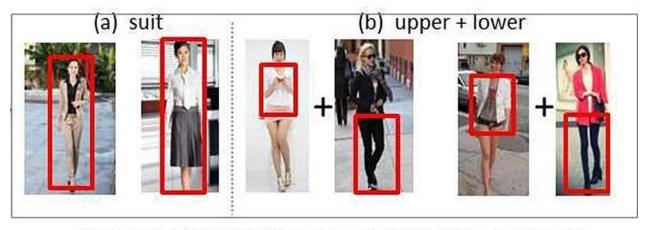

Occasion-Oriented Clothing Recommendation Results



Occasion-Oriented Clothing Pairing Results

Figure 5. Pattern recommendation with similarity score

The proposed scheme is further below, as follows: we will utilize a closeness calculation, which and the design vector of each picture in the vault with the style profile grid. This gives us a score dependent on the quantity of component coordinates (i.e., how

great is the degree of similarity of a picture to the individual's style profile).

**Step 1**: def similarity (feature\_data, inp\_ feature\_data):

**Step 2**: nun\_samp=inp\_feature\_data. size

**Step 3**: print (unm\_samp) Sim\_score = [] for i in range (1 en (feature\_data)): score=0

**Step 4**: show\_sample (data\_images[i])

**Step 5**: print (feature\_data[i]) score \_m = inp\_feature\_data - feature\_data[i]

**Step 6:** print (Soore\_ m) score= nun\_samp-np. Count\_nonzero (score\_m)sim\_score [i]=score

Step 7: print (score) sim Score

Step 8: end

#### i.User management services:

The system provides a platform through which a user can visit the system and provide his/her choices regarding the fashion images for best recommendation.

# ii. Fashion vector for images in repository and input fashion vector:

The system is responsible for making fashion vectors for images in the repository and fashion vector images provided by the user to the system, for the similarity measures and for making Recommendations. After making the fashion vector, some predictions are made, as illustrated The system is responsible for making Recommendations to users based on their user data. The user data compiled in the dataset is filtered by the recommender system through the recommender algorithm.

Step1:Def similarity (feature\_data, inp\_feature\_data);
Num\_samp=inp\_feature\_data.size Step2: print (num\_samp) Sim\_score
= () For i in range (len (feature\_data)); score = 0show\_sample
(data\_images[i]) print(feature\_data[i]) Romanian Journal of
InformationTechnology and Automatic Control, Vol.

31, No. 4, 123-136, 2021 131

#### htp://www.rria.ici.ro

**Step3:** Score\_m inp\_feature\_data-feature\_data[i] print (score\_m)

**Step4**:Score=num\_samp-np.count\_nonzero(score\_m)

Sim\_score[i]=score print(score)

Step 5: Return sim\_score

## **Step 1**: Similarites=similarity(feature\_data,inp\_feature\_data)

step.2.items(),

key=operator.itemegter(1),reverse=(true)

Num\_reco=30data=feature\_data.size

For I in range(num\_reco) Ind = sorted\_similarites[i][0] print (sorted\_similarites)

Print ("score:", sorted\_similartes[i][1])
Show\_sample(data\_images[ind])

## Step 3: end

By accessing the system, users are able to access and view their content- based Recommendations. However, all the Recommendations are made based on the similarity between user inputs and user inputs. As long as there is a level of similarity, we make the best Recommendations.

## iv. Recommender to the query images in dataset:

We can see that our model can capture the best matching style by including the length, shape, color, fabric and pattern of the cloths, as illustrated in three query images examples. In the first example, the model captures deep features including the blouse category, fabric, repeated formal pattern and the regular ft style. As seen, the five recommended images display different clothes. The second example shows that the model captures the wool fabrics, the contrast color stitches and the turtleneck. The third example shows that the model cap capture the cotton fabrics and the printed letters. The Recommendations can be seen in Figure.

## DESCRIBING CLOTHES AND STYLE

#### CLASSY

Your style is elegant and, with clean, simple lines, softly tailored not usually mix and match.

Never trendy, faddish or severe, Textures such as silk, soft woolen fabrics, cotton are among your favourites.

#### **FUNKY ROCK**

This look
is edgy, a
fashion style
expressed by bold
hair styles and
colors, accessories,
black leather
jackets and
shirts with
funky designs.

#### ETNIC

The easiest way
to wear the look
is a print. If
prints aren't
your thing, then
you can still
indulge in the
ethnic /tribal
fashion trend
by way of accessories.

#### GIRLY GLAM

Your outfits hug
Your body tightly
and are full of
pink, loud and
sparkly accessories,
high stilettos and
platforms. It is a
style that
exposes some of
your body and brings
out a flirty, feminine
and sexy look.

#### BOHO CHIC

It a vintage
inspired style with
earthy tones, loose
fitting clothes, and
combining certain
looks to appeal to
an eclectic vibe.
This trend is a
mix of luxurious textures
and contrasting fabrics,
big purses, casual, long

#### TRENDY

You love the big city and adore your uniform of all black with stiletto boots, pumps, or sandals. You love to dress up, be in all the latest trends. You know which pieces make the whole look appear expensive.

#### PREPPY/GIRLY

Polo shirts, or Oxford shirts, dresses and T shirts all either in pastel or bright colors, jeans, khakis, slacks, or Bermuda shorts. Oxford shoes, tennis shoes, ballet flats make the look.

#### CASUAL

A cute,
sweat suit is your
go-to outfit. If an
evening activity is
on the agenda,
a quick change to
slacks or jeans and
a sweater
or nice T-shirt does
the trick. Your color
navy, gray, and black

## necklaces... PUNK

A lot of punk
clothing has a DIY
(do it yourself)
look to it.
Flight jackets,
skinny jeans,
leather, studs,
are the things
to wear together
with classic accessories
like, arm warmers, bullet
belts, and wristbands with
pyramid studs, stars or
spikes.

#### MOD

Dresses and skirts are A-line and either mid-thigh length or just below the knee. Go for crazy patterns or stripes with lines that pop. Typical colors are white and black, but you can incorporate others. Mod shoes are chunky knee- or ankle-high boots

#### SKATER Their look is

more put
together and
creative then
you'd think.
Strategic
layers (long and
short sleeve
Tees) and smart
yet
accessories
(necklaces, etc.) are
the basis of this look.

#### HIPSTER

Wear skinny jeans, basically, the tighter, the better. Wear glasses and dress vintage. Hipster shoes include cowboy boots, Converse, and a range of flats. Wearing things that don't match together is also very hipster.

#### HOBO

Hobo's clothes
must be either
painfully small or
comically large.
Hobo Shoes can
cover a wide range
of styles, as long
as they are beaten
up and battered,
fingerless gloves and hats
give you the look too.

#### GOTH GLAM

Goth glam fashion is now a classy version of gothic. It still retains dark and gloomy colors like black, navy and burgundy.

#### ROMANTIC

You like to wear soft colors and fabrics like chiffon and silk that drape graciously on your body.
You also go for ruffle or skirt and dresses with floral prints, lace, crocheted tops, cameos and antique jewelry.

#### EMO

Tight clothing
is still
your thing,
though much
of it has taken
a more modern
look now.
Stripes are popular
as stars, hearts,
skulls, nautical stars,
and sparrows. Hair
still black.



As shown in Figure, our model can capture the style with high accuracy, meaning that our system achieves its purpose. It can be noticed that our system can perform for all the involved categories like pattern, style, fabric etc. The highest similarity score shows that the input images and the recommended ones are similar. This figure also illustrates that the system can work best for pattern recommendation and recommend top similar images in different colors, shapes, and styles.

### v.Recommendations to the query images outside the dataset:

It's natural to ask if the model you made works with images which are not part of the dataset. We randomly downloaded three online images illustrating expensive clothes. As shown in Figure 8, the model is still able to capture the style, pattern and fabrics of the clothes and recommend similar ones.

The model is checked for different categories like pattern, style, fabric. The highest score show that the image is more similar to the input query. So, our model obtains high similarity score for different categories.

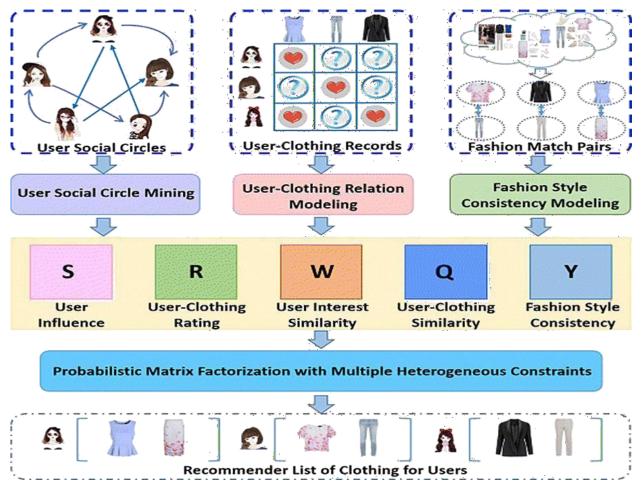


Figure: Outside recommendation dataset

## System result and accuracy:

Finally, this subsection evaluates the system and shows the testing results and the accuracy of our model. After adding the model on top of the convolutional base, freezing the weights of all layers except of the top ones, and training the model for 5 epochs, the following accuracy was obtained, as shown in Figure.

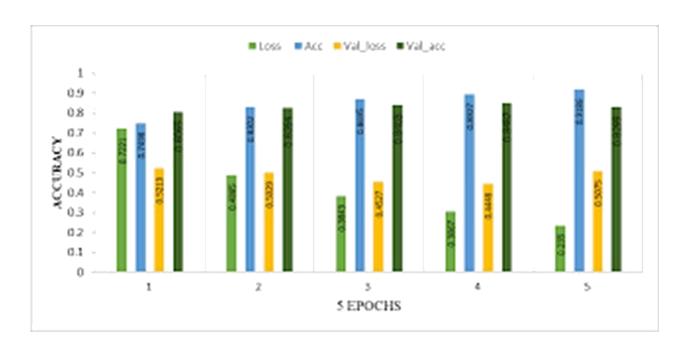


Figure 9. Model accuracy after freezing the layers for 5 epochs

After calculating the mean accuracy for 5 epochs, the obtained results areas follows:

Validation: accuracy = 0.836000; loss = 0.489109

This part of the sentence "After calculating the mean accuracy for 5 epochs" is mentioned also below, after Figure 10, and these values mentioned for accuracy and loss (0.836000 and 0.489109) are not illustrated in Figure 9, but in Figure.


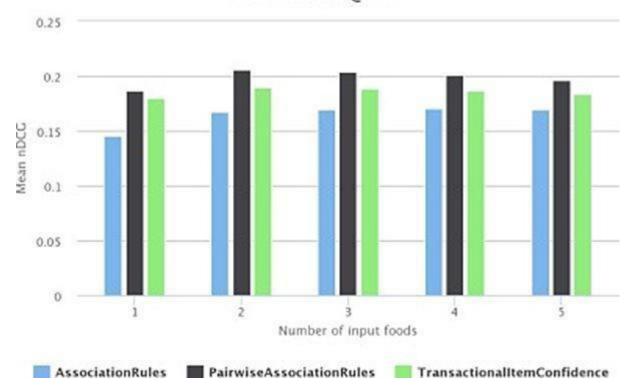


Figure 10. Model accuracy for 5 epochs

After calculating the mean accuracy for 5 epochs, the final result are as follows: Validation: accuracy = 0.864750; loss = 0.516400 These values mentioned for accuracy and loss (0.864750 and 0.516400) are not illustrated in Figure 10.

The accuracy of our model was compared with the one of Alex Net model. It can be clearly noticed that our model gives a better accuracy when compared to Alex Net, as shown in Figure 11.

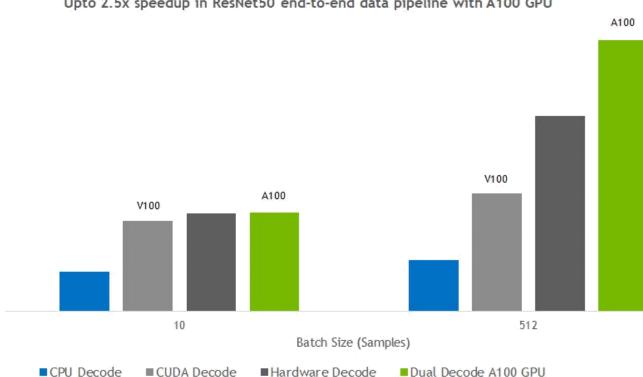

Upto 2.5x speedup in ResNet50 end-to-end data pipeline with A100 GPU

Figure 11. Accuracy and loss

A100 GPU

Hardware + CUDA Decode (75:25)

Recommender systems are still developing and, as extra research is beingdone, extra areas and weaknesses that need greater study are also developing. Recommender systems have proved to be a great solution to the overload of web data, an important problem affecting the users. With the ever-growing records and choices, recommender systems enable the customers to access the data they need within minutes, just by a mere mouse click or by a single key stroke. Table 2 shows the comparison with other models regarding the accuracy and the loss values.

## n.html

Legacy GPU

f a S

S o u r c e C o d

е

```
<html>
<head>
<meta name="viewpoint" content="width=device-width, initial-</pre>
scale=1.0">
<title>FASHION VIBE</title>
<style>
  *{ margin: 0;
padding: 0;
font-family: "Century Gothic", CenturyGothic, AppleGothic, sans-
serif, 'CourierNew', Courier, monospace;
box-sizing: border-box;background: fixed;
}
.footer
{
width:100%;height: 20%;display:fex;
background:#121212;margin-top: 5%; color: #7DE5ED; padding-
left: 22%;
```

```
align-items: center;text-align: center;
}
.hero{
width: 100%;height: auto;
background-color:#8f8f8f;color: #525252;
}
nav{
background: #7DE5ED;width: 100%;
padding: 10px 10%;
display: fex;
align-items: center;
justify-content: space-between;
position: fixed;
}
.logo{
width:200px;
```

```
height:50px;

text-decoration:none;text-align: center; color:#001128;

}
.user-pic{ width: 40px;

border-radius: 50%;cursor: pointer; margin-lef: 30px;

}

nav ul{

width: 100%; text-align: right; font-weight: bold;

}

nav ul li{

display: inline-block;list-style: none; margin: 10px 20px;

}

nav ul li a{

color: rgb(252, 252, 5);

text-decoration: none;
```

```
}
.Banner
foat:lef; width: 100%;
height: 400px;
background-color: #121212;
color: #7DE5ED;margin-top: 10%;text-align: center;
}
.Bannerimg1
foat: lef; width:50%; height: 400px;
background-color: #525252;
}
.Bannerimg2
foat: right; width:50%; height: 400px;
background-color: #525252;
```

```
}
  .Adcontent
  width:45%; height: 400px; margin-lef: 55%;color: #7DE5ED;text-align:
  center; padding: 100px;
  .Adcontent2
  {
  width:45%; height: 400px; margin-left: 5%;
  color: #7DE5ED;text-align: center;padding: 100px;
  }
.columnst { foat:lef; margin-lef:7%;
  margin-top: 10%;
  width:230px; height:400px;
  background-color:transparent;
  border: 2px solid #74bde0;border-color:transparent;
  }
.column { foat:lef; margin-lef:7%;
  margin-top: 10%; width: 230px; height: 400px;
  background-color:transparent; border: 2px solid #74bde0; border-
  color:transparent;
  .columnend
  {
```

```
foat:lef; margin-lef:7%;
margin-top: 10%;
margin-bottom: 10%; width: 230px;
height:400px;
background-color:transparent; border: 2px solid #74bde0; border-
color:transparent;
}
.Botom
{
height:50px;width:230px;
text-align: center;margin-top:300;
background: #000000e8;color: rgb(252,252,5); padding: 5%;
}
.depimg
{
foat:lef; width:228px; height:300px;
background-color:transparent; border: 2px solid #74bde0; border-
color:transparent;
```

```
}
.image
width: 100%;
height: 100%; object-ft: contain;
}
.search{
width: 330px; margin-lef: 40%;color: #7DE5ED;position:fxed;
}
.srch{
width: 200px;height: 40px;
background: #7DE5ED;
border: 2px solid #121212;margin-top: 13px; margin-right:13px;
color: #FCE700;
font-size: 16px;
```

```
align-items: center; padding: 10px;
border-bottom-left-radius: 25px;
border-top-left-radius: 25px; border-bottom-right-radius: 25px;border-
top-right-radius: 25px;
}
.btn{
width: 60px; height: 40px;
border: 2px solid #000000dd;background:#000000dd; margin-top:
13px;
color: rgb(252, 252, 5);align-items: center; font-size: 15px;
border-bottom-left-radius: 25px;border-top-left-radius: 25px; border-
bottom-right-radius: 25px;border-top-right-radius: 25px;
}
```

```
.btn:focus{ outline: none;
  }
.srch:focus{ outline: none;
  }
.sub-menu-wrap{ position:absolute;top: 100%;
  right: 2%; width: 320px;
  max-height: 0px; overfow: hidden; transition: max-height 0.5s;
  }
  .sub-menu-wrap.open-menu{
  max-height: 400px;
  }
.sub-menu{ background:rgb(252, 252, 5);padding: 20px;
  margin: 10px;
```

```
border-radius: 8%;
 }
.user-info{ display: fex;
 align-items: center;
 }
  .user-info h3{
 font-weight: 500;
 }
.user-info img{width: 60px;
 border-radius: 50%;margin-right: 15px;
  }
.sub-menu hr{ border: 0; height: 1px; width: 100%;
 background: #525252;
 margin: 15px 0 10px;
 }
  .sub-menu-link{
```

```
display: fex;
  align-items: center; text-decoraton: none;color: #525252; margin:
  12px 0;
 }
  .sub-menu-link p{
  width: 100%;
 }
.sub-menu-link img{ width: 40px; background: #e5e5e5;border-radius:
  50%; padding: 8px;
  margin-right: 15px;
 }
.sub-menu-link span{font-size: 22px;
 transiton: transform 0.5s;
  .sub-menu-link:hover span{
  transform: translateX(5px);
 }
  .sub-menu-link:hover p{
```

```
font-weight: 600;
}
.hello{
margin-botom: 200px;text-align: lef; positon:absolute; right: 10px;
}
</style>
</head>
<body>
<nav>
<a class="logo" href="MadFinalhome.html"><h2>FASHION
VIBE</h2></a> 
      <input class="srch" type="search" name=""</li>
placeholder="TYPE TOSEARCH">
<a href="#"><buton class="btn">SEARCH</buton></a>
<a href="#">HOME</a> <ahref="#">FEATURES</a>
<a href="#">ABOUT</a>
```

```
<img src="htps://storagedemo-madzh.s3.jp-tok.cloud-object-</pre>
storage.appdomain.cloud/images/profle.jpeg"
                                                          class=
"user-pic"onclick="toggleMenu()">
<div class="sub-menu-wrap" id="subMenu">
<div class="sub-menu">
<div class="user-info">
                            src="htps://storagedemo-madzh.s3.jp-
                    <img
tok.cloud-object-storage.appdomain.cloud/images/profle.jpeg">
<h2>NAME</h2>
</div>
<hr>
<a href="#" class="sub-menu-link">
                            src="htps://storagedemo-madzh.s3.jp-
                    <img
tok.cloud-object-storage.appdomain.cloud/images/profle.jpeg">
EDIT PROFILE
</a>
<a href="#" class="sub-menu-link">
                            src="htps://storagedemo-madzh.s3.jp-
                    <img
tok.cloud-object-storage.appdomain.cloud/images/setngs.jpeg">
```

```
SETTING & PRIVACY
</a>
<a href="#" class="sub-menu-link">
                   <img src="htps://storagedemo-madzh.s3.jp-</pre>
tok.cloud-object-storage.appdomain.cloud/images/help.jpeg">
HELP
</a>
<a href="/Login" class="sub-menu-link">
<img src="htps://cdn-icons- png.fatcon.com/512/56/56805.png">
LOGOUT
</a>
</div>
</div>
</nav>
<div class="Banner">
<div class="Bannerimg1"> <img img class="image"
src="fashionimagebanner.webp"></div>
```

```
<div class="Adcontent">
<h1><br>THE JOY OF DRESSING IS AN ART.</br>
<br>Let's have a look on it-----></br>
</div>
</div>
<div class="rowstart">
               <div class="columnst"> <div class="depimg"> <img
class="image"src="sarees.webp"> </div> <div class="Botom">WEDDING
SAREES</div> </div>
       <div class="columnst"> <div class="depimg"> <img class="image"</pre>
src="Salwarkameez.webp"> </div> <div class="Botom">SALWAR
KAMEEZ</div> </div>
               <div class="columnst"> <div class="depimg"> <img</pre>
class="image"src="Kurts.webp"> </div> <div class="Botom">CASUAL
KURTIS</div> </div>
       <div class="columnst"> <div class="depimg"> <img class="image"</pre>
src="bridallehenga.webp"> </div> <div class="Botom">BRIDAL
LEHENGA</div> </div>
</div>
<div class="Banner">
<div class="Bannerimg2"> <img img class="image"</pre>
src="lovablekidsatre.webp"></div>
<div class="Adcontent2">
<h1 class="kids"><br>LOVABLE KIDS ATTIRE</br></h1>
```

```
<br>----- <br/>br>-----
</div>
</div>
<div class="row">
       <div class="column"> <div class="depimg"> <img class="image"</pre>
src="Modern vibe.webp"> </div> <div class="Botom">MODERN
VIBE</div> </div>
               <div class="column"> <div class="depimg"><img</pre>
class="image" src="festvemood.webp"> </div> <div
class="Botom">FESTIVE MOOD</div> </div>
        <div class="column"> <div class="depimg"> <img class="image"</pre>
src="skinny dress.webp"> </div> <div class="Botom">SKINNY
DRESS</div> </div>
         <div class="column"> <div class="depimg"> <img
class="image" src="Max girls.webp"> </div> <div
class="Botom">MAX GIRLS</div> </div>
</div>
<div class="Banner">
<div class="Bannerimg1"> <img img class="image"</pre>
src="mensfashion.webp"></div>
<div class="Adcontent">
<h1><br>HANDSOME MEN ATTIRE</br></h1>
<br>Always DRESS well, Keep it SIMPLE but SIGNIFICANT
```

```
</div>
</div>
<div class="row">
        <div class="column"> <div class="depimg"> <img class="image"</pre>
src="polo tshirts.webp"> </div> <div class="Botom">POLO T-
SHIRTS</div> </div>
                 <div class="column"> <div class="depimg"> <img</pre>
class="image"src="menhoodies.webp"> </div> <div
class="Botom">HOODIES</div> </div>
         <div class="column"> <div class="depimg"> <img class="image"</pre>
src="mencasuals.webp"> </div> <div class="Botom">MEN
CASUALS</div> </div>
        <div class="column"> <div class="depimg"> <img class="image"</pre>
src="formalshirts.webp"> </div> <div class="Botom">FORMAL
SHIRTS</div> </div>
</div>
<div class="Banner">
<div class="Bannerimg2"> <img class="image"</pre>
src="adornments.webp"></div>
<div class="Adcontent2">
<h1><br>PERSONAL ADORNMENTS</br></h1>
<br>ADORNMENT is never anything except a REFLECTION of the
HEART!!!</br>
</div>
</div>
```

```
<div class="rowend">
   <div class="columnend"> <div class="depimg"> <img class="image"</pre>
src="womenornmanets.webp"> </div> <div</pre>
class="Botom">JEWELLERY</div> </div>
 <div class="columnend"> <div class="depimg"> <img
class="image"src="watch.jpg"> </div> <div
class="Botom">WATCHES</div> </div>
            <div class="columnend"> <div class="depimg"> <img
class="image" src="htps://5.imimg.com/data5/TQ/NK/MY-
45888708/men-belts-500x500.jpg"> </div> <div
class="Botom">BELTS</div> </div>
            <div class="columnend"> <div class="depimg"> <img</pre>
class="image" src="htps://encrypted-
tbn0.gstatc.com/images?q=tbn:ANd9GcQSWDKgpQeZ-3VNR7-
9SfaVGVvqOawrkZiLdNfSpjNNQJNI6hl8cJg0Qs_DZfpJtzUst0&usqp=CAU">
</div>
<div class="Botom">HANDBAGS & CLUTCHES</div> </div>
</div>
<script>
let subMenu = document.getElementById("subMenu");functon
toggleMenu(){
subMenu.classList.toggle("open-menu");
window.watsonAssistantChatOptons = {
```

```
integrationID: "1a8c11c0-839e-4442-8b03-59f7c12ce5f5", // The ID
 of this
 integration.
region: "au-syd", // The region your integration is hosted in.
 serviceInstanceID: "bada3725-51e6-42fe-bccc-3e2603433478", //
 The ID
 of your service instance.
 onLoad: functon(instance) { instance.render(); }
 };
 setTimeout(functon(){
 const t=document.createElement('script');
       t.src="htps://web-
 chat.global.assistant.watson.appdomain.cloud/versions/" +
 (window.watsonAssistantChatOptons.clientVersion || 'latest') +
 "/WatsonAssistantChatEntry.js";
 document.head.appendChild(t);
 });
                                                            </script>
                                                             </body>
                                                             <footer>
 <div class="footer">
 <div class="hello">
 <a href="Feedback.html">feedback</a>
 </div>
 <div >
 <H1>THANK YOU FOR PURCHASING...... WELCOME
 AGAIN!!!!</H1>
 </div>
                                                      </div></footer>
```

#### server.py

from flask import Flask, render\_template,request import os

```
appFlask = Flask(_____name_)
picFolder = os.path.join('statc','images') appFlask.confg['UPLOAD_FOLDER'] =
picFolder

@appFlask.route('/') @appFlask.route('/out')def index():
return render_template("login.html")

@appFlask.route('/login',methods = ['POST', 'GET'])
def my_forum_post():
return render_template('FashionVibe.html')

@appFlask.route('/index',methods = ['POST', 'GET'])
```

```
def my_forum_posts():
return render_template('index.html')
@appFlask.route('/Feed',methods = ['POST', 'GET'])def
my_forum_posts1():
return render_template('Feedback.html')
if_name___== "__main___":
appFlask.run(debug=True)
fashion.css
{
margin: 0;
padding: 0;
font-family: "Century Gothic", CenturyGothic, AppleGothic, sans-
serif, 'CourierNew', Courier, monospace;
box-sizing: border-box;background: fixed;
}
.footer
{
```

```
width:100%;height: 20%;display:fex;
background:#121212;margin-top: 5%; color: #7DE5ED; padding-lef:
22%; align-items: center; text-align: center;
}
.hero{
width: 100%;height: auto;
background-color:#8f8f8f;
color: #525252;
}
nav{
background: #7DE5ED;width: 100%;
padding: 10px 10%;display: fex;
```

```
align-items: center;
  justify-content: space-between;
  position: fixed;
  }
  .logo{
  width:200px;height:50px;
  text-decoration:none;text-align: center; color:#001128;
  }
.user-pic{ width: 40px;
  border-radius: 50%; cursor: pointer; margin-left: 30px;
  }
  nav ul{
  width: 100%; text-align: right; font-weight: bold;
```

```
}
nav ul li{
display: inline-block; list-style: none; margin: 10px 20px;
}
nav ul li a{
color: rgb(252, 252, 5);text-decoration: none;
}
.Banner
{
foat:left; width: 100%;
height: 400px;
background-color: #121212;
color: #7DE5ED;margin-top: 10%;text-align: center;
.Bannerimg1
{
foat: lef; width:50%;
```

```
height: 400px;
background-color: #525252;
.Bannerimg2
{
float: right; width:50%; height: 400px;
background-color: #525252;
}
.Adcontent
width:45%; height: 400px; margin-left: 55%; color: #7DE5ED;text-
align: center; padding: 100px;
}
.Adcontent2
width:45%; height: 400px; margin-left: 5%;
```

```
color: #7DE5ED;text-align: center;padding: 100px;
}

.columnst { foat:left; margin-lef:7%;
    margin-top: 10%;
    width:230px; height:400px;
    background-color:transparent;
    border: 2px solid #74bde0;border-color:transparent;
}

.column { foat:left; margin-lef:7%;
    margin-top: 10%;width:230px; height:400px;
    background-color:transparent;
```

```
border: 2px solid #74bde0;border-color:transparent;
}
.columnend
foat:left; margin-lef:7%;
margin-top: 10%;
margin-bottom: 10%; width: 230px; height: 400px;
background-color:transparent;
border: 2px solid #74bde0;border-color:transparent;
}
.Bottom
height:50px;width:230px;
text-align: center;margin-top:300;
background: #000000e8;
color: rgb(252,252,5);
```

```
padding: 5%;
}
.depimg
foat:left; width:228px; height:300px;
background-color:transparent; border: 2px solid #74bde0; border-
color:transparent;
}
.image
{
width: 100%;
height: 100%; object-ft: contain;
}
.search{
width: 330px; margin-left: 40%;color: #7DE5ED;position:fixed;
}
```

```
.srch{
width: 200px;height: 40px;
background: #7DE5ED; border: 2px solid #121212;margin-top: 13px;
margin-right:13px ;color: #FCE700; font-size: 16px; align-items:
center;padding: 10px;
border-bottom-left-radius: 25px;border-top-left-radius: 25px; border-bottom-right-radius: 25px;border-top-right-radius: 25px;
}
.btn{
width: 60px; height: 40px;
border: 2px solid #000000dd;
```

```
background:#00000dd;margin-top: 13px;
  color: rgb(252, 252, 5);
  align-items: center;font-size: 15px;
  border-bottom-left-radius: 25px;
  border-top-left-radius: 25px; border-bottom-right-radius: 25px;border-
 top-right-radius: 25px;
 }
.btn:focus{ outline: none;
 }
.srch:focus{ outline: none;
 }
.sub-menu-wrap{ position:absolute;top: 100%;
  right: 2%; width: 320px;
```

```
max-height: 0px; overfow: hidden; transition: max-height 0.5s;
 }
  .sub-menu-wrap.open-menu{
 max-height: 400px;
 }
.sub-menu{ background:rgb(252, 252, 5);padding: 20px;
 margin: 10px;
  border-radius: 8%;
 }
.user-info{ display: fex;
 align-items: center;
  }
  .user-info h3{
 font-weight: 500;
```

}

.user-info img{

```
width: 60px;
 border-radius: 50%;margin-right: 15px;
  }
.sub-menu hr{ border: 0; height: 1px; width: 100%;
 background: #525252;
 margin: 15px 0 10px;
 }
.sub-menu-link{display: fex;
 align-items: center;
 text-decoration: none; color: #525252; margin: 12px 0;
 }
  .sub-menu-link p{
 width: 100%;
  }
.sub-menu-link img{width: 40px;
```

```
background: #e5e5e5;border-radius: 50%; padding: 8px;
  margin-right: 15px;
.sub-menu-link span{font-size: 22px;
 transition: transform 0.5s;
 }
  .sub-menu-link:hover span{
 transform: translateX(5px);
 }
.sub-menu-link:hover p{font-weight: 600;
 }
  .hello{
  margin-bottom: 200px;text-align: left; position:absolute; right: 10px;
 test.js
```

```
<script>
let subMenu = document.getElementById("subMenu");functon
toggleMenu(){
subMenu.classList.toggle("open-menu");
}
window.watsonAssistantChatOptons = {
        integrationID: "1a8c11c0-839e-4442-8b03-59f7c12ce5f5", //
The ID ofthis integration.
region: "au-syd", // The region your integration is hosted in.
    serviceInstanceID: "bada3725-51e6-42fe-bccc-3e2603433478",
// The IDof your service instance.
onLoad: functon(instance) { instance.render(); }
};
setTimeout(functon(){
const t=document.createElement('script');
      t.src="htps://web-
chat.global.assistant.watson.appdomain.cloud/versions/" +
(window.watsonAssistantChatOptons.clientVersion || 'latest') +
"/WatsonAssistantChatEntry.js";
document.head.appendChild(t);
});
</script>
chat.js
<script>
let subMenu = document.getElementById("subMenu");functon
toggleMenu(){
```

```
subMenu.classList.toggle("open-menu");
}
window.watsonAssistantChatOptons = {
        integrationID: "1a8c11c0-839e-4442-8b03-59f7c12ce5f5", //
The ID ofthis integration.
region: "au-syd", // The region your integration is hosted in.
    serviceInstanceID: "bada3725-51e6-42fe-bccc-3e2603433478",
// The IDof your service instance.
onLoad: functon(instance) { instance.render(); }
};
setTimeout(functon(){
const t=document.createElement('script');
      t.src="htps://web-
chat.global.assistant.watson.appdomain.cloud/versions/" +
(window.watsonAssistantChatOptons.clientVersion
                                                         \parallel
                                                         'latest')+
"/WatsonAssistantChatEntry.js";
document.head.appendChild(t);
}):
</script>
```

### DISCUSSION

This scholarly article has provided a comprehensive review of the methods, algorithmic models and filtering techniques used in the recent fashion recommendation-based research papers. However, this review paper has some limitations too. Primarily, the focus of this comprehensive review paper was to explore fashion recommendation-based articles published in last decade that

explicitly described their frameworks, algorithms, and filtering techniques. To achieve this goal, the articles were searched using keywords relevant to the topic title instead of using the PRISMA technique. However, it did not affect the article extraction methodology, because the authors included and studied all the research papers relevant to the research focus. However, future researchers could conduct a systematic literature review on the same topic. The initial keywordsearching did not include "garment" and "outfit"; however, this did not influence thesearch results because we also studied the fashion recommendation articles that contained these keywords. The future research can also conduct a review of the datasets that have been used in fashion recommendation-based research articles. Additionally, further reviews of fashion recommendation systems can apply our proposed potential algorithms to any of the available fashion image datasets to evaluate the performance of the recommender systems.

# CONCLUSION

Recommendation systems have the potential to explore new opportunities for retailers by enabling them to provide customized Recommendations to consumers based on information retrieved from the Internet. They help consumers to instantlyfind the products and services that closely match with their choices. Moreover, different stat-of-the-art algorithms have been developed to recommend productsbased on users' interactions with their social groups. Therefore, research on embedding social media images within fashion recommendation systems has gained huge popularity in recent times. This paper presented a review of the fashion recommendation systems, algorithmic models and filtering techniques based on the academic articles related to this topic. The technical aspects, strengths and weaknesses of the filtering techniques have been discussed elaborately, which will help future researchers gain an in-depth understanding of fashion recommender systems. However, the proposed prototypes should be tested in commercial applications to understand their feasibility and accuracy in the retail market, because inaccurate Recommendations can produce a negative impact on a customer. Moreover, future research should concentrate on including time series analysis and accurate categorization of product images based on the

clothing style in order to develop an effective recommendation system.

## **FUTURE SCOPE**

Online selling and purchasing offer innumerable benefits to both sellers and buyers, and these advantages are also the reasons for the rising scope of eCommerceWell, to put it bluntly, the scope of ebusiness in the near future looks to be ever-increasing and growing, because the trend has really caught on here. E-commerce giant Amazon is keen to conquer the Indian market and has alreadyinvested a great deal, especially with its 49% stake in the Future Group.

Indian online retail giant Flipkart has already opened a few offline stores and plans more stores in smaller cites. They plan to combine online and offline stores to maximize their selling potential. Google and Tata Trust have launched a joint program 'Saathi' to increase internet and mobile penetration among rural women. The Government of India is also making a huge push for Ecommerce by providing numerous sops to startups, cyberparks, and so on through its Digital India program. As of now, there are close to 20,000 E-commerce companies in India, with many more expected to join the bandwagon every month.

#### REFERENCE

- 1. Guan, C.; Qin, S.; Ling, W.; Ding, G. Apparel recommendation system evolution: An empirical review. Int. J. Cloth. Sci. Technol. 2016, 28, 854–879, doi:10.1108/ijcst-09-20150100.
- 2. Hu, Y.; Manikonda, L.; Kambhampat, S. What we Instagram: A first analysis of Instagram photo content and user types. Available online: htp://www.aaai.org (accessed on 1 May 2014).
- 3. Gao, G.; Liu, L.; Wang, L.; Zhang, Y. Fashion clothes matching scheme based on Siamese Network and Autoencoder. Multmed. Syst. 2019, 25, 593–602, doi:10.1007/s00530-01900617-9.
- 4. Liu, Y.; Gao, Y.; Feng, S.; Li, Z. Weather-to-garment: Weather-oriented clothing recommendation. In Proceedings of the 2017 IEEE International

#### Conference on

- Multimedia and Expo. (ICME), Hong Kong, China, 31 August 2017; pp. 181–186, doi:10.1109/ICME.2017.8019476.
- Chakraborty, S.; Hoque, M.S.; Surid, S.M. A comprehensive review on image based style prediction and online fashion recommendation.
   J. Mod. Tech.Eng. 2020, 5, 212–233.