


Team ID : PNT2022TMID11820

Create HTTP Requests To Communicate With MobileApp

Node red flow

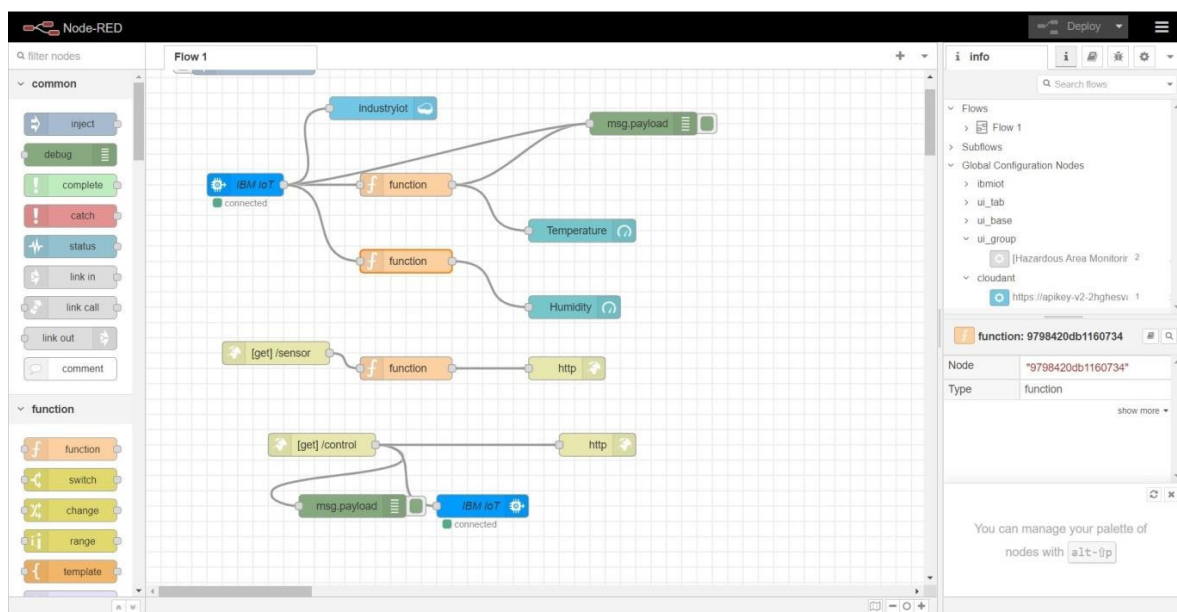

Http requests

The screenshot shows the Node-RED web interface. In the center workspace, a flow is visible with an 'IBM IoT' node connected to a 'function' node. The 'Edit http in node' dialog is open, displaying the following properties:

- Method: GET
- URL: /sensor
- Name: Name

The 'info' panel on the right shows the node details for '[get] /sensor':

- Node: *ac27b7986f90525b*
- Type: http in

← → ↻ ⚠ Not secure | 159.122.177.234:30241/sensor

```
{"temperature":37,"humidity":26}
```

The screenshot shows the Node-RED web interface. In the center workspace, a flow is visible with an 'IBM IoT' node connected to a 'function' node. The 'Edit http in node' dialog is open, displaying the following properties:

- Method: GET
- URL: /control
- Name: Name

The 'info' panel on the right shows the node details for '[get] /control':

- Node: *c3d6cc4f73c0976*
- Type: http in

← → ↻ ⚠ Not secure | 159.122.177.234:30241/control?command=motoron

```
{"command":"motoron"}
```

Team ID : PNT2022TMID11820