

## Assignment -4

### Docker and Kubernetes


Assignment Date	21 October 2022
Student Name	Ebinezer Paul Lazer.j
Student Roll Number	512219104007
Maximum Marks	2 Marks

#### 1. Pull an image from docker hub and run it in docker Playground


The screenshot displays the Docker Hub page for the `uifd/ui-for-docker` repository. The repository is marked as deprecated, with a note stating: "This repo is deprecated. Development continues at: [portainer/portainer](#)". The page shows the repository's overview, including its description: "A web interface for Docker, formerly known as DockerUI. Deprecated, use Portainer for new features." The Docker Pull Command is shown as `docker pull uifd/ui-for-docker`.

Below the Docker Hub page, the Docker Playground interface is visible. It shows a session titled `cd9an2u3_cd9av060qau0008hbjs0` with an IP address of `192.168.0.13`. The session is running on a node named `node1`. The terminal output shows the following commands and their results:

```
# This is a sandbox environment. Using personal credentials is HIGHLY discouraged. Any consequences of doing so are completely the user's responsibilities.
# The FWD team.
(node1) (local) root@192.168.0.13 ~
$ docker pull uifd/ui-for-docker
Using default tag: latest
latest: Pulling from uifd/ui-for-docker
841194d080c8: Pull complete
Digest: sha256:fe371ff5a69549269b24073a5ab1244dd4c0b834cbadf244870572150b1cb749
Status: Downloaded newer image for uifd/ui-for-docker:latest
(node1) (local) root@192.168.0.13 ~
$ docker run -d -p 9000:9000 --privileged -v /var/run/docker.sock:/var/run/docker.sock uifd/ui-for-docker
c590dd163101ae795bdcea0eb1ddd98f6fe549cb5f24dadb9ff7c1931923fc0d
(node1) (local) root@192.168.0.13 ~
```

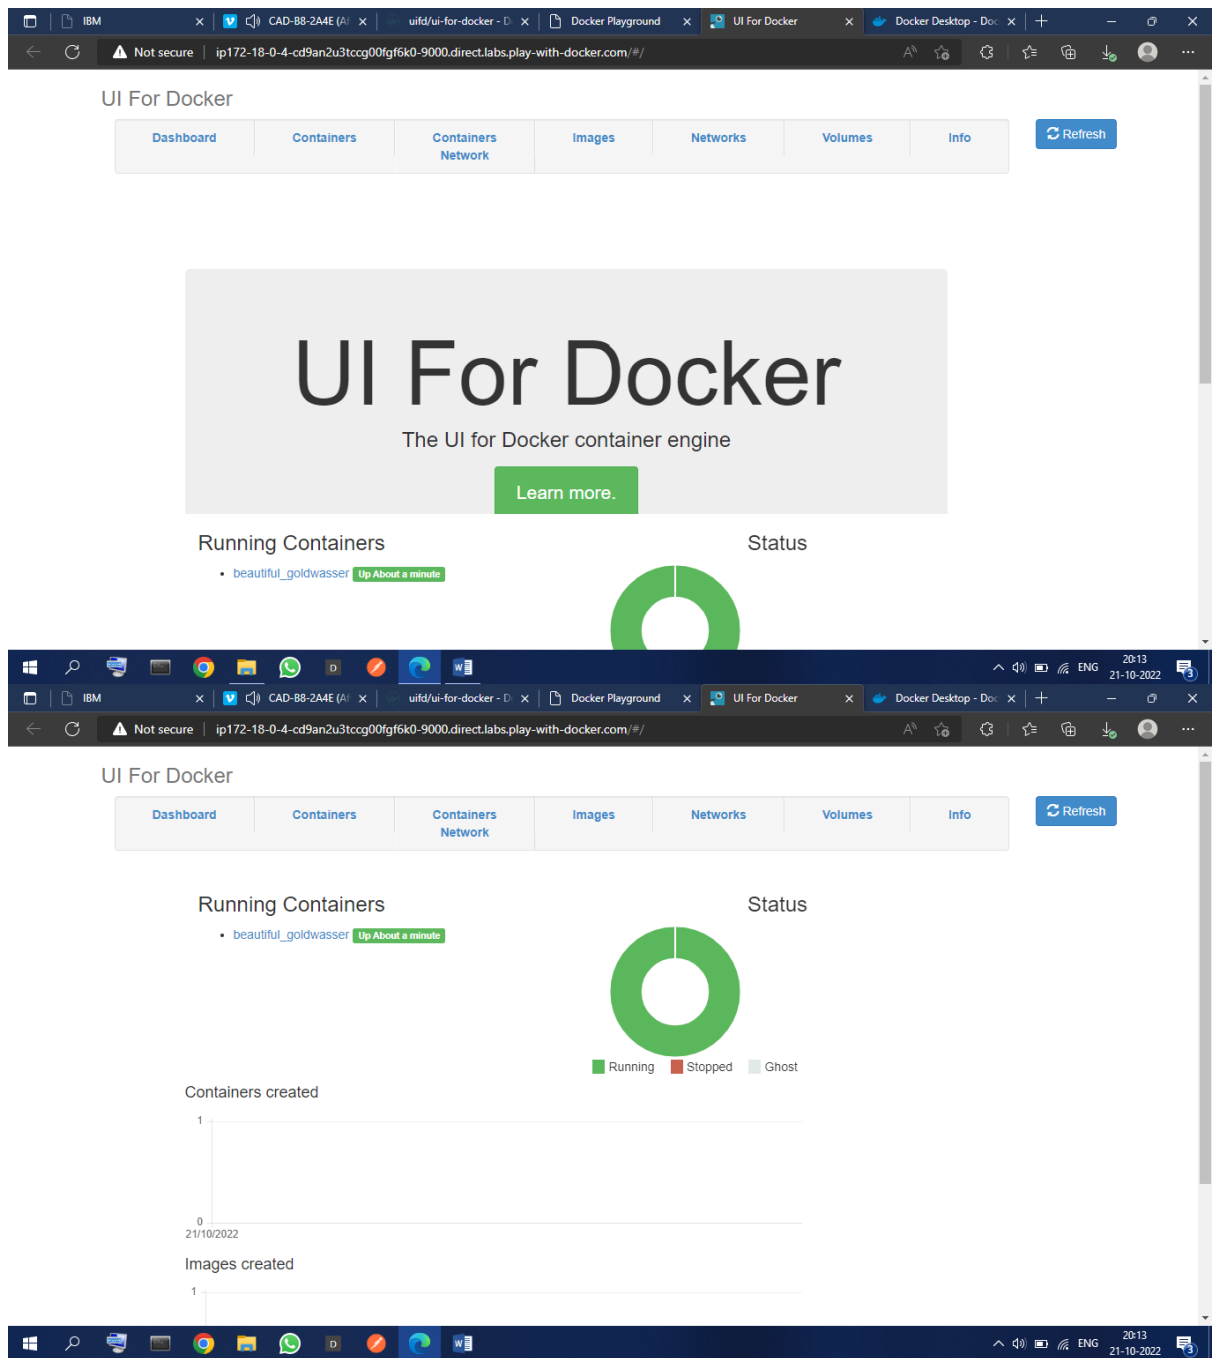

2. Create a docker file for the job portal application and deploy it in Docker desktop application

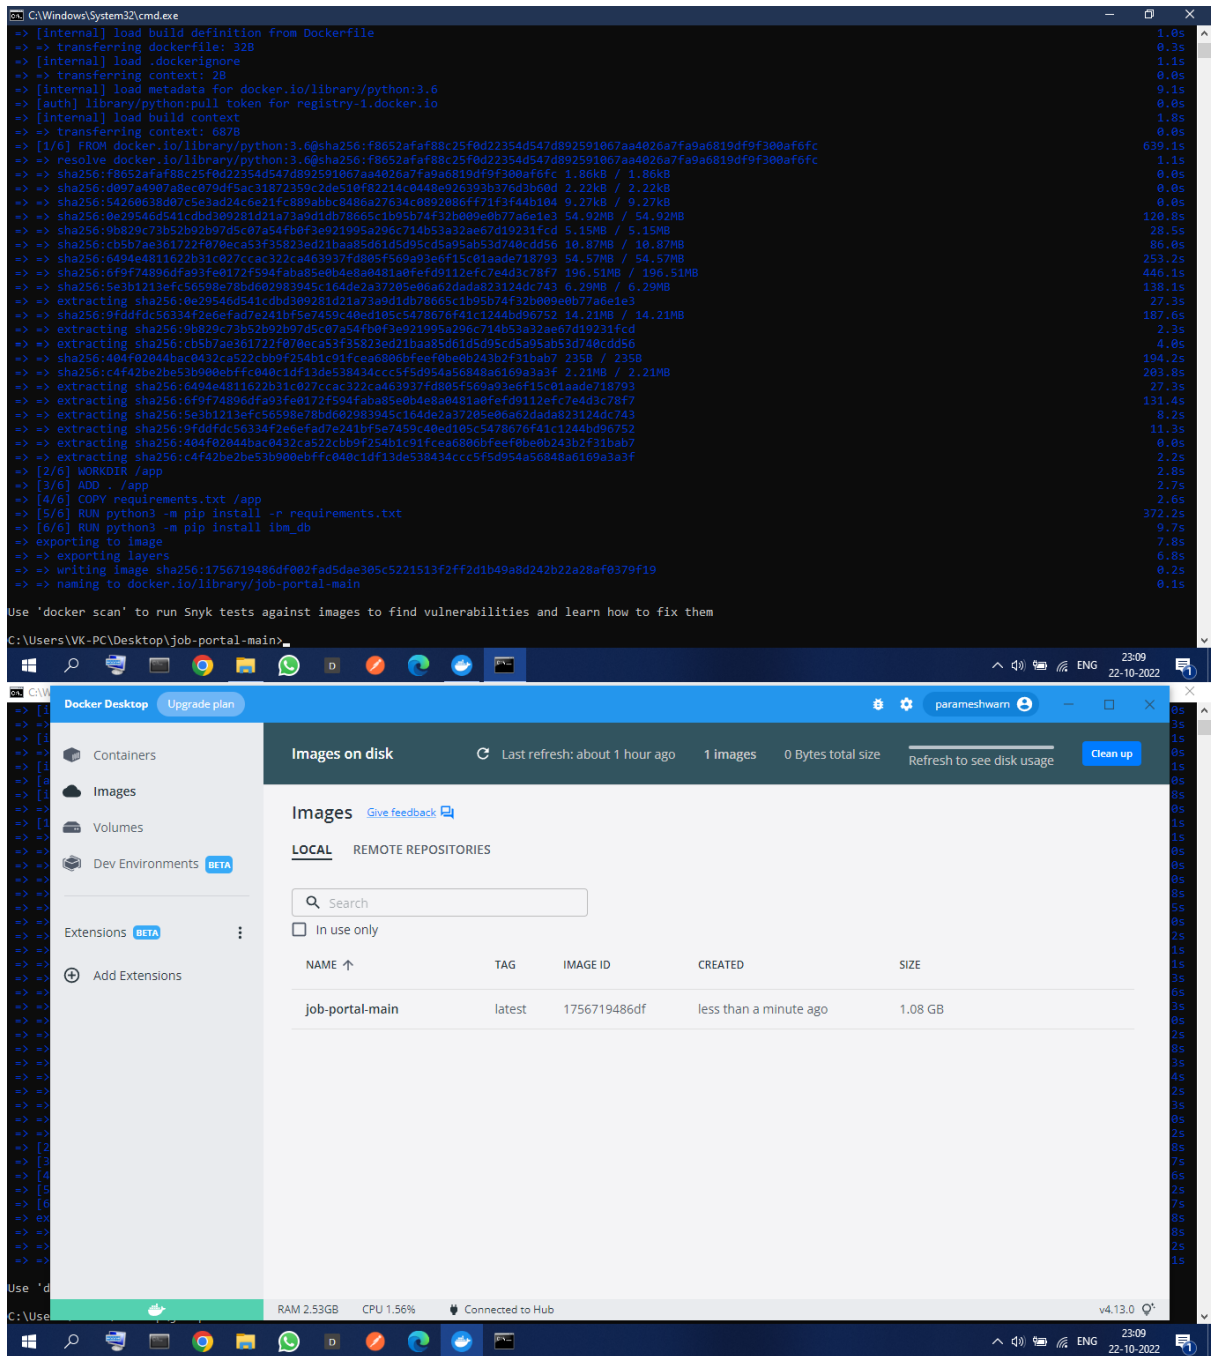

### 3. Create a IBM container registry and deploy helloworld app